


Alfia

Recessed luminaire for outdoor installation on wall. Configuration: phospho-chromatised and polyester powder coated die-cast aluminium structure with coated die-cast aluminium finish frame, moulded silicone gasket and tempered transparent glass.

Design by Ares Concept

IP54 

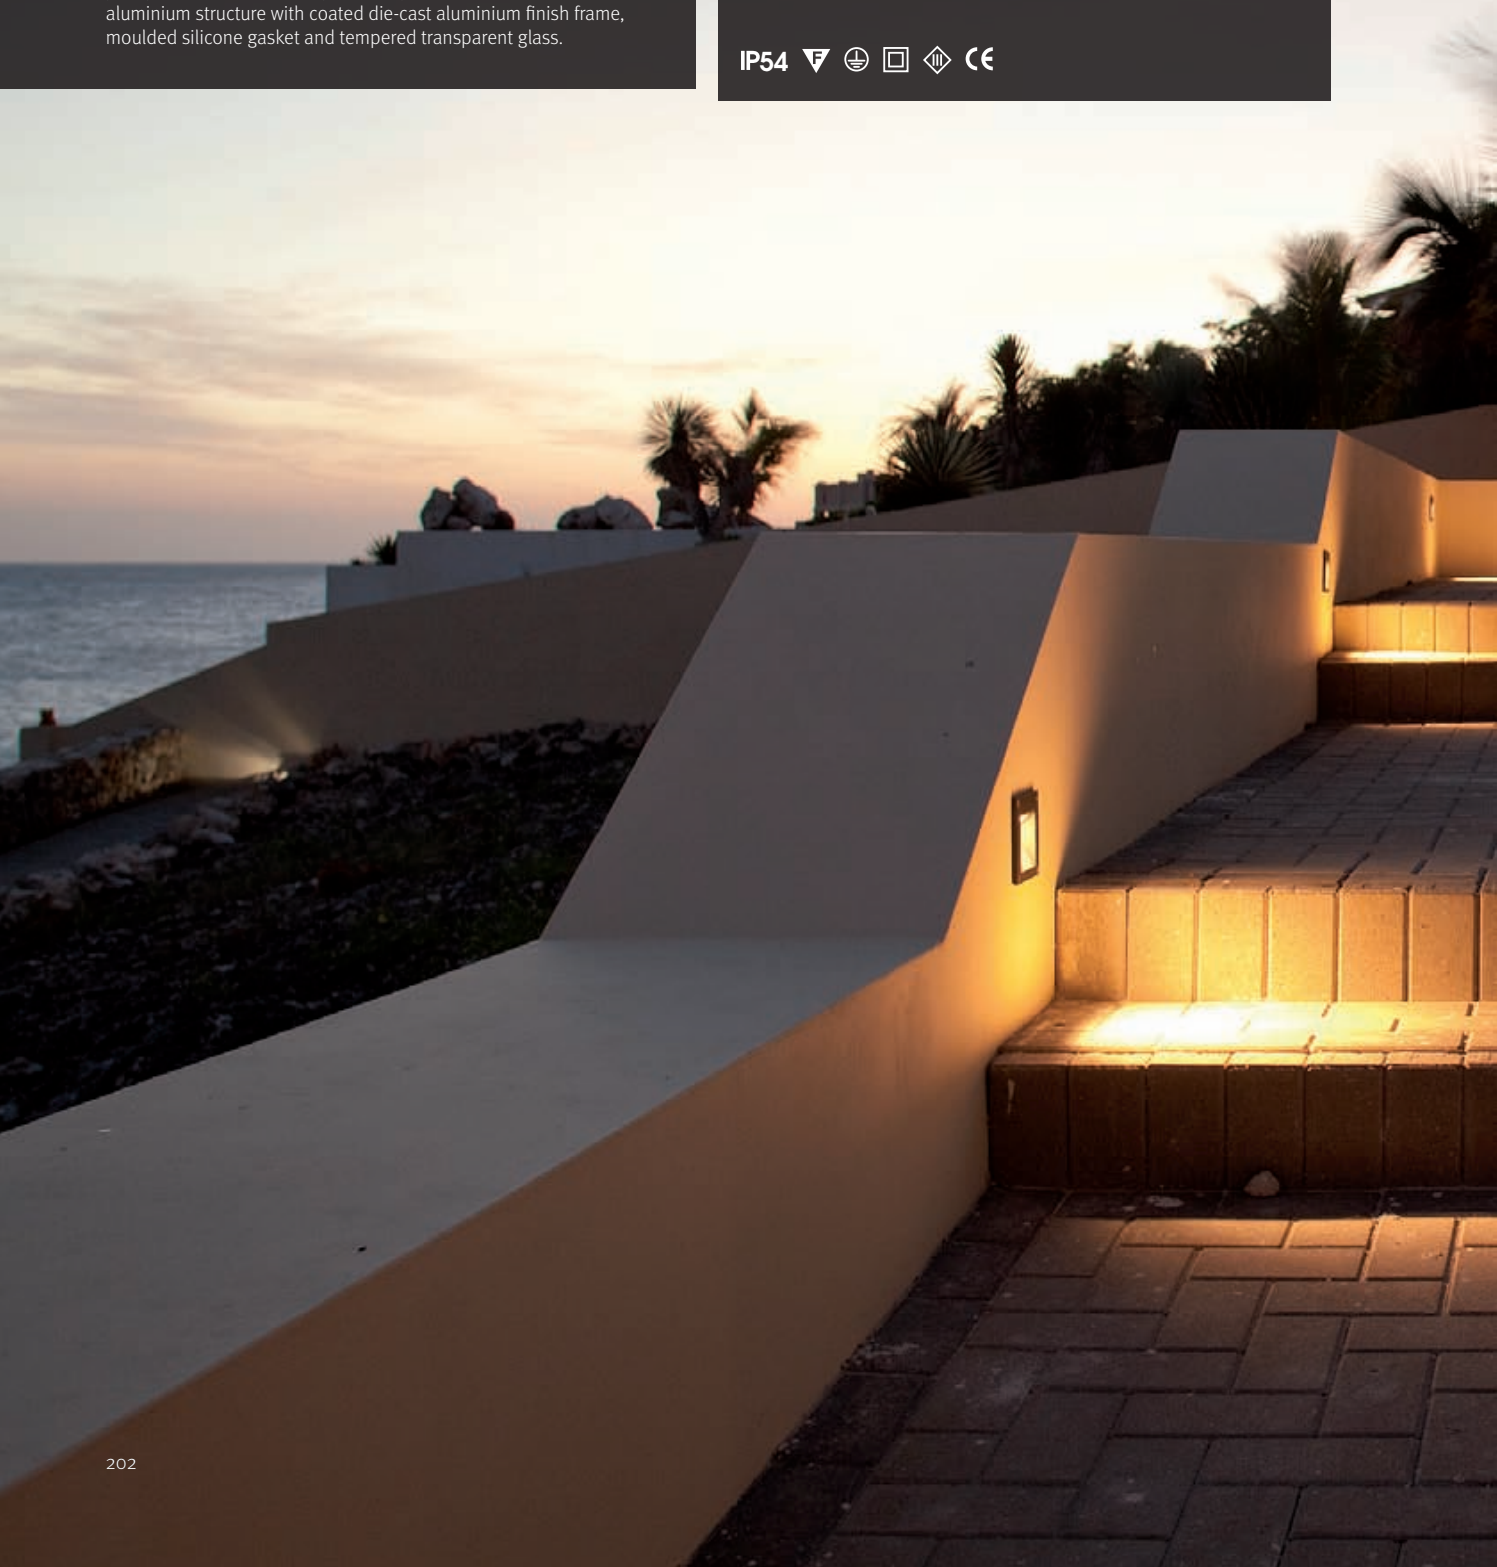





MiniAlfia

Versions:

Diffuser: transparent glass

40W QT14 G9 halogen lamp

2x1W LEDs module (cool white 6000K, natural white 4000K, warm white 3000K). 100÷240V power supply included

2x1W LEDs module (cool white 6000K, natural white 4000K, warm white 3000K). 24Vd.c. remote power supply (parallel connection allowed)

Square frame: 120mm side

Recessing depth (including box for installation): 60mm

Protection Rating: IP54;


In compliance with EN 60598-1 standards

Class of insulation: mains: I, LED: II, III

Installation: wiring through two rubber cable holder. Outdoor use requires suitable flexible cables assuring the watertightness of the cable gland. Installation requires a dedicated box for installation (to be ordered separately).

IP54     CE

Dimensions

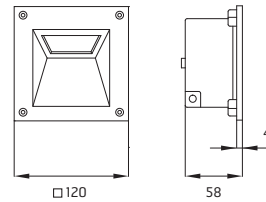

Recessed wall fitting.



The fitting is equipped with 2 cable input.



The feeding transformer (230V/24V) for low voltage must be installed on remote position



Protection against impact.
IK 08 - 5,00 joule

Alfia

Versions:

Diffuser: transparent glass

100W QT32 E27 halogen lamp
 26W TC-D G24d-3 or 26W TC-DEL G24q-3 compact fluorescent lamp
 35W or 70W HIT G12 metal halide lamp
 70W HIT-DE Rx7s metal halide lamp


Square frame: 250mm side
 Recessing depth (including box for installation): 110mm

Protection Rating: IP54
 In compliance with EN 60598-1 standards
 Class of insulation: mains: I


Installation: wiring through two M16 plastic cable glands ($\varnothing < 10$ mm cables). Outdoor use requires suitable flexible cables assuring the watertightness of the cable gland. Installation requires a dedicated "box for installation" (to be ordered separately).

IP54   

Dimensions

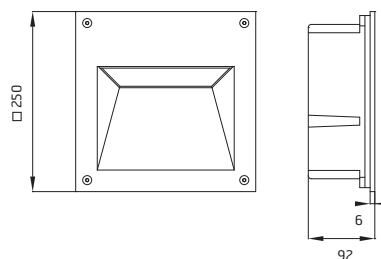

Recessed wall fitting.



The fitting is equipped with 2 cable input.



Protection against impact.
 IK 08 - 5,00 joule

Alfia on post

Versions:

Diffuser: transparent glass

Light emission:

unidirectional: one lateral emission

100W QT32 E27 halogen lamp

26W TC-D G24d-3 or 26W TC-DEL G24q-3 compact fluorescent lamp

35W HIT-CE G12 metal halide lamp

70W HIT-DE Rx7s metal halide lamp

Rectangular section: 300x80mm

Height: 1000mm

Base: 370x150mm

Protection Rating: IP54


In compliance with EN 60598-1 standards

Class of insulation: mains: I

Installation: Wiring through two M20 plastic cable glands (Ø13mm cables).

IP54   

Dimensions

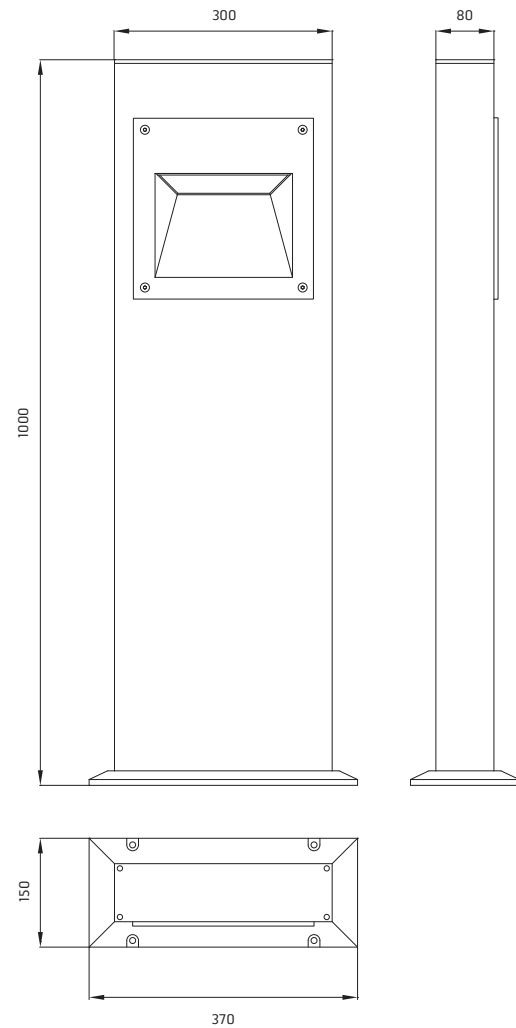

Bollard light



The fitting is equipped with 2 cable input.




Protection against impact.
IK 08 - 5,00 joule

MiniAlfia / Transparent Glass




812700
QT 14.40W/230V G9

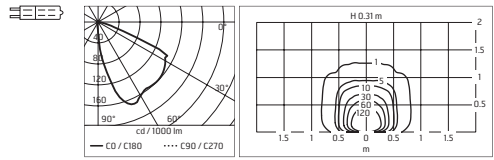

MiniAlfia LED / Transparent Glass



816800
COOL WHITE LEDs
2x1W/100÷240V
Electronic power supply included

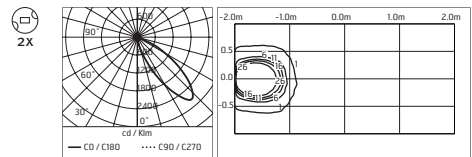

8121300
NATURAL WHITE LEDs
2x1W/100÷240V
Electronic power supply included



816400
WARM WHITE LEDs
2x1W/100÷240V
Electronic power supply included



8121400
COOL WHITE LEDs
2x1W/24V d.c.
Remote electronic power supply
to be ordered




8121500
NATURAL WHITE LEDs
2x1W/24V d.c.
Remote electronic power supply
to be ordered



8121600
WARM WHITE LEDs
2x1W/24V d.c.
Remote electronic power supply
to be ordered



Alfia / Transparent Glass

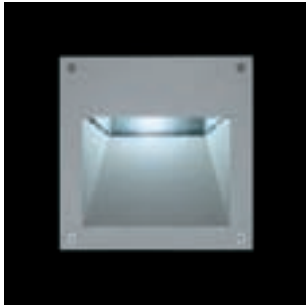

820100
QT 32 100W E27















820900
TC-D 26W G24d-3

826100
TC-DEL 26W G24q-3
Electronic ballast

823500
HIT-CE 35W G12

827100
HIT-CE 70W G12

822900
HIT-DE 70W Rx7s

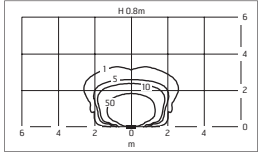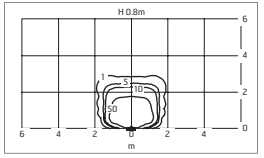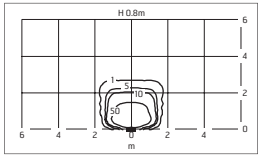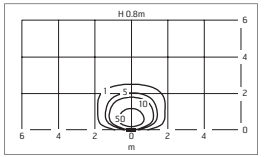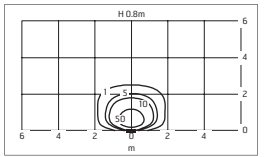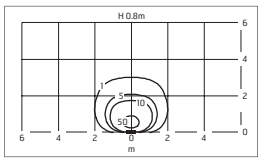

Alfia on post / Transparent Glass - Unidirectional



820164
QT 32 100W E27








820964
TC-D 26W G24d-3

826164
TC-DEL 26W G24q-3
Electronic ballast

823564
HIT-CE 35W G12

822964
HIT-DE 70W Rx7s

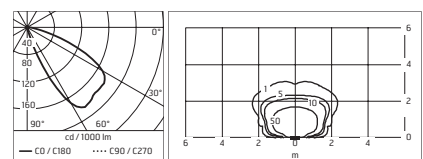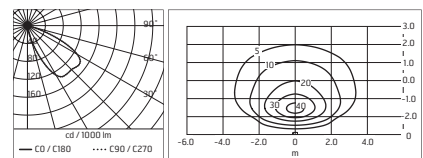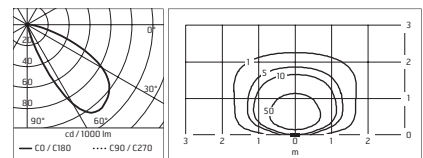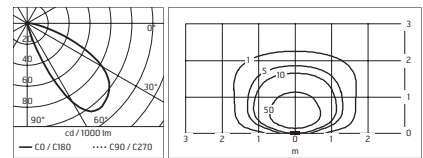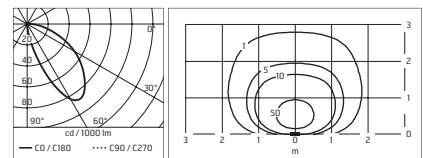


Accessories: Alfia


59
BOX FOR INSTALLATION
120 x 120 H 60mm




60
BOX FOR INSTALLATION
250 x 250 H 110mm

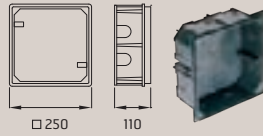


106
POWER SUPPLY DUAL FUNCTION
24Vd.c. 8W 100÷240V
Iout 350mA (6x1W) 100÷240V - IP65 CLASS II
SELV EQ.




87
POWER SUPPLY 10W/110÷240V - 24V d.c.
IP20 CLASS II SELV EQ.

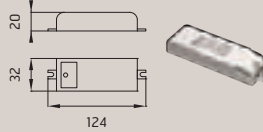


144
POWER SUPPLY 17W/110÷240V - 24V d.c.
(15W@110V) IP20 CLASS II SELV EQ.



147
POWER SUPPLY 20W/220÷240V - 24V d.c.
IP67 CLASS I SELV EQ.

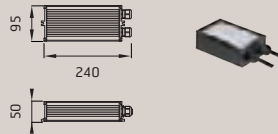

110
POWER SUPPLY 70W/220÷240V - 24V d.c.
IP67 CLASS II SELV EQ.

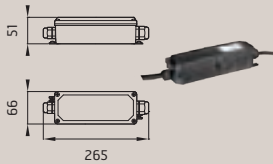

Accessories chart

acc. code ▶	59	60	106	87	144	147	110
prod. code ▼							
MiniAlfia							
812700	•						
816400	•						
816800	•						
8121300	•						
8121400	•		•	•	•	•	•
8121500	•		•	•	•	•	•
8121600	•		•	•	•	•	•
Alfia							
820100		•					
820900		•					
822900		•					
823500		•					
826100		•					
827100		•					
Alfia on post							
820164							
820964							
822964							
823564							
826164							