

()
INTERSTATE COUNCIL FOR STANDARDIZATION, METROLOGY AND CERTIFICATION
(ISC)

**IEC/TR 61000-1-6—
2014**

()

1-6

(IEC/TR 61000-1-6:2012, IDT)



2015

IEC/TR 61000-1-6—2014

, 1.0-92 «
 » 1.2-2009 «
 , , »
 , , ,
 1 « - «
 » 30 «
 »
 2
 3 , (-
 14 2014 . 72-)

(3166) 004-97	(3166)004-97	
	AZ	
	BY	
	KG	
	MD	-
	RU	
	TJ	

4 24
 2014 . 1708- IEC/TR 61000-1-6—2014
 1 2015 .

5 IEC/TR 61000-1-6:2012
 Electromagnetic compatibility (EMC) — Part 1-6: General — Guide to assessment of measurement uncertainty [].
 IEC 61000-1-6:2012 77 IEC
 CISPR ().
 IEC 61000-1-6:2012 1-6 IEC 61000
 IEC 107 Electromagnetic
 compatibility — Guide to the drafting of electromagnetic compatibility publications ().
 ().
 — (IDT)

« »,
« ».
« ».

© , 2015

,

III

1	1
2	1
3	, ,	2
3.1	2
3.2	6
3.3	7
4	8
4.1	8
4.2	8
4.3	9
4.4	10
5	13
5.1	13
5.2	16
5.3	27
5.4	34
5.5	40
6	44
7	49
	()	50
	()	57
	60
	()	63

61000

- 1. : (,), ;
- 2. : , ;
- 3. : , (, - ,);
- 4. : , ;
- 5. : , ;
- 6. : , ;
- 9. . , / , ;
, , (, 61000-6-1).

()

1-6

Electromagnetic compatibility (EMC). Part 1-6. General.
Guide to assessment of measurement uncertainty

— 2015—03—01

1

IEC 61000.

IEC,

IEC 61000,

2

()

().

/TR 61000-1-6—2014

IEC 60050-161:1990 International Electrotechnical Vocabulary (IEV) — Chapter 161: Electromagnetic compatibility

() . 161.
].

CISPR 16-1-1:2010 Specification for radio disturbance and immunity measuring apparatus and methods — Part 1-1: Radio disturbance and immunity measuring apparatus — Measuring apparatus

() . 1-1.
).

CISPR 16-4-2:2011 Specification for radio disturbance and immunity measuring apparatus and methods — Part 4-2: Uncertainties, statistics and limit modelling — Measurement instrumentation uncertainty

() . 4-2.
).

ISO/IEC Guide 98-3:2008 Uncertainty of measurement — Part 3: Guide to the

expression of uncertainty in measurement (GUM:1995) ()

3:

(GUM:1995),]

3

3.1

no IEC 60050-161,

— IEC 60050-161

3.1.1 (combined standard uncertainty):

() ISO/IEC 99:2007, 2.31, ()
).]

3.1.2 (confidence level): , , ,

[IEC 60050-393:2003. 393-18-31]

3.1.3 (coverage factor): , , ,

() ISO/IEC 99:2007, 2.36, — ()
3.1.4 (coverage interval): , , ,

[ISO/IEC 99:2007, 2.36, —
].]

3.1.5 (coverage probability): , , ,

() / 99:2007, 2.37, —
].]

3.1.6 (distribution function): , , ,
X * :

$GU = \Pr(X^*)$.

() ISO/IEC 98-3, 1:2008, 3.2]
3.1.7 (error): , , ,

(ISO/IEC 99:2007, 2.16, —)

3.1.8 ()] (expanded uncertainty): , , ,

(ISO/IEC 98-3:2008, 2.3.5, —)

3.1.9 ; (electromagnetic 1-3 compatibility;)]:

(IEC 60050-161:1990, 161-01-07]

3.1.10 (emission): ,

(IEC 60050-161:1990, 161-01-08,

]

3.1.11 (emission level);

from a disturbing source); , (emission level

(IEC 60050-161:1990, 161-03-11]

3.1.12 (emission limit);

a disturbing source); (emission limit from

[IEC 60050-161:1990, 161-03-12]

3.1.13 (immunity);

to a disturbance); ,

[IEC 60050-161:1990, 161-01-20]

3.1.14 (immunity limit);

[IEC 60050-161:1990, 161-03-15]

3.1.15 (immunity test level); ,

[IEC 60050-161:1990, 161-04-41]

3.1.16 (indication); ,

(/ 99:2007, 4.1, —)

3.1.17 (influence quantity); ,

(IEC 60050-394:2007, 394-40-27,

3.1.18 — ; (instrumentation uncertainty; IU);]

; (measurement instrumentation uncertainty; MIU);]

1 —

«

; »

16

«

2 —

IEC 60359:2001,

; ()».

3.1.19 (intrinsic uncertainty of the measurement); ,

1

—

/TR 61000-1-6—2014

2 —

/ 98-3:2008,

D,

0.1.1.

3 —

[IEC 60359:2001,

3.1.11,

1]

3.1.20 (level);
quantity):(level of a time varying
/

[IEC 60050-161:1990, 161-03-01,

3.1.21

—

] (limits of error of a measuring instrument):

ISO/IEC 99:2007,

4.26,

2]

3.1.22 (measurand):

[IEC 60050-311:2001, 311-01-03]

3.1.23 (measurement accuracy);
accuracy of measurement);

(accu-

(precision of measurement):

1 — [IEC 60050-311:2001, 311-06-08,

1

2

]

3.1.24 (measurement precision):

[ISO/IEC 99:2007,

2.15,

1-4

(measurement result):

(IEC 60050-311:2001, 311-01-01,
1-5]

3.1.26 (measuring system):

[IEC 60050-311:2001, 311-03-06]

3.1.27 (measurement trueness):

() ISO/IEC 99:2007,
1-3]

2.14,

—

; (measurement uncertainty; MU):

() ISO/IEC 99:2007,
1-4]

2.26,

—

; (probability density function; PDF):

1 —

$$g(\cdot)d; = \Pr(s < X <_+ d;)$$

(
3.1.30

ISO/IEC 98-3:2008,

3.3,

(random error):

—

)

(IEC 60050-394:2007, 394-40-33,
2]
3.1.31 (repeatability);
results of measurement):

1

[IEC 60050-311:2001, 311-06-06.
3.1.32 (reproducibility of measurements):

1 — « » ,
(IEC 60050-311:2001, 311-06-07,
1]
3.1.33 (sensitivity coefficient):

3.1.34 (standard deviation of
single measurement in a series of measurement):

$$(q_i) = \sqrt{\frac{1}{(n-1)} \sum_{j=1}^n (q_j - \bar{q})^2}$$

\bar{q}
(ISO/IEC 98-3:2008,
1-4]
3.1.35 .2.17, (standard devi-
ation of the arithmetic mean of a series of measurements):

/TR 61000-1-6—2014

1 —

(. . 5.3),

 q

3.1.36 (standard uncertainty):

(ISO/IEC 99:2006, 2.30, —
()]

3.1.37 (systematic error):

[IEC 60050-394:2007, 394-40-32,
]

3.1.38 (tolerance):

3.1.39 (true value):

(1 —
())
(IEC 60050-311:2001, 311-01-04,
1-4, —
A (type A evaluation):[ISO/IEC 99:2007, 2.29, —
() , 1-3]
3.1.41 (type evaluation):[ISO/IEC 99:2007, 2.29, —
() ,]

3.2

X - ;
 $*$ - X ;
 \sim - X ;
 d - ;
 N - ;
 v - , $v = N - 1$;
 v_x - X ;
 $-$ - ;
 $-$ - ;
 $= (1 -) / 2$;
 Q , - ;
 Q - / ;
 Q_j - j - N ;
 Q - N ;
 $s(Q)$ - ;
 $s(q)$ - , $s(q) = \$Q_i/V/V$;
 $u(Q)$ - $A, u(Q) = n(v)s(Q)$;

$r|v)$ - ;
 $t_p(y)$ - ;
 $X_{\min} \sim X;$
 $G(X) - X \cdot g(x) = (<),$
 $() - ()$
 $(X) - X, () = |Xg(X)dX;$
 $X, = (X);$
 $ay - X, * = \wedge(-())^{2\wedge} = j(X-x)^2-d(X)dX;$
 $() - , () = *;$
 $X, -$
 $6 / - X,;$
 $Y -$
 $, -$
 $, -$
 $u(x_j) - X_t;$
 $() -$
 $U(y) - U(y) = ku_c(y).$

3.3

CLT

EUT
 FAR
 GUM PBH
 IEC
 IFU
 IUM
 LPU 3PH
 MIU
 MU
 OATS
 PDF

/TR 61000-1-6—2014

RSS KCK
 SAC
 SCU CCTH
 VSWR KCBH

4

4.1

IEC 61000.


4.2

()


(

)

(1 2):

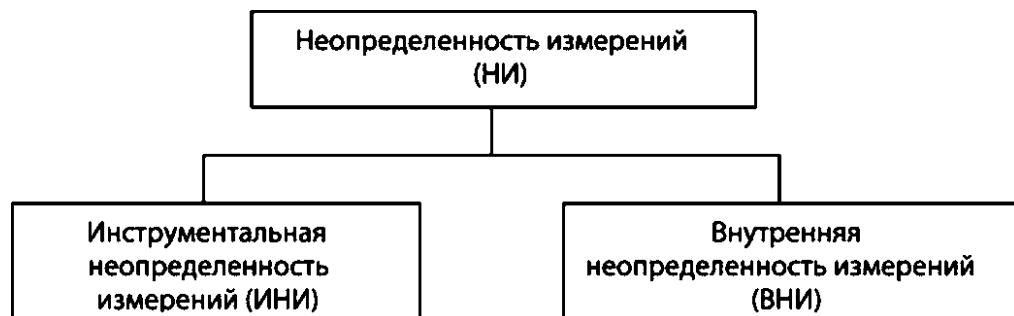

1 -

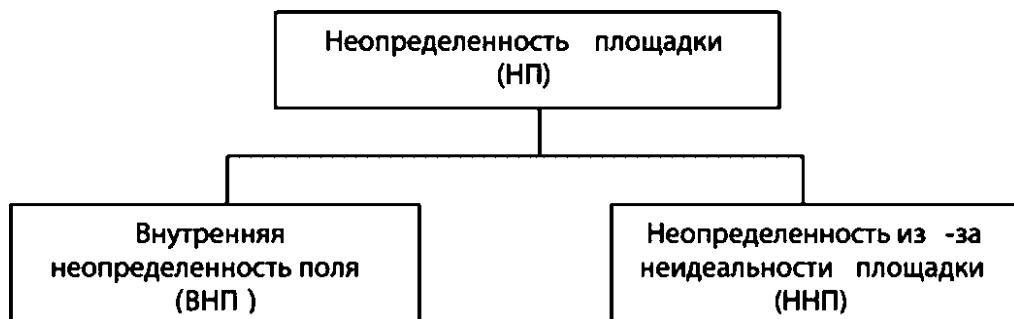

2 -

(, ,)

1

a)

).

(, , () .

b)

(, ,) ,

() (

2

c)

(

(, ,) ,

d)

(,).

—

(. .

).

,

8

[, ,]

()]

(

(

).

1 —

CISPR 16-4-1.

« CISPR 16-4-1 »

CISPR 16-4-2

2 —

2007

4.3

().

().

),

()

5.2.3.4.

ISO/IEC 99-

() CISPR 16-4-1.
().

a)

b)

();

(. [1])

,

ISO/IEC 98-3,

1

ISO/IEC 98-3

ICO/IEC 98-3

a)

 $V = \dots + \dots + 2^2 + \dots + C/jXf;$

b)

/TR 61000-1-6—2014

c) | (,)| ;

d) (, s 3).
a)-d) , Y

t(y),

$$= \alpha_0 + \alpha_1 + \alpha_2 + \dots +$$

$$\text{"()} = [(Cl \ll (*)) ^ 2 + (\text{2} \ll (\text{2})) ^ 2 + \dots + (<?,, (\text{ })) ^ 2] ^ 2.$$

4.4

).

(

$$(\ ' < X < x' + dx') = g(x')dx', \quad (1)$$

('),

(')


(') —

(')

(),


(. . . 3).

().
*,

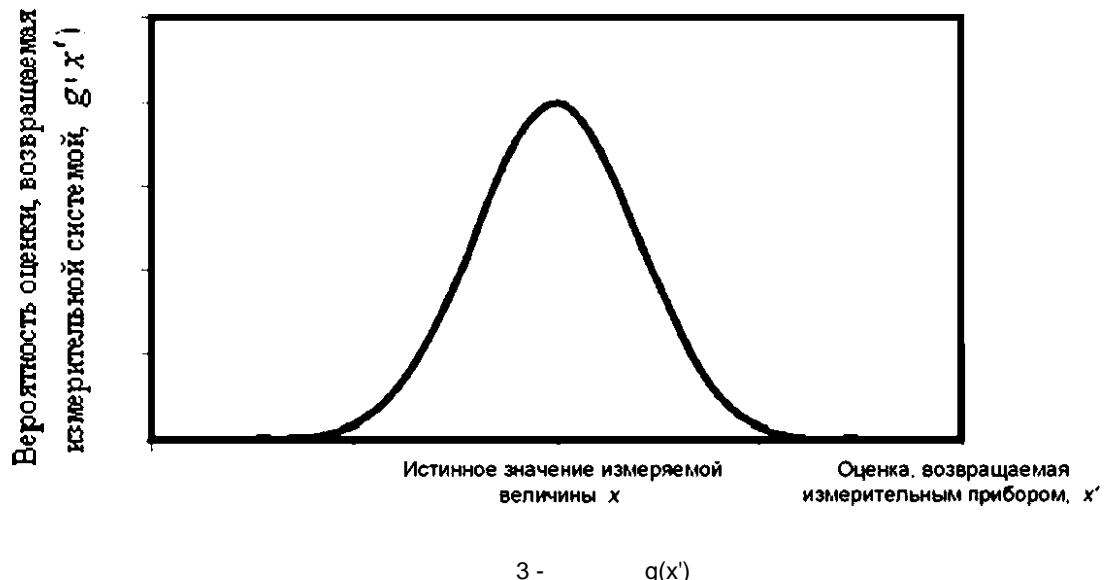 $g(x)$

4


().

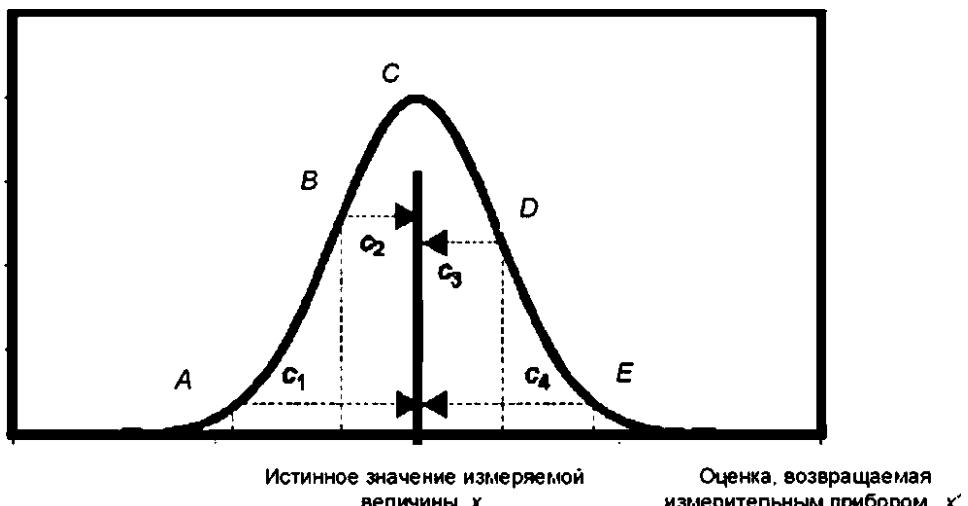

4 - ()

()

4

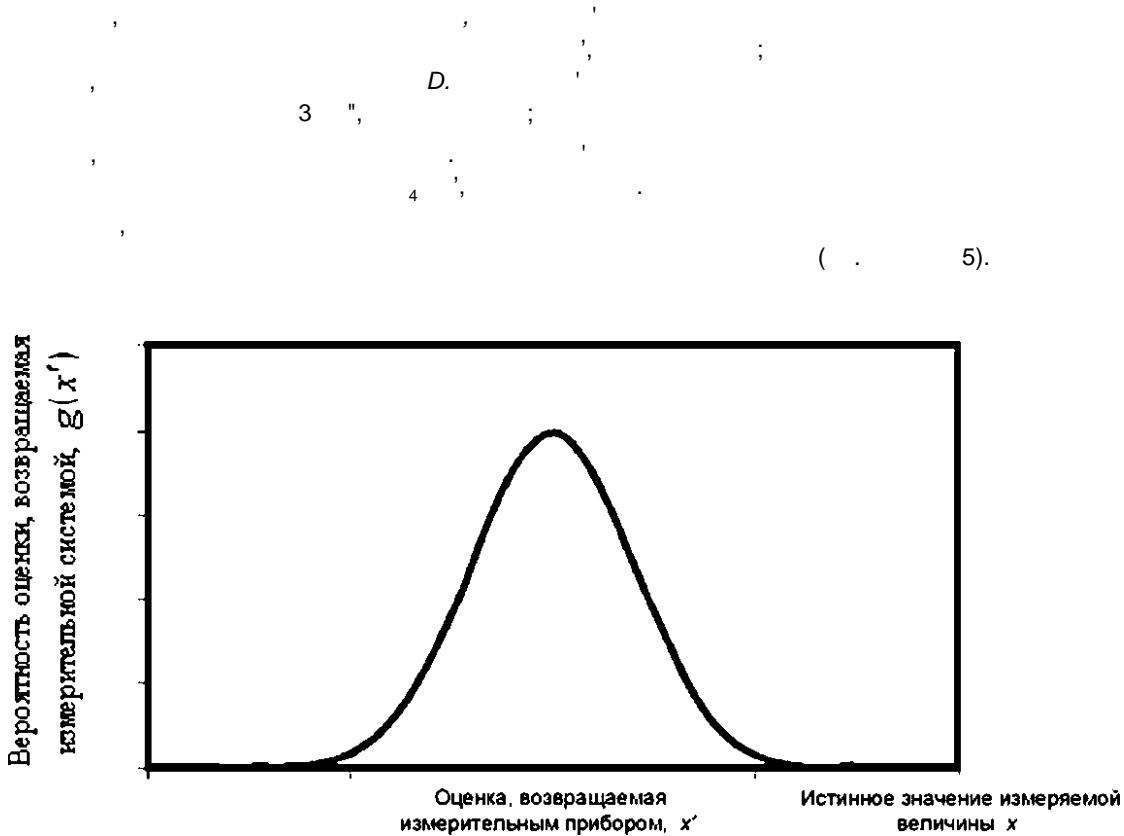

5 - ,

5.**5.1**

1

1-

1	-	Y	
2	X; (. -).	Y	
3	, -	Y	
4	(/)		Y
5	, -	Y	
6	= < u(x _t)		Y
7	« » . .		Y
8	U = - , — U		Y

1

,
 , (/),
 1-4

360°.

2

CISPR 16-4-2

$$I = V_r + \dots + Y_T + 61^A + 6V_{pa} + \wedge V_{pf} + 6I_n + 6 \dots + SZ_{cp} + \wedge D_{AE} + 62 \text{ £} + 6V_{env},$$

V_r — ;
 — ;
 Y_T — ;
 $6V_{SW}^{+\wedge} + \$Vpr^{+\wedge}nf$ — (. CISPR 16-4-2);
 6 — ;
 $6Z_{cp}$ — ;
 — ,
 ()
 bZ_{AE} — ;
 — ,
 .
 ,
 () ,
 .

4

(>) ,
 (, -) (X/ +) 100%, (,) $a/\sqrt{2}$, / /
 $= (+ + ")/2$ - 2,
 , 95% (,
), 1, ,
 68% (, —).
 ,
 ,
 (= , (+ - ")/2. (,
), .

2 -

ФПВ	Выражение для стандартной неопределенности	График
Прямоугольная	$u(x_i) = a/\sqrt{3}$	<p>График показывает равнобедренный треугольник с вершиной на оси абсцисс и основанием, расположенным между точками $x_i - a^-$ и $x_i + a^+$. Ось абсцисс имеет метки $x_i - a^-$, x_i и $x_i + a^+$.</p>
Треугольная	$u(x_i) = a/\sqrt{6}$	<p>График показывает равнобедренный треугольник с вершиной на оси абсцисс и основанием, расположенным между точками $x_i - a^-$ и $x_i + a^+$. Ось абсцисс имеет метки $x_i - a^-$, x_i и $x_i + a^+$.</p>
U-образная	$u(x_i) = a/\sqrt{2}$	<p>График показывает кривую, симметричную относительно оси абсцисс, с вершиной на оси абсцисс и концами, расположенными между точками $x_i - a$ и $x_i + a$. Ось абсцисс имеет метки $x_i - a$, x_i и $x_i + a$.</p>
Нормальная (из оценки стабильности $k=1$)	$u(x_i) = a$	<p>График показывает симметричную кривую Гаусса, симметричную относительно оси абсцисс, с вершиной на оси абсцисс и концами, расположенными между точками $x_i - a$ и $x_i + a$. Ось абсцисс имеет метки $x_i - a$, x_i и $x_i + a$.</p>
Нормальная (из протокола калибровки $k=2$)	$u(x_i) = a/2$	

5

1),

6

, = 1 = ().

7

8

$$U(y) = k u_c(y).$$

(()

95 %. 2 (1,96). 95 %. , 1,64

$R L (R + U < L) (2)$.

5.2

5.2.1

5.2.1.1

$$[a^-, a^+];$$

[', *];

5.2.1.2

5.2.1.3

$$a^+, (" < ^+)$$

$$\mathcal{L}() = \frac{a'' \mathfrak{X} s a^+}{() = 0} \quad < , * <$$

(2)

1. 6. $\frac{1}{(a^+ - a^-)}$.

$$1/(a^+ - a^-)$$

$$* \quad \quad \quad + \quad \quad \quad X$$

. 6 -

()

$$= J x g(x) dx = 5 - | \hat{g} - (3)$$

()

$$- f(x-n) g(x) dx = \frac{(a^+ - a^-)^2}{12} \quad (4)$$


$$\frac{|a^+ - a^-|}{2\sqrt{3}} \quad (5)$$

$$(" + + | / 2 \quad X ,$$

$$1,65 (. . 95/100 \quad 95 \% \quad 99 \% \quad 100 \% \quad X \quad -$$

5.2.1.4

5.2.1.4.1

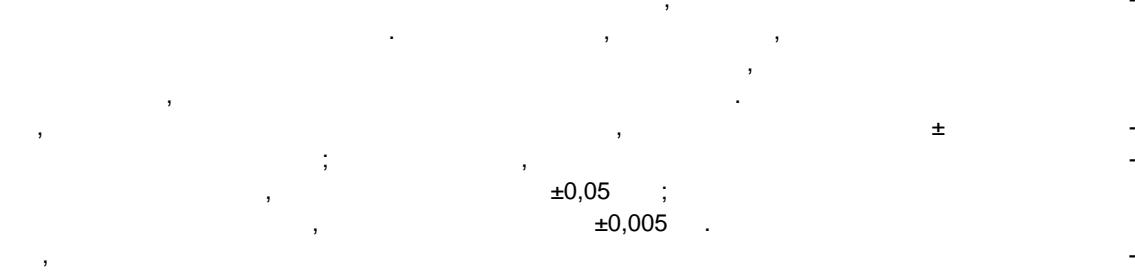

/TR 61000-1-6—2014

$$u = \sigma = \frac{0,05 - (-0,05)}{2\sqrt{3}} = 0,03, \quad (6)$$

2

$$u = \sigma = \frac{0,005 - (-0,005)}{2\sqrt{3}} = 0,003, \quad (7)$$

(6)

(7)

5.2.1.4.2

$$(5) \quad 6,64 / \quad 6,38 / \quad 0,075 / \quad 6,51 / ,$$

$$20 \cdot \lg \left(\frac{6,51 + 0,075}{6,51} \right) = 0,10. \quad (8)$$

5.2.1.4.3

$$\pm 0,01 / ^\circ, \quad (20 \pm 2) ^\circ \text{C},$$

$$(5) \quad \pm 0,02 \quad 0,0115$$

5.2.1.4.4

$$\pm 0,05 .$$

$$\pm 0,01 (5) \quad 0,006 .$$

5.2.2

5.2.2.1


5.2.2.2

5.2.2.3

| ", + |a" < +)

$$\begin{aligned} & \frac{2(a^* - a)}{(a^* - a)(a^* - a)} & " < < \\ & g(x) = \frac{2(a^* - a)}{(a^* - a)(a^* - a)} & \mathcal{E} \mathcal{E} +, \end{aligned} \quad (9)$$

~ + , , , ,
7. — , ,
(+-)

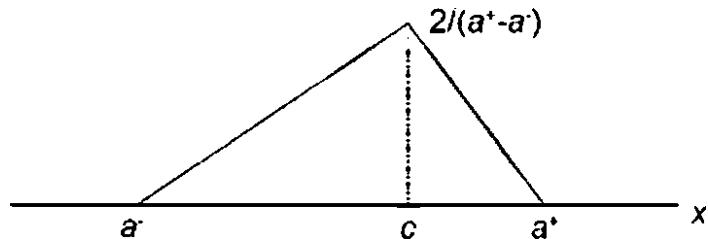

()

$$= \int xg(x)dx = -\frac{a^* - a}{3} \quad ()$$

() — <

$$= J(x-n)g(x)dx = \frac{(a^-)^2 + (a^+)^2 + 2a^-a^+ - a^*a^- - a^*a^+}{18} \quad (11)$$

$$\sigma_x = \frac{\sqrt{(a^-)^2 + (a^+)^2 + c^2 - a^-a^+ - a^-c - a^+c}}{3\sqrt{2}} \quad (12)$$

, . . [-, +],

$$95 \% \quad 99 \% \quad 100 \% \\ 2.32 (\dots 95/100 \dots), 2.42 \quad 2.45,$$

5.2.2.4

$$(\dots) \quad \pm 0,1 \quad \pm 0,05$$

$$2V6 \quad 0.041, \quad (14)$$

5.2.3

5.2.3.1

$$(X, \dots) \quad (\dots)$$

$$(\dots, \dots, \dots, \{X\})$$

$$g(x) = \frac{1}{\sigma\sqrt{2\pi}} \exp\left[-\frac{(x-\mu)^2}{2\sigma^2}\right] \quad -30 < x < \dots \quad (15)$$


$$\hat{\dot{O}X}^g = f_p \quad (16)$$

$$(x=0) = 1.72 \quad (16)$$

$$G(x)$$

$$(\dots, \dots, \dots)$$

$$G(x) = \dots \quad (17)$$

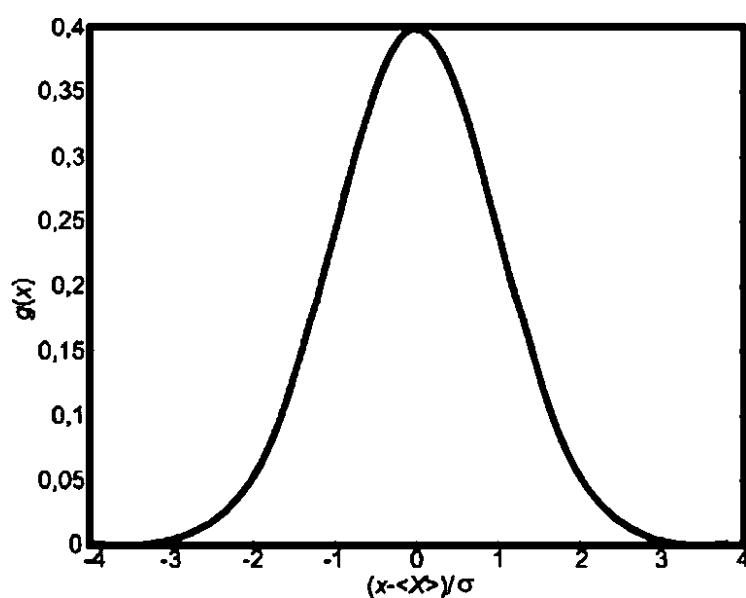

5.2.3.3

5.2.3.3.1

/TR 61000-1-6—2014

, . (, , ,
 .) , ,
 , ,).

 X

 ;
 ;
 X (.
 ;
 ,
 (. , ^-).
 5.2.3.3.2 (X)

 X
 S.

 ,
 , X s (3]
 X s (4).
 5.2.3.3.3 (X) X f-

 ,
 (, , ,)

 ;
 (,) — ();

 X

 , ()±() + .
 X , [5] (, X),

 (,) (,) X)

 ,
 (,) , (,)
) (()^{*0}), (,)

5.2.3.4

$$\langle \varepsilon' \rangle = - = \langle \varepsilon'' \rangle.$$

$$g(e') = \frac{1}{\sigma\sqrt{2\pi}} \exp\left[-\frac{(e' - \langle E' \rangle)^2}{2\sigma^2}\right] \text{ для } -\infty < e' < +\infty. \quad (18)$$

$$\langle \varepsilon' \rangle = \langle \varepsilon'' \rangle, \dots = 1 \quad \langle \varepsilon' \rangle = 0,3 \langle \varepsilon'' \rangle.$$

$$[(\varepsilon') - 1,960 \cdot (\varepsilon'') + 1,960] = [0.804(\varepsilon''), 1.196(0)].$$

$$f_A(a) = \frac{a}{\sigma^2} \exp\left(-\frac{a_0^2 + a^2}{2\sigma^2}\right) I_0 \cdot \left(\frac{a_0 a}{\sigma^2}\right), \quad (19)$$

$$= \sqrt{O^2 + (E'')^2} = 10,54 \text{ —}$$

I_0 —

95 %-

[8,63, 12,54].

\$

95 %-

[0,225, 2,715].

5.2.4 U-

5.2.4.1

U-

$$P_G = P_G$$

$$/ = |1 - |^2 -$$

$$|1 - \frac{1}{17}|^2 = \dots, \quad : \quad$$

a) $\quad \quad \quad 1$

b) $\quad \quad \quad ,$

$$= | \quad | \quad , \\ 0 \quad 2 \quad , \quad X$$

$$X = |1 - \frac{1}{17}|^2$$

5.2.4.2

X

$$9(*) = \frac{1}{zj[x - (1-K)^2][((1+K)^2 - X)]} \quad <20>$$

$$(1 - \frac{1}{17})^2 < (1 + \frac{1}{17})^2 \quad () = 0$$


$$= 1 + \frac{1}{17}^2, \quad () = J2K \cdot U -$$

9.

$$101(). \quad 101() \quad U - \quad ,$$


$$6 \pm = 201(1 \pm). \quad 101() \quad (0 \quad),$$

$$\frac{20\lg(e)}{17} = 6,14 \quad (21)$$

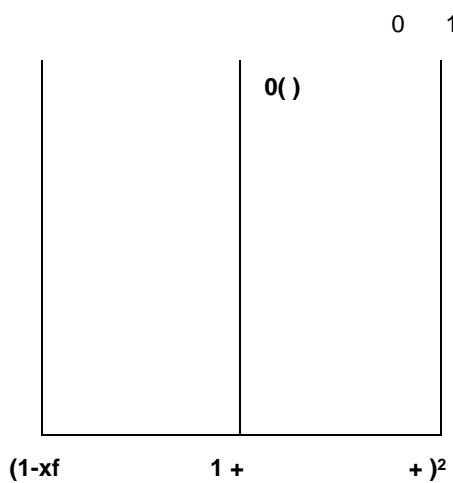

$$9 - U -$$

5.2.4.3

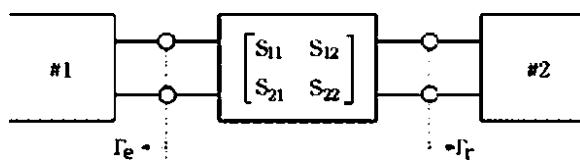

10 -

10

#1 #2

#1 #2

S-

#1 #2;

#1 #2;

#1 #2,

#1

;

#2.

6

$$Ml = 20 \lg 1(1 - r_s)(1 - S_{22})^{-\frac{1}{2}} \quad (22)$$

S22 -

§21-

6

(22):

$$=20\lg[|\pm(||S_{11}|+||S_{22}|+|r_e|r_r||S_{11}||S_{22}|+|r_e|r_r||S_2|^2)|] \quad (23)$$

6

U-

$$< = \begin{matrix} -6 \\ 2^2 \end{matrix} \quad (24)$$

5.2.4.4

$$w(x_i) = \left| \frac{1}{x_i - x_{i+1}} \right| < 0,3. \quad (25)$$

3 -

	1	2
	0.2 (KCBH = 1.5)	0,333 (= 2.0)
	0,333 (= 2.0)	0.5 (= 3.0)
S- S_n	0,056 (-25)	0.1 (-20)
S- S_{22}	0.032 (-32)	0.1 (-20)
S- S_{12}	0,89 (-1.0)	0,89 (-1.0)
S- S_{21}	0,89 (-1,0)	0,89 (-1.0)

1:

$$= 20 \lg [|I| \pm |I_0|]. \quad (26)$$

5.3

5.3.1

8

(. .).

).
—

(. .).
—

(. .).
—

(. .),
—

N
 N

(. .).
—

$1/Jn$

N .

1 —

).

5.3.2

 $/ = 1, 2, \dots, N.$

$$Q = \sum_{i=1}^N q_i Q_i \quad (27)$$

$$q = Q.$$

- a)
b)
c)

$$s(Q_i):$$

<28>

$$Q_1, Q_2, \dots, Q_N$$

 $N - 1$

(28)

$$N = 1.$$

$$N, N-1, \dots, N-1,$$

$$(27),$$

(28).
 $N - 1, \dots, 0/0,$

$$N - Q = 0.$$

 $i=1$

$$v = / - 1$$

$$N, N-1, \dots, v - N.$$

 N

$$N, \quad , \quad , /=1,2,\dots \quad .$$

$$, \quad N. \quad (\quad) \quad Q_i.$$

$$Q. \quad \underline{\quad} - ! \quad Q = \underline{\quad},$$

(28),

$$s(\bar{Q}_j) = \sqrt{\frac{1}{M-1} \sum_{j=1}^M (Q_j - \bar{\bar{Q}})^2}. \quad (29)$$

(. [7]). » \$ (Q). s (Q) —

$$s(\bar{Q}) = \sqrt{\frac{1}{N(N-1)} \sum_{i=1}^N (Q_i - \bar{Q})^2} \quad (30)$$

$$s(\bar{Q}) = \frac{s(Q_i)}{\sqrt{N}} \quad (31)$$

(29).

(30) (29)

(31)

$$s(Q_i) \quad \wedge^2(V-1) \quad / \wedge^3(-) \quad 1.$$

$$, \quad s(Qy) \quad N,$$

N

N.

1/N/V.

\$ ()

(28).

76 % $N=2$ (. ISO/IEC 98-3, 1).

$$\begin{aligned}
& , \quad , \quad , \quad 8 \quad , \\
N. & , \quad , \quad , \quad , \\
& , \quad , \quad , \quad , \\
& N \quad , \quad , \quad / = 10, \quad . \\
& , \quad , \quad , \quad , \quad 24 \%. \\
& , \quad (\quad . \quad 1), \\
& Q \\
& , \quad , \quad , \quad , \\
& r(v) > 1, \\
A u(Q_v): & \\
& "Q = n(v)s(Q) \quad (32)
\end{aligned}$$

(33)

$$\eta(v) = \begin{cases} 6.48 & v = 1 \\ 2.20 & v = 2 \\ \sqrt{\frac{v}{v-2}} & v \geq 3. \end{cases} \quad (34)$$

$$\begin{aligned}
t(v) & \quad 1 < v < 99 \quad (\quad . \quad 25/V \leq 100) \quad 4. \quad q(1) \\
|2) - & \quad *0.025 \quad 0/* \quad , \quad 25 \quad (\quad) \quad * \quad . \quad 25(2)/* \quad . \quad 25(^{\circ}) \\
fp(v) & \quad f- \quad q \\
& \quad , \quad *0.025 \quad (1)^S \quad 12.71 \quad ? \quad 25(\quad) = 1.96, \\
0.025 \quad (1)/ \quad . \quad 25 \quad (^{\circ}) & = 6.48 \quad . \quad *0.025(2) = 4.3^{\circ}. \quad * \quad , \quad 25 \quad (2)/* \quad ,025 \quad (*) = 2.20.
\end{aligned}$$

$$\frac{1-}{2} = \frac{1-}{2} (\quad , \quad = 0.95 \quad = 0.025). \quad /$$

$$2 = \frac{1-}{2} (\quad . \quad ISO/IEC 98-3, \quad G).$$

4 —

$r|(v)$.

v	1	2	3	4	5	6	7	8	9
n(v)	6.48	2,20	173	1,41	1,29	1,22	1.18	1,15	1,13

	10	11	12	13	14	19	29	49	99
n(v)	1,12	1,11	1,10	1,09	1,08	1.06	1.04	1.02	1,01

1

(,) (32) (, N*10) (,).
 (,) Qi Q2.
 , , u(Qi). |Qf-Q2| > 1,96-72 u(Q2),
 5 %, , u(Qj),
 (,) .
 , ,
 3 — Q, -Q2 , ,
 0 77-u(Qi).

2

(IEC) 61000-4-3.

(/),

5.3.3

(CISPR 16-1-1. $E_{min} = -2$, $E_{max} = +2$).

(),

$$(< < + dE) = g(E)dE. \quad (35)$$

$$(< < + dE^{\wedge} - , + dE , dE -)$$

$$(-).$$

$$g(E)sO ; \quad (36)$$

$$\int g(E)dE = 1 \quad (37)$$

$$, j g(E)dE = 1. \quad (E_{\min}, E_{\max})$$

$$, -1 - 0,95,$$

$$\int_{E_{\min}}^{E_{\max}} g(E)dE = p \quad (38)$$

(37)

$$E_{\max} - E_{\min}$$

сота равна $1/(E_{\max} - E_{\min})$. В случае треугольной ФПВ ширина основания опять равна $E_{\max} - E_{\min}$, а

$$2/(E_{\max} - E_{\min}).$$

$$Eg(E)dE ,$$

$$Eg(E)dE$$

(),

$$\langle E \rangle = \int Eg(E)dE \quad (39)$$

()

(35)

$$\text{= } (\text{)}. \quad (39)$$

$$\textcircled{R} = (\wedge_{\min} * \wedge_{\max})$$

$$((E-\lambda)^2) = f(E-(E))^2 g(E) dE. \quad (40)$$

$$(\text{)} \quad (40)$$

$$u(e) = j f(\xi - (\xi))^2 g(\xi) d\xi. \quad (41)$$

$$u(e) = Of. \quad (41),$$

$$(\text{)} = \frac{\wedge_{\max} - \wedge_{\min}}{\sqrt{12}} g \quad (42)$$

$$u(e) = \frac{E_{\max} - E_{\min}}{\sqrt{24}}. \quad (43)$$

$$\begin{aligned} E_{\min} &= -2 & &= +2 & &= 1,2 \\ (\text{)} &= 0,8 & & & & \\ = 0 & & & & & \\ 1 & & & & & \\), & & & & & \\ 95 \% , & & & & & \\ \wedge \wedge 2-1,96 \gg 3,92 & & [& & & \\ & & & & &] . \end{aligned}$$

 $X,$

5.4

5.4.1

()

)

10

(

;

;

;

(12),

(, ,)

, $N = 40$

« »

.

 N

.)

 N

() . . .)]

 N .

[

,

(, ,),

),

 $N)$

(,)

,

5.4.2

(, .)

 X (

,

 N = \overline{X} .

(44)

 $X, —$ $X —$ { X }. X

$$s_X = \sqrt{\frac{\sum_{i=1}^N (x_i - \bar{x})^2}{N-1}}$$
(45)

 X (X)

$$s_{\bar{X}} = \frac{s_X}{\sqrt{N}} \quad (46)$$

$$s^*, \quad , \quad N$$

5.4.3

$v_x = < / ((, X) , X ; X , X) ,$

$$1/v_x$$

(47)

$$v_x^{\wedge}|| + 2v_x \quad \Big) / \sqrt{(2N)}$$

5.4.4

$$\left| \begin{array}{c} \% \\ \mathcal{L}_{1\pm 100}^* \end{array} \right) \cdot_2$$

,

$$\left(\begin{array}{c} . \\ . \\ . \end{array} \right) \cdot_1$$

—

$$3 \wedge_{100} | \cdot_2 \quad ?^*_{1+ 100}) \cdot_2$$

95%-

G(X)

$$\sigma(\Xi_{0.975}^+) \quad \sigma(\Xi_{0.025}^-) \quad (48)$$

X:

/TR 61000-1-6—2014

$$\text{~~406975~~} \frac{1}{\sqrt{N}} = \frac{0,025}{\sqrt{y/N}} \cdot \frac{2,671}{\sqrt{N}} = \frac{1,363}{\sqrt{y/N}} = \frac{1,363}{\sqrt{y/N}} \quad (49)$$

(3).

$$N = 10, 100, 1000$$

$$\begin{array}{ll} 95 \% & 43,1 \% \\ 13,6 \% , 4,3 \% & \\ 59,9 \% , 18,9 \% , 5,9 \% & \end{array}$$

2<

5.4.5

5.4.5.1

5.4.5.2

$$X \sim N(\bar{x}, \sigma^2) \quad (50)$$

$$g(x; \bar{x}, \sigma^2) = \frac{1}{\sqrt{2\pi\sigma^2}} \exp\left[-\frac{(x - \bar{x})^2}{2\sigma^2}\right] \quad (50)$$

$$\begin{aligned} X &\sim N(\bar{x}, \sigma^2) \\ (x_1, x_2, \dots, x_N) &\sim N(\bar{x}, \sigma^2) \end{aligned}$$

/ ,

5.4.5.3 $(\langle E \rangle = 0)$

$$W$$

$$g(w; v) = \int_{r(dW) < T} \left(\frac{w}{\sigma_w} \right)^{xdW-1} \exp \left(-JdN \frac{w}{\sigma_w} \right), \quad (51)$$

$V(dN)$

$$d \quad d-1; \\ d=2; \\ d=3.$$

$$= = 2dn^2 \quad \sigma_w = 2\sqrt{\frac{d}{N}}\sigma^2 \quad (52)$$

$$\langle | \rangle = 2\langle \cdot \rangle^2$$

|%

$$\frac{I_J}{V(dN)} \quad \frac{1 \pm 100}{2} \quad (53)$$

$y(dN)$ —

5.4.5.4


$$(\langle E \rangle = 0)$$

$$g(a; N) = \frac{1}{2} r(dW) \exp \left\{ - \left[dN - \left(\frac{\Gamma(dN + \frac{1}{2})}{\Gamma(dN)} \right)^2 \right] \left(\frac{a}{\sigma_A} \right)^2 \right\} \quad (54)$$


$$\langle \bar{A} \rangle = \sqrt{2} \quad (\quad), \quad \sigma_{\bar{A}} = \sqrt{\frac{2}{N} \left[dN - \frac{\left(r(dN) + \frac{i}{\pi} I \right)^2}{T(dN)} \right]} \sigma. \quad (55)$$

/TR 61000-1-6—2014


|%
(56).

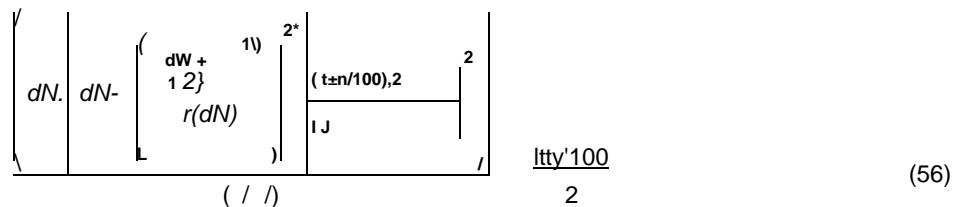

— 11 12
— N
,
(≤ 1).
95 %, 99 % 99,5 % W

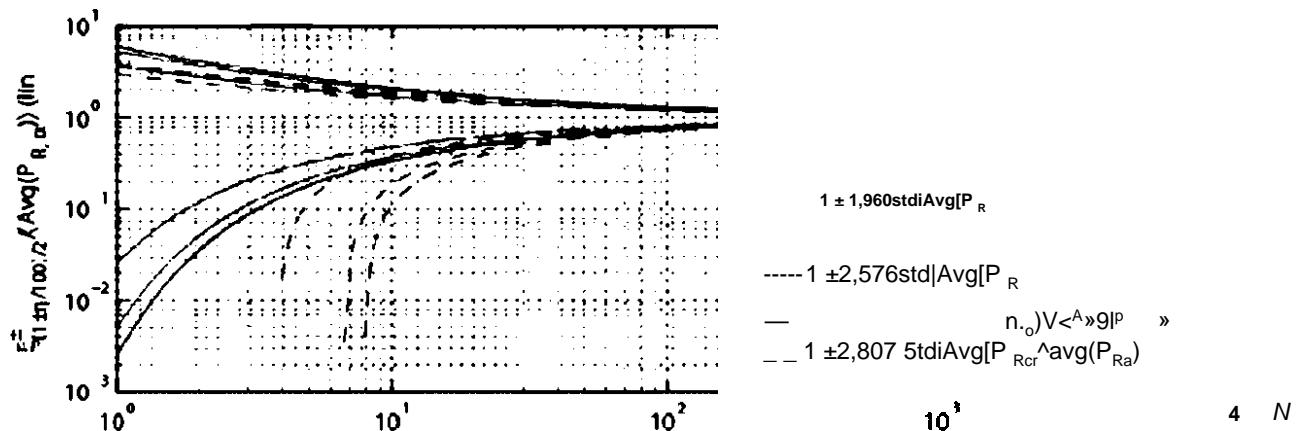

— 11 -
— N
()
95 %. 99 % 99,5 % W

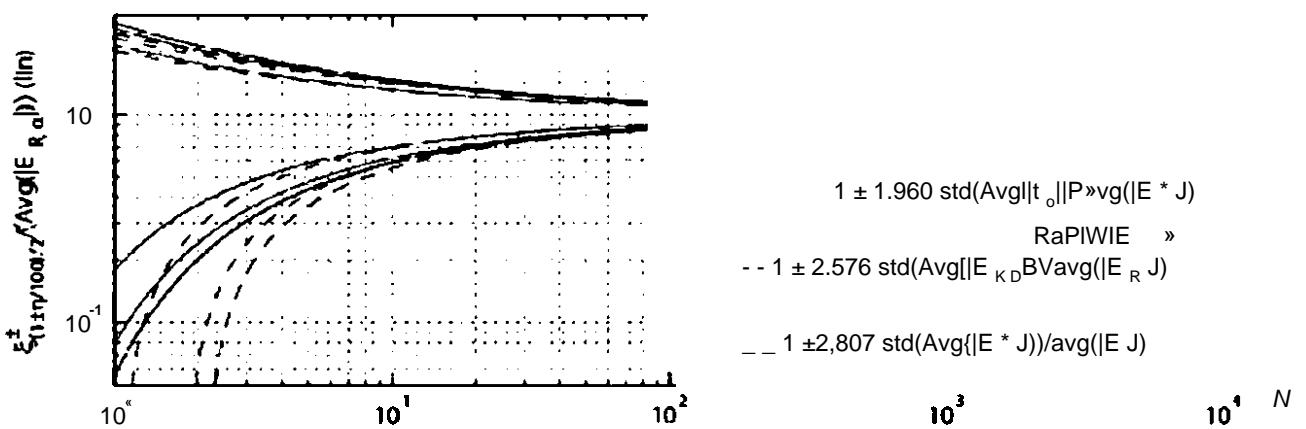

12 - 95 %, 99 % 99,5 % N

5.4.6

5.4.6.1

$$\overline{N} = \frac{N}{N-1}$$

5.4.6.2

$$N = \frac{N}{N-1}$$

$$g(s_x; N) = \frac{2}{\Gamma(N-1)} \left[\frac{N-1}{2} - \left(\frac{\Gamma(N/2)}{\Gamma(N-1)} \right)^2 \right]^{-1/2} \left(\frac{s_x}{\sigma_{s_x}} \right)^{N-2} \exp \left[- \left[\frac{N-1}{2} - \left(\frac{\Gamma(N/2)}{\Gamma(N-1)} \right)^2 \right] \left(\frac{s_x}{\sigma_{s_x}} \right)^2 \right] \quad (57)$$


$$\langle s_x \rangle = \sqrt{\frac{2}{N-1}} \frac{\Gamma(N/2)}{\Gamma(N-1)} \sigma_{s_x}, \quad \sigma_{s_x} = \sqrt{1 - \frac{1}{N-1}} \sigma_x. \quad (58)$$

$$5.4.6.3 \quad (\text{W}, \text{V}) \quad ((E) = 0)$$

$$\Delta V = \sqrt{dN - \frac{1}{2}} \frac{\%}{\sigma_{|V|}} \quad (59)$$

$$\sigma_{s_w} = \frac{\sigma_w}{\sqrt{dN - \frac{1}{2}}} \quad (60)$$

5.4.6.4

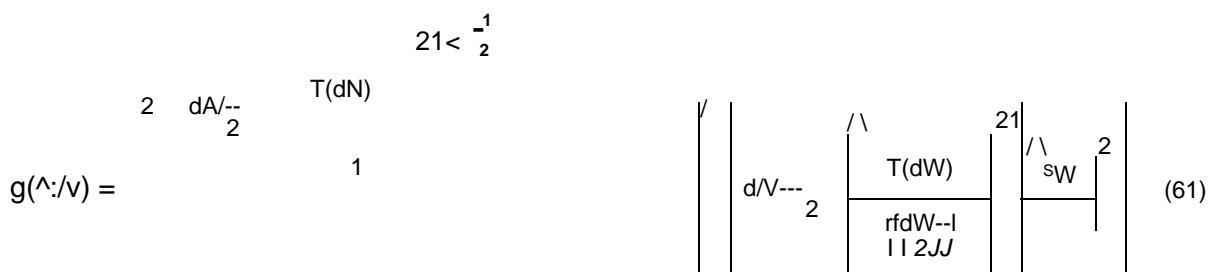

/TR 61000-1-6—2014

$$\langle S_A \rangle = \frac{1}{\sqrt{dN - \frac{1}{2}}} \frac{\Gamma(dN)}{\Gamma\left(dN - \frac{1}{2}\right)} \sigma_A, \quad \sigma_{S_A} = \sqrt{1 - \frac{1}{dN - \frac{1}{2}} \left(\frac{\Gamma(dN)}{\Gamma\left(dN - \frac{1}{2}\right)} \right)^2} \sigma_A. \quad (62)$$


13

95%-

Sy

N

(d = 1),

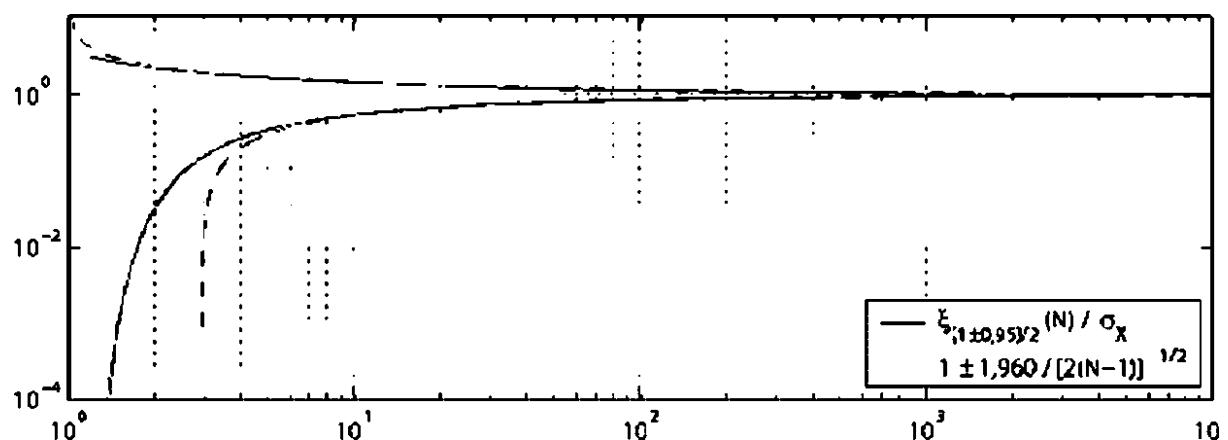

13-95%-

Sy

/,

5.5

5.5.1

[(. . . , . . . / . . . , . . . (. . .) . . .) . . .]
 [9].

5.5.2

5.5.2.1

(. . . , . . . < / «1),

$$F = 20 \lg(E) \quad (63)$$

$$\vartheta_F(\) = \exp \frac{2e^{-2}}{\ln \frac{(F-20\lg(\))^2}{20g}} \quad (64)$$

F

$$\vartheta_f(F) = \exp \frac{\ln \frac{20}{\ln 10}}{\ln 10} \quad (65)$$

5.5.2.2

(%)

$$= 201 \quad () \quad (66)$$

$$() = \frac{1}{20} \cdot 10^{20} g_A = 102 \quad (67)$$

$$() = 7^{20} \vartheta() \quad (68)$$

$$\hat{\wedge} = \hat{\wedge}^9 (= 201 \quad ()) \quad (69)$$

$$() = J \exp \frac{1}{2} \cdot 10 \lg_s (B = X) cPC \quad (70)$$

/TR 61000-1-6—2014


$$g_a W = \begin{pmatrix} -A^2 \\ 2\sigma^2 \end{pmatrix} \quad (71)$$

$$g_s(B) = C \frac{\ln 10}{20a^2} 10^{20} \exp \frac{\frac{A'}{2\sigma^2}}{2ct^2} \quad (72)$$

$$= e = 1/72.$$

14

a.

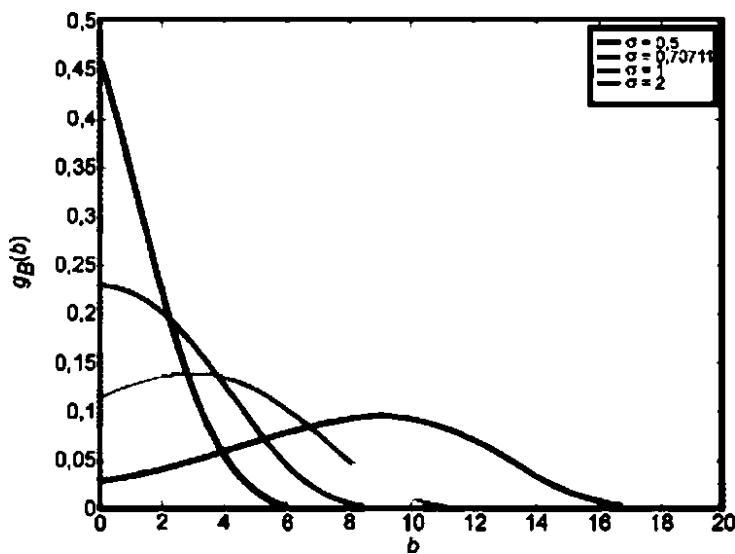

14 -

5.5.2.3

(2-

)

$$V = 10 \lg(R). \quad (73)$$

$$g_V(V) = C \frac{\ln 10}{10} 10^{10} g_R \quad R = 10^{10} \quad (74)$$

$$\{V\} = f \cdot 10 \lg(X) g_R(R = X) dX. \quad (75)$$

(76)

$$g_V(V = X) dX. \quad (77)$$

 $R,$

$$g_r(r) = \frac{\exp\left(-\frac{R}{2\sigma^2}\right)}{2\sigma^2} \quad (78)$$

$$g_V(V) = C \frac{\ln 10}{20\sigma^2} 10^{10} \exp\left(-\frac{V}{2\sigma^2}\right). \quad (79)$$

 $R,$

$$(V) = 10 \lg(2\sigma^2) - 2,507, \quad (80)$$

5.5.3

$$[\dots] = 20 \lg_{10}(X),$$


$$f(x) = \frac{1}{20(\dots)} 20, \quad (81)$$

$$Z = 10 \lg_{10}(X),$$

$$9z(\wedge) = \frac{1 \ 10}{10(0 -)} \quad 1010^2 \quad (82)$$

$$() = \frac{201}{7(b-a)\ln(10)} X^2, \quad (83)$$

6

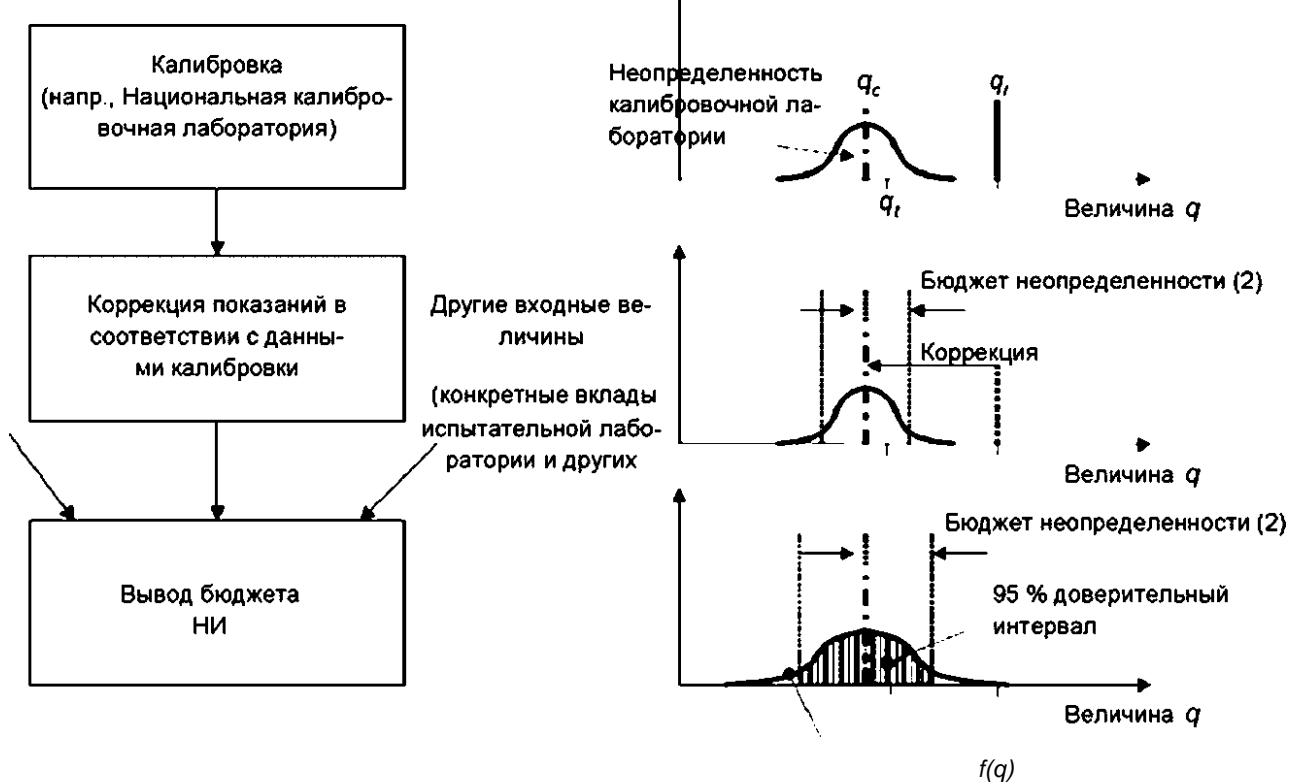


15 -

$$15 \quad q_c = q_t + \frac{q_c - q_t}{\sqrt{1 + \left(\frac{q_c - q_t}{\Delta q} \right)^2}}$$

$$q_c = q_t + \frac{q_c - q_t}{\sqrt{1 + \left(\frac{q_c - q_t}{\Delta q} \right)^2}} \quad (1)$$

(2).




15. 8

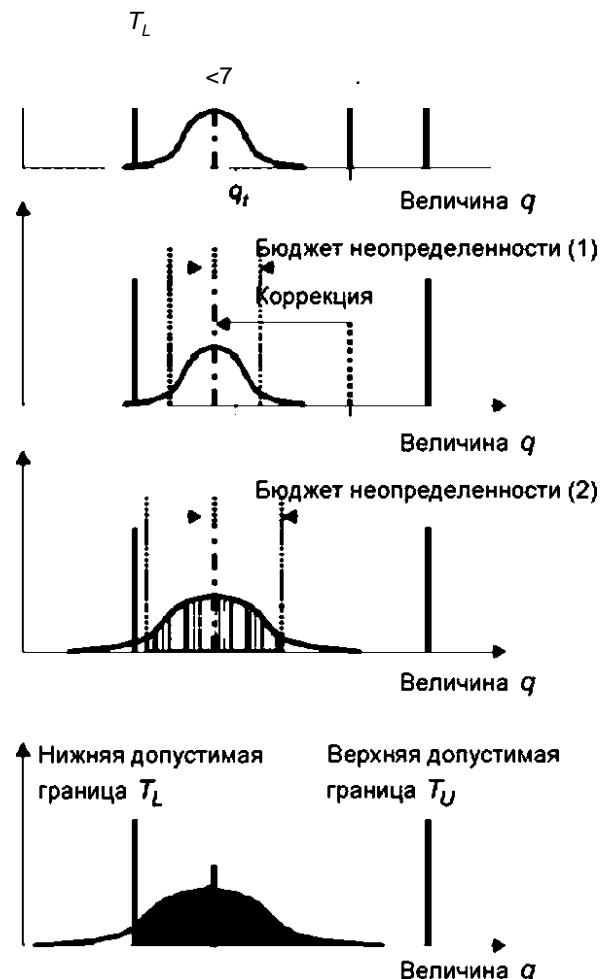


16 -

16 T_L


17

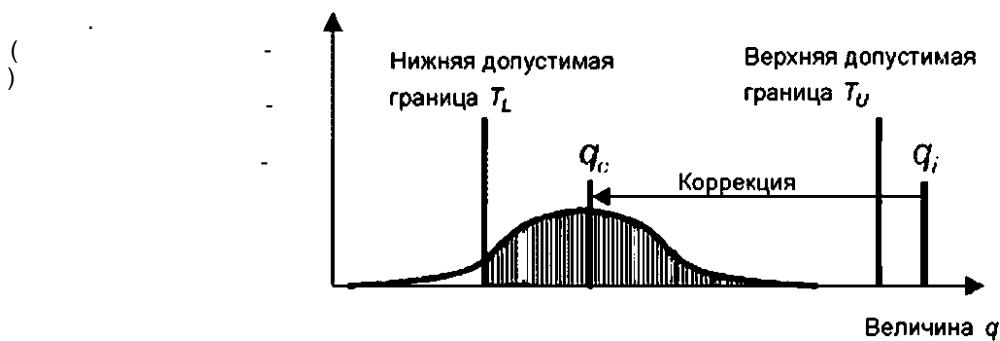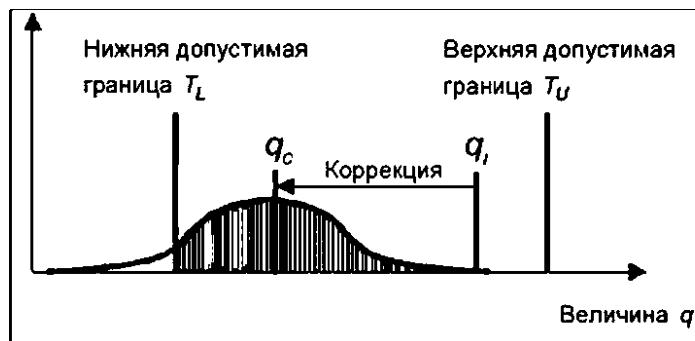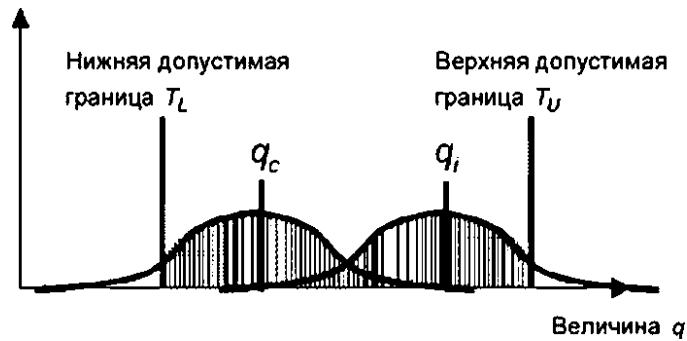


{

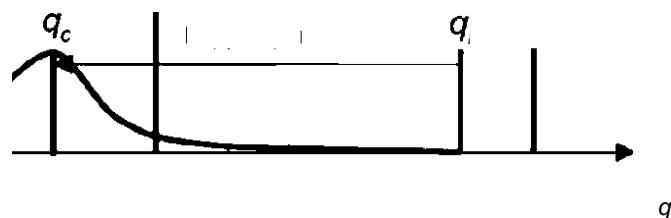 T_L  q

,
 $q_c - < T_L$,
 $q_c + >),$
 $($
 $),$
 1^*

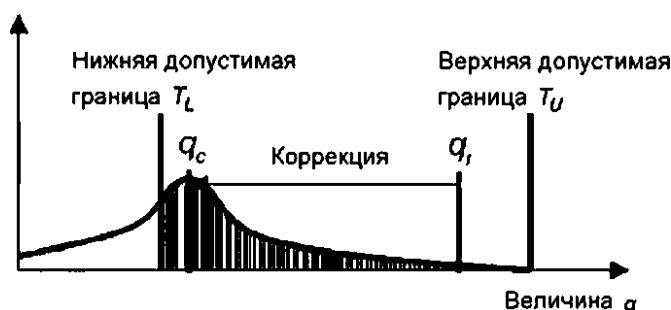

,
 $q_c + HH > T_L$,
 $q_c - HH <),$
 1^*

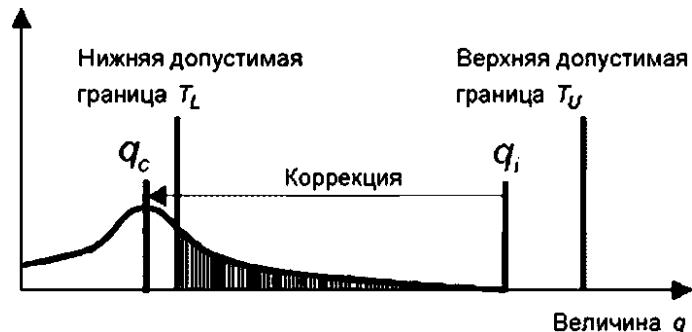 1^*

61000-4-,

17-

()
 A

.1

.1.1

X/ -

;

X} - X/;

8 , -

;

(/) -

, -;

Cj -

;

-

, (

),

,

()~

;

U () -

;

-

,

* -

;

-

.

.1.2

-

, (/),

360°

.1.3

-

,

,

;

6 -

,

,

;

V_r -

, ();

SVgjy-

6V_{nf} -

, .

.1.4

G_p -

;

6Gp -

;

F_g -

. (/);

8F₆ I -

-

;

6F_a (Hf-

-

,

;

ph -

-

,

;

6F₆ -

-

,

;

-

-

,

;

6 -

-

;

6d -

-

;

8 -

-

;

.2

1 18

$$= V_r + Bq + G_p + F_g + 6V\$iv + 6V_hf + \&Gp + \&M + \&Fgf + 3\# + \&Faph + \&F_{ac}p + \$vsuft + ^NNT + \&J \quad \bullet$$

	$*_I$	X,			
	V_r	0,1		=1	0,10
: - 2>		0,2		=2	0,10
11)	G_P	0,2		=2	0,10
⑧*	F_e	1,0		*=2	0,50
3)	W_{sw}	1,5		= 2	0,75
11Δ	${}^5\!G_P$	1,2			0,70
1-6 4)	,	+ 07/0,0			0,4
6-18 4>	,	+0.1/0,0			0,58
⑧)	:	+13/-1.5			1,00
- ⑧)	:	6M	+1.2/-1.4		0,92
	:				
7)	-	$\wedge_3 f$	0,3		0,17
⑧)		dir	+3.0/-0.0		0,87
3	9)	pft	0,3		0,17
10>		${}^6\!F_A$	0,9		0,52
	12>		3,0		1,22
, 1-6 13)	-		1,5		0,87
6-18 13)	-	${}^6\!A_{wr}$	2,0		1,15
3	14)		0,3		0,17
1S)			0,0	*=2	0,00

1)-5)

.,

6)-15) — .1 .2.

4

| , | = 1, . 5.1 ().

$$U_{cv}(E) = 2U_c(E) J^{5J81} \quad *6 \quad 6-18$$

(1-5)

$$V_r = \frac{U_{cv}(E)}{R} \quad (R=1)$$

2)

$$E_{NP} = V_{NP} + F_a + s_c = -67 + 10\lg F_w + 10\lg B_w + w_{PN} + F_a + a_c$$


4)

$$E_{NP} = V_{NP} + F_a + s_c = -67 + 10\lg F_w + 10\lg B_w + w_{PN} + F_a + a_c$$

6


$$E_{NP} = V_{NP} + F_a + s_c = -67 + 10\lg F_w + 10\lg B_w + w_{PN} + F_a + a_c$$

74 (/) (CISPR 22) CIS/I/106/CDV 58 (/) (CISPR 16-1-1 (±2) 2)

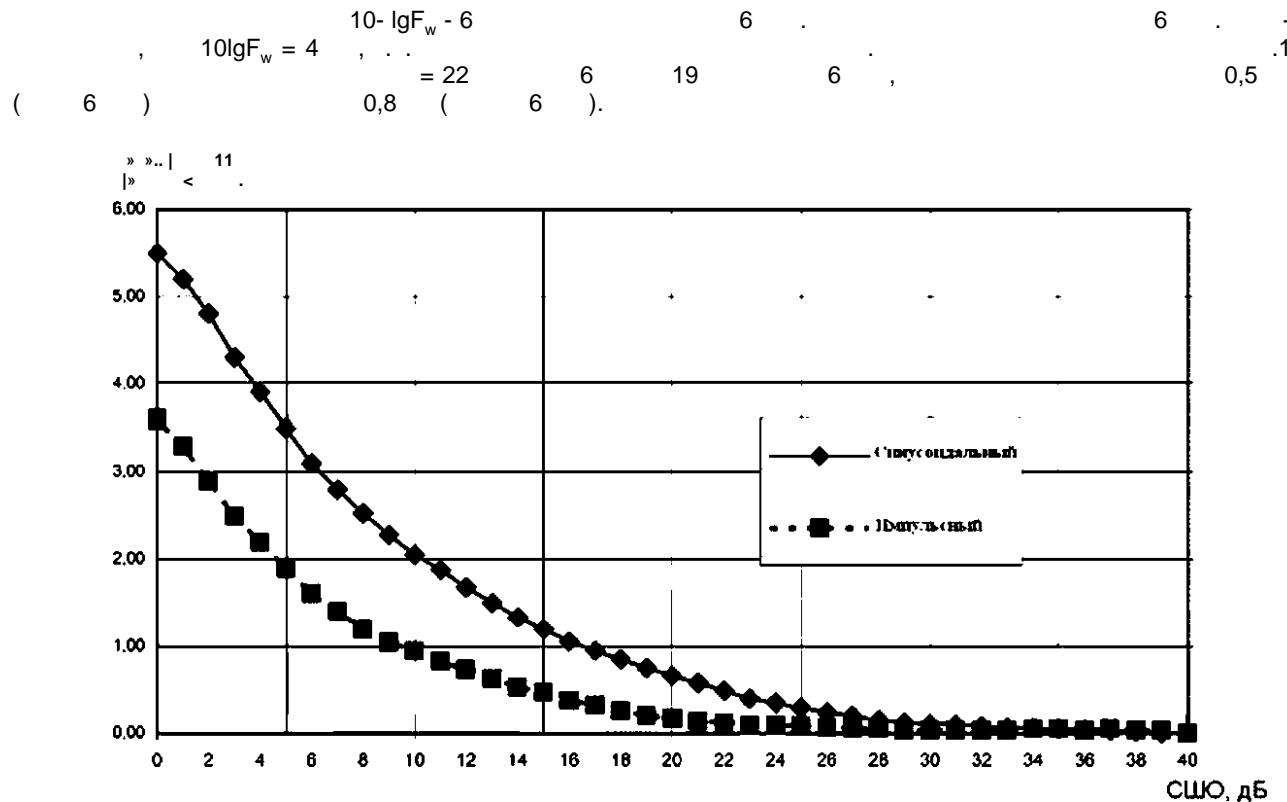

$G_1 = 10\lg(g_1) =$
 $Nfw =$
 $F_{tot} =$
 $Nf_{sys}(F_1, F_2)$
 $Nnot =$
 $Nfsyst = 1 + Nftot$

$$F_{tot} = F_1 + \frac{F_2 - 1}{g_1}, \quad Nnot = \dots, \quad Nfsyst = 1 + Nftot$$

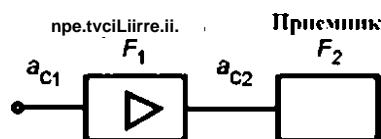

5)

$$6M = 20 \lg |(1 - r_e S_{11})(1 - r_f S_{22}) - S_{11} r_e|; \quad (A.2)$$

— , 50 , 6 ,
 8 : 5 = $20 \lg [I \pm (|r_e| |S_{11}| + |r_f| |S_{22}|) + |r_e| |r_f| |S_{11}| |S_{22}| + |r_e| |r_f| |S_{21}|^2]. \quad (.)$

(, [' -6)
 , V2 (,
 , , 1 , , s^< 2,0:1,
 $|I'| \leq 0,33.$,
 $(|S_{ii}| \ll 1, |S_{22}| \ll 1) \quad 1 \quad 1 \ll 0,9), \quad 0$
 CISPR 16-1-1 < 3,0:1 | | < 0,5.
 , ,
 , , £2,0:1.
 1
 6 0 U- , [* -).
 1 — 6 ' & ,
 2 — ,
 2.0:1.
 3 — « » , CISPR 16-1-4 , £2,0:1
 4 — ,
 ,
 $|r_e| |S_{11}| + O.Sx1O^{a120},$
 — ;
 — ;
 5 — (.):
 a)
 b) (/ —),
 $\ll 6.1^a (|r_e| |S_{11}|)^2 + (|r_f| |S_{22}|)^2 + (|r_e| |r_f| |S_{21}|^2)^2$

.4
1 18 () 15)

6) , F_a

7) ,

$6F_a$ ()
0,3

1 — , ,

8) w (9) CISPR 16-2-3:2010,
w

w
(9).

+1 (.)
1,5 , , ,

w.

2 — 1 , , 1 ,
3 (. CISPR 16-2-3). 1 , , ,

3 (20 / 1/).

1

CISPR 16-2-3

9)

$\pm 0,1$

10) , ,
 $8F_a$

20 , CISPR 16-1-4.

0,9 ,

11)

G_p

(

0,7

12) CISPR 16-1-4,

6

/TR 61000-1-6—2014

Sy_{SkVp}, CISPR 16-1-4

1 , 6 Sy_{SkVR},
 6 .
 3 CISPR/A/838/INF. Sy_{5kW?} 6
 4 . , 4
 4 = 3 (1,33),
 = 3 .
 2 Sy_{SkW?} 2 ,
 1,22. , — 15 (20)
 SyswR = 6
 3 — 1 Sy_{SkVR} 6 ,
 = 3. 2 Sy\$pvR 6 ,
 ^5 \$ / , 2,
 13) CISPR 16-1-4 1
 14) , 1
 , 15) 1 ±0,1

()

.1

$X/-$,
 $X/- X,-;$
 $8/- ;$
 $u(Xj) - , -;$
 $, - ;$
 $- () ,$

() -

$U() - ;$
 $- ,$
 $* - ;$
 $- .$

.2

- . (/),

80 1000

— , () (

,).

TM

- , (/);
 $CF - ;$
 $6Lin - ;$
 $6/so - ;$
 $1 - ;$
 $6Uni - ;$
 $6 - ;$
 $8Res - .$

.4

80 1

$$E-E_m + CF + 6Lin + 8/so+6/ / + SUni + 6Har + 6 \operatorname{Re} s.$$

	X,	X,			
		- ,			
		0.8	= 1	1	0,80
2)	-	CF	1,7	= 2	1
	:				
	3*	bUrt	0.5		1
	4*	8/so	0.5		1
		6/nt	0,5		
	UFA ^{6*}	6Uni	1.5	= 1	1
	1*	6Har	0,5		0,29
	8*	6Res	0.3		0,17
					3,98
				$u_c(y) = 7z^u(x^*)^2$	1,99
				U () (= 2)	3,99
	1)-8)	0 3			

- .5
- 1)
a) , : , () -
- b) ().
c) () , (), () -
- 2) , () -
- () , = 2, () - 95 %
- 3) , -
- 4) , -
- 5) , -

6)

16 , (/)
80 1000

7)

6 , 1
0.5

8)

,
— 0,5
7).

IEC

IEC 60050-101:2001	International Electrotechnical Vocabulary — Part 101: Mathematics (. 101.)
IEC 60050-300:2001	International Electrotechnical Vocabulary — Electrical and electronic measurements and measuring instruments — Part 312: General terms relating to electrical measurements — Part 313: Types of electrical measuring instruments — Part 314: Specific terms according to the type of instrument (. 312. 313. 314)
IEC 60050-393:2003	International Electrotechnical Vocabulary — Part 393: Nuclear instrumentation — Physical phenomena and basic concepts (. 393.)
IEC 60050-394:2007	International Electrotechnical Vocabulary — Part 394: Nuclear instrumentation — Instruments, systems, equipment and detectors (. 394.)
IEC 60390:2001	Electrical and Electronic measurement equipment — Expression of performance (.)
IEC 61000-4 (all parts)	Electromagnetic compatibility (EMC) [. (. . . .)]
IEC 61000-4-3:2006	Electromagnetic compatibility (EMC) — Part 4-3: Testing and measurement techniques— Radiated, radio-frequency, electromagnetic field immunity test Amendment 1:2007 Amendment 2:2010 [. (. . . .) 4-3. 1:2007, 2:2010]
CISPR 16 (all parts)	Specification for radio disturbance and immunity measuring apparatus and methods (.)
CISPR 16-1-4:2010	Specification for radio disturbance and immunity measuring apparatus and methods- Part 1-4: Radio disturbance and immunity measuring apparatus — Antennas and test sites for radiated disturbance measurements (.) 1-4

CISPR 16-2-3:2010	Specification for radio disturbance and immunity measuring apparatus and methods - Part 2-3: Methods of measurement of disturbances and immunity — Radiated disturbance measurements Amendment 1:2010
	(2-3. 1:2010)
CISPR/TR 16-4-1	Specification for radio disturbance and immunity measuring apparatus and methods - Part 4-1: Uncertainties, statistics and limit modeling — Uncertainties in standardized EMC tests
	(4-1. 4-1.)
CISPR 22:2008	Information technology equipment — Radio disturbance characteristics — Limits and methods of measurement
	()
ISO/IEC Guide 98-3/Suppl. 1:2008 (JCGM 101:2008)	Uncertainty of measurement — Part 3: Guide to the expression of uncertainty in measurement (GUM:1995) — Supplement 1: Propagation of distributions using a Monte Carlo method Technical Corrigendum 1:2009
	[— 3: (GUM: 1995) 1. 1:2009]
ISO/IEC Guide 99:2007	International vocabulary of metrology — Basic and general concepts and associated terms (VIM)
	(no)
European Telecommunications Standards Institute (ETSI)	Electromagnetic Compatibility and Radio Spectrum Matters (ERM): Uncertainties in the measurement of mobile radio equipment characteristics — Part 1. Technical Report TR 100 028-1, Dec.2001
	(1. TR 100 028-1, 2001)
European Telecommunications Standards Institute (ETSI)	Electromagnetic Compatibility and Radio Spectrum Matters (ERM): Uncertainties in the measurement of mobile radio equipment characteristics — Part 2, Technical Report TR 100 028-2, Dec.2001
	(2. TR 100 028-2, 2001)
European Accreditation (EA): EA-4/02: M3003	Expression of the uncertainty of measurement in calibration, Dec. 1999 (1999)
UK Accreditation Service (UKAS): M3003	The expression of uncertainty and confidence in measurement, 2nd ed. 2007 (2007), 2-

/TR 61000-1-6—2014

M Kendall and A Stuart	The advanced theory of Statistics. 4th ed. Vol. 1. Charles Griffin, London, 1997.
I.A. Harris and F.L Warner	Re-examination of mismatch uncertainty when measuring microwave power and attenuation, IEE Proc., Vol. 128, Pt. H., No.1 Feb. 1981
D. Carpenter	A demystification of the U-shaped probability distribution. Proc. IEEE International Symposium on EMC, Boston, USA 2003
. Carpenter	A further demystification of the U-shaped probability distribution, Proc. IEEE International Symposium on EMC, Chicago, USA 2005

- [1] C.F.M. Carrobi, 'The GUM Supplement I and the uncertainty evaluations of EMC measurements', IEEE-EMC Newsletter. Issue 225, Spring 2010, pp 53-57
(1 GUM)
- [2] UK Accreditation Service (UKAS): LAB 34, Edition 1, Aug. 2002
(. LAB 34)
- [3] L.R. Arnaut, 'Measurement uncertainty in reverberation chambers — I. Sample statistics', Report TQE 2, Ed. 2.0, National Physical Laboratory, Teddington, U.K.. Dec 2008. [http://publications.npl.co.uk/npl_web/pdf/TQE2.pdf]
(. 1.)
- [4] . Cramer. Mathematical Methods of Statistics. Princeton University Press, Princeton, 1946
()
- [5] L.R. Arnaut, 'Time-domain measurement and analysis of mechanical step transitions in mode-tuned reverberation chambers', NPL Report DEM-EM-012, October 2006
()
- [6] . Soong, 'Probabilistic Modelling and Analysis in Science and Engineering', Wiley, 1981
()
- [7] J.R. Taylor, An Introduction to Error Analysis, 2nd edition. University Science Books. Sausalito (CA), 1997
()
- [8] L R. Arnaut, 'Sampling distributions of random electromagnetic fields in mesoscopic or dynamical systems' / Phys. Rev. E, vol. 80. no. 3, 036601, 2009.
()
- [9] C.F.M. Carrobi, 'The use of logarithmic units in the uncertainty evaluations of EMC measurements', IEEE-EMC Newsletter, Issue 224, Winter 2010, pp. 46-50
()

()

1

IEC 60050-161: 1990 161	-	-	30372-95
IEC 60050-161:1990 161.	-	-	30372—95 ¹
CISPR 16-1-1:2010 1-1.	-	-	30805.16.1.1—2013 1-1. (CISPR 16-1-1:2006, MOD)
CISPR 16-4-2:2011 4-2.	-	IDT	CISPR 16-4-2—2013 4-2. (CISPR 16-4-2:2011,)
ISO/IEC Guide 98-3:2008 3:	-	-	*
 - MOD -			

1

50397—2011.

/TR 61000-1-6—2014

621.396/.397.001.4:006.354 33.100 IDT

24.03.2015. 60x84%.
8,37. 32 . 1360

« ».
123995 . , 4.
www.gostinfo.ru info@gostinfo.ru