



POWER METAL STRIP® SURFACE-MOUNT RESISTORS

RESISTIVE PRODUCTS

PRODUCT OVERVIEW






























AUTOMOTIVE
GRADE
Available

**Flame retardance test may not be applicable to some resistor technologies.*





POWER METAL STRIP® RESISTORS

Global Model	Power Rating	Resistance Range (Ω)	RTC (ppm/°C)	Tolerance	Dimensions	Applications
 WSL0603	0.1 W	0.015 to 0.10	± 75	0.5 %, 1 %	L = 0.060 in. [1.52 mm] W = 0.030 in. [0.76 mm] H = 0.013 in. [0.33 mm]	<ul style="list-style-type: none"> Cell phone battery fuel gauges Disk drive motor controls DC/DC converters in cell phones, pagers
 WSL0805	0.125 W	0.01 to 0.2	± 75	0.5 %, 1 %	L = 0.080 in. [2.03 mm] W = 0.050 in. [1.27 mm] H = 0.013 in. [0.33 mm]	
 WSL0603-18	0.2 W	0.015 to 0.1	± 75	0.5 %, 1 %	L = 0.060 in. [1.52 mm] W = 0.030 in. [0.76 mm] H = 0.013 in. [0.33 mm]	
 WSL0805-18	0.25 W	0.01 to 0.2	± 75	0.5 %, 1 %	L = 0.080 in. [2.03 mm] W = 0.050 in. [1.27 mm] H = 0.013 in. [0.33 mm]	
 WSL1206	0.25 W	0.001 to 0.0029 0.003 to 0.0049 0.005 to 0.0069 0.007 to 0.2	± 275 ± 150 ± 110 ± 75	1 % 1 % 1 % 0.5 %, 1 %	L = 0.126 in. [3.20 mm] W = 0.063 in. [1.60 mm] H = 0.025 in. [0.64 mm]	<ul style="list-style-type: none"> Li-Ion battery management DC/DC converters in switching power supplies VRMs in notebooks PCs Disk drive motor controls Automotive controls for body and powertrain
 WSLP0603	0.4 W	0.01 to 0.1	± 75	0.5 %, 1 %	L = 0.060 in. [1.52 mm] W = 0.030 in. [0.76 mm] H = 0.013 in. [0.33 mm]	
 WSL1206-18	0.5 W	0.001 to 0.0029 0.003 to 0.0049 0.005 to 0.0069 0.007 to 0.2	± 275 ± 150 ± 110 ± 75	1 % 1 % 1 % 0.5 %, 1 %	L = 0.126 in. [3.20 mm] W = 0.063 in. [1.60 mm] H = 0.025 in. [0.64 mm]	
 WSL2010	0.5 W	0.001 to 0.0029 0.003 to 0.0049 0.005 to 0.0069 0.007 to 0.5	± 275 ± 150 ± 110 ± 75	1 % 1 % 1 % 0.5 %, 1 %	L = 0.200 in. [5.08 mm] W = 0.100 in. [2.54 mm] H = 0.025 in. [0.64 mm]	
 WSLP0805	0.5 W	0.01 to 0.05	± 75	0.5 %, 1 %	L = 0.080 in. [2.03 mm] W = 0.050 in. [1.27 mm] H = 0.013 in. [0.33 mm]	
 WSK0612	1.0 W	0.0005, 0.00075 0.001 0.002 0.003, 0.004, 0.005	± 600 ± 275 ± 225 ± 150	1 %	L = 0.060 in. [1.50 mm] W = 0.120 in. [3.05 mm] H = 0.015 in. [0.38 mm]	
 WSLP1206	1.0 W	0.001 to 0.0029 0.003 to 0.0049 0.005 to 0.0069 0.007 to 0.05	± 275 ± 150 ± 110 ± 75	1 % 1 % 1 % 0.5 %, 1 %	L = 0.126 in. [3.20 mm] W = 0.063 in. [1.60 mm] H = 0.025 in. [0.64 mm]	
 WSL2010-18	1.0 W	0.01 to 0.5	± 75	0.5 %, 1 %	L = 0.200 in. [5.08 mm] W = 0.100 in. [2.54 mm] H = 0.025 in. [0.64 mm]	
 WSL2512	1.0 W	0.001 to 0.0029 0.003 to 0.0049 0.005 to 0.0069 0.007 to 0.5	± 275 ± 150 ± 110 ± 75	1 % 1 % 1 % 0.5 %, 1 %	L = 0.250 in. [6.35 mm] W = 0.125 in. [3.18 mm] H = 0.025 in. [0.64 mm]	
 WSLT2010-18	1.0 W	0.01 to 0.50	± 75	0.5 %, 1 %	L = 0.200 in. [5.08 mm] W = 0.100 in. [2.54 mm] H = 0.025 in. [0.64 mm]	
 WSLT2512	1.0 W	0.01 to 0.5	± 75	0.5 %, 1 %	L = 0.250 in. [6.35 mm] W = 0.125 in. [3.18 mm] H = 0.025 in. [0.64 mm]	
 WSK2512	1.0 W	0.003 to 0.025	± 50	0.5 %, 1 %	L = 0.250 in. [6.35 mm] W = 0.125 in. [3.18 mm] H = 0.025 in. [0.64 mm]	

Global Model	Power Rating	Resistance Range (Ω)	RTC (ppm/°C)	Tolerance	Dimensions	Applications
 WSR2	2.0 W	0.001 to 0.0019 0.002 to 0.0029 0.003 to 0.0039 0.004 to 0.0049 0.005 to 0.0099 0.01 to 1.0	± 750 ± 600 ± 450 ± 300 ± 110 ± 75	1 % 1 % 1 % 1 % 0.5 %, 1 % 0.5 %, 1 %	L = 0.455 in. [11.56 mm] W = 0.275 in. [6.98 mm] H = 0.095 in. [2.41 mm]	<ul style="list-style-type: none"> DC/DC converters in switching power supplies VRMs in notebooks, desktop PCs Instrumentation Automotive controls for body and powertrain
 WSL2512-18	2.0 W	0.001 to 0.0029 0.003 to 0.0049 0.005 to 0.0069 0.007 to 0.04	± 275 ± 150 ± 110 ± 75	1 % 1 % 1 % 0.5 %, 1 %	L = 0.250 in. [6.35 mm] W = 0.125 in. [3.18 mm] H = 0.025 in. [0.64 mm]	<ul style="list-style-type: none"> Li-Ion battery management DC/DC converters in switching power supplies VRMs in notebooks, desktop PCs
 WSL2816	2.0 W	0.01 to 0.1	± 75	0.5 %, 1 %	L = 0.280 in. [7.10 mm] W = 0.165 in. [4.20 mm] H = 0.025 in. [0.64 mm]	<ul style="list-style-type: none"> Automotive controls for body and powertrain
 WSL3637	3.0 W	0.001 to 0.0029 0.003 to 0.0049 0.005 to 0.010	± 75 ± 50 ± 50	1 % 0.5 %, 1 % 0.5 %, 1 %	L = 0.360 in. [9.14 mm] W = 0.370 in. [9.40 mm] H = 0.025 in. [0.64 mm]	<ul style="list-style-type: none"> DC/DC converters in switching power supplies VRMs in notebooks, desktop PCs Automotive controls for EHPS/EPS/EPAS and brushless DC motors
 WSL3921	3.0 W	0.0003, 0.0005, 0.001, 0.002, 0.003, 0.004	± 175 ± 75	1 %, 5 %	L = 0.394 in. [10.0 mm] W = 0.205 in. [5.20 mm] H = 0.037 in. [0.93 mm]	<ul style="list-style-type: none"> High temperature (+ 275 °C) Automotive controls for EHPS/EPS/EPAS and brushless DC motors Down hole oil well monitor/testing
 WSLT3921	3.0 W	0.0003, 0.0005 0.001, 0.002, 0.003, 0.004	± 175 ± 75	1 %, 5 %	L = 0.394 in. [10.0 mm] W = 0.205 in. [5.20 mm] H = 0.037 in. [0.93 mm]	<ul style="list-style-type: none"> High temperature (+ 275 °C) Automotive controls for EHPS/EPS/EPAS and brushless DC motors Down hole oil well monitor/testing
 WSR3	3.0 W	0.001 to 0.0019 0.002 to 0.0029 0.003 to 0.0039 0.004 to 0.0049 0.005 to 0.0099 0.01 to 0.2	± 750 ± 600 ± 450 ± 300 ± 110 ± 75	1 % 1 % 1 % 1 % 0.5 %, 1 % 0.5 %, 1 %	L = 0.455 in. [11.56 mm] W = 0.275 in. [6.98 mm] H = 0.095 in. [2.41 mm]	<ul style="list-style-type: none"> DC/DC converters in switching power supplies VRMs in notebooks, desktop PCs Instrumentation Automotive controls for body and powertrain
 WSH2818	5.0 W	0.001 to 0.00599 0.006 to 0.1	± 200 ± 75	1 % 0.5 %, 1 %	L = 0.280 in. [7.10 mm] W = 0.180 in. [4.60 mm] H = 0.032 in. [0.81 mm]	<ul style="list-style-type: none"> DC/DC converters in switching power supplies VRMs in notebooks, desktop PCs
 WSL5931	5.0 W	0.0002 0.0003, 0.0005 0.001, 0.002, 0.003	± 225 ± 175 ± 75	1 %, 5 %	L = 0.591 in. [15.0 mm] W = 0.305 in. [7.75 mm] H = 0.083 in. [2.10 mm]	<ul style="list-style-type: none"> Automotive controls for EHPS/EPS/EPAS and brushless DC motors
 WSLT5931	5.0 W	0.001, 0.002, 0.003, 0.004	± 75	1 %, 5 %	L = 0.591 in. [15.0 mm] W = 0.305 in. [7.75 mm] H = 0.083 in. [2.10 mm]	<ul style="list-style-type: none"> High temperature (+ 275 °C) Automotive controls for EHPS/EPS/EPAS and brushless DC motors Down hole oil well monitor/testing
 WSR5	5.0 W	0.001 to 0.0019 0.002 to 0.0029 0.003 to 0.0039 0.004 to 0.0049 0.005 to 0.0099 0.006 to 0.1	± 750 ± 600 ± 450 ± 300 ± 110 ± 75	1 % 1 % 1 % 1 % 0.5 %, 1 % 0.5 %, 1 %	L = 0.455 in. [11.56 mm] W = 0.275 in. [6.98 mm] H = 0.095 in. [2.41 mm]	<ul style="list-style-type: none"> DC/DC converters in switching power supplies VRMs in notebooks, desktop PCs Instrumentation Automotive controls for body and powertrain



POWER METAL STRIP® RESISTORS

Global Model	Power Rating	Resistance Range (Ω)	RTC (ppm/°C)	Tolerance	Dimensions	Applications
 WSLP3921	9.0 W	0.0005, 0.001	± 175 ± 75 ± 75	1 %, 5 %	L = 0.394 in. [10.0 mm] W = 0.205 in. [5.20 mm] H = 0.037 in. [0.93 mm]	<ul style="list-style-type: none"> DC/DC converters in switching power supplies VRMs in notebooks, desktop PCs
	5.0 W	0.002, 0.003, 0.004				
 WSLP5931	10.0 W	0.0003, 0.0005	± 175 ± 75	1 %, 5 %	L = 0.591 in. [15.0 mm] W = 0.305 in. [7.75 mm] H = 0.083 in. [2.10 mm]	<ul style="list-style-type: none"> Automotive controls for EHPS/EPAS/EPAS and brushless DC motors
	7.0 W	0.001, 0.002, 0.003				

Introduction

Vishay's Power Metal Strip® current sensing resistors combine superior performance in high-temperature applications with a wide range of package sizes and a choice of resistance values from 0.0002 Ω to 1 Ω . These patented, state-of-the-art products deliver overload capabilities equivalent to wirewound devices and temperature coefficients as low as 30 ppm/°C.

Current sensing Power Metal Strip® resistors allow control circuitry to monitor the level of current in a circuit by translating current into a voltage that can be monitored easily. The devices work by resisting the current flow in a circuit to a calibrated level, thus allowing a voltage drop to be detected and monitored by control circuitry. The low resistance values of Power Metal Strip® resistors allow this function to be carried out with exceptional efficiency.

Applications

Industrial

- Power supplies
- Power tools
- Bar code scanners
- HVAC
- Other current detection

Consumer Goods

- Home electronics
- White goods
- Gaming systems
- Lighting controls
- Video cameras
- Television

Automotive

- Engine controls
- Anti-lock brakes
- Airbag

Automotive

- Traction controls
- Multimedia
- Climate controls
- Electronic power steering
- Electric/hybrid vehicles

Medical and Instrumentation

- Monitoring systems
- Defibrillators
- Implantables
- Electronic scales
- Diagnostic equipment

Telecom

- Cell phones
- Modems
- Pagers

Telecom

- Base stations
- Bluetooth
- Switching circuits

Military and Aerospace

- Guidance systems
- Satellites
- Missiles
- Surveillance equipment

Computer


- DC/DC converter
- Disk drives
- Power supplies
- Graphic cards
- PCMCIA
- Li-Ion battery management

For technical questions, contact: ww2bresistors@vishay.com.

Technical Information


Very Low Ohmic Value (0.2 mΩ to 1 Ω)

To maximize energy conversion efficiency and minimize power consumption, current sense resistors should be of the lowest resistance value possible (typically below 25 mΩ). The single Power Metal Strip® resistor can achieve the same low ohmic values for which four to six conventional cermet chips or two or more conventional thin film chips are required.

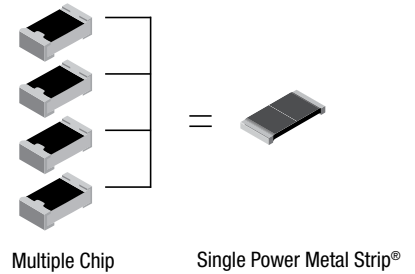


Tight Tolerance (1 % Standard, 0.5 % Available)

For maximizing the sensing performance and saving energy, the tolerance of the sense resistor must be $\pm 1\%$ or tighter. 1 % tolerance allows designers to use a narrow resistance window when specifying sensing voltages. Another advantage of 1 % or better tolerance is reduced response time to switching currents. The chart to the right shows that it takes a comparable thick film resistor almost three times longer than the Power Metal Strip® to stabilize its sensing voltage.

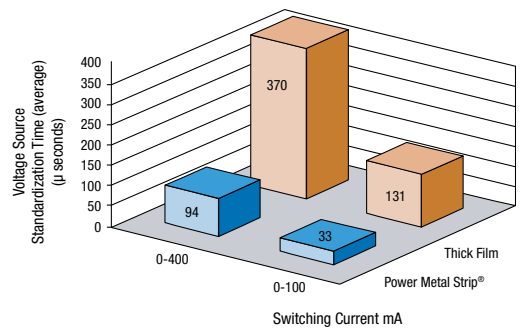

High Temperature Capability (Up to + 275 °C)


When used in industrial and automotive applications, components may be exposed to high temperatures. The current sensing resistor must be capable of operating in high temperature conditions with a minimal reduction (derating) of rated power. The Vishay Dale WSL (maximum temperature of 170 °C) and WSLT/WSR (maximum temperature of 275 °C) type resistors will withstand high temperatures much better than cermet chips. The chart to the right provides a high temperature comparison for these device types.

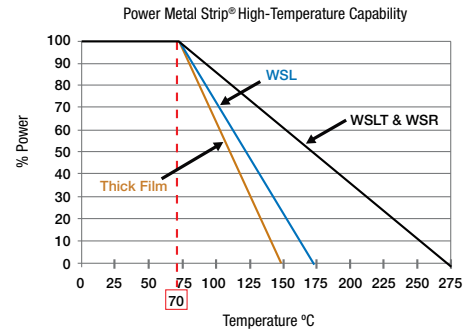

Low Temperature Coefficient of Resistance (TCR) (Down to 30 ppm/°C)

The low TCR of Vishay Power Metal Strip® resistors minimizes the resistance change caused by self heating and high temperature environments.

This chart illustrates voltage of a 30 ppm/°C Vishay Power Metal Strip® resistor compared to a typical 100 ppm/°C metal strip and 700 ppm/°C thick film chip.

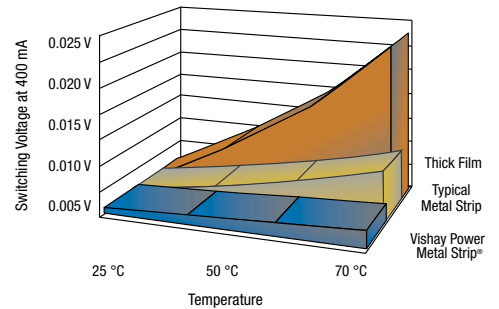





Low Thermal EMF (Below 3 $\mu\text{V}/^\circ\text{C}$)

Dissimilar metals, in contact with each other, produce a small voltage. This voltage varies with temperature and is therefore called a “Thermal EMF” or “thermocouple effect.” The rate of change of voltage with temperature from an intermetallic junction is a function of the metallic combination and the polarity of the voltage produced. Virtually all resistors have intermetallic combinations and it is presumed will eventually be connected to copper as a final intermetallic junction (circuit trace). Hence, copper is the typical reference metal.


Thermal EMF is an important consideration in low value resistors used in DC circuits. Thermal EMF can be large enough, when compared to the expected signal, that it can result in significant sensing errors. Vishay’s Power Metal Strip® current sensing resistors utilize resistance materials that have low Thermal EMF characteristics (Below 3 $\mu\text{V}/^\circ\text{C}$).

Metal Alloy	Thermal EMF vs. Copper $\mu\text{V}/^\circ\text{C}$
Evanohm	+ 2
Cupron	- 45
Manganin	- 3
Zeranin	- 1.3
Nickel	- 22
Gold	+ 0.2
Silver	- 0.2
Aluminum	- 4

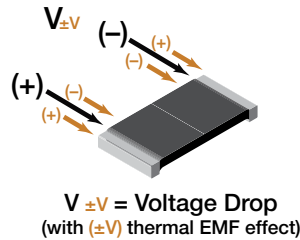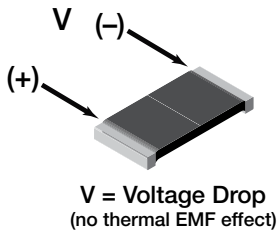

Terminal Construction

At resistance levels down to 1 m Ω and tolerances of 1 % or larger, a two-terminal construction is typically acceptable. Where better accuracy is required, Vishay recommends the use of the four-terminal type such as WSK0612, WSK1206, WSK2512, WSL2726, WSL3637, or WSL4026. The four-terminal construction reduces terminal resistance, copper terminal TCR, and solder joint TCR.

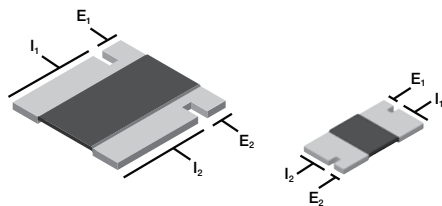


(E_1 & E_2 Voltage Connections, I_1 & I_2 Current Connections)

High Current Capability (More than 220 A)

The maximum DC load current required by today’s applications is in excess of 200 A. Vishay’s Power Metal Strip® current sensing resistors utilize solid metal resistance elements which are capable of handling the highest load currents.


Multiple Package Sizes (0603 to 5931)

Vishay's Power Metal Strip® resistors are available in more than 10 package sizes. Multiple package sizes give the customer the ability to minimize PCB space by utilizing a smaller component or lessen resistor temperature by utilizing a larger component for their current sense applications.

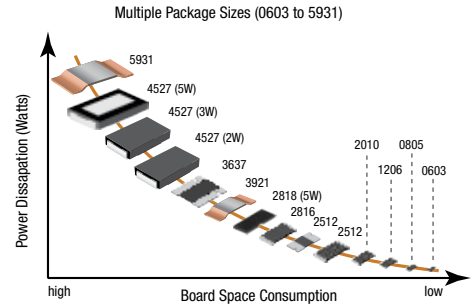

High Power Density (Up to 222 W/in²)

Vishay's Power Metal Strip® resistors have evolved to "High Power" WSL...-18, WSLP, WSR3, WSR5 and WSH2818 type resistors. With the higher power capacity of standard WSL and WSR2 type resistor series, the WSL...-18, WSLP, WSR3, WSR5 and WSH2818 series are intended for high power, current sensing applications. Specially selected materials and processing permit these high power ratings of up to 10 watts. The WSL...-18, WSLP, WSR3, WSR5 and WSH2818 resistors offer a high power-to-package size ratio while maintaining superior electrical characteristics. These high power ratings enable designers to use smaller PCBs, which in turn increases manufacturing speed and reduces raw material costs.

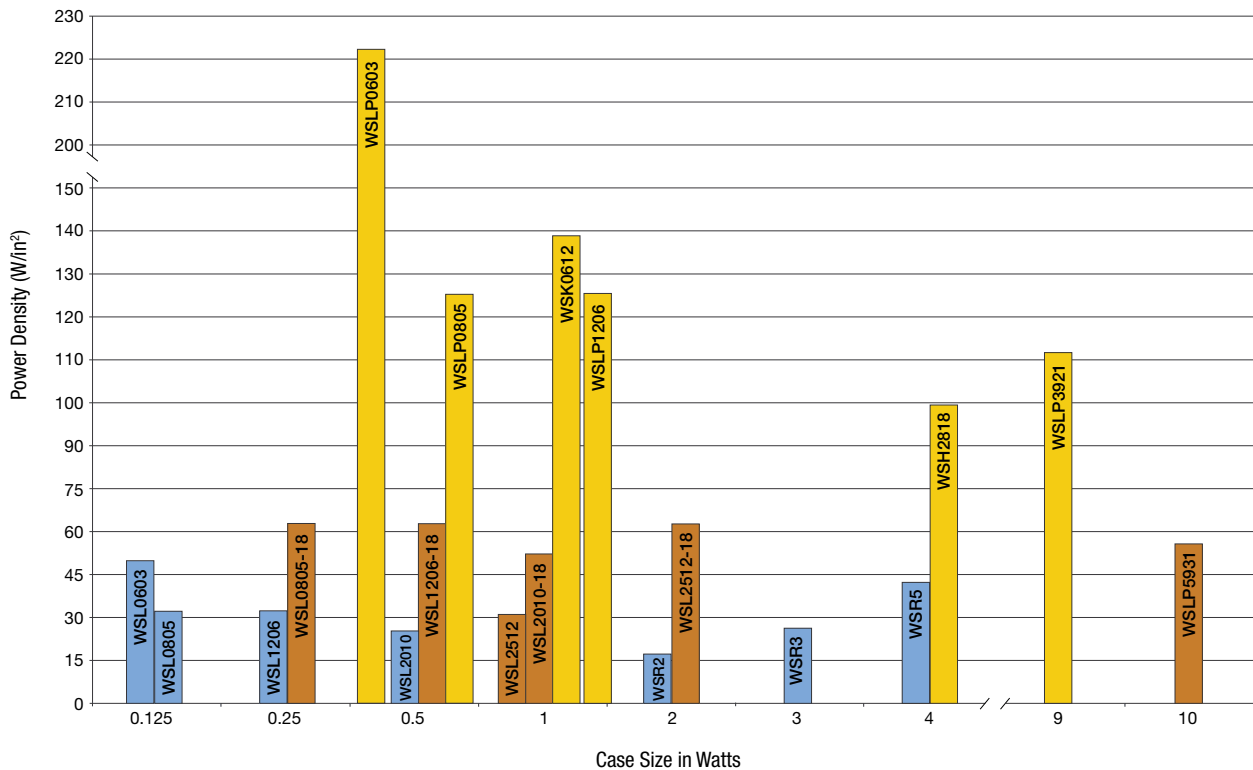

DISCLAIMER All product specifications and data are subject to change without notice. Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications. Product names and markings noted herein may be trademarks of their respective owners.

SEMICONDUCTORS:

Rectifiers • High-Power Diodes and Thyristors • Small-Signal Diodes • Zener and Suppressor Diodes
• FETs • Optoelectronics • ICs • Modules

PASSIVE COMPONENTS:

Resistive Products • Magnetics • Capacitors



One of the World's Largest Manufacturers of
Discrete Semiconductors and Passive Components

WORLDWIDE SALES CONTACTS

THE AMERICAS

UNITED STATES

VISHAY AMERICAS
ONE GREENWICH PLACE
SHELTON, CT 06484
UNITED STATES
PH: +1-402-563-6866
FAX: +1-402-563-6296

ASIA

SINGAPORE

VISHAY INTERTECHNOLOGY ASIA PTE LTD.
37A TAMPINES STREET 92 #07-00
SINGAPORE 528886
PH: +65-6788-6668
FAX: +65-6788-0988

P.R. CHINA

VISHAY CHINA CO., LTD.
15D, SUN TONG INFOPORT PLAZA
55 HUAI HAI WEST ROAD
SHANGHAI 200030
P.R. CHINA
PH: +86-21-5258 5000
FAX: +86-21-5258 7979

JAPAN

VISHAY JAPAN CO., LTD.
SHIBUYA PRESTIGE BLDG. 4F
3-12-22, SHIBUYA
SHIBUYA-KU
TOKYO 150-0002
JAPAN
PH: +81-3-5466-7150
FAX: +81-3-5466-7160

EUROPE

GERMANY

VISHAY ELECTRONIC GMBH
GEHEIMRAT-ROSENTHAL-STR. 100
95100 SELB
GERMANY
PH: +49-9287-71-0
FAX: +49-9287-70435

FRANCE

VISHAY S.A.
199, BLVD DE LA MADELEINE
06003 NICE, CEDEX 1
FRANCE
PH: +33-4-9337-2727
FAX: +33-4-9337-2726

UNITED KINGDOM

VISHAY LTD.
SUITE 6C, TOWER HOUSE
ST. CATHERINE'S COURT
SUNDERLAND ENTERPRISE PARK
SUNDERLAND SR5 3XJ
UNITED KINGDOM
PH: +44-191-516-8584
FAX: +44-191-549-9556

Build **Vishay**
into your **Design**

www.vishay.com

VMN-PL0407-1010