

More than safety.



EUCHNER



High spirits safeguard steady innovation

The EUCHNER success story starts in 1940 with the start-up of an engineering company by Emil Euchner. A milestone was set in 1952 with the development of the first “multiple limit switch” in the world. Highly sophisticated in technical terms, this position switch was developed in close co-operation with the machine tool industry. It is used for positioning and controlling machines and systems, and is still a symbol of the company’s innovative power today.

Safeguarding people, machines and processes is the main focus of EUCHNER's activities today. Wherever people and machine meet, our safety components help minimizing hazards and risks for workers.

Our primary objective is 100% customer satisfaction without neglecting the well-being of our employees. The hallmarks of the EUCHNER philosophy are therefore quality, reliability and precision. Based on the long-standing experience of our staff, we always find the right solution for our customers’ specific requirements.

14 subsidiaries – eight in Europe, four in Asia and two in North and South America cover the globe along with 28 authorized partners. Besides our Headquarters in Leinfelden and a production in Unterböhringen, the company has also started an assembly plant in China.



Contents

■ Automation

Position switches, precision single limit switches, precision multiple limit switches

4

Inductive identsystem, trip rails/trip dogs, single hole fixing limit switches,
round plug connectors

5

■ Safety

Safety switches with metal housing

Without guard locking, with guard locking

6

With guard locking and guard lock monitoring, safety hinges,
position switches and limit switches with safety function

7

Safety switches with plastic housing

Without guard locking, position switches with safety function

8

With guard locking and guard lock monitoring, rope pull switches

9

Non-contact safety switches

With transponder coding, with magnetic coding

10

With guard lock monitoring, with solenoid

11

Enabling switches, bolts for safety guards

Enabling switches

12

Bolts for safety guards

13

Safety products with integrated bus interface, safety relays

Safety products with integrated bus interface

14

Safety relays, modular safety system

15

■ ManMachine

Joysticks, electronic handwheels, hand-held pendant stations,


Electronic-Key-System

Joysticks, electronic handwheels, hand-held pendant stations

16

Electronic-Key-System, Electronic-Key-Manager

17

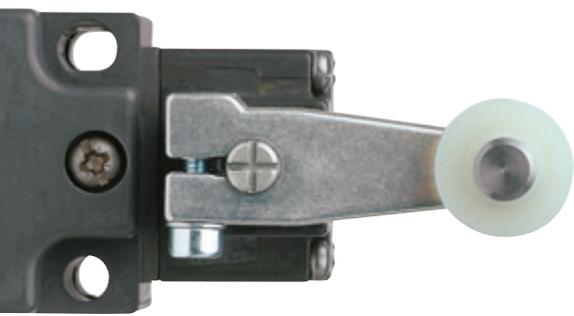

■ Automation

EUCHNER developed the first multiple limit switch in 1952. This switch, which has been continuously further developed, still forms a key element of the product range today alongside numerous other command switches. Selected, high quality materials, the tough surfaces as well as the proven EUCHNER characteristics of quality, reliability and precision makes these switches ideal for use in mechanical and systems engineering. The Automation product line also includes round plug connectors, trip dogs, trip rails and inductive ident systems.

Position switches

These mechanical command switches are designed according to the European standard EN 50041. The robust design, the utilization of corrosion-resistant materials, the precise production methods and the high degree of protection guarantee straightforward and reliable function in the toughest conditions.



■ Detailed information in catalog: Position Switches according to EN 50041



Precision single limit switches

These limit switches were developed in close co-operation with machine tool manufacturers. The high quality materials, the combination of mature technology, high precision and practical design guarantee straightforward function in all industrial applications. Different designs cover a wide range of specific applications.

■ Detailed information in catalog: Position Switches



Precision multiple limit switches

Suitable for use in harsh production conditions, these high precision, reliable switches with their compact design are ideal for positioning and control applications in mechanical and systems engineering. A very wide range of applications is covered by the flexible configuration of these devices with non-contact and mechanical switches as well as other customer-specific features. Their high quality guarantees an exceptional mechanical life.

■ Detailed information in catalog: Multiple Limit Switches



Inductive ident systems

Inductive ident systems are used for the non-contact identification of tools, workpiece carriers, pallets, containers and vehicles in the entire logistics sector. The read/write data carriers function completely wear-free and without batteries using inductive coupling.

▮ Detailed information in catalog: Identsystem CIS 3/CIS 3A

Trip rails/trip dogs

The combination of trip rails and trip dogs with all EUCHNER command switches safeguards the advantages of these highly precise positioning devices and ensures trouble-free operation.



▮ Detailed information in catalog: Multiple Limit Switches



Single hole fixing limit switches


The alternative to inductive proximity switches are mechanically actuated limit switches. These switches are completely maintenance-free and are also used in the most extreme conditions. Their small size makes it possible to install them directly at the monitoring point.

▮ Detailed information in catalog: Position Switches

Round plug connectors

Round plug connectors have a very robust, matt chromium-plated brass housing. When assembled correctly in relation to EMC, they provide optimal protection against electromagnetic interference. The connector system can also be used for very low currents and voltages because of the integration of gold-plated contacts.



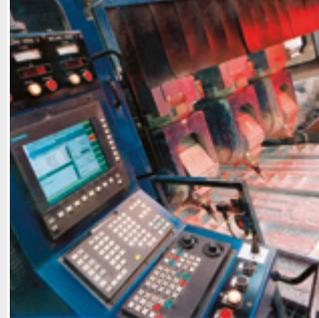

■ Safety

Safety switches with metal housing

The function of safety switches is to monitor the position of a safety guard and, if the safety guard is opened, to trigger a signal that safely interrupts the supply of power to the hazardous parts of the system. Switches are available with a large number of options, for example with guard locking, emergency release and escape release as well as accessories.

Safety switches without guard locking

Safety switches with a separate actuator permit operation of a system only if the safety guard is in the closed position and the actuator is inserted in the switch. A range of mounting fixtures makes these devices ideally suited to situations requiring high flexibility and robust design.



■ Detailed information in catalog: Safety Switches with Metal Housing



Safety switches with guard locking

In addition to the same function as the safety switches with a separate actuator, these switches also have guard locking. Safety guards can then not be opened when locked.

■ Detailed information in catalog: Safety Switches with Metal Housing





Safety switches with guard locking and guard lock monitoring

These safety switches have an interlocking solenoid with additional guard lock monitoring. As a result the position of the guard and the solenoid can be monitored safely. The guard locking prevents the unintentional opening of a safety guard. These switches are suitable for the protection of people as well as for the protection of the process.

▮ Detailed information in catalog: Safety Switches with Metal Housing



Safety hinges

Because of its small design, the safety hinge is particularly suitable for applications in which robustness is required in conjunction with small dimensions. It combines the function of a door hinge with that of a safety switch. The safety hinge can be mounted on standard aluminum profiles or directly on doors. The operating point can be adjusted over a large angular range.

▮ Detailed information in catalog: Safety Switches with Metal Housing

Position switches and limit switches with safety function

These position switches are used to limit the final position and to safely shut down drives in systems and machinery. The built-in safety switching elements ensure safe interruption of the circuit. Like all EUCHNER safety switches, contact elements are available in a large number of versions and provide the necessary flexibility for all applications.

▮ Detailed information in catalog: Safety Switches with Metal Housing



■ Safety

Safety switches with plastic housing

The safety switches with plastic housing are also ideally suited to use in all applications. Both small and large guards can be protected depending on the version and requirement. Switches with and without guard locking are also available in plastic housing.



Position switches with safety function

These switches are used for monitoring the position of safety guards and moving machine components. They are available with different actuating heads. Every user can thus employ the most suitable actuating element for his/her application. The versions with hinged actuator require little space for mounting and can be fitted such that they are secure against tampering.

■ Detailed information in catalog: [Safety Switches with Plastic Housing](#)



Safety switches without guard locking

These safety switches with a separate actuator are suitable for safety guards that must be closed to provide the necessary safety. The different versions of the switches provide solutions for all applications.





Safety switches with guard locking and guard lock monitoring

The plastic safety switches also ensure that safety guards remain in the closed position until a dangerous movement has come to a standstill. Opening of the safety guards during a process is also prevented. With a choice of actuating heads made of plastic or metal, you will find the right combination for every application. The advantages of metal and plastic switches can therefore be optimally combined.



▮ Detailed information in catalog: Safety Switches with Plastic Housing

Rope pull switches

EUCHNER rope pull switches are used as EMERGENCY STOP devices with detent according to the related standard wherever machines and systems cannot be protected with safety covers (for example on particularly long and extensive systems). The EMERGENCY STOP function is triggered by pulling a pre-tensioned rope system or if the rope is severed.

▮ Detailed information in catalog: Safety Switches with Plastic Housing





■ Safety

Non-contact safety switches

EUCHNER supplies non-contact safety switches with two different principles of operation. Systems with transponder technology and systems with magnetically coded reed switches. Especially the transponder-based safety systems feature a very large read distance and offset, a uniform operating distance as well as protection against tampering. Furthermore, with their small design, no service requirements and their resistance to vibration, they offer advantages in many applications.

Non-contact safety systems CES with transponder coding

Non-contact safety switches are interlocking devices for the protection of people and machines. The non-contact safety switches CES feature an electronically coded actuator based on transponder technology. Because of this special principle of operation, they are ideal for use in the highest safety category. Various read heads and actuators combined with different evaluation units cover a wide range of applications. Versions are available with multiple coding and with unique coding.



**■ Detailed information in catalog:
Non-Contact Safety System CES**



Non-contact safety systems CMS – magnetic coding

These magnetic switches are characterized by their high degree of protection and compact design. A major advantage of safety switches CMS is that the actuator and read head can be fitted behind stainless steel.

**■ Detailed information in catalog:
Non-Contact Safety System CMS**





Non-contact safety guard locking and with guard lock monitoring

With the CET the advantages of non-contact transponder technology have been combined with mechanical guard locking for the first time. Features such as unique coding and a particularly large offset are integrated into a switch with extremely high locking forces. The highest safety category is achieved even with the use of a single switch.

▮ Detailed information in catalog: Non-Contact Safety System CES



Safety System MGB – Multifunctional Gate Box

The safety system MGB (Multifunctional Gate Box) combines a safety switch, bolt and door locking mechanism in one system. The modular design is flexible for upgrades and can be individually adapted to suit the diverse safety requirements of every customer. It is ideal for protecting safety doors according to EN ISO 13849 and EN 1088.

▮ Detailed information in catalog: Multifunctional Gate Box MGB



Non-contact safety switches CEM with solenoid

The safety switches CEM are the ideal solution for all those customers who must achieve a high level of safety when securing a safety guard and who also need guard locking. The switches comprise a solenoid combined with the CES system. Opening is effectively prevented by the magnetic forces even in applications where significant forces are applied by the user.

▮ Detailed information in catalog: Non-Contact Safety System CES





■ Safety

Enabling switches

The large range of enabling switches from EUCHNER provides the user with suitable solutions for every application. Along with standard devices, built-in versions and kits are available.

Bolts for safety guards

Bolts are used in conjunction with safety switches. The safety switches are protected against damage and installation is simplified.



Enabling switches

Enabling switches are manually operated control devices. These switches are used wherever personnel must work directly in the danger area on machines and systems. Because of their robust and ergonomic design, these switches are the right choice for numerous applications, for example during setup operation.



Authorized personnel can enter hazardous areas with the enabling switches. Enabling switches are available as built-in and hand-held versions, with two or three-stage switching elements and in various housings.



■ Detailed information in catalog: Enabling Switches



Bolts for safety guards

The use of bolts will ensure that the actuator is properly inserted in the safety switch when the safety guard is closed. Forces, as occur for instance on slamming a guard shut, are applied to the mechanically very robust bolt and not the safety switch. In accessible hazardous areas, bolts with escape release enable the safety guard to be opened from inside the danger area. By fitting padlocks to the bolt tongue, operators can effectively prevent locking inside.

An additional door handle is no longer required if an EUCHNER bolt is used.



The bolt is designed to provide mechanical protection of the switch when the safety guard is closed. The assembly holes provided permit easy and fast installation of the bolts to the safety guards. Mounting is particularly straightforward on standard aluminum profiles. Bolts can be combined with both electromechanical and non-contact safety switches

▮ Detailed information in the accessory category of catalogs: **Non-Contact Safety System CES, Safety Switches with Metal Housing and Safety Switches with Plastic Housing.**





■ Safety

Safety products with integrated bus interface

A connection to the AS-Interface Safety at Work is available for almost all EUCNER safety switches. As a result the switches can be integrated into the bus very easily.

Safety relays

EUCNER supplies a wide range of evaluation units for monitoring safety components.

Safety products with integrated bus interface

These safety products are based on the proven standard AS-Interface bus technology. The wiring effort has been reduced to a minimum. Because of the simple structure it is not necessary to set parameters. The safety-related signals for AS-Interface Safety at Work are evaluated using a safety monitor. This monitor is a safety PLC that can be programmed, as required, very straightforwardly using clearly understandable software.



The wiring of the overall system always corresponds to the highest safety category. The status signals from all safety-related components connected can be evaluated directly in the control system. Additions can be realized as required with very little effort and very easily.

■ Detailed information in catalog: Safety Products with Integrated Bus Interface





Safety relays ESM

All modules in this series are built into a housing that is only 22.5 mm wide. Various safety relays are available to which expansion modules can be added on the output side. The advantage of the ESM modular principle is that different safety evaluations can be realized with only a few module variants.



▮ Detailed information in catalog:
Safety Relays ESM



ManMachine

Joysticks, electronic handwheels, hand-held pendant stations

Joysticks are integrated into control panels and portable control equipment. Electronic handwheels are particularly useful in any situation where manual axis positioning is required. The hand-held pendant stations facilitate work in danger areas on machinery and systems.

Electronic-Key-System

The EKS provides electronic access management on PCs and control systems, and protects against unauthorized operation.



Electronic handwheels

EUCHNER electronic handwheels are universal pulse generators for manual axis positioning. They are mainly used for positioning NC-controlled axes. Different pulse rates and output stages make the handwheels suitable for the most control systems. By using wear-free magnetic detent mechanisms, absolutely no servicing is required.

Detailed information in catalog: Hand-Held Pendant Stations/Handwheels

Joysticks

These devices are always used if movements are to be controlled as a function of the manual actuation direction. Joysticks are used in areas of the steel and construction industry, in transport and conveyor systems, in systems engineering and mechanical engineering, as well as in warehousing, medicine and studios. The devices are also approved for maritime use because of their certification by Germanischer Lloyd.



Detailed information in catalog: Joystick Switches



Hand-held pendant stations

Machine functions can be monitored and controlled decentrally using hand-held pendant stations. In addition to the control function, hand-held pendant stations can also have a safety function. For this purpose the hand-held pendant stations are equipped with EMERGENCY STOP buttons and enabling switches.




Detailed information in catalog: Hand-Held Pendant Stations/Handwheels



Electronic-Key-System EKS

The EKS comprises an Electronic-Key and an Electronic-Key adapter - a read/write device with integrated evaluation electronics and interface. Various versions with different interfaces are available. All devices feature an extremely compact design for installation in a standard cut-out. Because of the non-contact transfer of data, the Electronic-Key adapter is suitable for harsh industrial use.

▮ Detailed information in catalog: **Electronic-Key-System EKS**

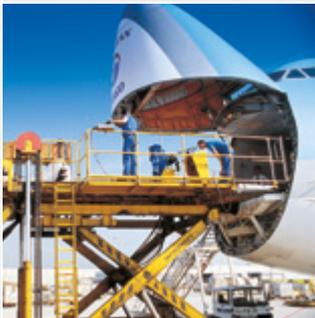


Electronic-Key-Manager EKM

EKM is a software package for writing and managing the keys using a PC. All Electronic-Keys and their contents are saved in a central database. The freely programmable memory in the key can be allocated to database fields. The database fields and the user interfaces for entering the data can be configured as required. Read and write authorizations can be granted through user management. Product parameters and operator entries can be logged according to FDA-21 CFR part 11.

▮ Detailed information in catalog: **Electronic-Key-System EKS**

Head office

EUCHNER GmbH + Co. KG
Kohlhammerstraße 16
70771 Leinfelden-Echterdingen
Germany
Tel. +49 711 7597-0
Fax +49 711 753316
info@euchner.de
www.euchner.com



International Representatives

Australia

Micromax Sensors & Automation
Unit 2, 106-110 Beaconsfield Street
Silverwater, NSW 2128
Tel. +61 2 87482800
Fax +61 2 96482345
info@micromaxsa.com.au

Austria

EUCHNER GmbH
Süddruckgasse 4
2512 Tribuswinkel
Tel. +43 2252 42191
Fax +43 2252 45225
info@euchner.at

Benelux countries

EUCHNER (BENELUX) BV
Visschersbuurt 23
3356 AE Papendrecht
Tel. +31 78 615-4766
Fax +31 78 615-4311
info@euchner.nl

Brazil

EUCHNER Ltda
Av. Prof. Luiz Ignácio Anhaia Mello,
no. 4387
S. Lucas
São Paulo - SP
CEP 03295-000
Tel. +55 11 29182200
Fax +55 11 23010613
euchner@euchner.com.br

Canada

IAC & Associates Inc.
2180 Fasan Drive, Unit A
Oldcastle, Ontario
NOR 1L0
Tel. +1 519 737-0311
Fax +1 519 737-0314
sales@iacnassociates.com

China

EUCHNER (Shanghai) Trading Co., Ltd.
No. 8 Workshop A, Hi-Tech Zone
503 Meinengda Road Songjiang
201613 Shanghai
Tel. +86 21 5774-7090
Fax +86 21 5774-7599
info@euchner.com.cn

Czech Republic

EUCHNER electric s.r.o.
Videňská 134/102
61900 Brno
Tel. +420 533 443-150
Fax +420 533 443-153
info@euchner.cz

Denmark

Duelco A/S
Systemvej 8
9200 Aalborg SV
Tel. +45 7010 1007
Fax +45 7010 1008
info@duelco.dk

Finland

Sähkölehto Oy
Holkkitie 14
00880 Helsinki
Tel. +358 9 7746420
Fax +358 9 7591071
office@sahkolehto.fi

France

EUCHNER France S.A.R.L.
Parc d'Affaires des Bellevues
Allée Rosa Luxembourg
Bâtiment le Colorado
95610 ERAGNY sur OISE
Tel. +33 1 3909-9090
Fax +33 1 3909-9099
info@euchner.fr

Hong Kong

Imperial Engineers & Equipment Co., Ltd.
Unit B 12/F
Cheung Lee Industrial Building
9 Cheung Lee Street Chai Wan
Hong Kong
Tel. +852 2889 0292
Fax +852 2889 1814
info@imperial-elec.com

Hungary

EUCHNER Ges.mBH
Magyarországi Fióktelep
2045 Törökbálint
FSD Park 2.
Tel. +36 2342 8374
Fax +36 2342 8375
info@euchner.hu

India

EUCHNER (India) Pvt. Ltd.
401, Bremen Business Center,
City Survey No. 2562, University Road,
Aundh, Pune - 411007
Tel. +91 20 64016384
Fax +91 20 25885148
Mobil +91 8600121112
info@euchner.in

Israel

Ilan & Gavish Automation Service Ltd.
26 Shenkar St. Qiryat Arie 49513
P.O. Box 10118
Petach Tikva 49001
Tel. +972 3 9221824
Fax +972 3 9240761
mail@ilan-gavish.com

Italy

TRITECNICA S.r.l.
Viale Lazio 26
20135 Milano
Tel. +39 02 541941
Fax +39 02 55010474
info@tritecnica.it

Japan

EUCHNER Representative Office Japan
8-20-24 Kamitsurumahoncho
Minami-ku, Sagami-hara-shi
Kanagawa 252-0318
Tel. +81 42 8127767
Fax +81 42 7642708
hayashi@euchner.jp

Solton Co. Ltd.

2-13-7, Shin-Yokohama
Kohoku-ku, Yokohama
Japan 222-0033
Tel. +81 45 471-7711
Fax +81 45 471-7717
sales@solton.co.jp

Korea

EUCHNER Korea Co., Ltd.
RM 810 Daerung Technotown 3rd
#448 Gasang-Dong
Gumcheon-gu, Seoul
Tel. +82 2 2107-3500
Fax +82 2 2107-3999
info@euchner.co.kr

Mexico

SEPIA S.A. de C.V.
Maricopa # 10
302, Col. Napoles.
Del. Benito Juarez
03810 Mexico D.F.
Tel. +52 55 55367787
Fax +52 55 56822347
alazcano@sepia.mx

Poland

ELTRON
Pl. Wolności 7B
50-071 Wrocław
Tel. +48 71 3439755
Fax +48 71 3460225
eltron@eltron.pl

Republic of South Africa

RUBICON ELECTRICAL DISTRIBUTORS
4 Reith Street, Sidwell
6061 Port Elizabeth
Tel. +27 41 451-4359
Fax +27 41 451-1296
sales@rubiconelectrical.com

Romania

First Electric SRL
Str. Ritmului Nr. 1 Bis
Ap. 2, Sector 2
021675 Bucuresti
Tel. +40 21 2526218
Fax. +40 21 3113193
office@firstelectric.ro

Singapore

Sentronics Automation & Marketing Pte Ltd.
Blk 3, Ang Mo Kio Industrial Park 2A
#05-06
Singapore 568050
Tel. +65 6744 8018
Fax +65 6744 1929
sentronics@pacific.net.sg

Slovakia

EUCHNER electric s.r.o.
Videňská 134/102
61900 Brno
Tel. +420 533 443-150
Fax +420 533 443-153
info@euchner.cz

Slovenia

SMM proizvodni sistemi, d.o.o.
Jaskova 18
2000 Maribor
Tel. +386 2 4502326
Fax +386 2 4625160
franc.kit@smm.si

Spain

EUCHNER, S.L.
Gurutzegei 12 - Local 1
Polígono Belartza
20018 San Sebastian
Tel. +34 943 316-760
Fax +34 943 316-405
comercial@euchner.es

Sweden

Censit AB
Box 331
33123 Värnamo
Tel. +46 370 691010
Fax +46 370 18888
info@censit.se

Switzerland

EUCHNER AG
Grofstrasse 17
8887 Mels
Tel. +41 81 720-4590
Fax +41 81 720-4599
info@euchner.ch

Taiwan

Daybreak Int'l (Taiwan) Corp.
3F, No. 124, Chung-Cheng Road
Shihlin 11145, Taipei
Tel. +886 2 8866-1234
Fax +886 2 8866-1239
day111@ms23.hinet.net

Turkey

Entek Otomasyon Urunleri San.ve Tic.Ltd.Sti.
Perpa Tic.Mer. B Blok
Kat: 11 No: 1622-1623
34384 Okmeydani / Istanbul
Tel. +90 212 320-2000 / 01
Fax +90 212 320-1188
entekotomasyon@entek.com.tr

United Kingdom

EUCHNER (UK) Ltd.
Unit 2 Petre Drive
Sheffield
South Yorkshire
S4 7PZ
Tel. +44 114 2560123
Fax +44 114 2425333
info@euchner.co.uk

USA

EUCHNER USA Inc.
6723 Lyons Street
East Syracuse, NY 13057
Tel. +1 315 701-0315
Fax +1 315 701-0319
info@euchner-usa.com

EUCHNER USA Inc.
Detroit Office
130 Hampton Circle
Rochester Hills, MI 48307
Tel. +1 248 537-1092
Fax +1 248 537-1095
info@euchner-usa.com

EUCHNER GmbH + Co. KG Kohlhammerstraße 16 70771 Leinfelden-Echterdingen Germany Tel. +49 711 7597-0 Fax +49 711 753316 info@euchner.de www.euchner.com		

More than safety.



EUCHNER