

**Compact CO₂ Laser with High Reliability, High Performance
and High Functionality**

FANUC LASER C series

C1000i-MODEL C

C2000i-MODEL C

C4000i-MODEL C

C6000i-MODEL C



Compact CO₂ Laser with High Reliability, High Performance and High Functionality

FANUC LASER C series

C1000i-C/C2000i-C/C4000i-C/C6000i-C

FANUC LASER C series i-MODEL C is designed for **Series 30i/31i-LB**, which is compact, high-performance and highly-reliability carbon-dioxide laser applicable to cut metallic and non-metallic materials.

High Efficiency and Economy

- Superior RF Discharge Excitation
 - High conversion efficiency
 - Stable laser output
- High-Efficiency Turbo Blower
 - Compact with large blowing capacity by high speed rotation
 - Employment of FANUC Built-in Spindle Motor
- Power Saving Functions
 - Quick Power Saving state
 - Eco Power Saving state


Superior Control Functions

- Oscillator Control
 - Direct Oscillator Control by CNC
 - Laser Power Feedback Control
 - Minute Laser Output Control and Calibration Function
 - Laser Cutting Condition Control

High-Speed High-Precision Cutting

- High-Speed Cutting Functions
 - High-Speed High-Precision Cutting Function
- High-Precision Cutting Functions
 - Edge Cutting Function
 - Nano Smoothing Function
 - Enhancement of pulse frequency command range
- High-Efficient Cutting Functions
 - Cutting Condition Setting Function
 - Gap Control Function



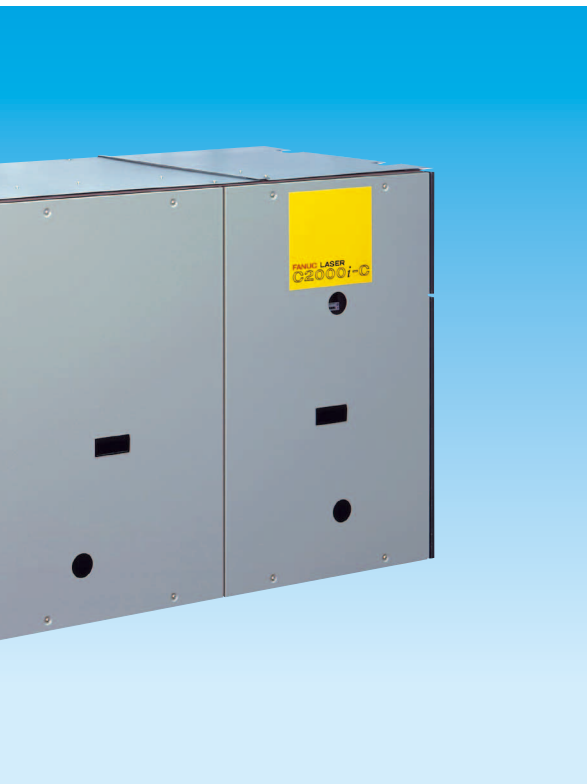

Tuning for Dedicated System

- Tools for Dedicated Functions
 - Nano CNC system
 - C Language Executor
 - Real-Time Custom Macro
 - Personal Computer Function with Windows® OS
- Customization
 - Cutting condition data settings

Highly Reliable Design

- RF Discharge Excitation with High Reliability and High Safety
 - All-solid-state laser power supply
 - Compact and high efficiency by latest MOSFETs
- Easy Maintenance
 - Screen of maintenance information history power compensation coefficient, run hour/maintenance time of parts etc.
 - Automatic Leakage Check Function
 - Automatic Power Supply Adjustment Function
 - Support Function for Start-Up after Turbo Oil Exchange
- Conformity to Safety Standards
 - EC directive (CE Marking)
 - FDA (U.S.)




System Configuration

FANUC LASER C series is supplied together with FANUC CNC and servo motors, which makes it easy for customers to construct high-performance laser cutting machines. **FANUC LASER C series** is compact, high-performance and high-reliability carbon-dioxide laser. Four models – **C1000i-C**, **C2000i-C**, **C4000i-C**, and **C6000i-C** – are available to tailor output to your processing needs. They are specifically developed to cut metallic and non-metallic materials. Pumped at 2MHz with RF discharge using all-solid-state laser power supply, the laser oscillator became compact, efficient, and stable. Moreover, the fast axial gas flow produces the optimum beam quality for the cutting process.

FANUC Series 30i/31i-LB realizes high-speed, high-precision laser cutting with **FANUC LASER C series**. **FANUC AC SERVO MOTOR α i series**, which is the most widely used in the world, also improves stable process together with the most advanced digital servo controlling technology.


System Configuration

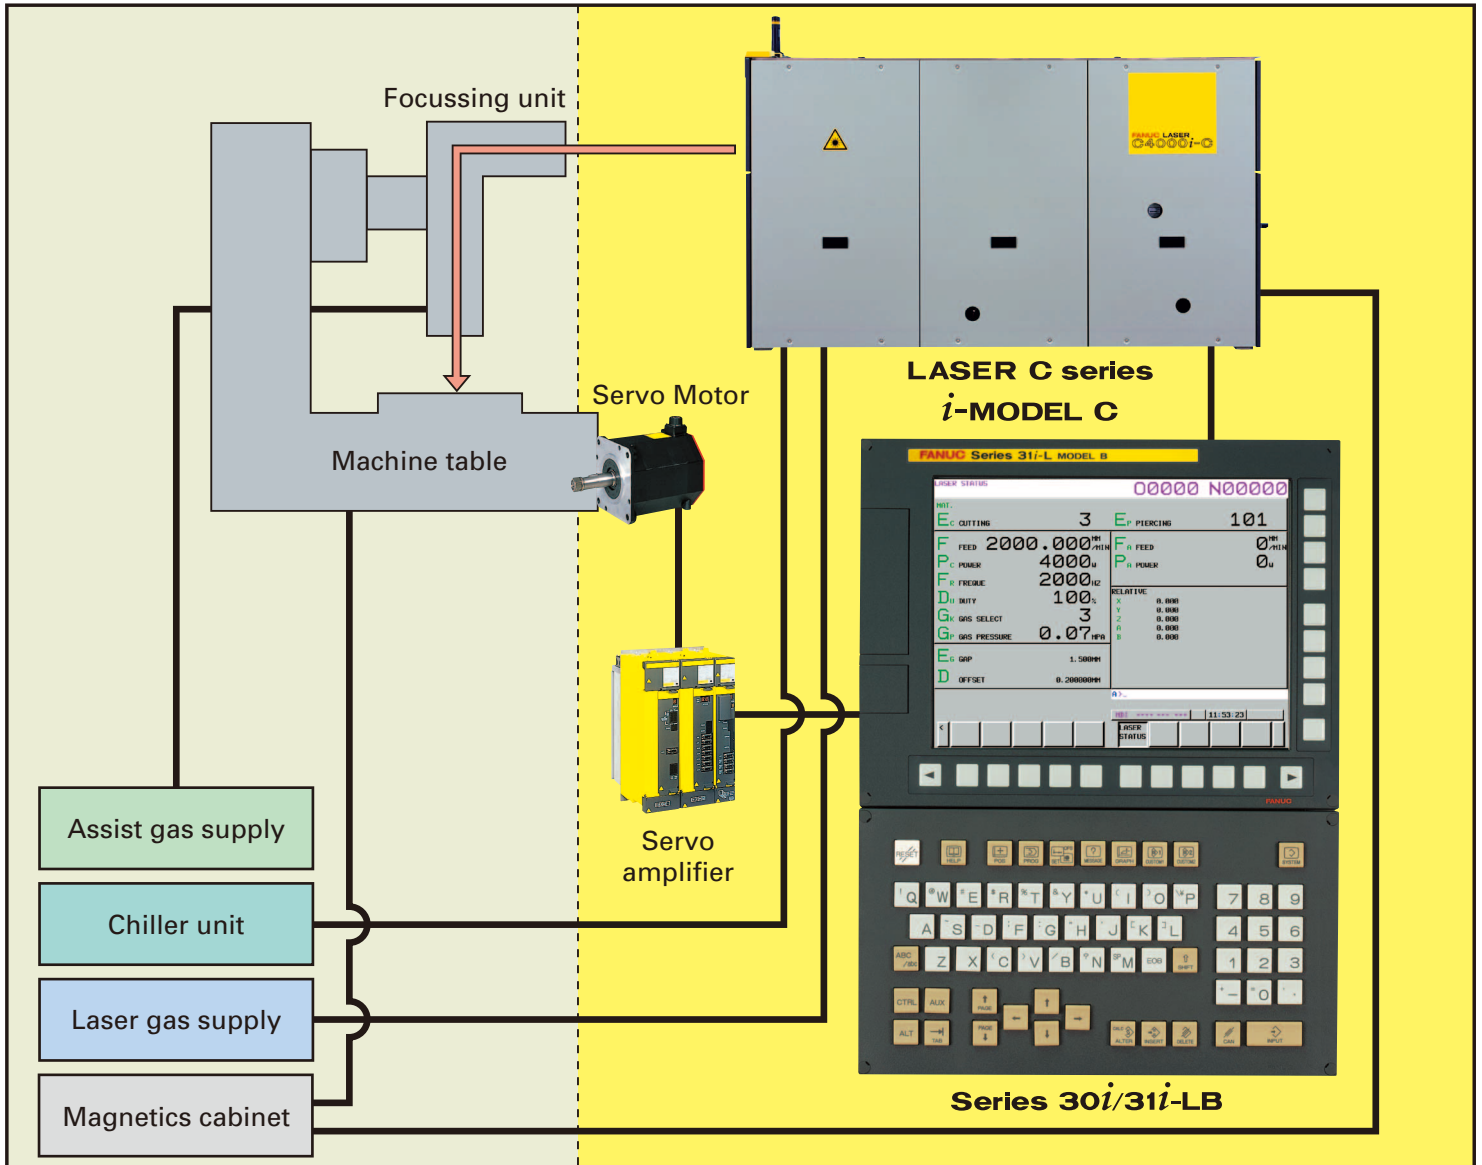

High Efficiency and Economy

Superior RF Discharge Excitation and High-Efficiency Turbo Blower

Using RF discharge excitation has brought about improved oscillation efficiency as well as output power stability. It also produces safety of operation due to low discharge voltage and high reliability due to non-contamination of laser gas which is possible only by adopting the external electrode structure as in **FANUC LASER C series**. The RF discharge excitation, stable and uniform one by nature, produces excellent pulsing characteristics. The transistorization using high power MOSFET, the first achievement at this power level, has also improved reliability.

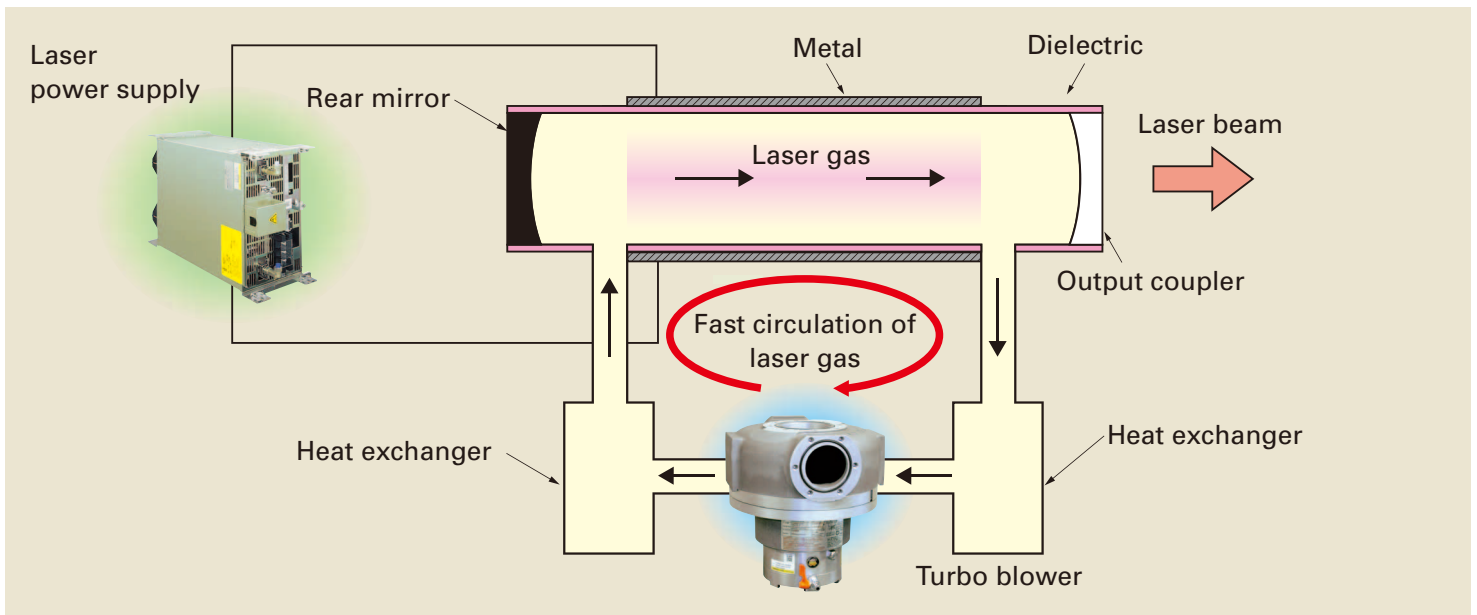


FANUC LASER C series are equipped with high speed rotation Turbo Blower to achieve fast laser gas circulation. Turbo blower design is optimized by use of FANUC Built-in Spindle Motor. Precise tuning of rotator and strict inspections enabled high speed rotation, and thus realizing the light weight, compact and large capacity Turbo Blower.

Power Saving Functions

During laser idle time, such as exchanging works, designing layout, and press processing on turret punch press machine, electric power consumption becomes lower by moving into the power saving states, in which laser power supplies and turbo blowers of laser oscillator are controlled in power saving conditions.

Two power saving states are available. One is Eco Power Saving state, in which electric power consumption is dramatically saved and the other is Quick Power Saving state, in which laser cutting can be restarted quickly. Therefore, according to the customers' choices, electric power consumption will be saved with these power saving functions. Assuming a cutting ratio of 50%, the effect of the power saving is about 20% with Power Saving Functions.

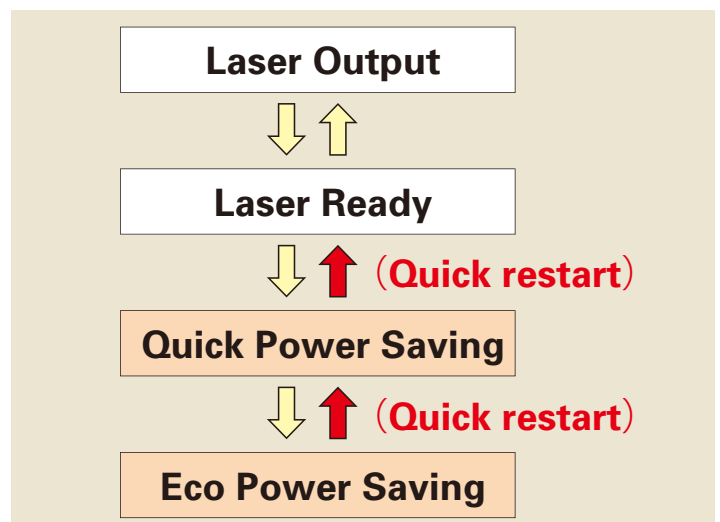

Superior Control Functions

Direct Oscillator Control by CNC

A CNC unit can be connected directly to control the laser oscillator. The CNC unit constantly checks the status of the laser oscillator during operation from startup to termination and automatically keeps the oscillator ready with the optimum operating conditions. The CNC unit also automatically controls other parameters that affect beam output, such as laser gas pressure.

In **i-model C**, the enhancement of oscillator control sequence enabled to reduce the start-up time and shut down time of oscillator by half to the conventional model.

i-model C will contribute to increase the utilization rates of the laser cutting machine.

Minute Laser Output Control and Calibration Function


Stable minute laser output, which is needed for laser marking, is achieved with enhanced control of laser power supplies.

In addition, Calibration Function for minute laser output realizes stable laser marking process over long periods, not to be affected by change of oscillator condition or exchange of mirrors.



Power Consumption Monitor

CNC always monitors the condition of the laser oscillator, and outputs estimated power consumption value. Using this power consumption value, the laser machine can display the total power consumption and the utilization rate of the laser machine, which will support the users to reduce the power consumption by their programming.

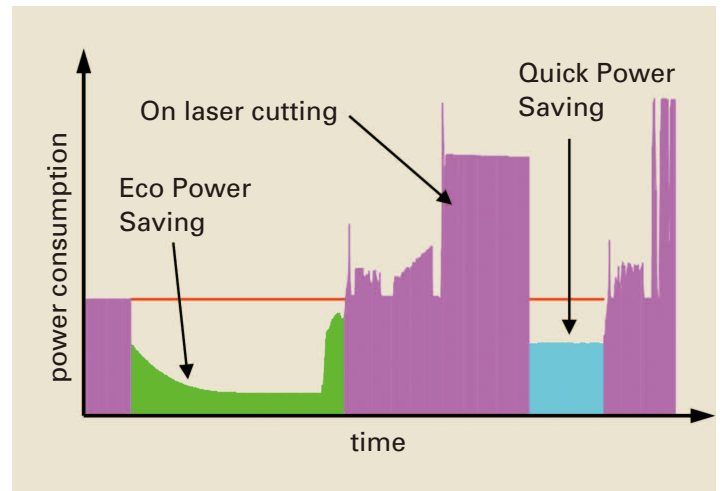

Laser Cutting Condition Control

Full automatic process is provided by programming, including automatic shutter open/close, output beam on/off, assist gas start/stop, output power, and pulse output (frequency and duty).

In addition, the commanded laser output value, pulse frequency, pulse duty and actual output power value are displayed on the CNC screen.


LASER STATUS		00026 N0000	
MAT.			
E C CUTTING	0	E P PIERCING	0
F FEED	870.00 ^{MM} / _{MIN}	F A FEED	0.00 ^{MM} / _{MIN}
P C POWER	0 ^u	P A POWER	1000 ^u
F R FREQUENCY	1000 HZ		
D U DUTY	0 %	RELATIVE	
G K GAS SELECT	0	X	-60.000
G P GAS PRESSURE	0.00 MPA	Y	70.000
		Z	0.000
		A	0.000
		B	0.000
		C	0.000
		C	0.000
		C	0.000
E R DEFLECTION	0.010MM		
D OFFSET	0.00MM		
A>^			
		MEH STRT *** FIN	09:15:13
		LASER STATUS	

High-Speed High-Precision Cutting

Nano Smoothing


For laser cutting with a free-form curve, since a curve becomes a polygon when a machining program is specified with linear interpolation, an unnatural winding point could be made on the finished cut edge.

"Nano Smoothing" estimates a desired path within the tolerance with NURBS curves using a minute line segment command point sequence created by a CAD/CAM system and interpolates the generated NURBS curves in nanometers. This technology gives a smooth machined surface approximate to the designed figure and reduces manual finishing processes.

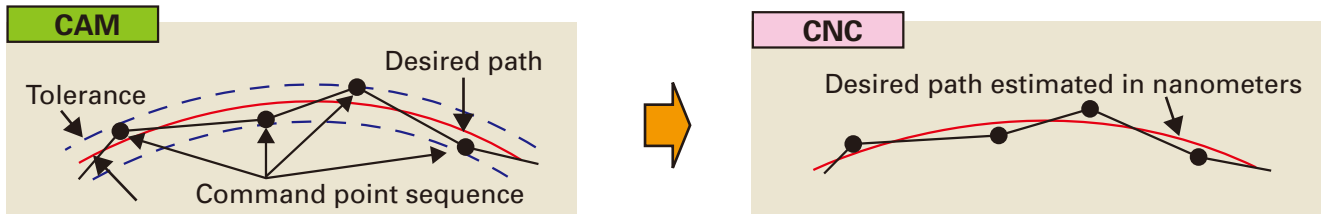


High-Speed High-Precision Cutting Function

Extreme high-precision synchronization between axis command and beam on/off command is realized. In high speed cutting, deviation between cutting head position and beam on/off command increases. The function minimizes the deviation sufficiently smaller than the beam spot size.

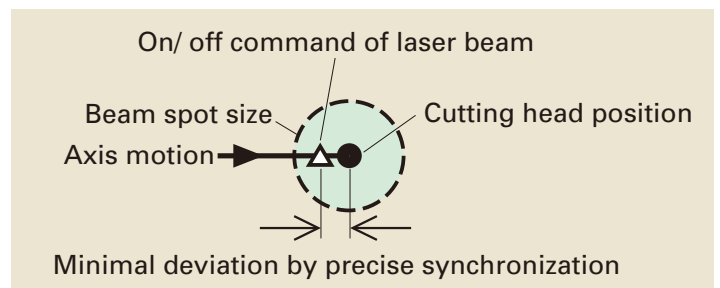


Enhancement of Pulse Frequency

The maximum command frequency of laser power has been enhanced from 2,000Hz to 32,767Hz. Enhancement of pulse frequency is effective in the improvement of the cut edge quality and decreasing dross.

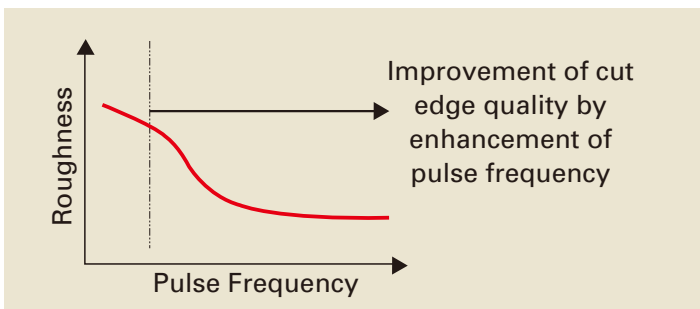

Edge Cutting Function

On detection of sharp angles in the cut path, automatic acceleration/deceleration is performed with appropriate cutting condition, thus enabling sharp-edge cutting.

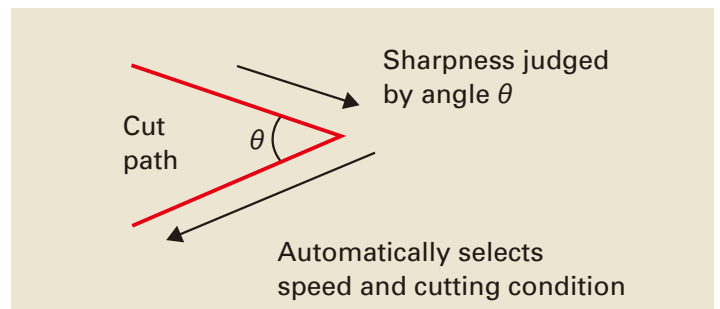

Tuning for Dedicated System

Nano CNC System

High-precision cutting Achieved by Coordination between “High-Precision Operation in Nanometers” and “State-of-the-Art Servo Technology” Nano interpolation that computes position commands for the digital servo control unit in nanometers, SERVO HRV Control and SPINDLE HRV Control for which the control cycle is made faster, and **FANUC AC SERVO MOTOR α i series** with a high-resolution pulse coder are used as standard and make up “Nano CNC System,” which achieves high-speed, high-precision cutting.

C Language Executor

Machine tool builders can create their own operation screens.


- C language is used ANSI functions and CNC and PMC functions for programming.
- High-level tasks to which high execution priority is assigned can monitor signal.



Real-Time Custom Macro

Signals and peripheral axes can be controlled from machining programs.

- A macro statement can be executed in real time in synchronization with a machining program.
- Signals can be input and output by using DI/DO variables.
- Operation that the signal status is used as a trigger can simply be created.
- Macro variables can dynamically be read and written.
- Operation that position information of a system variable is used as a trigger can be created.
- Multiple real-time macro statements can be executed concurrently.
- Peripheral axis control can be written in the same program during machining.

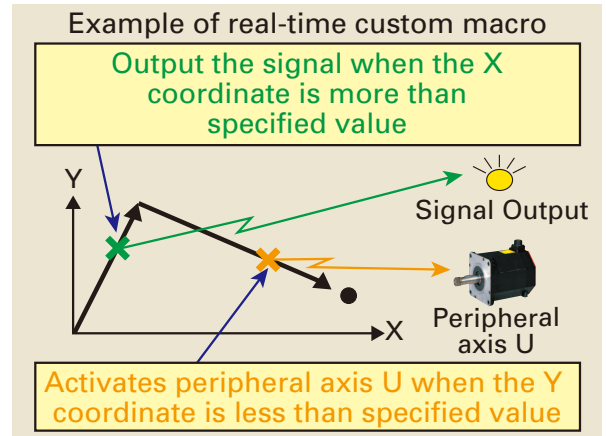

Personal Computer Function

The best combination between a CNC and personal computer is realized by transferring bulk data via an original high-speed interface. Unique dedicated applications can be realized easily by personal computer function, and the machine tools can meet special needs for machine tool customers.

Feature


Various commercially application software and hardware are available

Application

Best fit for flexibility with computer applications, such as tool file management by utilizing database

OS

Windows® XP Embedded

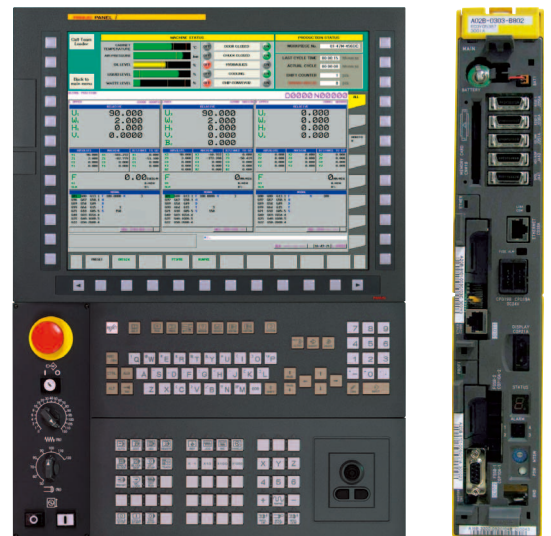

PANEL *i*

Highly Reliable Design

High Reliability

The thermal deformation of the resonator is suppressed by using low thermal expansion material. The indirect cooling structure exhibits excellent corrosion resistance.

The ceramic coating and external electrode structure are adopted to the discharge tubes, in order to protect them mechanically and to decrease the contamination into the laser gas.

The laser power supply is all-solid-state type using the latest MOSFETs.

All these factors contribute to the high reliability.



Easy Maintenance


The history of power compensation coefficient, current/ voltage of laser power supplies, status of laser, and run hour/maintenance time of fundamental parts are displayed on the CNC screen.

The Automatic Leakage Check Function exhausts the resonator chamber to vacuum and displays the change of inside pressure over time.

The Automatic Power Supply Adjustment Function automates the adjustment after replacement of laser power supplies.

After the laser is turned on, decrease of output power is always monitored. When it exceeds a certain preset level, a warning is displayed on the CNC screen to urge mirror cleaning.

In addition, newest techniques such as the oil mist decomposition element, dust collection unit and so on, have reduced the frequency of mirror cleaning interval and the high-precision-machined mirror stage has simplified mirror adjustment.

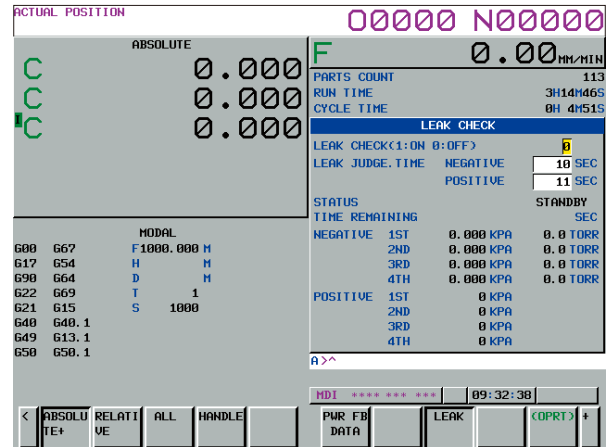

Automatic leakage check screen

High Safety

FANUC LASER C series products comply with the EC directive (CE Marking) and U.S. standards (FDA) under the laser radiation control for health and safety that apply to manufactures of laser products.


Warning labels and certification label such as the ones shown down side are affixed permanently on each laser product.

Using RF discharge excitation produces safety of operation due to low discharge voltage and skin effect by RF current.







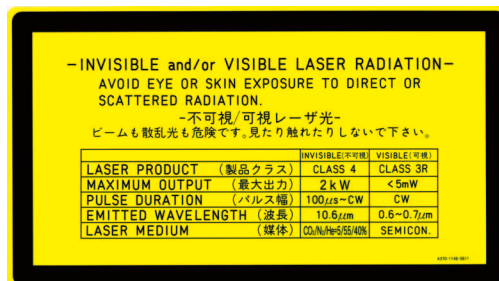



















—CERTIFICATION LABEL—

This laser product complies with 21 CFR 1040.10 and 1040.11.



Utility Plan for the Object

Corresponding to the cutting materials and thicknesses, laser models can be selected to achieve the best cutting performance. (Cutting performance of the laser machine might be limited depending on its configuration.)

	Mild steel	Stainless steel	Aluminum
C1000i-C	 800mm/min 9mmthk  1600mm/min 4.5mmthk	 1200mm/min 3mmthk  2600mm/min 2mmthk	 1600mm/min 2mmthk  4000mm/min 1mmthk
C2000i-C	 550mm/min 22mmthk  2400mm/min 6mmthk	 500mm/min 10mmthk  1000mm/min 6mmthk	 600mm/min 6mmthk  2000mm/min 3mmthk
C4000i-C	 550mm/min 28mmthk  3000mm/min 6mmthk	 800mm/min 12mmthk  1800mm/min 6mmthk	 2000mm/min 6mmthk  3000mm/min 4mmthk
C6000i-C	 550mm/min 32mmthk  2400mm/min 12mmthk	 600mm/min 16mmthk  1200mm/min 12mmthk	 1200mm/min 10mmthk  2600mm/min 6mmthk

Specifications

Standard specification of laser oscillator

Items	Contents						
Model	C1000i-C	C2000i-C		C4000i-C		C6000i-C	
Optical path length		Short	Long	Short	Long		
System principle	RF discharge excitation fast axial gas flow						
Structure	Integrated type (Note1) (oscillator and power supply)						
Laser rated output (W)	1000	2000		4000		6000	
Laser maximum output (W)	1000	2500		4000		6000	
Pulse peak power (W)	1000	2700 (Note 2)		4000		7000 (Note 2)	
Output stability	±1% (Note 3)			±2% (Note 3)			
Laser wavelength	10.6μm						
Beam mode	Low order mode						
Beam diameter at exit (mm)	< φ 20	< φ 27	< φ 24	< φ 27	< φ 24	< φ 27	
Polarization	45° linear			Circular	90° linear		
Beam divergence angle (full angle)	2mrad or less						
Pulse frequency	5 to 32767Hz						
Pulse duty	0 to 100%						
Laser gas (Note4)	Gas A	Gas B					
Gas consumption rate (l/h)	Approx. 10					Approx. 20	
Cooling water	Water rate (l/min.)	40	75	160	250		
	Circulated water pressure	0.5MPa or less gauge pressure					
	Water temperature/ Water temperature stability	20 to 30°C/±1°C			20 to 30°C/±2°C		
	Recommended cooling capacity (kW)	11	22	44	66		
Input power supply	AC200V+10%、-15% 50/60Hz±1Hz or AC220V+10%、-15% 60Hz±1Hz or AC230V+5%、-10% 60Hz±1Hz						
Power supply capacity (kVA)	18	33	55	75			
Mass (kg)	350 30 (pump)	700	900	1300			

Note 1) In **C1000i-C**, the vacuum pump is placed outside of the main unit.

Note 2) Within limited pulse duty

Note 3) At rated power with laser power feedback during 8 hours.


Note 4) Gas A /Pre-mixed gas of CO₂:N₂:He (volume ratio, N₂ balance) 5:55:40% ±5% or less for each composition

Gas B /Pre-mixed gas of CO₂:N₂:He (volume ratio, He balance) 5:35:60% ±5% or less for each composition

Maintenance and Customer Support

Worldwide Customer Service and Support

FANUC operates customer service and support system anywhere in the world through subsidiaries and affiliates. FANUC provides the highest quality service with the quickest response at the location nearest you.

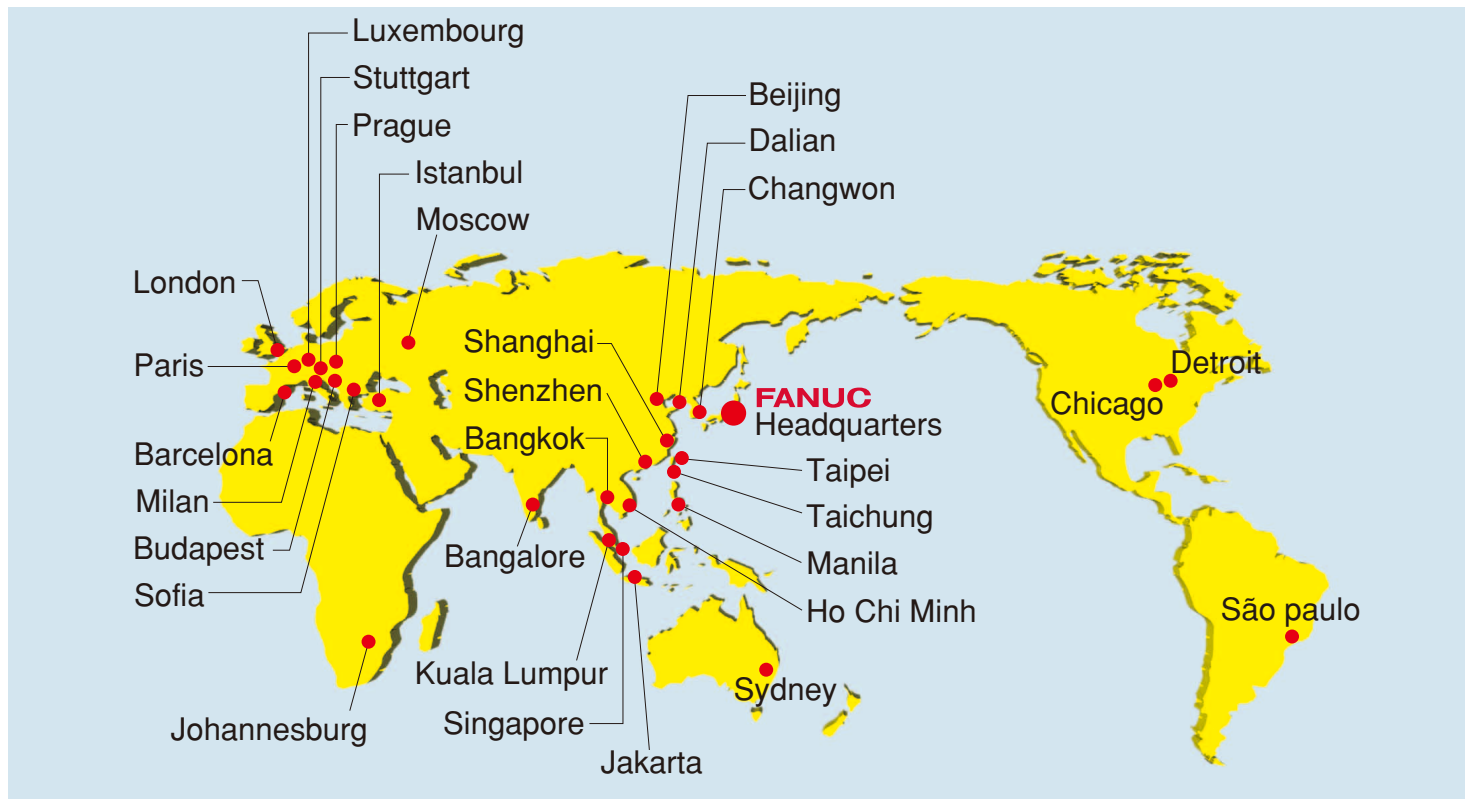

FANUC Training Center

FANUC Training Center operates training courses for daily, periodic, and preventive maintenance including mirror cleaning procedure of CO₂ laser oscillator.

Inquiries : Yamanakako-mura, Yamanashi,
Japan 401-0501

Phone : 81-555-84-6030

Fax : 81-555-84-5540



FANUC CORPORATION

• Headquarters Oshino-mura, Yamanashi 401-0597, Japan
Phone: 81-555-84-5555 Fax: 81-555-84-5512 <http://www.fanuc.co.jp>

• America

FANUC FA AMERICA CORPORATION
FANUC FA Brazil Ltda

Tel 1-847-898-5000 Fax 1-847-898-5001
Tel 55-11-3952-8888 Fax 55-11-3856-0848

FANUC FA Polska Sp. Zo.O.
FANUC FA Nordic AB
FANUC FA Switzerland GmbH.

Tel 48-71-7766-170 Fax 48-71-7766-179
Tel 46-8-505-80-700 Fax 46-8-505-80-701
Tel 41-32-366-63-63 Fax 41-32-366-63-64

• Europe, the middle east and Africa

FANUC Luxembourg Corporation, S.A.
FANUC FA Deutschland GmbH
FANUC FA France
FANUC FA UK Ltd.
FANUC FA Italia S.r.l.
FANUC FA Iberia S.A.
FANUC FA Satis ve Servis Tic. Ltd. Sti.
FANUC FA Bulgaria Ltd.
FANUC FA CZ s.r.o.
FANUC FA Hungary kft
FANUC SOUTH AFRICA (PTY) LIMITED
FANUC AUTOMATION LLC

Tel 352-727979-1 Fax 352-727979-214
Tel 49-7158-187400 Fax 49-7158-187455
Tel 33-1-4569-6333 Fax 33-1-4569-0325
Tel 44-1895-634182 Fax 44-1895-676140
Tel 39-02-45795-1 Fax 39-02-45795-250
Tel 34-943-74-82-90 Fax 34-943-74-44-21
Tel 90-216-651-1408 Fax 90-216-651-1405
Tel 359-2-963-3319 Fax 359-2-963-2873
Tel 420-234-072-131 Fax 420-234-072-110
Tel 36-23-507-400 Fax 36-23-507-401
Tel 27-11-392-3610 Fax 27-11-392-3615
Tel 7-495-956-9780 Fax 7-495-956-9785

• Asia and Oceania
KOREA FANUC CORPORATION
TAIWAN FANUC LIMITED
BEIJING-FANUC Mechatronics CO., LTD.
FANUC INDIA PRIVATE LIMITED
FANUC THAI LIMITED
FANUC MECHATRONICS (MALAYSIA) SDN. BHD.
PT. FANUC INDONESIA
FANUC SINGAPORE PTE. LTD.
FANUC OCEANIA PTY. LIMITED
FANUC PHILIPPINES CORPORATION
FANUC VIETNAM LIMITED

Tel 82-55-278-1200 Fax 82-55-284-9826
Tel 886-4-2359-0522 Fax 886-4-2359-0771
Tel 86-10-6298-4739 Fax 86-10-6298-4741
Tel 91-80-2852-0057 Fax 91-80-2852-0051
Tel 66-2-662-6111 Fax 66-2-662-6120
Tel 60-3-7628-0110 Fax 60-3-7628-0220
Tel 62-21-4584-7285 Fax 62-21-4584-7288
Tel 65-6-220-3911 Fax 65-6-225-0098
Tel 61-2-8822-4600 Fax 61-2-8822-4666
Tel 63-2-813-3155 Fax 63-2-813-3157
Tel 84-8-3824-6638 Fax 84-8-3824-6637

- All specifications are subject to change without notice.
- No part of this catalog may be reproduced in any form.

• The products in this catalog are controlled based on Japan's "Foreign Exchange and Foreign Trade Law". The export of Series 301-LB from Japan is subject to an export License by the government of Japan. Other models in this catalogue may also be subject to export controls.

Further, re-export to another country may be subject to the license of the government of the country from where the product is re-exported. Furthermore, the product may also be controlled by re-export regulations of the United States government. Should you wish to export or re-export these products, please contact FANUC for advice.

© FANUC CORPORATION, 1992

LASER C-24(E), 2012.6, Printed in Japan