

Light
harmony

BILIGHT, TRILIGHT, LUXOR

DECORATIVE LIGHTING DEVICES FOR DOMESTIC/URBAN SECTOR

Innovations

Light for the domestic sector

Bilight, Trilight, Luxor, Luxor Wall and Luxor Wallwasher are the ideal solution for meeting all residential lighting needs (green areas, common areas, condominiums and villas).

LED innovation

BILIGHT and TRILIGHT, in die-cast aluminium, use LED technology to reduce energy consumption and guarantee a longer lifespan compared with conventional sources. The devices have dual ignition: one for the main lighting, and one for signalling.

More simple and resistant


The Luxor devices are designed to compensate for any installation and maintenance problems. Apart from guaranteeing the IP68 degree of protection, the quality of the materials and the design logic ensure resistance to outdoor conditions of use.




Luxor for flush-mounting



Luxor for floor-mounting

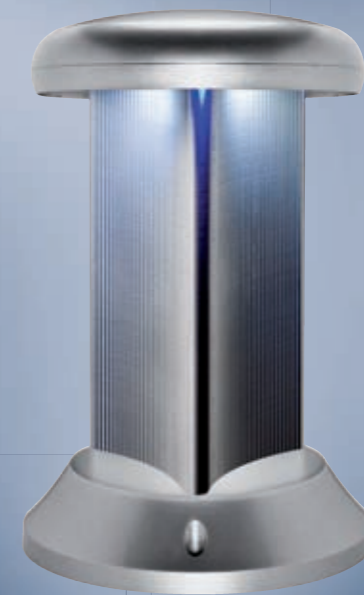

Trilight

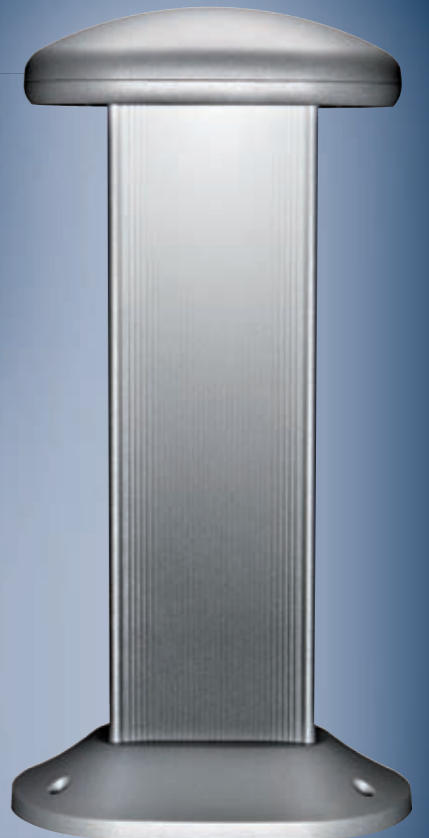

Bilight

Bilight and Trilight - Decorative devices for the domestic/urban sector




Light diffusion

The longitudinal faceting of the stem encourages the maximum reflection of the main light, but without creating glare.



No water build-up

The rounded shape means water can run off when it rains, and the drip-guard edge on the diffuser prevents water collecting.



Creative lighting

The side LEDs for light signalling are available in amber, white and blue, to create the ideal atmosphere in every outdoor context (parks, gardens and access drives).



Luxor Wall - Devices for flush-mounting




Family feeling

The design is co-ordinated with the Chorus LUX domestic range, whose plate design is echoed here in the closure flange.




Easy to install

The product is fixed to the outer casing with just two screws, so the correct closure of the product is not conditioned by the correct installation of the outer casing.



Wide range

Luxor Wall is available in four different sizes and with several light sources (also LED), with both symmetrical and asymmetrical light distribution.

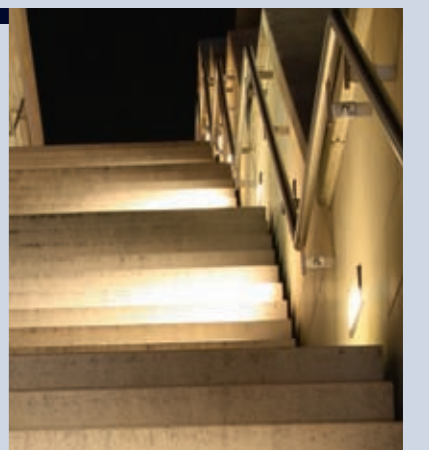

Luxor - Devices for floor-mounting



Aligned flanges

The device can be adjusted inside its outer casing. The closure flanges are easily aligned, regardless of how the outer casing has been installed.




Anti-condensate system

The insulation on the cable input, and the corresponding resin coating, prevent damp from penetrating inside the device (IP68 degree of protection).



Versatility and flexibility

Available with a wide range of light sources and distribution, the Luxor Floor range includes versions with either steel or aluminium finishing, and with a rectangular, square or circular flange.

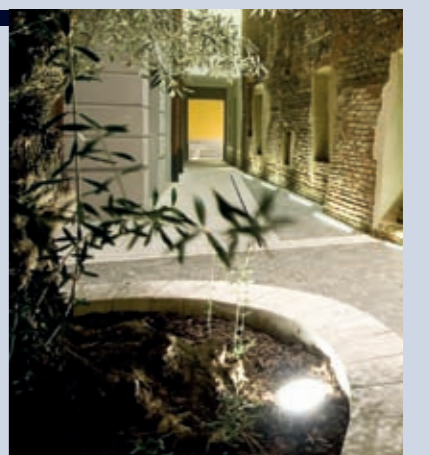

Luxor Wallwasher



Adjustable device

The product can be adjusted by up to 15° (in 5° steps), ensuring the maximum flexibility of use in every application.




Compactness

The compactness of the device allows it to be used wherever minimum dimensions and maximum results are needed.



Efficiency and understatement

Available in two lengths depending on the type of source (LED or fluorescent) and power you want to use.

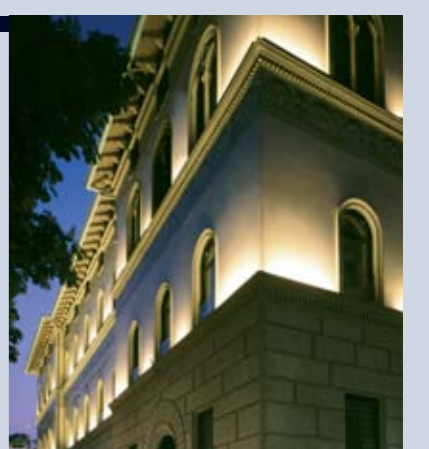

Bilight and Trilight

SOURCE		BILIGHT					TRILIGHT				
		Main lighting	Light signalling	Code	Height (mm)	Overall power	Main lighting	Light signalling	Code	Height (mm)	Overall power
LED (230 V)		White	Amber	GW 82 061	300	18 W	White	Amber	GW 82 081	300	27 W
				GW 82 064	600	18 W			GW 82 084	600	27 W
				GW 82 067	900	18 W			GW 82 087	900	27 W
		White	White	GW 82 062	300	18 W	White	White	GW 82 082	300	27 W
				GW 82 065	600	18 W			GW 82 085	600	27 W
				GW 82 068	900	18 W			GW 82 088	900	27 W
		White	Blue	GW 82 063	300	18 W	White	Blue	GW 82 083	300	27 W
				GW 82 066	600	18 W			GW 82 086	600	27 W
				GW 82 069	900	18 W			GW 82 089	900	27 W

Luxor Floor - Devices for floor-mounting - IP68*

SOURCE		VERSION											
		Aluminium flange versions			Stainless steel flange versions				Stainless steel flange versions			Stainless steel frame versions	
		Luxor 100	Luxor 100L	Luxor 200	Luxor 80	Luxor 100	Luxor 100L	Luxor 200	Luxor 100	Luxor 100L	Luxor 200	Luxor 400	Luxor 900
		Flange dimensions (mm)			Flange dimensions (mm)				Flange dimensions (mm)			Flange dimensions (mm)	
		Ø140	Ø140	Ø214	Ø85	Ø175	Ø175	Ø260	175 X 175	175 X 175	260X260	400X100	950X100
		Height with outer casing (mm)			Height with outer casing (mm)				Height with outer casing (mm)			Height with outer casing (mm)	
		101	230	325	100	104	233	328	101	230	325	68	68
Halogen with very low voltage (12V)		GU4 20W			GW 82 901								
		GU5,3 35W	GW 82 911			GW 82 921			GW 82 926				
Halogen with mains voltage (230V)		Gz10 50W	GW 82 932				GW 82 942			GW 82 947			
LED (230 V)		White	GW 82 912	GW 82 933	GW 82 902	GW 82 922	GW 82 943		GW 82 927	GW 82 948		GW 82 993	GW 82 998
		Blue	GW 82 913	GW 82 934	GW 82 903	GW 82 923	GW 82 944		GW 82 928	GW 82 949			
Fluorescent compact (230V)		18W G24-d2		GW 82 951				GW 82 971			GW 82 981		
		26-32W GX24-q3		GW 82 952				GW 82 972			GW 82 982		
		9W E27 electronic	GW 82 931 F					GW 82 941 F		GW 82 946 F			
Linear halogen (230 V)		FD G5 8W FD G5 39W										GW 82 991 (symm.) GW 82 992 (asymm.)	GW 82 996 (symm.) GW 82 997 (asymm.)
Metal halides (230 V)		35W MT G12		GW 82 953 (7°) GW 82 954 (34°)				GW 82 973 (7°) GW 82 974 (34°)			GW 82 983 (7°) GW 82 984 (34°)		
		70W MT G12		GW 82 955 (7°) GW 82 956 (34°)				GW 82 975 (7°) GW 82 976 (34°)			GW 82 985 (7°) GW 82 986 (34°)		

*IP67 for: Luxor 80, Luxor 400, Luxor 900.

Luxor Wall - Devices for flush-mounting / Luxor Wallwasher - IP65

SOURCE		VERSION													
		Symmetrical				Asymmetrical				Wallwasher					
		Luxor Wall 90S	Luxor Wall 260S		Luxor Wall 90	Luxor Wall 220		Luxor Wall 250		Luxor 400		Luxor 900			
		Flange dimensions (mm)				Flange dimensions (mm)				Flange dimensions (mm)					
		90X90	270X152		90X90	205X152		260X260		358X65		904X65			
		Depth with outer casing (mm)				Depth with outer casing (mm)				Depth with outer casing (mm)					
		85	115		85	101		113		83		83			
		Colour finishing				Colour finishing				Colour finishing					
		Graphite	Aluminium	Graphite	Aluminium	Graphite	Aluminium	Graphite	Aluminium	Graphite	Aluminium	Graphite	Aluminium		
LED (230 V)		White	GW 82 106	GW 82 806	GW 82 137	GW 82 837	GW 82 101	GW 82 801	GW 82 112	GW 82 812		GW 82 143	GW 82 843	GW 82 144	GW 82 844
		Blue			GW 82 138	GW 82 838			GW 82 113	GW 82 813					
Compact fluorescent (230 V)		FSQ G24-q1 10W							GW 82 111	GW 82 811					
		FSM GX24q-3 26-32W			GW 82 136	GW 82 836					GW 82 121	GW 82 821			
Linear halogen (230 V)		FD G5 8W										GW 82 141	GW 82 841		
		FD G5 39W												GW 82 142	GW 82 842
Metal halides (230 V)		35W MT G12								GW 82 122	GW 82 822				