




VIDEO



POWER TOOLS

IP56 RATED TO PROTECT FROM DUST, WATER, AND ANYTHING ELSE THE JOBSITE THROWS AT YOU, GREENLEE POWER TOOLS COMBINE LONG LASTING LI-ION TECHNOLOGY WITH PROFESSIONAL DESIGN FOR TODAY'S MODERN CONTRACTOR.

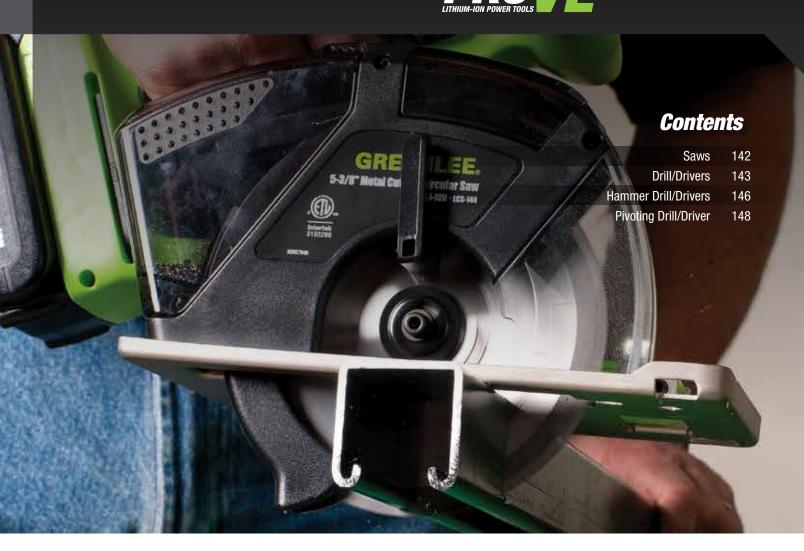

USA PHONE 800.435.0786 CANADA PHONE 866.384.8813 FAX 800.451.2632 FAX 800.524.2853

INT'L PHONE +1.815.397.7070 FAX +1.815.397.9247



POWER TOOLS

SAWS LCS-144 Electrician's Metal Cutting Circular Saw







The Greenlee circular saw is designed primarily to cut metal—almost any metal. This includes conduit, strut, and threaded rod. Plus, the blade doesn't leave burrs, so chasing threads or filing the edges isn't needed. The full surround blade guard contains most of the chips, and with its compact size, it will work where larger saws can't. It even has a LED work light so you can make straight cuts in dark locations.

- High capacity battery: 14.4V LI-ION
- Lightweight 5.7 lbs (2.59 kg)
- IP-56 Rated: Keeps out dust and water
- Blade depth cuts unistrut in one pass
- 3-way chip control system (vacuum cleaner, chip case or eject from rear of tool)
- Shaft lock for easy blade replacement
- · Electronic performance monitoring system maximizes battery life
- LED work light





INCLUDES:

(1) 14.4V Metal Cutting Circular Saw with LCS-M13C Metal Blade,
(2) 14.4V Lithium-Ion Compact Batteries, (1) 14.4V – 28.8V Battery Charger, (1) Carrying Case

NEW Available Blades



LCS-W13A CARBIDE-TIPPED WOOD CIRCULAR SAW BLADE - 5-3/8" (REGULAR)



LCS-M13C CARBIDE-TIPPED METAL CIRCULAR SAW BLADE - 5-3/8" (REGULAR)

(G)

GREENLEE

LCS-W13B CARBIDE-TIPPED WOOD CIRCULAR

SAW BLADE - 5-3/8"



LCS-M13D CARBIDE-TIPPED METAL CIRCULAR SAW BLADE - 5-3/8" (THIN)



1862

SPECIFICATIONS

E	Battery		14.4 V Lithium-Ion
0	Charging Time	:	35 min Usable, 50 min Full
ŀ	Arbor Size	20.000 mm	
_	Blade Diameter		5-3/8" Outer
	Cutting Depth	1-13/16" 3600 RPM	
	Speed		
1	Гуре	Metal Cutting	
0	CAT NO.	UPC	DESCRIPTION
l	LCS-144	95936	Metal Cutting Circ Saw Kit - 14.4V
] [LDS-144	05098	Combo Kit (Drill & Saw)
L	LBC-81B	95945	Battery Charger - 7.2-28.8V (Pt)
l	LBP-144	95942	Li-Ion Battery - 14.4V (Pt)
] [LCS-M13C	95946	Blade, Metal Circ Saw - 5-3/8" Reg
] [LCS-M13D	95947	Blade, Metal Circ Saw - 5-3/8" Thin
] [LCS-W13A	95948	Blade, Wood Circ Saw - 5-3/8" Reg
1 1	LCS-W13B	95949	Blade, Wood Circ Saw - 5-3/8" Thin

DRILL/DRIVERS LDD-144 1/2" LI-ION Electrician's Drill/Driver



INCLUDES:

- (1) 14.4V Drill/Driver, (2) 14.4V Lithium-Ion Compact Batteries,
- (1) 14.4V 28.8V Battery Charger, (1) Carrying Case

This drill/driver is small and light. It is easy to carry around and easy to fit into tight spaces. Yet, with its 14.4V LI-ION battery, it has enough power to drive Greenlee's top performing Self-Feeding spade bits—up to 42 holes in 1-1/2" wood with a 7/8" bit. With 18 clutch settings, it can be set to drive just about any screw properly.

G GREENLEE.

- Lightweight: 3.7 lbs. (1.68 kg)
- IP-56: Keeps out dust and water
- High capacity battery: 14.4V LI-ION
- High power: 390 in-lb
- Clutch torque: 4.4 to 39.0 in-lb, 18 stages (2 in-lb per stage)
- 1/2" Heavy-duty keyless chuck
- Over molded grip for comfort
- Electronic performance monitoring system maximizes battery life
- Belt hook



SPECIFICATIONS

	Battery		14.4 V Lithium-Ion		
	Charging Time	:	35 min Usable, 50 min Full		
	Chuck Size		1/2"		
	Clutch Torque		4.4 - 39.0 IN-LB		
		18 Stages (2 IN-LB Per Stage)			
	Speed		60 - 400 RPM Low, 200 - 1350 RPM High		
	Torque	:	390 IN-LB		
	CAT NO.	UPC	DESCRIPTION		
Ν	LDD-144	95934	Drill/Driver Kit - 14.4V		
Ν	LDS-144	05098	Combo Kit (Drill & Saw)		
Α	LBC-81B	95945	Battery Charger - 7.2-28.8V (Pt)		
Α	LBP-144	95942	Li-Ion Battery - 14.4V (Pt)		



LDS-144 Combo Kit



INCLUDES:

(1) LDD-144 Drill/Driver (1) LCS-144 Metal Cutting Circular Saw (2) 14.4V Lithium-Ion Compact Batteries (1) 14.4V – 28.8V Battery Charger (1) Heavy-Duty Multi-Pocket Bag

	CAT NO.	UPC	DESCRIPTION
Ν	LDS-144	05098	Combo Kit (Drill & Saw)



LDD-216 1/2" LI-ION Electrician's Drill/Driver



This drill/driver is a rugged workhorse for day after day heavy-duty drilling, yet at 5.4 pounds it is one of the lightest drills in its class. The high capacity 21.6V LI-ION battery delivers plenty of power to drill up to 139 holes 3/4" diameter in 1-1/2" wood. It includes an accessory handle for better control, and it features an 18 stage clutch so you can drive screws to just the right torque.

- Lightweight: 5.4 lbs. (2.45 kg)
- IP-56: Keeps out dust and water
- High capacity battery: 21.6V LI-ION
- Clutch torque: 8.8 to 61.0 in-lb (3.0 in-lb. per stage), 18 stages
- 1/2" Heavy-duty keyless chuck •
- Over molded grip for comfort ٠
- Electronic performance monitoring system maximizes battery life •
- LED work light •
- Rugged all-metal gear system ٠
- Fan-cooled motor for long life •



SPECIFICATIONS

	Battery		21.6 V Lithium-Ion
	Charging Time		45 min Usable, 60 min Full
	Chuck Size		1/2"
	Clutch Torque		8.8 - 61.0 IN-LB
			18 Stages (3.0 IN-LB Per Stage)
	Speed		100 - 400 RPM Low, 350 - 1500RPM High
	Torque		575 IN-LB
	CAT NO.	UPC	DESCRIPTION
1	LDD-216	95937	Drill/Driver Kit - 21.6V
	LBC-81B	95945	Battery Charger - 7.2-28.8V (Pt)
	LBP-216	95943	Li-Ion Battery - 21.6V (Pt)



- (1) 21.6V Drill/Driver, (2) 21.6V Lithium-Ion Compact Batteries,
- (1) 14.4V 28.8V Battery Charger, (1) Carrying Case





The LHD-216 provides the same heavy-duty drilling and bit driving performance as the LDD-216 drill/driver, plus it offers the hammer function for drilling up to 1/2" holes in masonry. It is truly a multi-purpose tool. Turn the chuck collar to any of the 18 clutch positions for bit driving, or to the drilling or the hammer drill position. Yet with all of these functions, it only weighs 5.6 pounds.

G GREENLEE.

- Light weight: 5.6 lbs. (2.54 kg)
- IP-56: Keeps out dust and water
- High capacity battery: 21.6V LI-ION
- High speed masonry drilling: 1,500 rpm / 27,000 bpm
- Clutch torque: 8.8 to 61.0 in-lb (3.0 in-lb per stage) 18 stages
- 1/2" Heavy-duty keyless chuck
- Over molded grip for comfort
- · Electronic performance monitoring system provides longer battery life
- LED work light
- Rugged all-metal gear system
- Fan-cooled motor for long life





SPECIFICATIONS

Battery	21.6 V Lithium-Ion
Charging Time	45 min Usable, 60 min Full
Chuck Size	1/2"
Clutch Torque	8.8 - 61.0 IN-LB, 18 Stages (3.0 IN-LB Per Stage,)
Blows Per Minute	1800 - 7200 BPM Low, 6300 - 27000 BPM High

	CAT NO.	UPC	DESCRIPTION
Ν	LHD-216	95938	Hammer Drill/Driver Kit - 21.6V
Α	LBC-81B	95945	Battery Charger - 7.2-28.8V (Pt)
Α	LBP-216	95943	Li-Ion Battery - 21.6V (Pt)

LHD-216 1/2" LI-ION Electrician's Hammer Drill/Driver

A = ACCESSORY

B = BARE TOOL

Intertek 3136277

R = REPLACEMENT PART

1**,6**V

ithium-lon

N = NEW PRODUCT

PRODUCT

POWER TOOLS

HAMMER DRILL/DRIVERS LRH-144 Electrician's 1/2" SDS-plus Rotary Hammer Drill/Driver



Air-Coupling Hammer Mechanism provides quick hole drilling in hard concrete!



With this one tool, you can do a complete concrete anchor installation. In the hammer mode, you can use a SDS masonry bit to drill the anchor hole. Then you can change to the drilling mode and use the included bit adapter to drive the screw into the anchor. Plus the LRH-144 has 5 clutch settings so you can use just the right amount of torque for the screw. The 14.4V LI-ION battery provides plenty of power to drill up to 12 holes of 1/2" diameter x 1-1/2" deep in concrete.

- Lightweight: 5.1 lbs. (2.31 kg)
- IP-56: Keeps out dust and water
- High capacity battery: 14.4V LI-ION
- Hammering force: 21.6 kN
- Blow rate per minute (rotation with hammering): 0-3,800 bpm
- SDS-plus bit system

٠

- Adapter for 1/4" hex shank bits
 - Exclusive intigraded drill/driver function
- · Electronic performance monitoring system provides longer battery life
- Dust-proof switch ensures long life



95945

95942



SPECIFICATIONS

Ν

A

A

LBC-81B

LBP-144

Battery		14.4 V Lithium-Ion
Charging Time		35 min Usable, 50 min Full
Shank		SDS-plus
Clutch Torque		13 - 48.7 IN-LB (5 Stages - 8.8 IN-LB Per Stage)
Speed		0 - 1000 RPM (No Load)
Blows Per Minute		0 - 3800 BPM
Hammering Force		21.6 KN
CAT NO.	UPC	DESCRIPTION
LRH-144	95935	Rotary Hammer Drill Driver Kit - 14.4V

INCLUDES:

(1) 14.4V Rotary Hammer Drill/Driver, (2) 14.4V Lithium-Ion Compact Batteries, (1) 14.4V – 28.8V Battery Charger, (1) Carrying Case, (1) Shoulder Strap, (1) Bit Adapter





CANADA PHONE 866.384.8813 FAX 800.524.2853

Battery Charger - 7.2-28.8V (Pt)

Li-Ion Battery - 14.4V (Pt)

INT'L PHONE +1.815.397.7070 FAX +1.815.397.9247 B = BARE TOOL

LRH-288 Electrician's 3/4" SDS-plus Rotary Hammer








Cooling/dust-proof design supports continuous use.

Rigorous continuous use is made possible by air flowing through the space between the gear case and the main unit housing. Which, similar to a radiator, cools the entire gear case containing the hammer and gears which become hot from use. A large cooling fan drives the exhaust system to prevent dust buildup.



This is one tough rotary hammer. With its magnesium gear case housing that provides excellent heat dispersal and its cooling fan that flows air around the gear case, it is capable of drilling up to 9/16" diameter holes in concrete continuously. Also, the large cooling fan provides enough air flow to prevent tool-killing dust buildup, and the two-finger trigger is sealed to prevent dust entry. Use the Soft hammer selection for holes up to 3/16" diameter.

- Lightweight: 8.4 lbs. (3.81 kg)
- IP-56: Keeps out dust and water
- High capacity battery: 28.8V LI-ION
- Hammering force: 5,300 lbF
- Two speed hammering selection:
 - High: 0-4,500 bpm, Low: 0-2,800 bpm
- SDS-plus bit system
- Magnesium gear case provides long gear life and heat dispersion
- Ergonomic soft rubber grip for stress reduction
- Electronic performance monitoring system provides longer battery life
- Dust-proof switch ensures long life



SPECIFICATIONS

LBP-288

A

95944

	Battery		28.8 V Lithium-Ion
	Charging Time		55 min Usable, 70 min Full
	Shank		3/8" SDS-plus
	Speed		0 - 920 RPM High, 0 - 500 RPM Low
	Hammering Spe	ed	0 - 4500 BPM High, 0 - 2800 BPM Low
	Hammering Force		5300 LBF
	Application		For Holes Up To 1" Diameter
	CAT NO.	UPC	DESCRIPTION
Ν	LRH-288	95939	Rotary Hammer Kit - 28.8V
A	LBC-81B	95945	Battery Charger - 7.2-28.8V (Pt)

Li-Ion Battery - 28.8V (Pt)

INCLUDES:

(1) 28.8V Rotary Hammer, (2) 28.8V Lithium-Ion Compact Batteries, (1) 14.4V – 28.8V Battery Charger, (1) Carrying Case,

(1) Shoulder Strap

POWER TOOLS

PIVOTING DRILL/DRIVERS LSD-36 LI-ION Electrician's Pivoting Drill/Driver







INCLUDES:

(1) 3.6V Drill/Driver, (2) 3.6V Lithium-Ion Compact Batteries,

(1) 3.6V Battery Charger

G

GREENLEE

SPECIFICATIONS

Battery	3.6 V Lithium-Ion
Charging Time	15 min Usable, 30 min Full
Chuck Size	1/4" Hex Quick Change
Clutch Torque	2.7-25.7 - IN-LB
	21 Stages (0.9 IN-LB Per Stage)
Speed	2 Speed reversible, Low: 200RPM, High: 600RPM
Torque	39 IN-LB

	CAT NO.	UPC	DESCRIPTION
Ν	LSD-36	95940	Screwdriver / Drill - 3.6V
A	LBC-10B	95951	Battery Charger - 2.4-3.6V (Pt)
Α	LBP-36	95950	Li-Ion Battery - 3.6V (Pt)

