

GLOBAL INC. *pro*

3 - CIRCUIT LIGHTING TRACK SYSTEM



Multi

Fix-Point™ GA 70

NQA

Multi Fix-Point™ GA 70




GLOBAL trac®
is a registered
trademark of
Nordic Aluminium Plc

We reserve the right to changes.

FIX-POINT TECHNICAL SPECIFICATIONS

GA 70

Rated values 10 A, 250 V
Protection class I
Pull strength 50 N
Bending moment max 2,5 Nm
Built-in cable grip




Use for spotlights with 3-circuit adapters:

- Use with GA 69, XTSA 68, XTSA 67, XTSA 66, or TEK 69 (2-circuit)
- Switch adapter to phase 1
- Surface mounting for ceilings and walls
- Local installation requirements have to be followed
- Suitable for most 3-circuit multi-adapters on the market



XTSA 71

Recessed box for GA 70 and XTSA 70
Pull strength 50 N
Adjustable for differing ceiling thicknesses (max. 30 mm)
Fixing hole diameter Ø 105-125 mm

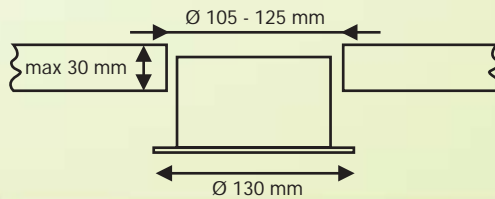

COLOURS

- Grey -1
- Black -2
- White -3





NORDIC ALUMINIUM

P.O.Box 117, FIN-02401 Kirkkonummi, Finland

Tel. +358 9 68 251, fax +358 9 298 2154

www.nordicaluminium.fi

