



INDUSTRIAL FLOOR TRUNKING



INDUSTRIAL FLOOR TRUNKING

	Survey of the system	2-63
TFCL		
TFCL 60	Industrial floor trunking	2-64
TFCL 85	Industrial floor trunking	2-64
TFCL 110	Industrial floor trunking	2-65
COVER		
DTFCL	Cover for industrial floor trunking	2-65
DGTFCL	Cover for industrial floor trunking	2-65
ACCESSORIES		
BTFCFL	Horizontal bend 90°	2-66
DBTFCL	Cover for horizontal bend 90°	2-66
DGBTFCFL	Cover with holes for horizontal bend 90°	2-67
ASTFCFL	Horizontal adapter 90°	2-67
SIN	Build-in division plate	2-68
JOINTING PLATE		
V 35*200	Jointing plate	2-68
V 60*200	Jointing plate	2-68
V 85*200	Jointing plate	2-69

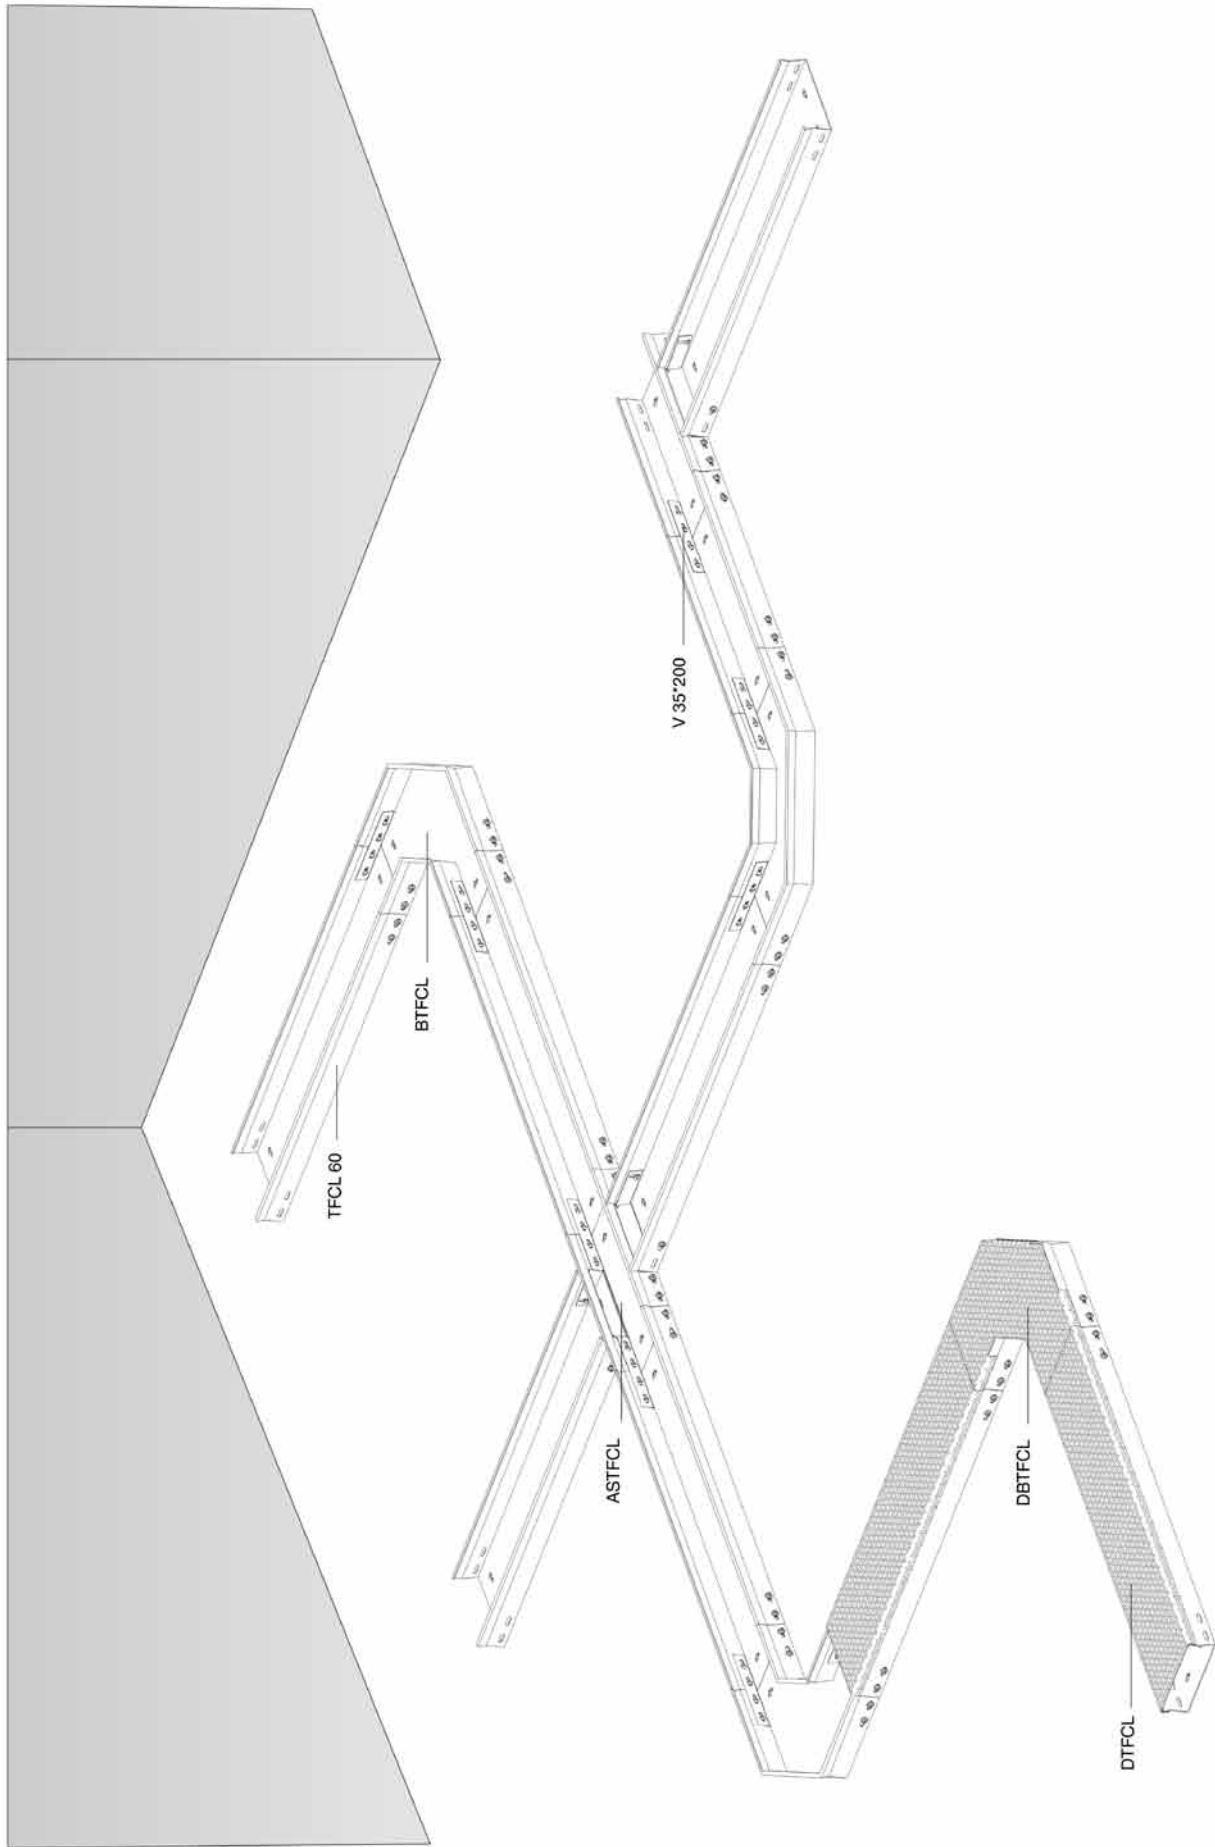

TFCL 60

Industrial floor trunking

2



Non-perforated bottom
Return flanges

On Demand	Powder coating / Duplex System
Standard finish	Pre-galvanised
Optional finish 1	Hot-dip galvanised

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/m	⊞	Stock	Unit
HD	TFCL 60*100*2.00	60	100	2.000	3000	3.650	30		m
HD	TFCL 60*150*2.00	60	150	2.000	3000	4.440	30		m
HD	TFCL 60*200*2.00	60	200	2.000	3000	5.250	30		m
HD	TFCL 60*250*2.00	60	250	2.000	3000	6.020	30		m
HD	TFCL 60*300*2.00	60	300	2.000	3000	6.850	30		m

To fix with:									
HD	V 35*200	25	200	-	-	0.040	48	✓	piece

Application area : The industrial floor trunking is being used in surroundings where robots need to have a permanent freedom of movement and where people can tread the cable trays. For example, at production lines in the automotive industry.

TFCL 85

Industrial floor trunking



Non-perforated bottom
Return flanges

On Demand	Powder coating / Duplex System
Standard finish	Pre-galvanised
Optional finish 1	Hot-dip galvanised


HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/m	⊞	Stock	Unit
HD	TFCL 85*100*2.00	85	100	2.000	3000	4.430	30		m
HD	TFCL 85*150*2.00	85	150	2.000	3000	5.230	30		m
HD	TFCL 85*200*2.00	85	200	2.000	3000	6.030	30		m
HD	TFCL 85*250*2.00	85	250	2.000	3000	6.830	30		m
HD	TFCL 85*300*2.00	85	300	2.000	3000	7.630	30		m

To fix with:									
HD	V 60*200	50	200	-	-	0.080	48	✓	piece

Application area : The industrial floor trunking is being used in surroundings where robots need to have a permanent freedom of movement and where people can tread the cable trays. For example, at production lines in the automotive industry.

TFCL 110

Industrial floor trunking

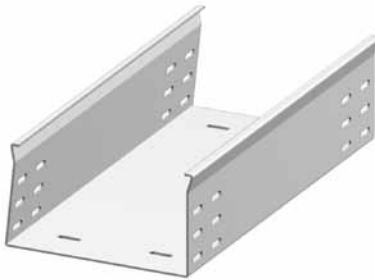

Non-perforated bottom
Return flanges

On Demand	Powder coating / Duplex System
Standard finish	Pre-galvanised
Optional finish 1	Hot-dip galvanised

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/m	📦	Stock	Unit
HD	TFCL 110*150*2.00	110	150	2.000	3000	6.020	30		m
HD	TFCL 110*200*2.00	110	200	2.000	3000	6.820	30		m
HD	TFCL 110*250*2.00	110	250	2.000	3000	7.620	30		m
HD	TFCL 110*300*2.00	110	300	2.000	3000	8.420	30		m

To fix with:


HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/m	📦	Stock	Unit
HD	V 85*200	75	200	-	-	0.130	48	✓	piece

Application area : The industrial floor trunking is being used in surroundings where robots need to have a permanent freedom of movement and where people can tread the cable trays. For example, at production lines in the automotive industry.

DTFCL

Cover for industrial floor trunking

QUICK & CLICK

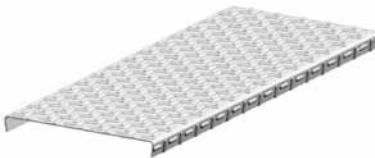

Clippable cover.


On Demand	Powder coating / Duplex System
Standard finish	Pre-galvanised
Optional finish 1	Hot-dip galvanised

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/m	📦	Stock	Unit
HD	DTFCL 100	18	100	1.500	1500	2.030	30		m
HD	DTFCL 150	18	150	1.500	1500	2.790	30		m
HD	DTFCL 200	18	200	1.500	1500	3.560	30		m
HD	DTFCL 250	18	250	1.500	1500	4.330	30		m
HD	DTFCL 300	18	300	1.500	1500	6.480	30		m

DGTFCL

Cover for industrial floor trunking

QUICK & CLICK

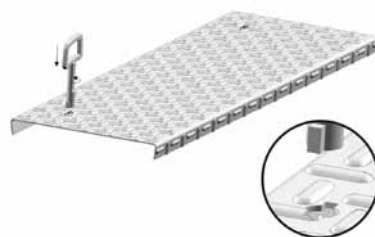

Clippable cover, with openings for double-bit key.

On Demand	Powder coating / Duplex System
Standard finish	Pre-galvanised
Optional finish 1	Hot-dip galvanised

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/m	📦	Stock	Unit
HD	DGTFCL 100	18	100	1.500	1500	2.030	30		m
HD	DGTFCL 150	18	150	1.500	1500	2.790	30		m
HD	DGTFCL 200	18	200	1.500	1500	3.560	30		m
HD	DGTFCL 250	18	250	1.500	1500	4.330	30		m
HD	DGTFCL 300	18	300	1.500	1500	6.480	30		m

BTFCL

Horizontal bend 90°

2



Non-perforated bottom
Return flanges

Radius	250 mm
On Demand	Powder coating / Duplex System
Standard finish	Pre-galvanised
Optional finish 1	Hot-dip galvanised

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
HD	BTFCL 60*100	60	100	2.000	-	2.790	1		piece
HD	BTFCL 60*150	60	150	2.000	-	3.870	1		piece
HD	BTFCL 60*200	60	200	2.000	-	4.790	1		piece
HD	BTFCL 60*250	60	250	2.000	-	5.710	1		piece
HD	BTFCL 60*300	60	300	2.000	-	6.620	1		piece
HD	BTFCL 85*100	85	100	2.000	-	3.600	1		piece
HD	BTFCL 85*150	85	150	2.000	-	4.570	1		piece
HD	BTFCL 85*200	85	200	2.000	-	5.540	1		piece
HD	BTFCL 85*250	85	250	2.000	-	6.510	1		piece
HD	BTFCL 85*300	85	300	2.000	-	7.480	1		piece
HD	BTFCL 110*150	110	150	2.000	-	5.210	1		piece
HD	BTFCL 110*200	110	200	2.000	-	6.190	1		piece
HD	BTFCL 110*250	110	250	2.000	-	7.190	1		piece
HD	BTFCL 110*300	110	300	2.000	-	8.170	1		piece
To fix with:									
HD	V 35*200	25	200	-	-	0.040	48	✓	piece
HD	V 60*200	50	200	-	-	0.080	48	✓	piece
HD	V 85*200	75	200	-	-	0.130	48	✓	piece

DBTFCL

Cover for horizontal bend 90°



Clippable cover


On Demand	Powder coating / Duplex System
Standard finish	Pre-galvanised
Optional finish 1	Hot-dip galvanised

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
HD	DBTFCL 100	18	100	1.500	-	1.340	1		piece
HD	DBTFCL 150	18	150	1.500	-	2.000	1		piece
HD	DBTFCL 200	18	200	1.500	-	2.720	1		piece
HD	DBTFCL 250	18	250	1.500	-	3.500	1		piece
HD	DBTFCL 300	18	300	1.500	-	4.340	1		piece

DGBTFCL

QUICK & CLICK

Cover with holes for horizontal bend 90°

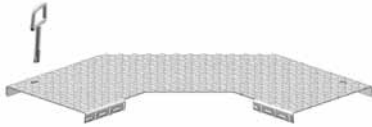

Clippable cover

On Demand Powder coating / Duplex System

Standard finish Pre-galvanised


Optional finish 1 Hot-dip galvanised

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
HD	DGBTFCL 100	18	100	1.500	-	1.340	1		piece
HD	DGBTFCL 150	18	150	1.500	-	2.000	1		piece
HD	DGBTFCL 200	18	200	1.500	-	2.720	1		piece
HD	DGBTFCL 250	18	250	1.500	-	3.500	1		piece
HD	DGBTFCL 300	18	300	1.500	-	4.340	1		piece

Clippable cover with openings for double-bit key.

ASTFCL

Horizontal adapter 90°

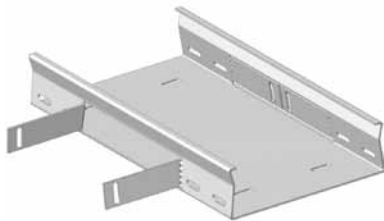

Non-perforated bottom
Return flanges

On Demand Powder coating / Duplex System

Standard finish Pre-galvanised

Optional finish 1 Hot-dip galvanised

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
HD	ASTFCL 60*100	60	100	2.000	-	1.030	1		piece
HD	ASTFCL 60*150	60	150	2.000	-	1.480	1		piece
HD	ASTFCL 60*200	60	200	2.000	-	1.980	1		piece
HD	ASTFCL 60*250	60	250	2.000	-	2.620	1		piece
HD	ASTFCL 60*300	60	300	2.000	-	3.320	1		piece
HD	ASTFCL 85*100	85	100	2.000	-	1.230	1		piece
HD	ASTFCL 85*150	85	150	2.000	-	1.720	1		piece
HD	ASTFCL 85*200	85	200	2.000	-	2.290	1		piece
HD	ASTFCL 85*250	85	250	2.000	-	2.950	1		piece
HD	ASTFCL 85*300	85	300	2.000	-	3.680	1		piece
HD	ASTFCL 110*250	110	250	2.000	-	3.280	1		piece
HD	ASTFCL 110*150	110	150	2.000	-	1.970	1		piece
HD	ASTFCL 110*200	110	200	2.000	-	2.580	1		piece
HD	ASTFCL 110*300	110	300	2.000	-	4.050	1		piece

To fix with:

HD	V 35*200	25	200	-	-	0.040	48	✓	piece
HD	V 60*200	50	200	-	-	0.080	48	✓	piece
HD	V 85*200	75	200	-	-	0.130	48	✓	piece

Multifunction junction piece, which can also be used as a T-piece or Crosspiece.

- Integrated connectors for potential connection.

SIN

Build-in division plate




On Demand	Powder coating / Duplex System
Standard finish	Pre-galvanised
Optional finish 1	Hot-dip galvanised

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/m	⊞	Stock	Unit
HD	SIN 60	60	-	-	3000	0.520	3		m
HD	SIN 85	85	-	-	3000	0.670	3		m
HD	SIN 110	110	-	-	3000	0.900	3		m

This partition is pointwelded in the floor trunking according to your specifications. The scale should be given when ordering.

V 35*200

Jointing plate

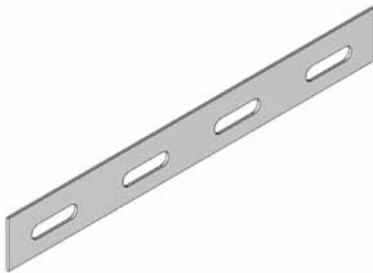


On Demand	Powder coating / Duplex System
Standard finish	Pre-galvanised
Optional finish 1	Hot-dip galvanised

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
HD	V 35*200	25	200	-	-	0.040	48	✓	piece

Minimum number bolts and nuts VM 6*10: 2 pieces.

V 60*200


Jointing plate

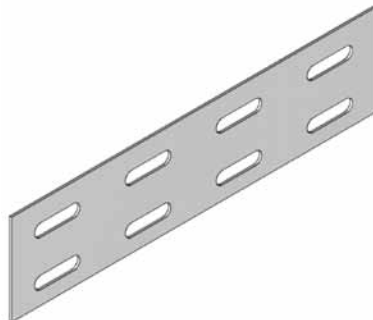

On Demand	Powder coating / Duplex System
Standard finish	Pre-galvanised
Optional finish 1	Hot-dip galvanised

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
HD	V 60*200	50	200	-	-	0.080	48	✓	piece

Minimum number bolts and nuts VM 6*10: 4 pieces.

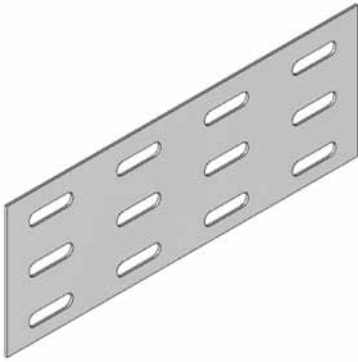V 85*200**Jointing plate**

On Demand

Powder coating / Duplex System

Standard finish

Pre-galvanised

Optional finish 1

Hot-dip galvanised

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
HD	V 85*200	75	200	-	-	0.130	48	✓	piece

Minimum number bolts and nuts VM 6*10: 4 pieces.

