



Fast Fuel Sensor for liquid hydrocarbons

...a leak detection solution for optimum safety & environmental protection

- Early detection of fuel leaks and spills
- Quick response warning in dangerous environmental conditions
- Detect leaks before they damage the environment
- Cost effective solution for safety and environmental protection

Leaking hydrocarbon fuels are extremely dangerous in an industrial environment.

Undetected fuel leaks lead to a high risk of fires or explosions.

A slow leak that goes unnoticed can cause environmental damage and expensive clean-up and legal liability.


The TraceTek Fast Fuel Sensor has been developed to help plant managers address the safety and environmental risks associated with leaking fuel.

The sensor is fast to react, accurate, and reliable with a low probability of false alarms. It can easily be reset and re-used even after multiple detection of leaks.



tyco

Thermal Controls

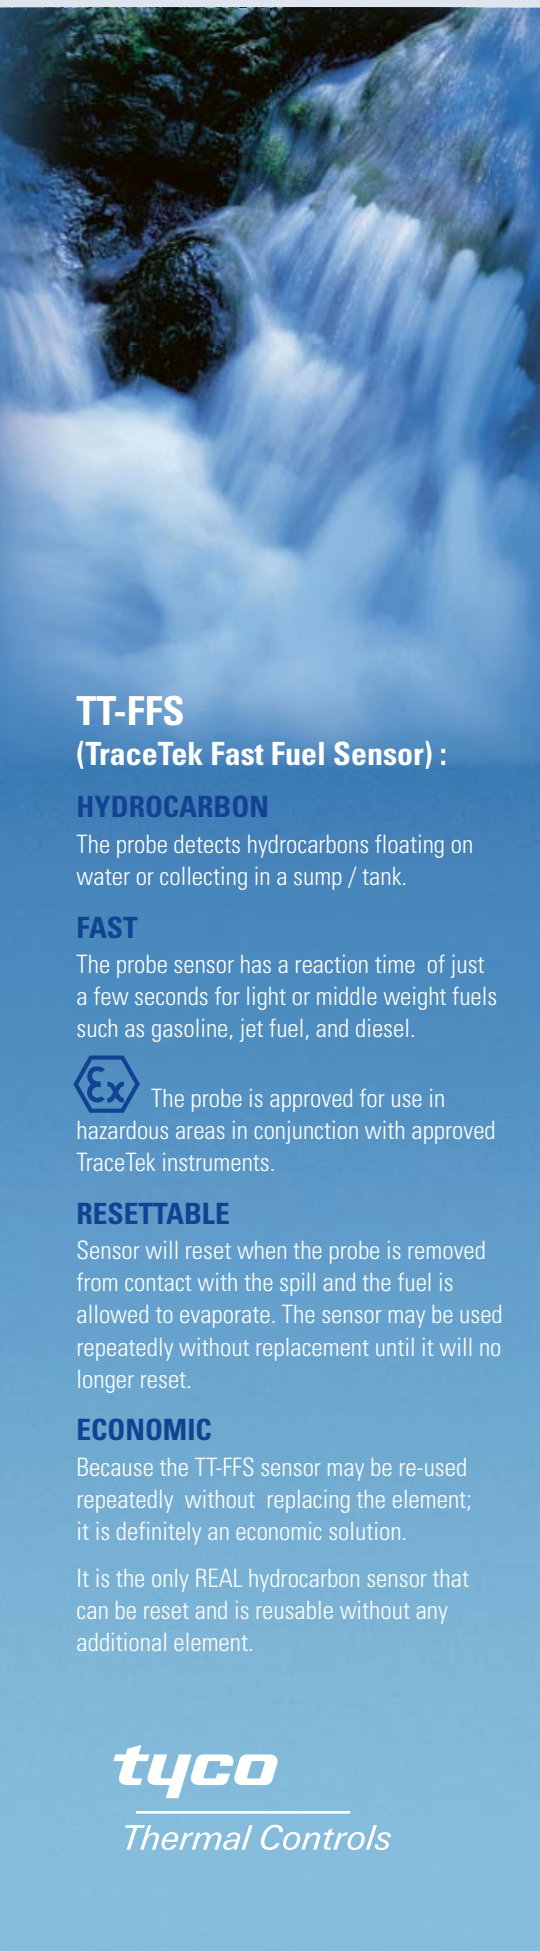

TT-FFS

(TraceTek Fast Fuel Sensor) :

HYDROCARBON

The probe detects hydrocarbons floating on water or collecting in a sump / tank.

FAST

The probe sensor has a reaction time of just a few seconds for light or middle weight fuels such as gasoline, jet fuel, and diesel.



The probe is approved for use in hazardous areas in conjunction with approved TraceTek instruments.

RESETTABLE

Sensor will reset when the probe is removed from contact with the spill and the fuel is allowed to evaporate. The sensor may be used repeatedly without replacement until it will no longer reset.

ECONOMIC

Because the TT-FFS sensor may be re-used repeatedly without replacing the element; it is definitely an economic solution.

It is the only REAL hydrocarbon sensor that can be reset and is reusable without any additional element.


tyco
Thermal Controls



Multiple Applications

The TT-FFS sensor can be used for multiple applications:

- Refineries and tank farms safety monitoring
- Tank's roof rain water monitoring
- Tank farm bunded areas monitoring
- Industrial plant waste water monitoring
- Downstream checking of the oil separators in water treatment processes
- Safety and environment monitoring in Petrol Filling Stations
- Detecting and identifying the polluters in rivers or marinas
- Water table control pits monitoring
- Water table channelling protection
- Rain water reservoirs monitoring
- Final outflow monitoring for ground water remediation projects.

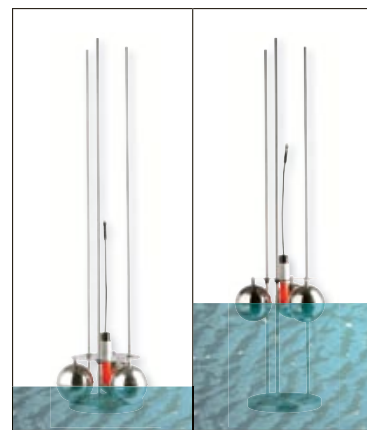

Fast fuel sensor is incorporated into a float assembly to monitor fuels floating on the surface. Stand-alone sensors can be provided for dry applications or for use in customer equipment.

Available literature

TT-FFS datasheet

www.tracetek.com

TraceTek is a trademark of Tyco Thermal Controls.

Important: All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. Tyco Thermal Controls makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Thermal Controls' only obligations are those in the Tyco Thermal Controls Standard Terms and Conditions of Sale for this product, and in no case will Tyco Thermal Controls or its distributors be liable for any incidental, indirect or consequential damages arising from the sale, resale, use or misuse of the product. Specifications are subject to change without notice. In addition, Tyco Thermal Controls reserves the right to make changes, without notification to the Buyer, to processing or materials that do not affect compliance with any applicable specification.

USA

Tyco Thermal Controls
300 Constitution Drive
Menlo Park,
California 94025-1164
Tel. (800) 545-6258
Fax (800) 527-5703
info@tycothermal.com

European headquarters

Tyco Thermal Controls
Staatsbaan 4A
3210 Lubbeek, Belgium
Tel. (32) 16 213 511
Fax (32) 16 213 610
Sales: (33) 621 72 1803
(49) 171 517 8513