

Programmable Power Supplies

EN



PROGRAMMABLE POWER SUPPLIES

The new Z+ Series

One third smaller, 40% less weight and 50% higher power density compared to predecessor series.



Industrial

Test



Product features

- Same Package Size for 4 Output Power Models
- Interface: USB, RS232 & RS485, analogue control & monitoring
- Optional: LAN, GPIB (IEEE488) & isolated analogue interfaces
- Rackmount or bench model (6 units per 19" rack)
- 16 bit resolution and extremely fast programming response

More information you will find in our Catalog
“Programmable Power Supplies” or on Internet:
www.emea.tdk-lambda.com

Specifications

- 200, 400, 600, 800 W models in 2U
- Input voltage:
85-265 V AC single phase, 47-63 Hz
- Output voltage 10, 20, 36, 60, 100 V DC
- Up to 86% efficiency
- User programmable signal pins
- Waveform generator with internal storage
- 5 years warranty

Typical applications

- Test and measurement
- Part and component testing
- ATE and laser diodes
- Automotive

Product Summary Z⁺ 200 W – 800 W

		Interface								
				Standard	Wide Chassis					
Output Voltage [V DC]	Output Current [A]	Output Power [W]	LAN	L/L2*	IEEE	IS510/IS420	Model	Available		
0~10	20	200	○	○	○	○	Z10-20	✓		
	40	400	○	○	○	○	Z10-40	✓		
	60	600	○	○	○	○	Z10-60		Autumn	
	72	720	○	○	○	○	Z10-72	✓		
0~20	10	200	○	○	○	○	Z20-10	✓		
	20	400	○	○	○	○	Z20-20	✓		
	30	600	○	○	○	○	Z20-30		Autumn	
	40	800	○	○	○	○	Z20-40	✓		
0~36	6	216	○	○	○	○	Z36-6	✓		
	12	432	○	○	○	○	Z36-12	✓		
	18	648	○	○	○	○	Z36-18	✓		
	24	864	○	○	○	○	Z36-24	✓		
0~60	3.5	210	○	○	○	○	Z60-3.5	✓		
	7	420	○	○	○	○	Z60-7	✓		
	10	600	○	○	○	○	Z60-10		Autumn	
	14	840	○	○	○	○	Z60-14	✓		
0~100	2	200	○		○	○	Z100-2	✓		
	4	400	○		○	○	Z100-4	✓		
	6	600	○		○	○	Z100-6		Autumn	
	8	800	○		○	○	Z100-8	✓		

Interfaces: ○ = Optional

Dimensions (W x H x D): Z+ Standard 1/6 19" x 2U x 405* mm
Z+ Wide Chassis 1/4 19" x 2U x 405* mm
*Output Cover is included

* L: Output Current max. 24 A

* L2: CAT III-Type (isolated)

Warranty: 5 Years

Standard built-in: USB, RS-232/RS-485

Product-Code

Z+ 200 W – 800 W

Z	36	-	12	-		-		-	E
Series name	Output Voltage (0–36 V)	Output Current (0–12 A)	Option:	IEEE IS510 IS420 LAN	Output Jacks	L	L2	AC Cable	
						E - Europe		GB - United Kingdom	
						U - North America		I - Middle East	

P/N:

USB Interface built-in Standard	—
RS-232/RS-485 Interface Built-in Standard	—
IEEE 488.2 (GPIB) Interface	IEEE
Voltage Programming Isolated Analog Interface	IS510
Current Programming Isolated Analog Interface	IS420
LAN Interface (Complies with LXI class C)	LAN
Front Panel Output Jacks (60 V or 24 A max)	L
Front Panel Output Jacks (CAT III, isolated)	L2



The powerful Genesys™ Series

Exceptional Reliability and Performance.



Industrial



Test



Product features

- Interface: RS232 & RS485, analogue control & monitoring
- Optional: LAN, IEEE, Power Sink and Fast Speed
- Rackmount or bench model (19" rack)
- Auto-restart/safe-start user-selectable

Specifications

- 750, 1500, 2400 W models in 1U
- 3300, 5000 W models in 2U
- 10000, 15000 W models in 3U
- Active/passive power factor correction (single-phase & three-phase AC input)
- Output voltage up to 600 V, output current up to 1000 A
- Up to 88% efficiency
- 5 years warranty

Typical applications

- Test and measurement
- Automation
- Part and component testing
- Automotive
- Burn-in

More information you will find in our Catalog
“Programmable Power Supplies” or on Internet:
www.emea.tdk-lambda.com

Product Summary 1U GENH 750 W (GEN 750 W – 2.4 kW)

		Interface									
Output Voltage [V DC]	Output Current [A]	Output Power [W]	RS-232/RS-485	Analog	LAN	IEEE	IS510/IS420 Isolated analog	PSINK	Dimensions	Model	
0~6	0~100	600	•	•	○	○	○		1/2 19" x 1U x 480 mm	GENH6-100	
	0~100	600	•	•	○	○	○		19" x 1U x 498 mm	GEN6-100	
	0~200	1200	•	•	○	○	○		19" x 1U x 498 mm	GEN6-200	
0~8	0~90	720	•	•	○	○	○		1/2 19" x 1U x 480 mm	GENH8-90	
	0~90	720	•	•	○	○	○		19" x 1U x 498 mm	GEN8-90	
	0~180	1440	•	•	○	○	○		19" x 1U x 498 mm	GEN8-180	
	0~300	2400	•	•	○	○	○		19" x 1U x 486 mm	GEN8-300	
0~10	0~240	2400	•	•	○	○	○		19" x 1U x 486 mm	GEN10-240	
0~12.5	0~60	750	•	•	○	○	○		1/2 19" x 1U x 480 mm	GENH12.5-60	
	0~120	750	•	•	○	○	○	○	19" x 1U x 498 mm	GEN12.5-60	
	0~60	1500	•	•	○	○	○	○	19" x 1U x 498 mm	GEN12.5-120	
0~16	0~150	2400	•	•	○	○	○		19" x 1U x 486 mm	GEN16-150	
0~20	0~38	760	•	•	○	○	○		1/2 19" x 1U x 480 mm	GENH20-38	
	0~38	760	•	•	○	○	○	○	19" x 1U x 498 mm	GEN20-38	
	0~76	1520	•	•	○	○	○	○	19" x 1U x 498 mm	GEN20-76	
	0~120	2400	•	•	○	○	○		19" x 1U x 486 mm	GEN20-120	
0~30	0~25	750	•	•	○	○	○		1/2 19" x 1U x 480 mm	GENH30-25	
	0~25	750	•	•	○	○	○	○	19" x 1U x 498 mm	GEN30-25	
	0~50	1500	•	•	○	○	○	○	19" x 1U x 498 mm	GEN30-50	
	0~80	2400	•	•	○	○	○		19" x 1U x 486 mm	GEN30-80	

Output Voltage [V DC]	Output Current [A]	Output Power [W]	Interface						Dimensions	Model
			RS-232/RS-485	Analog	LAN	IEEE	IS510/IS420 Isolated analog	PSINK		
0~40	0~19	760	•	•	◦	◦	◦		1/2 19" x 1U x 480 mm	GENH40-19
	0~19	760	•	•	◦	◦	◦	◦	19" x 1U x 498 mm	GEN40-19
	0~38	1520	•	•	◦	◦	◦	◦	19" x 1U x 498 mm	GEN40-38
	0~60	2400	•	•	◦	◦	◦	◦	19" x 1U x 486 mm	GEN40-60
0~50	0~30	1500	•	•	◦	◦	◦		19" x 1U x 498mm	GEN50-30
0~60	0~12.5	750	•	•	◦	◦	◦		1/2 19" x 1U x 480 mm	GENH60-12.5
	0~12.5	750	•	•	◦	◦	◦	◦	19" x 1U x 498 mm	GEN60-12.5
	0~25	1500	•	•	◦	◦	◦	◦	19" x 1U x 498 mm	GEN60-25
	0~40	2400	•	•	◦	◦	◦	◦	19" x 1U x 486 mm	GEN60-40
0~80	0~9.5	760	•	•	◦	◦	◦		1/2 19" x 1U x 480 mm	GENH80-9.5
	0~9.5	760	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN80-9.5
	0~19	1520	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN80-19
	0~30	2400	•	•	◦	◦	◦		19" x 1U x 486 mm	GEN80-30

• = Standard, ◦ = Optional. **Warranty:** 5 Years. Optional for all Models: USB external solution. Dimensions including Bus bar enclosure



Product Summary 1U GENH 750 W (GEN 750 W – 2.4 kW)

		Interface									
Output Voltage [V DC]	Output Current [A]	Output Power [W]	RS-232/RS-485	Analog	LAN	IEEE	IS510/IS420 Isolated analog	PSINK	Dimensions	Model	
0~100	0~7.5	750	•	•	◦	◦	◦		1/2 19" x 1U x 480 mm	GENH100-7.5	
	0~7.5	750	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN100-7.5	
	0~15	1500	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN100-15	
	0~24	2400	•	•	◦	◦	◦		19" x 1U x 486 mm	GEN100-24	
0~150	0~5	750	•	•	◦	◦	◦		1/2 19" x 1U x 480 mm	GENH150-5	
	0~5	750	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN150-5	
	0~10	1500	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN150-10	
	0~16	2400	•	•	◦	◦	◦		19" x 1U x 486 mm	GEN150-16	
0~300	0~2.5	750	•	•	◦	◦	◦		1/2 19" x 1U x 480 mm	GENH300-2.5	
	0~2.5	750	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN300-2.5	
	0~5	1500	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN300-5	
	0~8	2400	•	•	◦	◦	◦		19" x 1U x 486 mm	GEN300-8	
0~600	0~1.3	780	•	•	◦	◦	◦		1/2 19" x 1U x 480 mm	GENH600-1.3	
	0~1.3	780	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN600-1.3	
	0~2.6	1560	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN600-2.6	
	0~4	2400	•	•	◦	◦	◦		19" x 1U x 486 mm	GEN600-4	

• = Standard, ◦ = Optional. **Warranty:** 5 Years. Optional for all Models: USB external solution. Dimensions including Bus bar enclosure

Product-Code

GENH 750 W 1U

GEN H	600	-	1.3	-	E
Series name	Output Voltage (0–600 V)	Output Current (0–1.3 A)	Option: IEEE IS510 IS420 LAN	AC Cable E. Europe GB, UK J. Japan I. Middle East U. USA O. unterminated BLANK: None	

GEN 750/1500 W mit Power Sink

GEN	60	-	25	-	PSINK	-	LN
Series name	Output Voltage	Output Current	Option: IEEE IS510 IS420 LAN	(Low Noise) Up to 60 V only			

GEN 2400 W 1U

GEN	600	-	4	-	 	-	
Series name	Output Voltage	Output Current	Option: IEEE IS510 IS420 LAN	AC Input-Option: 1P230 (Single Phase 230 V AC) 3P208 (Three Phase 208 V AC)			

P/N:

RS-232/RS-485 Interface Built-in Standard –

IEEE 488.2 (GPIB) Interface IEEE

Voltage Programming Isolated Analog Interface IS510

Current Programming Isolated Analog Interface IS420

LAN Interface (Complies with **LXI** class C) LAN

Power Sink PSINK



Product Summary 2U GEN 3.3 kW – 5.5 kW


		Interface								
Output Voltage [V DC]	Output Current [A]	Output Power [W]	RS-232/ RS-485	Analog	LAN	IEEE	Isolated analog	FAST SPEED	Dimensions	Model
0~8	0~400	3200	•	•	○	○	○		19" x 2U x 518 mm	GEN8-400
	0~600	4800	•	•	○	○	○		19" x 2U x 518 mm	GEN8-600
0~10	0~330	3300	•	•	○	○	○		19" x 2U x 518 mm	GEN10-330
	0~500	5000	•	•	○	○	○		19" x 2U x 518 mm	GEN10-500
0~15	0~220	3300	•	•	○	○	○		19" x 2U x 518 mm	GEN15-220
0~16	0~310	4960	•	•	○	○	○		19" x 2U x 498 mm	GEN16-310
0~20	0~165	3300	•	•	○	○	○	○	19" x 2U x 518 mm	GEN20-165
	0~250	5000	•	•	○	○	○	○	19" x 2U x 518 mm	GEN20-250
0~30	0~110	3300	•	•	○	○	○		19" x 2U x 518 mm	GEN30-110
	0~170	5100	•	•	○	○	○		19" x 2U x 518 mm	GEN30-170
0~40	0~85	3400	•	•	○	○	○	○	19" x 2U x 518 mm	GEN40-85
	0~125	5000	•	•	○	○	○	○	19" x 2U x 518 mm	GEN40-125
0~60	0~55	3300	•	•	○	○	○		19" x 2U x 518 mm	GEN60-55
	0~85	5100	•	•	○	○	○		19" x 2U x 518 mm	GEN60-85
0~80	0~42	3360	•	•	○	○	○		19" x 2U x 518 mm	GEN80-42
	0~65	5200	•	•	○	○	○		19" x 2U x 518 mm	GEN80-65
0~100	0~33	3300	•	•	○	○	○		19" x 2U x 518 mm	GEN100-33
	0~50	5000	•	•	○	○	○		19" x 2U x 518 mm	GEN100-50
0~150	0~22	3300	•	•	○	○	○		19" x 2U x 518 mm	GEN150-22
	0~34	5100	•	•	○	○	○		19" x 2U x 518 mm	GEN150-34
0~200	0~16.5	3300	•	•	○	○	○		19" x 2U x 518 mm	GEN200-16.5
	0~25	5000	•	•	○	○	○		19" x 2U x 518 mm	GEN200-25

Interface										
Output Voltage [V DC]	Output Current [A]	Output Power [W]	RS-232/RS-485	Analog	LAN	IEEE	Isolated analog	FAST SPEED	Dimensions	Model
0~300	0~11	3300	•	•	◦	◦	◦		19" x 2U x 518 mm	GEN300-11
	0~17	5100	•	•	◦	◦	◦		19" x 2U x 518 mm	GEN300-17
0~400	0~13	5200	•	•	◦	◦	◦		19" x 2U x 518 mm	GEN400-13
0~500	0~10	5000	•	•	◦	◦	◦		19" x 2U x 518 mm	GEN500-10
0~600	0~5.5	3300	•	•	◦	◦	◦		19" x 2U x 518 mm	GEN600-5.5
	0~8.5	5100	•	•	◦	◦	◦		19" x 2U x 518 mm	GEN600-8.5


• = Standard, ◦ = Optional. **Warranty:** 5 Years. Optional for all Models: USB external solution. Dimensions including Bus bar enclosure.

Product-Code

GEN 3.3 kW 2U

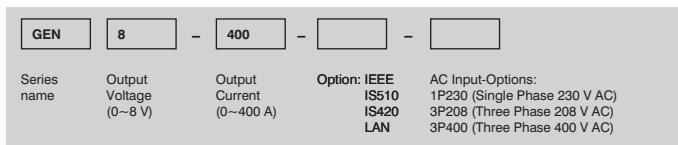

GEN 5 kW 2U

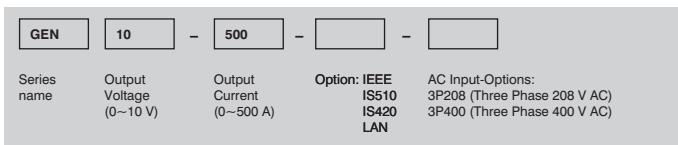

P/N:

RS-232/RS-485 Interface Built-in Standard	—
IEEE 488.2 (GPIB) Interface	IEEE
Voltage Programming Isolated Analog Interface	IS510
Current Programming Isolated Analog Interface	IS420
LAN Interface (Complies with LXI class C)	LAN



Product Summary 3U GEN 10 kW – 15 kW

Output Voltage [V DC]	Output Current [A]	Output Power [W]	Interface					Dimensions	Model
			RS-232/RS-485	Analog	LAN	IEEE	Isolated analog		
0~7.5	0~1000	7.5 k	•	•	○	○	○	19" x 3U x 622 mm	GEN7.5-1000
0~10	0~1000	10 k	•	•	○	○	○	19" x 3U x 622 mm	GEN10-1000
0~12.5	0~800	10 k	•	•	○	○	○	19" x 3U x 622 mm	GEN12.5-800
0~20	0~500	10 k	•	•	○	○	○	19" x 3U x 622 mm	GEN20-500
0~25	0~400	10 k	•	•	○	○	○	19" x 3U x 622 mm	GEN25-400
0~30	0~333	10 k	•	•	○	○	○	19" x 3U x 622 mm	GEN30-333
0~40	0~250	10 k	•	•	○	○	○	19" x 3U x 622 mm	GEN40-250
0~50	0~200	10 k	•	•	○	○	○	19" x 3U x 622 mm	GEN50-200
0~60	0~167	10 k	•	•	○	○	○	19" x 3U x 622 mm	GEN60-167
	0~250	15 k	•	•	○	○	○	19" x 3U x 622 mm	GEN60-250
0~80	0~125	10 k	•	•	○	○	○	19" x 3U x 622 mm	GEN80-125
	0~187.5	15 k	•	•	○	○	○	19" x 3U x 622 mm	GEN80-187.5
0~100	0~100	10 k	•	•	○	○	○	19" x 3U x 622 mm	GEN100-100
	0~150	15 k	•	•	○	○	○	19" x 3U x 622 mm	GEN100-150
0~125	0~80	10 k	•	•	○	○	○	19" x 3U x 622 mm	GEN125-80
	0~120	15 k	•	•	○	○	○	19" x 3U x 622 mm	GEN125-120
0~150	0~66	10 k	•	•	○	○	○	19" x 3U x 622 mm	GEN150-66
	0~100	15 k	•	•	○	○	○	19" x 3U x 622 mm	GEN150-100
0~200	0~50	10 k	•	•	○	○	○	19" x 3U x 622 mm	GEN200-50
	0~75	15 k	•	•	○	○	○	19" x 3U x 622 mm	GEN200-75
0~250	0~40	10 k	•	•	○	○	○	19" x 3U x 622 mm	GEN250-40
	0~60	15 k	•	•	○	○	○	19" x 3U x 622 mm	GEN250-60

		Interface								
Output Voltage [V DC]	Output Current [A]	Output Power [W]	RS-232/RS-485	Analog	LAN	IEEE	Isolated analog	Dimensions	Model	
0~300	0~33	9.9 k	•	•	○	○	○	19" x 3U x 622 mm	GEN300-33	
	0~50	15 k	•	•	○	○	○	19" x 3U x 622 mm	GEN300-50	
0~400	0~25	10 k	•	•	○	○	○	19" x 3U x 622 mm	GEN400-25	
	0~37.5	15 k	•	•	○	○	○	19" x 3U x 622 mm	GEN400-37.5	
0~500	0~20	10 k	•	•	○	○	○	19" x 3U x 622 mm	GEN500-20	
	0~30	15 k	•	•	○	○	○	19" x 3U x 622 mm	GEN500-30	
0~600	0~17	10.2 k	•	•	○	○	○	19" x 3U x 622 mm	GEN600-17	
	0~25	15 k	•	•	○	○	○	19" x 3U x 622 mm	GEN600-25	

• = Standard, ○ = Optional. **Warranty:** 5 Years. Optional for all Models: USB external solution. Dimensions including Bus bar enclosure



Product-Code

GEN 10/15 kW 3U

GEN	10	-	1000	-	MD	-	
Series name	Output Voltage (0~10 V)	Output Current (0~1000 A)	Option: IEMD IS510 IS420 LAN	AC Input-Options: 3P208 (Three Phase 208 V AC) 3P400 (Three Phase 400 V AC) 3P480 (Three Phase 480 V AC)			

RS-232/RS-485 Interface Built-in Standard
GPIB (Multi Drop Master) Interface

-
IEMD

Voltage Programming Isolated Analog Interface IS510
Current Programming Isolated Analog Interface IS420
(Complies with **LXI** class C) LAN



TDK-Lambda EMEA
www.emea.tdk-lambda.com



Please contact your local sales office to find the best solution to your application.



TDK-Lambda France SAS
ZAC des Delaches
CS 41077
9 rue Thuillere
91978 Villebon Courtaboeuf
France
Tel. +33 1 60 12 71 65
Fax +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.fr.tdk-lambda.com



Italy Sales Office
Via dei Lavoratori 128/130
20092 Cinisello Balsamo (MI)
Italy
Tel. +39 02 61 29 38 63
Fax +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.it.tdk-lambda.com



Netherlands
info@tdk-lambda.nl
www.tdk-lambda.nl



TDK-Lambda UK Ltd.
Kingsley Avenue
Ilfracombe
Devon EX34 8ES
United Kingdom
Tel. +44 12 71 85 66 66
Fax +44 12 71 86 48 94
powersolutions@uk.tdk-lambda.com
www.uk.tdk-lambda.com



TDK-Lambda Germany GmbH
Karl-Bold-Strasse 40
77855 Achern
Tel. +49 7841 666 0
Fax +49 7841 5000
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



TDK-Lambda Ltd.
Kibbutz
Givat Hashlosha 48800
Israel
Tel. +9 723 902 4333
Fax. +9 723 902 4777
info@tdk-lambda.co.il
www.tdk-lambda.co.il



Austria Sales Office
Aredstrasse 22
2544 Leobersdorf
Austria
Tel. +43 2256 655 84
Fax +43 2256 645 12
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Scandinavia Sales Office
Valdemarsgade 7
4100 Ringsted
Denmark
Tel. +45 58 10 35 56
Fax +45 69 80 44 99
info@de.tdk-lambda.com
www.emea.tdk-lambda.com

TDK-Lambda EMEA
www.emea.tdk-lambda.com