

AVX High Reliability Tantalum Capacitors



Version 14.8

AVX
A KYOCERA GROUP COMPANY

MIL-PRF-55365 • MIL-PRF-39006 • MIL-STD-790
AS 9100 • ISO 13485 • ISO 9001 • ISO 14001



ESCC 3012 • ESCC 3012/001 • ESCC 3012/004
CECC 30801 • ISO 9001 • ISO 14001 • TS 16949



| | |
|--|----------------|
| Introduction..... | 2 |
| High Reliability Tantalum Chip Specifications..... | 3-4 |
| Group A Test Options..... | 5 |
| High Reliability Specification Requirements Comparison Chart..... | 5 |
| High Reliability Tantalum Chip Product Family - Design Guide..... | 6 |
| Part Numbering, Test & Packaging Options | 7 |
| TAZ Series..... | 8-27 |
| CWR09 – MIL-PRF-55365/4 Established Reliability, COTS-Plus & Space Level | 8-11 |
| CWR19 – MIL-PRF-55365/4 Established Reliability, COTS-Plus & Space Level..... | 12-15 |
| CWR29 – MIL-PRF-55365/4 Established Reliability, COTS-Plus & Space Level..... | 16-21 |
| TAZ HRC5000 Medical Implantable Grade | 22-26 |
| TAZ Cots+, CWR09, CWR19, CWR29 and TAZ HRC5000 Series - Tape & Reel Packaging | 27 |
| TCP Series..... | 28-30 |
| TBJ Series | 31-47 |
| CWR11 – MIL-PRF-55365/8 Established Reliability, COTS-Plus & Space Level..... | 31-34 |
| COTS-PLUS | 35-45 |
| COTS-PLUS – SRC9000 Space Level | 46-52 |
| DSCC Dwgs 07016 & 95158..... | 53-58 |
| TBM Multianode..... | 59-64 |
| Tantalum Ultra Low ESR & Space Level..... | 59-61 |
| Tantalum Ultra Low ESR COTS-PLUS..... | 62-64 |
| TBC Series..... | 65-74 |
| CWR15 – MIL-PRF-55365/12 Established Reliability, COTS-Plus & Space Level..... | 65-67 |
| COTS-PLUS | 68-70 |
| TBC HRC5000 Medical Implantable Grade | 71-73 |
| TBC HRC6000 Next Generation Medical Implantable Grade | 74-76 |
| NBS COTS-Plus | 77-79 |
| NBM Multianodes..... | 80-81 |
| TWA Series – DSCC 93026 | 82-84 |
| TWA-E Series – CECC Wet Electrolytic Tantalum Capacitor..... | 85-88 |
| TWC Series..... | 89-105 |
| MIL-PRF-39006 Series – Military Conventional Wet Tantalum..... | 89-96 |
| COTS-PLUS – Conventional Wet Tantalum..... | 97-103 |
| High Temperature – COTS-Plus 200°C Wet Tantalum | 104-105 |
| TWD DCUltramax™ Series – Wet Tantalum Super Capacitor | 106-107 |
| TWM Module..... | 108-110 |
| TAJ ESCC Tantalum Capacitors..... | 111-112 |
| TES Low ESR – QPL ESCC Tantalum Chip Capacitor..... | 113-115 |
| TAJ CECC Tantalum Capacitors..... | 116-117 |
| TCH Low ESR Hermetic Series..... | 118-120 |
| THH 230°C Hermetic Series..... | 121-122 |
| High Reliability Tantalum MSL – Storage, Bake out, and Handling Recommendations | 123 |
| TAJ ESCC, TAJ CECC, TBJ CWR11, TBJ COTS+, TBM, NBM, NBS, TES, TBC CWR15, TBC COTS+, TBC HRC5000 and TBC HRC6000 Series – Tape & Reel Packaging..... | 124 |

INTRODUCTION

The Biddeford facility within the AVX Tantalum Division is the leading supplier of high reliability tantalum chips to the medical, military and aerospace industry.

As tantalum technology continues to develop, we are able to offer extended ratings providing more downsizing opportunities, higher capacitance ratings, new case sizes and Low ESR options for critical output filtering applications. Combining this with in-line reliability grading capability for all chip capacitor series, we are able to supply these products to the most demanding applications.

Based on the core qualifications maintained for CWR09, CWR19/29, CWR11 and CWR15 product families, new products are now available utilizing the latest advances in tantalum technology, which enable PCB downsizing and component count reduction, yet which incorporate manufacture & test in accordance with MIL-PRF-55365.

A special facility within the plant enables the production of application specific modules and arrays, providing custom solutions for specialized requirements.

AVX facility in Lanskrone, Czech Republic is manufacturing location with production of high end SMD & Wet tantalum capacitors including automotive, industrial, medical, aerospace and specialty applications. Lanskrone is European Space Agency (ESA) approved facility for manufacturing of ESCC 3012 SMD tantalum capacitors including detail specification ESCC 3012/001 TAJ-ESA series and ESCC 3012/004 low ESR and High CV SMD tantalum capacitors. Specialty applications are including industry unique hermetically sealed SMD tantalum capacitors THH with continuous operation temperature up to 230°C and TCH series of low ESR hermetically sealed SMD polymer capacitors for mission critical applications.

WET TANTALUM

A new axial leaded wet tantalum series named TWA has been introduced. This utilizes a unique cathode system that enables the manufacture of high capacitance / voltage ratings. The TWA series is qualified to DSCC 93026, which has been updated to include some of the new high capacitance ratings available.

The AVX proprietary cathode system TWA-E is also used on wet tantalum capacitors manufactured in Lanskrone facility in accordance with CECC 30202 standard.

In addition the TWC series, which corresponds to the conventional wet tantalum capacitors, has been launched with COTS-Plus and MIL-PRF-39006 options available. These wet tantalums are also available in 200°C versions or modular configurations (TWM) for the most demanding applications.

This catalog provides details for the latest product families and provides the necessary part numbering information to allow users to tailor any of these products to their own requirements.

COTS-PLUS TANTALUM CHIP – WEIBULL GRADE: EXTENDED RANGE/LOW ESR SERIES

These series have been developed in response to the “Commercial Off The Shelf” initiative taken by many military users to enable cost effective procurement of current technologies.

They are based on TAZ (CWR09/19/29), TBJ (CWR11) & TBC (CWR15) form factors. Leadership in tantalum technology has enabled the introduction of extended capacitance/voltage ratings for all standard case sizes, giving the designer scope for downsizing existing

assemblies and reducing component count. To reduce time to market for the introduction of extended CV ratings into military applications, these parts are supplied with Weibull grading and Group A / surge options in accordance with MIL-PRF-55365 Rev. G, but are not JAN branded. These parts can also be supplied to Source Control Drawings for specific military requirements. A standard non-established reliability level is available, together with the options of 100% testing to Weibull “B”, “C” or “D” grade. Other options include ambient or high/low temperature surge, additional Group A conformance testing (to MIL-PRF-55365 or alternative) and Low ESR ratings below current MIL-PRF-55365 specification limits.

Extended case sizes beyond the CWR standards are also available, especially targeted to high capacitance power supply filtering applications.

For TBJ series family case sizes, the new DSCC drawing 07016, superseding 95158, lists all available Low ESR ratings with full Weibull Grading and MIL-PRF-55365 Rev. G surge test options.

New additions to the AVX COTS-Plus portfolio are NBS & NBM series Oxicap™. Based on niobium oxide technology these series offer ideal solutions for lower voltage applications required by DSP and IC / ASIC bulk decoupling. This technology has the added advantage of a benign failure mode if ever subjected to forward overvoltage conditions.

MIL QPL - ESTABLISHED RELIABILITY

The new CWR19 & CWR29 TAZ series offer widely extended capacitance / voltage ratings. While the CWR09 remains available for all legacy programs with no planned obsolescence, CWR19 / 29 are recommended for all new designs, due to the opportunity to use a higher voltage rating in a given application or downsize a design to achieve real estate savings and weight reduction. CWR 19/29 are also available for ratings from 4 - 50V. Reliability levels up to and including “D” Weibull grading are available along with ambient and high/low temperature surge options. A new case size (X case) has been added to extend capacitance ratings to 470µF; for the larger case size (G, H and X case) low ESR options (to sub-100 mOhm levels) are available for critical power supply designs.

The new CWR15 series offers maximum capacitance / voltage ratings in micro miniature L (0603 equivalent), R (0805 equivalent) & A (1206 equivalent) sizes. These provide a unique opportunity for the designer to upgrade commercial designs using X5R ceramic to an equivalent capacitance / voltage / size rating in tantalum technology, with the additional benefits of established reliability, wider operating temperature range, improved temperature coefficient, no voltage coefficient, and elimination of piezo noise.


All Established Reliability series are MIL QPL listed ratings with both Group A & Group C tests maintained for MIL-PRF-55365 approval.

SPACE LEVEL, AVX SRC9000 & MIL T- LEVEL


For Space applications, additional testing is available with full details listed in our SRC9000 specification for Space Level products. As a minimum, SRC9000 requires both Weibull level voltage conditioning (“C” & “D” Level) and surge test (option “C”). Additional tests include DPA, 100% Real Time X-Ray, surge voltage, hot DCL test, 3 sigma parametric test limits and additional Lot Conformance Test protocols.

While AVX SRC9000 remains the standard for Space Level, MIL-PRF-55365 now defines a new “T” level, which specifies C Weibull grade reliability minimum, “C” surge and also includes DPA, X-ray and 3-sigma test limits common to SRC9000.


HIGH RELIABILITY TANTALUM CHIP SPECIFICATIONS

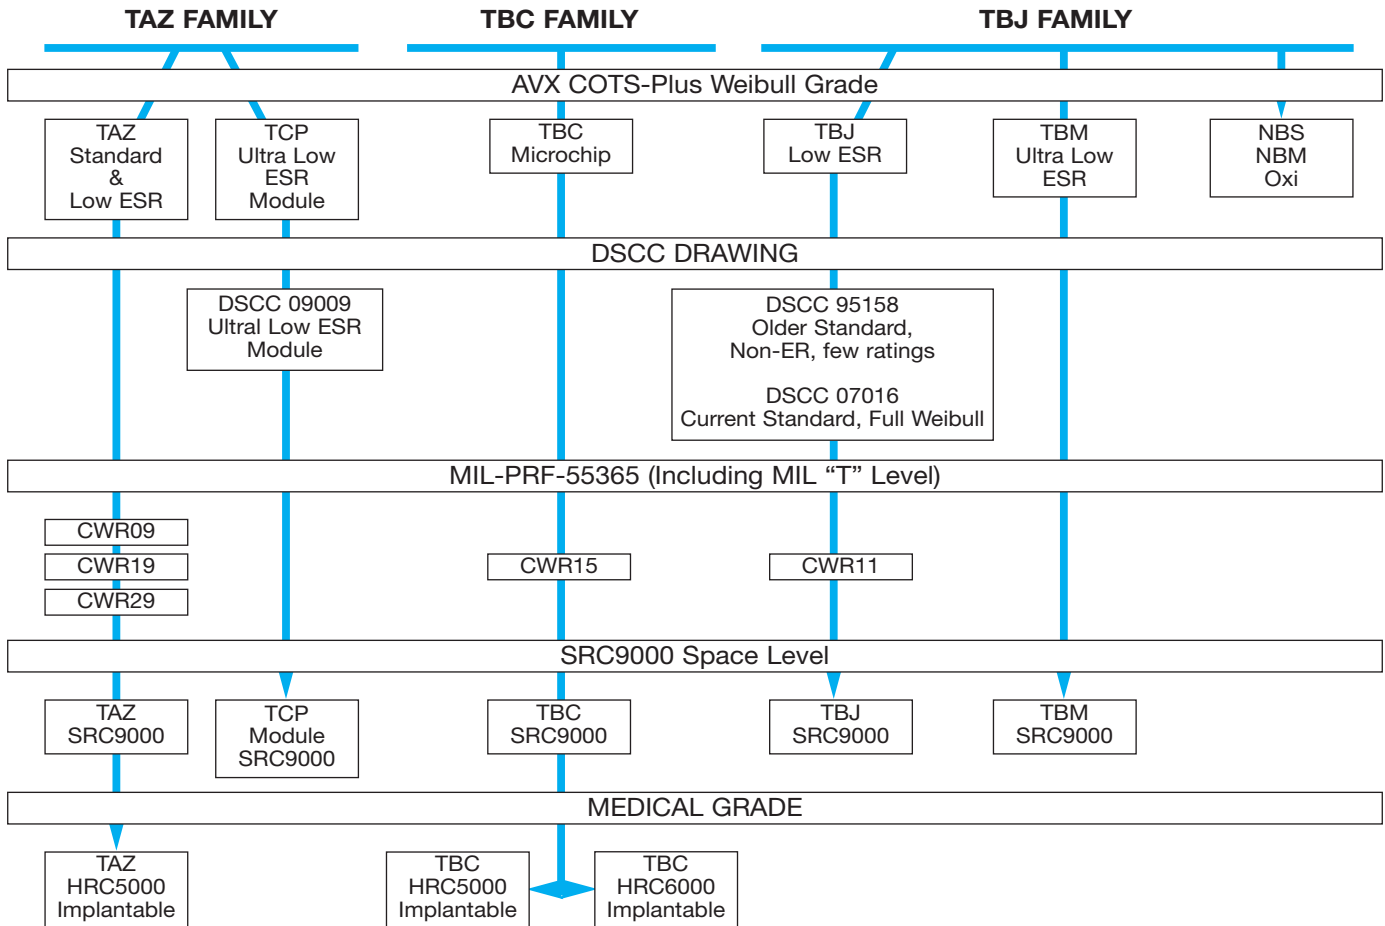

HIGH RELIABILITY TANTALUM CHIP SPECIFICATIONS

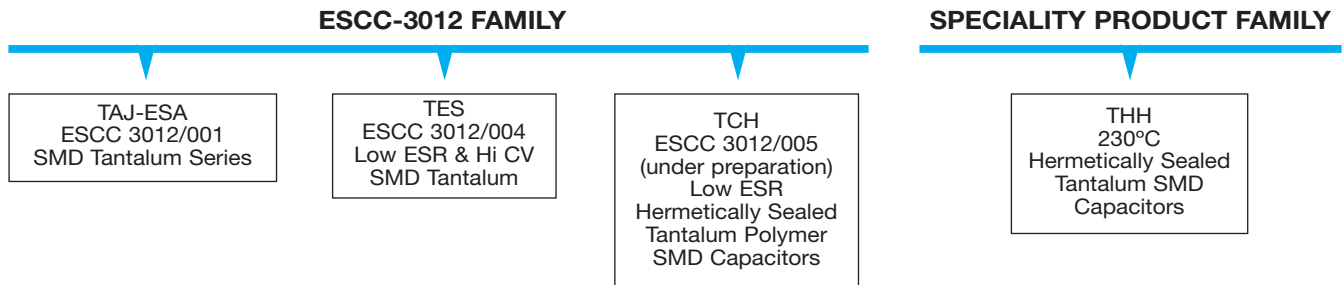

HIGH RELIABILITY WET TANTALUM SPECIFICATIONS

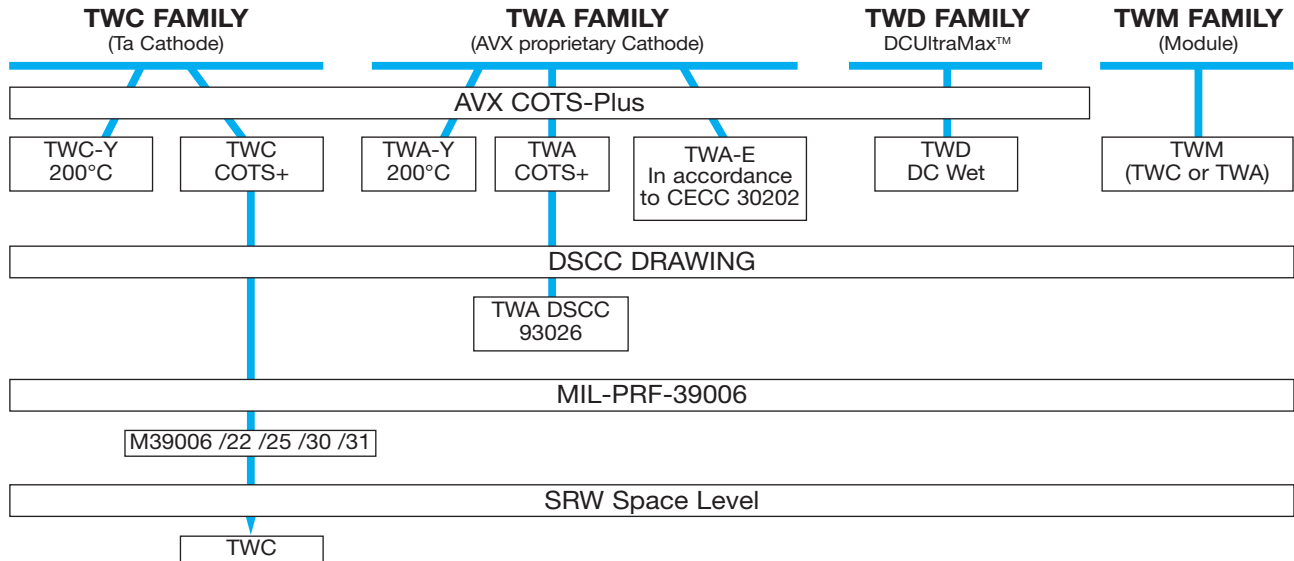

GROUP A TEST OPTIONS

| TEST | Group A Testing comparison | | | |
|--|------------------------------|------------------------------|---------------------------|---------------------------|
| | AVX COTS-Plus | MIL-PRF-55365 QPL | | AVX SRC9000 Space Level |
| | | MIL Weibull B, C, D | MIL T Level | |
| 100% Reflow | ✓ | ✓ | ✓ | ✓ |
| 100% Thermal Shock | ✓ | ✓ | ✓ | ✓ |
| 100% Weibull | Optional | Mandatory | Mandatory-Grade C min | Mandatory-Grade C min |
| 100% Surge Current | Optional | Optional | Mandatory - C Level | Mandatory - C Level |
| 100% Electrical Testing | Custom Test Limits Available | To Specification Limits Only | +3 Sigma Limits | +3 Sigma Limits or Custom |
| Visual & Mechanical | Sample | Sample | 100% - 20X | 100% - 20X |
| Simulated Mounting, Rework and Lot Conformance | | | | ✓ |
| Solderability Test* | Optional 75% Coverage | Mandatory 95% Coverage | Mandatory 95% Coverage | Mandatory 95% Coverage |
| 100% X-Ray | | | ✓ | ✓ |
| DPA - 1580 Destructive Physical Analysis | | | ✓ | ✓ |
| Surge Voltage | | | | ✓ |
| Hot DC Leakage | | | | ✓ |
| Temperature Stability | Optional | Mandatory | Mandatory | Mandatory |

*Only Mil QPL ratings receive the steam age portion of solderability testing unless otherwise specified by the customer

HIGH RELIABILITY SPECIFICATION REQUIREMENTS COMPARISON CHART

| TEST | AVX Series | 100% Reflow | Vibration | Shock or Bump | 100% Thermal Shock | Resistance to Soldering Heat | Moisture Resistance | Operating Life | 100% Weibull | 100% Surge Current | 100% Electrical Testing | Visual & Mechanical | Simulated Mounting, Rework and Accelerated Life | Solderability Test* | 100% X-Ray | DPA - 1580 Destructive Physical Analysis | Surge Voltage | Hot DC Leakage | Temperature Stability | Burn-in 168hrs | Adhesion (shear) | Climatque Sequence *** | | |
|-------------------|---------------|-----------------------|-----------|---------------|--------------------|------------------------------|---------------------|----------------|--------------|--------------------|-------------------------|---------------------|---|---------------------|------------|--|---------------|----------------|-----------------------|----------------|------------------|------------------------|---------|---|
| | | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | |
| MIL PRF 55365 QPL | Standard MIL | CWR09, 11, 15, 19, 29 | 0 ■ ▲ X | | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | |
| | New "T" level | CWR09, 11, 15, 19, 29 | 0 ■ ▲ X | | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | |
| Space Level | AVX SRC9000** | TBJ/TBM (COTS) | 0 ■ ▲ X | ▲ X | ▲ X | 0 ■ ▲ X | ▲ X | (*)▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 X | 0 X | 0 X | 0 X | 0 X | 0 X | 0 X | 0 X | ▲ X | | | |
| | AVX SRC9000** | TAZ/TBC/TBJ (MIL) | 0 ■ ▲ X | ▲ X | 0 ■ ▲ X | ▲ X | ▲ X | ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 ■ ▲ X | 0 X | 0 X | 0 X | 0 X | 0 X | 0 X | 0 X | 0 X | ▲ X | | | |
| AVX COTS-Plus | COTS-Plus** | TBJ/TBM/TAZ | 0 | | 0 | ▲ X | ▲ X | ▲ X | ▲ X | ▲ X | 0 X | ▲ X | ▲ X | ▲ X | | | ▲ X | ▲ X | ▲ X | | | | | |
| | DSCC 07016 | TBJ | 0 ■ ▲ X | | 0 ■ ▲ X | ▲ X | ▲ X | ▲ X | ▲ X | ▲ X | 0 X | ▲ X | ▲ X | ▲ X | | | ▲ X | ▲ X | ▲ X | | | | | |
| | DSCC 95158 | TBJ | 0 ■ ▲ X | | 0 ■ ▲ X | ▲ X | ▲ X | ▲ X | ▲ X | ▲ X | 0 X | ▲ X | ▲ X | ▲ X | | | ▲ X | ▲ X | ▲ X | | | | | |
| ESA-ESOC3012 | LAT 1 | TAJ-ESA, TES | 0 ● | 0 | 0 ● | | | 0 | ● | 0 ● | 0 | 0 | 0 | 0 ● | level B ● | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| | LAT 2 | | 0 ● | | ● | | | 0 | ● | 0 ● | 0 | 0 | 0 | 0 ● | level B ● | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| | LAT 3 | | ● | | ● | | | | ● | 0 ● | 0 | 0 | 0 | 0 ● | level B ● | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | NO LAT | | ● | | ● | | | | ● | ● | | | | ● | level B ● | | | | | | | | | |

*Only Mil QPL ratings receive the steam age portion of solderability testing unless otherwise specified by the customer

**Testing of low ESR components requiring a mounted sample shall allow a 2X increase in catalog ESR for post measurements

*** = Dry Heat, Damp Heat, Storage, Low Air Pressure, Damp Heat

- 0 Standard Test
- ▲ Optional Test
- Qualification and or GRP C
- X Sample Test
- ★ COTS Upscreen 1000Hr 125°C
- ▶ AVX Standard DCL/ESR/DF 3 SIGMA
- ◆ DLA Standard DCL/ESR 3 SIGMA
- Part of Manufacturing Flow (PID)

HIGH RELIABILITY TANTALUM CHIP PRODUCT FAMILY - DESIGN GUIDE

TAZ Series Case Size



TCP
Module

TAZ FAMILY SIZES:

CWR09, CWR19, CWR29 and TCP Modules


The TAZ family boasts the widest range of case sizes and fullest range of MIL-QPL qualifications of any tantalum chip family, making it the ideal choice for the MIL-Aerospace designer.

This family represents the most flexible of surface mount form factors. The case sizes originate from the original MIL chip sizes, enabling support for all legacy programs, but have been extended to include both smaller and larger case size options. There are ten case sizes covering the full Capacitance/Voltage range. Parts are suited to hybrid or PCB assembly, with case sizes A to E designed as low profile (.050" nom).

The Low ESR versions of the larger case sizes are ideally suited to power applications, and the H case is also footprint compatible with TBJ D / E case sizes.

This family is also the ideal replacement for conformal coated CWR06 styles in mechanically demanding applications.

TBJ Series Case Size

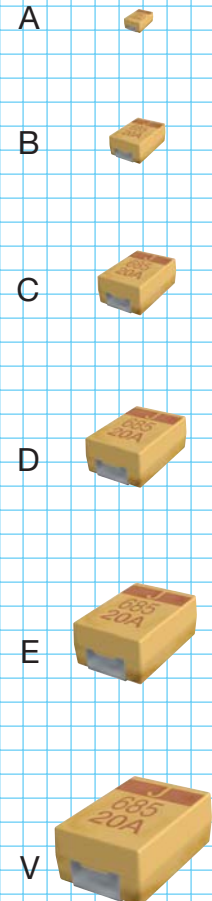

TBJ FAMILY SIZES:

DSCC 95158, 07016 & CWR11; TBM Ultra-Low ESR and TBW Fused; NBS & NBM Low ESR Oxicap™.


The TBJ family is based on EIA / Industrial standard sizes. While this series offers a more limited range of form factors (only 4 QPL case sizes, A through D, with an additional 2 case sizes (E & V) available to DSCC drawing), it does enable commercial designs / prototypes to be upgraded from commercial to COTS-Plus or even SRC9000 Space level for flight applications.

TBC FAMILY SIZES:

CWR15

TBC represents the world's smallest military approved tantalum chip capacitors technology. The case sizes are based on existing small case ceramic chip / resistor chip sizes; L, R & A case are equivalent to 0603, 0805 & 1206 sizes respectively, but with capacitance/voltage combinations significantly higher than available in 125°C rated ceramic devices. TBC represents a significant enabling technology for downsizing and reduced payload circuits for military and aerospace PCB, hybrid & flex circuit applications.

TBC Series Case Sizes



PART NUMBERING, TEST & PACKAGING OPTIONS

Part Numbering:

AVX part numbers have 19 character fields. Standard characters are used to denote AVX series, case size, capacitance code, capacitance tolerance, voltage code and standard / Low ESR designator.

Test Designators:

The following table is a cross-reference between AVX and MIL designators for the various termination, test and inspection options available:

| Symbol | Parameter | Condition | Designator | |
|--------|---|-------------------------------------|------------|-----|
| | | | MIL | AVX |
| ^ | Termination Finish | Hot Solder Dip | C | 8 |
| | | Solder Fused | K | 0 |
| | | Solder Plated | H | H |
| | | Gold | B | 9 |
| | | Matte Sn | - | 7 |
| # | Lot inspection Conformance Level | MIL QPL (JAN brand) | - | M |
| | | DSCC Dwg | - | D |
| | | Lab/SCD/SRC9000 | - | L |
| | | Standard | - | S |
| ++ | Surge Current Test (also used for custom requirements) | No Surge | Z | 00 |
| | | 10 Cycles Ambient | A | 23 |
| | | 10 Cycles -55°C & +85°C | B | 24 |
| | | 10 Cycles -55°C & +85°C Pre-Weibull | C | 45 |
| @ | Voltage Conditioning (Reliability) Grade | Non ER | A | Z |
| | | B Weibull | B | B |
| | | C Weibull | C | C |
| | | D Weibull | D | D |
| * | Capacitance Tolerance | ±5% | J | J |
| | | ±10% | K | K |
| | | ±20% | M | M |
| 0 | AVX SCD Designator | 0 = N/A | N/A | 0 |
| | | 9 = SRC9000 | N/A | 9 |

Packaging Designators:


Due to the wide range of mounting processes that can be used for these products, there are many packaging options including bulk, tape / reel and waffle pack. Full dimensional information and packaging quantities are available in the packaging section (Applications Guide). Custom packaging is available for some product series (e.g. non-modular reel quantities, inverted in waffle (for wire bonding), special bar coding requirements, etc.). Please contact factory for custom requirements.

| Symbol | Parameter | Condition | Designator | |
|--------|-------------|------------------------|------------|-----|
| | | | MIL | AVX |
| □ | Bulk | Bulk | Default | B |
| | | Bulk - ESD Packaging | - | K |
| | Tape & Reel | 4" Reel | TR/4 | X |
| | | 7" Reel | TR/7 | R |
| | | 13" Reel | TR/13 | S |
| | Waffle Pack | Waffle Pack | W | W |
| | | Waffle - ESD Packaging | - | L |

TAZ Series



CWR09 - MIL-PRF-55365/4 Established Reliability, COTS-Plus & Space Level

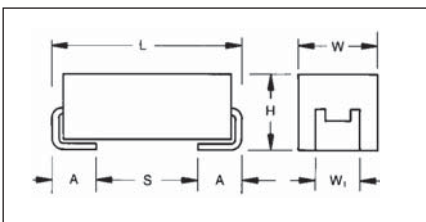

MARKING

(White marking on black body)



Polarity Stripe (+)

**Capacitance Code
Rated Voltage**

This is the original high reliability molded tantalum chip series and the case sizes still represent the most flexible of surface mount form factors. TAZ offers nine case sizes, eight of which (A through H) are fully qualified to MIL-PRF-55365/4, and also includes the original sub-miniature R case (non-QPL).

This series is fully interchangeable with CWR06 conformal types, while offering the advantages of molded body / compliant termination construction (ensuring no TCE mismatch with any substrate). This construction is compatible with a wide range of SMT board assembly processes including wave or reflow solder, conductive epoxy or compression bonding techniques.

The parts also carry full polarity and capacitance / voltage marking. The five smaller cases are characterized by their low

profile construction, with the A case being the world's smallest molded military tantalum chip.

All 4V to 50V ratings are qualified to MIL-PRF-55365 Weibull "B", "C", "D" and "T" levels, with all surge options ("A", "B" & "C") available.

For Space Level applications, AVX SRC 9000 qualification is recommended (see ratings table for part number availability).

There are four termination finishes available: solder plated, fused solder plated, hot solder dipped and gold plated (these are "H", "K", "C" and "B" termination, respectively, per MIL-PRF-55365). In addition, the molding compound has been selected to meet the requirements of UL94V-0 (Flame Retardancy) and outgassing requirements of NASA SP-R-0022A.

CASE DIMENSIONS:

millimeters (inches)

| Case Code | Length (L) ±0.38 (0.015) | Width (W) ±0.38 (0.015) | Height (H) ±0.38 (0.015) | Term. Width (W _t) | Term. Length (A) +0.25/-0.13 (+0.010/-0.005) | S min | Typical Weight (g) |
|-----------|-------------------------------|--|-----------------------------|---|--|-----------------|--------------------|
| A | 2.54 (0.100) | 1.27 (0.050) | 1.27 (0.050) | 1.27±0.13 (0.050±0.005) | 0.76 (0.030) | 0.38 (0.015) | 0.016 |
| B | 3.81 (0.150) | 1.27 (0.050) | 1.27 (0.050) | 1.27±0.13 (0.050±0.005) | 0.76 (0.030) | 1.65 (0.065) | 0.025 |
| C | 5.08 (0.200) | 1.27 (0.050) | 1.27 (0.050) | 1.27±0.13 (0.050±0.005) | 0.76 (0.030) | 2.92 (0.115) | 0.035 |
| D | 3.81 (0.150) | 2.54 (0.100) | 1.27 (0.050) | 2.41+0.13/-0.25 (0.095+0.005/-0.010) | 0.76 (0.030) | 1.65 (0.065) | 0.045 |
| E | 5.08 (0.200) | 2.54 (0.100) | 1.27 (0.050) | 2.41+0.13/-0.25 (0.095+0.005/-0.010) | 0.76 (0.030) | 2.92 (0.115) | 0.065 |
| F | 5.59 (0.220) | 3.43 (0.135) | 1.78 (0.070) | 3.30±0.13 (0.130±0.005) | 0.76 (0.030) | 3.43 (0.135) | 0.125 |
| G | 6.73 (0.265) | 2.79 (0.110) | 2.79 (0.110) | 2.67±0.13 (0.105±0.005) | 1.27 (0.050) | 3.56 (0.140) | 0.205 |
| H | 7.24 (0.285) | 3.81 (0.150) | 2.79 (0.110) | 3.68+0.13/-0.51 (0.145+0.005/-0.020) | 1.27 (0.050) | 4.06 (0.160) | 0.335 |
| R | 2.05 (0.081) ±0.20 (0.008) | 1.30 (0.051) +0.20 (0.008) -0.10 (0.004) | 1.20 (0.047) max | 1.0±0.10 (0.039±0.004) | 0.50 (0.020) +0.30 (0.012) -0.20 (0.008) | 0.71 (0.028) | 0.010 |

CWR09 MIL-PRF-55365/4

CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

| Capacitance | | Rated Voltage DC (V _R) at 85°C | | | | | | | |
|-------------|------|--|--------|---------|---------|---------|---------|---------|---------|
| µF | Code | 4V (C) | 6V (D) | 10V (F) | 15V (H) | 20V (J) | 25V (K) | 35V (M) | 50V (N) |
| 0.10 | 104 | | | | | | | | A |
| 0.15 | 154 | | | | | | | | A |
| 0.22 | 224 | | | | | | | A | B |
| 0.33 | 334 | R | | R | | | A | | B |
| 0.47 | 474 | | | R | | A | | B | C |
| 0.68 | 684 | | | | A | B | | C | D |
| 1.0 | 105 | | | A/R | | B | | D | E |
| 1.5 | 155 | | A | | B | C | | E | F |
| 2.2 | 225 | A/R | | B | C | D | | E | F |
| 3.3 | 335 | | B | C | D | E | | F | G |
| 4.7 | 475 | B | C | D | E | | F | G | H |
| 6.8 | 685 | C | D | E | | F | G | H | |
| 10 | 106 | D | E | | F | | G | | |
| 15 | 156 | E | | F | | G | H | | |
| 22 | 226 | | F | | G | H | | | |
| 33 | 336 | F | | G | H | | | | |
| 47 | 476 | | G | H | | | | | |
| 68 | 686 | G | H | | | | | | |
| 100 | 107 | H | | | | | | | |
| 150 | 157 | | | | | | | | |
| 220 | 227 | | | | | | | | |



HOW TO ORDER

COTS-PLUS & MIL QPL (CWR09):

| | | | | | | | | | | | |
|-------------|------------------|---|---|---|--|---|---|---|---|--|---|
| TAZ | H | 686 | * | 006 | C | □ | # | @ | 0 | ^ | ++ |
| Type | Case Size | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Capacitance Tolerance M = ±20% K = ±10% J = ±5% | Voltage Code 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 015 = 15Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc | Standard or Low ESR Range C = Std ESR L = Low ESR | Packaging B = Bulk R = 7" T&R S = 13" T&R W = Waffle See page 7 for additional packaging options. | Inspection Level S = Std. Conformance L = Group A M = MIL (JAN) CWR09 | Reliability Grade Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. Z = Non-ER | Qualification Level 0 = N/A T = T Level 9 = SRC9000 | Termination Finish H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated 7 = Matte Sn (COTS-Plus only) | Surge Test Option 00 = None 23 = 10 Cycles, +25°C 24 = 10 Cycles, -55°C & +85°C 45 = 10 cycles, -55°C & +85°C before Weibull |

Not RoHS Compliant

LEAD-FREE LEAD-FREE COMPATIBLE COMPONENT
For RoHS compliant products, please select correct termination style.

CWR09 P/N CROSS REFERENCE:

| | | | | | | | |
|--------------|---|--|---|---|--|--|--|
| CWR09 | D | ^ | 686 | * | @ | + | □ |
| Type | Voltage Code C = 4Vdc D = 6Vdc F = 10Vdc H = 15Vdc J = 20Vdc K = 25Vdc M = 35Vdc N = 50Vdc | Termination Finish H = Solder Plated K = Solder Fused C = Hot Solder Dipped B = Gold Plated | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Capacitance Tolerance M = ±20% K = ±10% J = ±5% | Reliability Grade Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. T = T Level A = Non-ER | Surge Test Option A = 10 cycles, +25°C B = 10 cycles, -55°C & +85°C C = 10 cycles, -55°C & +85°C before Weibull If blank, None required | Packaging Bulk = Standard TR = 7" T&R TR13 = 13" T&R W = Waffle See page 7 for additional packaging options. |

Not RoHS Compliant

SPACE LEVEL OPTIONS TO SRC9000*:

| | | | | | | | | | | | |
|-------------|------------------|---|---|---|--|---|--|---|---|---|--|
| TAZ | H | 686 | * | 006 | C | □ | L | @ | 9 | ^ | ++ |
| Type | Case Size | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Capacitance Tolerance M = ±20% K = ±10% J = ±5% | Voltage Code 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 015 = 15Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc | Standard or Low ESR Range C = Std ESR L = Low ESR | Packaging B = Bulk R = 7" T&R S = 13" T&R W = Waffle See page 7 for additional packaging options. | Inspection Level L = Group A | Reliability Grade Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. | Qualification Level 9 = SRC9000 | Termination Finish H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated | Surge Test Option 45 = 10 cycles, -55°C & +85°C before Weibull |

Not RoHS Compliant

*Contact factory for AVX SRC9000 Space Level SCD details.

TECHNICAL SPECIFICATIONS

| | | | | | | | | | | |
|-------------------------------------|---|-----|-----|------|------|------|------|------|------|--|
| Technical Data: | Unless otherwise specified, all technical data relate to an ambient temperature of 25°C | | | | | | | | | |
| Capacitance Range: | 0.1 μF 50 100 μF | | | | | | | | | |
| Capacitance Tolerance: | ±5%; ±10%; ±20% | | | | | | | | | |
| Rated Voltage: (V _R) | ≤85°C: | 4 | 6 | 10 | 15 | 20 | 25 | 35 | 50 | |
| Category Voltage: (V _C) | 125°C: | 2.7 | 4 | 6.7 | 10 | 13.3 | 16.7 | 23.3 | 33.3 | |
| Surge Voltage: (V _S) | ≤85°C: | 5.3 | 8 | 13.3 | 20 | 26.7 | 33.3 | 46.7 | 66.7 | |
| | 125°C: | 3.5 | 5.3 | 8.7 | 13.3 | 17.8 | 22.2 | 31.1 | 44.5 | |
| Temperature Range: | -55°C to +125°C | | | | | | | | | |

TAZ Series



CWR09 - MIL-PRF-55365/4 Established Reliability, COTS-Plus & Space Level

| RATING & PART NUMBER REFERENCE | | | Parametric Specifications by Rating per MIL-PRF-55365/4 | | | | | | | | | Typical Ripple Data by Rating | | | | | | | |
|--------------------------------|--------------------------------|--------------------------------|---|-------------------------------------|------------------------------------|---------------|---------------|----------------|--------------|--------------------|--------------|-------------------------------|---------------------------------|---------------------------------|----------------------------------|---------------------------------|---------------------------------|----------------------------------|------|
| | | | Cap @ 120Hz µF @ 25°C | DC Rated Voltage V @ +85°C | ESR @ 100kHz Ohms @ +25°C | DCL max | | | DF Max | | | Power Dissipation W | 25°C Ripple A (100kHz) | 85°C Ripple A (100kHz) | 125°C Ripple A (100kHz) | 25°C Ripple V (100kHz) | 85°C Ripple V (100kHz) | 125°C Ripple V (100kHz) | |
| | | | | | | +25°C (µA) | +85°C (µA) | +125°C (µA) | +25°C (%) | +(85/125)°C (%) | -55°C (%) | | | | | | | | |
| CWR09 P/N | AVX MIL & COTS-Plus p/n | AVX SRC9000 P/N | Case | | | | | | | | | | | | | | | | |
| CWR09M^224*0+ | TAZ A 224 * 035 C □ # @ 0 ^ ++ | TAZ A 224 * 035 C □ L @ 9 ^ ++ | A | 0.22 | 35 | 18 | 1 | 10 | 12 | 6 | 8 | 8 | 0.050 | 0.05 | 0.05 | 0.02 | 0.95 | 0.85 | 0.38 |
| CWR09M^474*0+ | TAZ B 474 * 035 C □ # @ 0 ^ ++ | TAZ B 474 * 035 C □ L @ 9 ^ ++ | B | 0.47 | 35 | 10 | 1 | 10 | 12 | 6 | 8 | 8 | 0.070 | 0.08 | 0.08 | 0.03 | 0.84 | 0.75 | 0.33 |
| CWR09M^684*0+ | TAZ C 684 * 035 C □ # @ 0 ^ ++ | TAZ C 684 * 035 C □ L @ 9 ^ ++ | C | 0.68 | 35 | 8 | 1 | 10 | 12 | 6 | 8 | 8 | 0.075 | 0.10 | 0.09 | 0.04 | 0.77 | 0.70 | 0.31 |
| CWR09M^105*0+ | TAZ D 105 * 035 C □ # @ 0 ^ ++ | TAZ D 105 * 035 C □ L @ 9 ^ ++ | D | 1 | 35 | 6.5 | 1 | 10 | 12 | 6 | 8 | 8 | 0.080 | 0.11 | 0.10 | 0.04 | 0.72 | 0.65 | 0.29 |
| CWR09M^155*0+ | TAZ E 155 * 035 C □ # @ 0 ^ ++ | TAZ E 155 * 035 C □ L @ 9 ^ ++ | E | 1.5 | 35 | 4.5 | 1 | 10 | 12 | 6 | 8 | 8 | 0.090 | 0.14 | 0.13 | 0.06 | 0.64 | 0.57 | 0.25 |
| CWR09M^335*0+ | TAZ F 335 * 035 C □ # @ 0 ^ ++ | TAZ F 335 * 035 C □ L @ 9 ^ ++ | F | 3.3 | 35 | 2.5 | 1 | 10 | 12 | 6 | 8 | 8 | 0.100 | 0.20 | 0.18 | 0.08 | 0.50 | 0.45 | 0.20 |
| CWR09M^475*0+ | TAZ G 475 * 035 C □ # @ 0 ^ ++ | TAZ G 475 * 035 C □ L @ 9 ^ ++ | G | 4.7 | 35 | 1.5 | 2 | 20 | 24 | 6 | 8 | 8 | 0.125 | 0.29 | 0.26 | 0.12 | 0.43 | 0.39 | 0.17 |
| CWR09M^685*0+ | TAZ H 685 * 035 C □ # @ 0 ^ ++ | TAZ H 685 * 035 C □ L @ 9 ^ ++ | H | 6.8 | 35 | 1.3 | 3 | 30 | 36 | 6 | 8 | 8 | 0.150 | 0.34 | 0.31 | 0.14 | 0.44 | 0.40 | 0.18 |
| CWR09N^104*0+ | TAZ A 104 * 050 C □ # @ 0 ^ ++ | TAZ A 104 * 050 C □ L @ 9 ^ ++ | A | 0.1 | 50 | 22 | 1 | 10 | 12 | 6 | 8 | 8 | 0.050 | 0.05 | 0.04 | 0.02 | 1.05 | 0.94 | 0.42 |
| CWR09N^154*0+ | TAZ A 154 * 050 C □ # @ 0 ^ ++ | TAZ A 154 * 050 C □ L @ 9 ^ ++ | A | 0.15 | 50 | 17 | 1 | 10 | 12 | 6 | 8 | 8 | 0.050 | 0.05 | 0.05 | 0.02 | 0.92 | 0.83 | 0.37 |
| CWR09N^224*0+ | TAZ B 224 * 050 C □ # @ 0 ^ ++ | TAZ B 224 * 050 C □ L @ 9 ^ ++ | B | 0.22 | 50 | 14 | 1 | 10 | 12 | 6 | 8 | 8 | 0.070 | 0.07 | 0.06 | 0.03 | 0.99 | 0.89 | 0.40 |
| CWR09N^334*0+ | TAZ B 334 * 050 C □ # @ 0 ^ ++ | TAZ B 334 * 050 C □ L @ 9 ^ ++ | B | 0.33 | 50 | 12 | 1 | 10 | 12 | 6 | 8 | 8 | 0.070 | 0.08 | 0.07 | 0.03 | 0.92 | 0.82 | 0.37 |
| CWR09N^474*0+ | TAZ C 474 * 050 C □ # @ 0 ^ ++ | TAZ C 474 * 050 C □ L @ 9 ^ ++ | C | 0.47 | 50 | 8 | 1 | 10 | 12 | 6 | 8 | 8 | 0.075 | 0.10 | 0.09 | 0.04 | 0.77 | 0.70 | 0.31 |
| CWR09N^684*0+ | TAZ D 684 * 050 C □ # @ 0 ^ ++ | TAZ D 684 * 050 C □ L @ 9 ^ ++ | D | 0.68 | 50 | 7 | 1 | 10 | 12 | 6 | 8 | 8 | 0.080 | 0.11 | 0.10 | 0.04 | 0.75 | 0.67 | 0.30 |
| CWR09N^105*0+ | TAZ E 105 * 050 C □ # @ 0 ^ ++ | TAZ E 105 * 050 C □ L @ 9 ^ ++ | E | 1 | 50 | 6 | 1 | 10 | 12 | 6 | 8 | 8 | 0.090 | 0.12 | 0.11 | 0.05 | 0.73 | 0.66 | 0.29 |
| CWR09N^155*0+ | TAZ F 155 * 050 C □ # @ 0 ^ ++ | TAZ F 155 * 050 C □ L @ 9 ^ ++ | F | 1.5 | 50 | 4 | 1 | 10 | 12 | 6 | 8 | 8 | 0.100 | 0.16 | 0.14 | 0.06 | 0.63 | 0.57 | 0.25 |
| CWR09N^225*0+ | TAZ F 225 * 050 C □ # @ 0 ^ ++ | TAZ F 225 * 050 C □ L @ 9 ^ ++ | F | 2.2 | 50 | 2.5 | 2 | 20 | 24 | 6 | 8 | 8 | 0.100 | 0.20 | 0.18 | 0.08 | 0.50 | 0.45 | 0.20 |
| CWR09N^335*0+ | TAZ G 335 * 050 C □ # @ 0 ^ ++ | TAZ G 335 * 050 C □ L @ 9 ^ ++ | G | 3.3 | 50 | 2 | 2 | 20 | 24 | 6 | 8 | 8 | 0.125 | 0.25 | 0.23 | 0.10 | 0.50 | 0.45 | 0.20 |
| CWR09N^475*0+ | TAZ H 475 * 050 C □ # @ 0 ^ ++ | TAZ H 475 * 050 C □ L @ 9 ^ ++ | H | 4.7 | 50 | 1.5 | 3 | 30 | 36 | 6 | 8 | 8 | 0.150 | 0.32 | 0.28 | 0.13 | 0.47 | 0.43 | 0.19 |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.



TAZ Series



CWR19 - MIL-PRF-55365/11 Established Reliability, COTS-Plus & Space Level



An extended range of capacitor ratings beyond CWR09 that is fully qualified to MIL-PRF-55365/11, this series represents the most flexible of surface mount form factors, offering nine case sizes (the original A through H of CWR09) and adds the new X case size.

The molded body / compliant termination construction ensures no TCE mismatch with any substrate. This construction is compatible with a wide range of SMT board assembly processes including wave or reflow solder, conductive epoxy or compression bonding techniques. The parts also carry full polarity and capacitance / voltage marking.


The four smaller cases are characterized by their low profile construction, with the A case being the world's smallest molded military tantalum chip.

The series is qualified to MIL-PRF-55365 Weibull "B", "C", "D" and "T" levels, with all surge options ("A", "B" & "C") available.

For Space Level applications, AVX SRC 9000 qualification is recommended (see ratings table for part number availability).

There are four termination finishes available: solder plated, fused solder plated, hot solder dipped and gold plated (these are "H", "K", "C" and "B" termination, respectively, per MIL-PRF-55365). In addition, the molding compound has been selected to meet the requirements of UL94V-0 (Flame Retardancy) and outgassing requirements of NASA SP-R-0022A.

The TAZ "X" case size components are considered to be MSL 3 in accordance with J-STD-020.

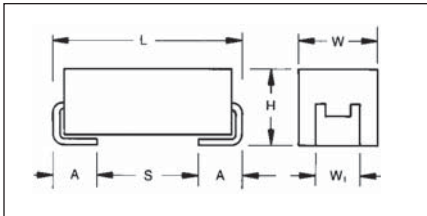

MARKING

(White marking on black body)



Polarity Stripe (+)

**Capacitance Code
Rated Voltage**

CASE DIMENSIONS:

millimeters (inches)

| Case Code | Length (L) ±0.38 (0.015) | Width (W) ±0.38 (0.015) | Height (H) ±0.38 (0.015) | Term. Width (W _t) | Term. Length (A) +0.25/-0.13 (+0.010/-0.005) | S min | Typical Weight (g) |
|-----------|-----------------------------|----------------------------|-----------------------------|---|--|--------------|--------------------|
| A | 2.54 (0.100) | 1.27 (0.050) | 1.27 (0.050) | 1.27±0.13 (0.050±0.005) | 0.76 (0.030) | 0.38 (0.015) | 0.016 |
| B | 3.81 (0.150) | 1.27 (0.050) | 1.27 (0.050) | 1.27±0.13 (0.050±0.005) | 0.76 (0.030) | 1.65 (0.065) | 0.025 |
| C | 5.08 (0.200) | 1.27 (0.050) | 1.27 (0.050) | 1.27±0.13 (0.050±0.005) | 0.76 (0.030) | 2.92 (0.115) | 0.035 |
| D | 3.81 (0.150) | 2.54 (0.100) | 1.27 (0.050) | 2.41+0.13/-0.25 (0.095+0.005/-0.010) | 0.76 (0.030) | 1.65 (0.065) | 0.045 |
| E | 5.08 (0.200) | 2.54 (0.100) | 1.27 (0.050) | 2.41+0.13/-0.25 (0.095+0.005/-0.010) | 0.76 (0.030) | 2.92 (0.115) | 0.065 |
| F | 5.59 (0.220) | 3.43 (0.135) | 1.78 (0.070) | 3.30±0.13 (0.130±0.005) | 0.76 (0.030) | 3.43 (0.135) | 0.125 |
| G | 6.73 (0.265) | 2.79 (0.110) | 2.79 (0.110) | 2.67±0.13 (0.105±0.005) | 1.27 (0.050) | 3.56 (0.140) | 0.205 |
| H | 7.24 (0.285) | 3.81 (0.150) | 2.79 (0.110) | 3.68+0.13/-0.51 (0.145+0.005/-0.020) | 1.27 (0.050) | 4.06 (0.160) | 0.335 |
| X | 6.93 Max (0.273) | 5.41 Max (0.213) | 2.74 Max (0.108) | 3.05±0.13 (0.120±0.005) | 1.19 (0.047) | N/A | 0.420 |

CWR19-MIL-PRF 55365/11

CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

| Capacitance | | Rated voltage DC (V _R) at 85°C | | | | | | |
|-------------|------|--|--------|---------|---------|---------|---------|---------|
| µF | Code | 4V (C) | 6V (D) | 10V (F) | 15V (H) | 20V (J) | 25V (K) | 35V (M) |
| 0.10 | 104 | | | | | | | |
| 0.15 | 154 | | | | | | | |
| 0.22 | 224 | | | | | | | |
| 0.33 | 334 | | | | | | | A |
| 0.47 | 474 | | | | | | A | |
| 0.68 | 684 | | | | | A | | |
| 1.0 | 105 | | | | A | A | B | |
| 1.5 | 155 | | | | A | B | | |
| 2.2 | 225 | | | A | A | B | D | |
| 3.3 | 335 | A | A | A | B | D | E | |
| 4.7 | 475 | A | A | B/C | B/C/D | E | | |
| 6.8 | 685 | A | B | B/C/D | D/E | E | F | G |
| 10 | 106 | B | B | B/C/D/E | D/E | E/F | G | H |
| 15 | 156 | B | B/D/E | D/E | E/F | F | G | |
| 22 | 226 | B/D | D/E | E | F | G | G/H | |
| 33 | 336 | D/E | E | F | F/G | H | H | |
| 47 | 476 | E | F | F/G | G/H | H/X | | |
| 68 | 686 | E | F/G | G | G/H | | | |
| 100 | 107 | F | G | G/H | H | | | |
| 150 | 157 | G | G | H/X | | | | |
| 220 | 227 | H | H | H | | | | |
| 330 | 337 | H | H | | | | | |



HOW TO ORDER

COTS-PLUS & MIL QPL (CWR19):

| | | | | | | | | | | | |
|-------------|------------------|---|---|--|--|---|---|---|---|--|---|
| TAZ | H | 227 | * | 006 | C | □ | # | @ | 0 | ^ | ++ |
| Type | Case Size | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Capacitance Tolerance M = ±20% K = ±10% J = ±5% | Voltage Code 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 015 = 15Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc | Standard or Low ESR Range C = Std ESR L = Low ESR | Packaging B = Bulk R = 7" T&R S = 13" T&R W = Waffle See page 7 for additional packaging options. | Inspection Level S = Std. Conformance L = Group A M = MIL (JAN) CWR19 | Reliability Grade Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. Z = Non-ER | Qualification Level 0 = N/A T = T Level 9 = SRC9000 | Termination Finish H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated 7 = Matte Sn (COTS-Plus only) | Surge Test Option 00 = None 23 = 10 Cycles, +25°C 24 = 10 Cycles, -55°C & +85°C 45 = 10 cycles, -55°C & +85°C before Weibull |

Not RoHS Compliant

LEAD-FREE
LEAD-FREE COMPATIBLE COMPONENT
For RoHS compliant products, please select correct termination style.

CWR19 P/N CROSS REFERENCE:

| | | | | | | | | |
|--------------|--|--|---|---|--|------------------|--|--|
| CWR19 | D | ^ | 227 | * | @ | H | + | □ |
| Type | Voltage Code C = 4Vdc D = 6Vdc F = 10Vdc H = 15Vdc J = 20Vdc K = 25Vdc M = 35Vdc | Termination Finish H = Solder Plated K = Solder Fused C = Hot Solder Dipped B = Gold Plated | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Capacitance Tolerance M = ±20% K = ±10% J = ±5% | Reliability Grade Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. T = T Level A = Non-ER | Case Size | Surge Test Option A = 10 cycles, +25°C B = 10 cycles, -55°C & +85°C C = 10 cycles, -55°C & +85°C before Weibull Z = None required | Packaging Bulk = Standard VTR = 7" T&R VTR13 = 13" T&R W = Waffle See page 7 for additional packaging options. |

Not RoHS Compliant

SPACE LEVEL OPTIONS TO SRC9000*:

| | | | | | | | | | | | |
|-------------|------------------|---|---|--|--|---|--|---|---|---|--|
| TAZ | H | 227 | * | 006 | C | □ | L | @ | 9 | ^ | ++ |
| Type | Case Size | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Capacitance Tolerance M = ±20% K = ±10% J = ±5% | Voltage Code 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 015 = 15Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc | Standard or Low ESR Range C = Std ESR L = Low ESR | Packaging B = Bulk R = 7" T&R S = 13" T&R W = Waffle See page 7 for additional packaging options. | Inspection Level L = Group A | Reliability Grade Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. | Qualification Level 9 = SRC9000 | Termination Finish H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated | Surge Test Option 45 = 10 cycles, -55°C & +85°C before Weibull |

Not RoHS Compliant

*Contact factory for AVX SRC9000 Space Level SCD details.


TECHNICAL SPECIFICATIONS

| | | | | | | | | | |
|-------------------------------------|---|-----|-----|------|------|------|------|------|--|
| Technical Data: | Unless otherwise specified, all technical data relate to an ambient temperature of 25°C | | | | | | | | |
| Capacitance Range: | 0.33 µF to 330 µF | | | | | | | | |
| Capacitance Tolerance: | ±5%; ±10%; ±20% | | | | | | | | |
| Rated Voltage: (V _R) | ≤85°C: | 4 | 6 | 10 | 15 | 20 | 25 | 35 | |
| Category Voltage: (V _C) | 125°C: | 2.7 | 4 | 6.7 | 10 | 13.3 | 16.7 | 23.3 | |
| Surge Voltage: (V _S) | ≤85°C: | 5.3 | 8 | 13.3 | 20 | 26.7 | 33.3 | 46.7 | |
| | 125°C: | 3.5 | 5.3 | 8.7 | 13.3 | 17.8 | 22.2 | 31.1 | |
| Temperature Range: | -55°C to +125°C | | | | | | | | |

TAZ Series



CWR29 - MIL-PRF-55365/11 Established Reliability, COTS-Plus & Space Level

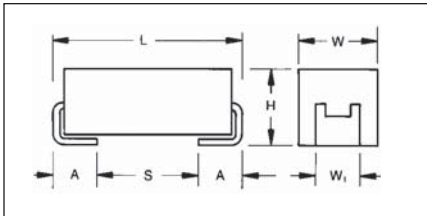

MARKING

(White marking on black body)



Polarity Stripe (+)

**Capacitance Code
Rated Voltage**

A low ESR version of CWR09 and CWR19 that is fully qualified to MIL-PRF-55365/11, the CWR29 series represents the most flexible of surface mount form factors and the optimum power handling for all filtering applications. It is offered in nine case sizes (the original A through H of CWR09 and adding the new X case size).

The molded body / compliant termination construction ensures no TCE mismatch with any substrate. This construction is compatible with a wide range of SMT board assembly processes including wave or reflow solder, conductive epoxy or compression bonding techniques. The parts also carry full polarity and capacitance / voltage marking.

The five smaller cases are characterized by their low profile construction, with the A case being the world's smallest molded military tantalum chip.

The series is qualified to MIL-PRF-55365 Weibull "B", "C", "D" and "T" levels, with all surge options ("A", "B" & "C") available.

For Space Level applications, AVX SRC 9000 qualification is recommended (see ratings table for part number availability).

There are four termination finishes available: solder plated, fused solder plated, hot solder dipped and gold plated (these are "H", "K", "C" and "B" termination, respectively, per MIL-PRF-55365). In addition, the molding compound has been selected to meet the requirements of UL94V-0 (Flame Retardancy) and outgassing requirements of NASA SP-R-0022A.

The TAZ "X" case size components are considered to be MSL 3 in accordance with J-STD-020.

CASE DIMENSIONS:

millimeters (inches)

| Case Code | Length (L) ±0.38 (0.015) | Width (W) ±0.38 (0.015) | Height (H) ±0.38 (0.015) | Term. Width (W _t) | Term. Length (A) +0.25/-0.13 (+0.010/-0.005) | S min | Typical Weight (g) |
|-----------|-----------------------------|----------------------------|-----------------------------|---|--|--------------|--------------------|
| A | 2.54 (0.100) | 1.27 (0.050) | 1.27 (0.050) | 1.27±0.13 (0.050±0.005) | 0.76 (0.030) | 0.38 (0.015) | 0.016 |
| B | 3.81 (0.150) | 1.27 (0.050) | 1.27 (0.050) | 1.27±0.13 (0.050±0.005) | 0.76 (0.030) | 1.65 (0.065) | 0.025 |
| C | 5.08 (0.200) | 1.27 (0.050) | 1.27 (0.050) | 1.27±0.13 (0.050±0.005) | 0.76 (0.030) | 2.92 (0.115) | 0.035 |
| D | 3.81 (0.150) | 2.54 (0.100) | 1.27 (0.050) | 2.41+0.13/-0.25 (0.095+0.005/-0.010) | 0.76 (0.030) | 1.65 (0.065) | 0.045 |
| E | 5.08 (0.200) | 2.54 (0.100) | 1.27 (0.050) | 2.41+0.13/-0.25 (0.095+0.005/-0.010) | 0.76 (0.030) | 2.92 (0.115) | 0.065 |
| F | 5.59 (0.220) | 3.43 (0.135) | 1.78 (0.070) | 3.30±0.13 (0.130±0.005) | 0.76 (0.030) | 3.43 (0.135) | 0.125 |
| G | 6.73 (0.265) | 2.79 (0.110) | 2.79 (0.110) | 2.67±0.13 (0.105±0.005) | 1.27 (0.050) | 3.56 (0.140) | 0.205 |
| H | 7.24 (0.285) | 3.81 (0.150) | 2.79 (0.110) | 3.68+0.13/-0.51 (0.145+0.005/-0.020) | 1.27 (0.050) | 4.06 (0.160) | 0.335 |
| X | 6.93 Max (0.273) | 5.41 Max (0.213) | 2.74 Max (0.108) | 3.05±0.13 (0.120±0.005) | 1.19 (0.047) | N/A | 0.420 |

CWR29-MIL-PRF 55365/11

CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

| Capacitance | | Rated voltage DC (V _R) at 85°C | | | | | | | |
|-------------|------|--|--------|---------|---------|---------|---------|---------|---------|
| µF | Code | 4V (C) | 6V (D) | 10V (F) | 15V (H) | 20V (J) | 25V (K) | 35V (M) | 50V (N) |
| 0.10 | 104 | | | | | | | | A |
| 0.15 | 154 | | | | | | | | A |
| 0.22 | 224 | | | | | | | A | B |
| 0.33 | 334 | | | | | | A | A | B |
| 0.47 | 474 | | | | | A | A | B | C |
| 0.68 | 684 | | | | A | A/B | B | C | D |
| 1.0 | 105 | | | A | A | A/B | B/C | D | E |
| 1.5 | 155 | | A | | A/B | B/C | D | E | F |
| 2.2 | 225 | A | | A/B | A/C | B/D | D/E | | F |
| 3.3 | 335 | A | A/B | A/C | B/D | D/E | E | F | G |
| 4.7 | 475 | A/B | A/C | B/C/D | B/C/D/E | E | F | G | H |
| 6.8 | 685 | A/C | B/D | B/C/D/E | D/E | E/F | F/G | G/H | |
| 10 | 106 | B/D | B/E | B/C/D/E | D/E/F | E/F | G | H | |
| 15 | 156 | B/E | B/D/E | D/E/F | E/F | F/G | G/H | | |
| 22 | 226 | B/D | D/E/F | E | F/G | G/H | G/H | | |
| 33 | 336 | D/E/F | E | F/G | F/G/H | H | H | | |
| 47 | 476 | E | F/G | F/G/H | G/H | H/X | | | |
| 68 | 686 | E/G | F/G/H | G | G/H | | | | |
| 100 | 107 | F/H | G | G/H | H | | | | |
| 150 | 157 | G | G | H/X | | | | | |
| 220 | 227 | H | H | H | | | | | |
| 330 | 337 | H | H | | | | | | |



TAZ Series



CWR29 - MIL-PRF-55365/11 Established Reliability, COTS-Plus & Space Level

HOW TO ORDER

COTS-PLUS & MIL QPL (CWR29):

| TAZ | H | 227 | * | 006 | C | □ | # | @ | 0 | ^ | ++ |
|-------------|------------------|---|---|---|--|---|---|---|---|--|---|
| Type | Case Size | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Capacitance Tolerance M = ±20% K = ±10% J = ±5% | Voltage Code 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 015 = 15Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc | Standard or Low ESR Range C = Std ESR L = Low ESR | Packaging B = Bulk R = 7" T&R S = 13" T&R W = Waffle See page 7 for additional packaging options. | Inspection Level S = Std. Conformance L = Group A M = MIL (JAN) CWR29 | Reliability Grade Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. Z = Non-ER | Qualification Level 0 = N/A T = T Level 9 = SRC9000 | Termination Finish H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated 7 = Matte Sn (COTS-Plus only) | Surge Test Option 00 = None 23 = 10 Cycles, +25°C 24 = 10 Cycles, -55°C & +85°C 45 = 10 cycles, -55°C & +85°C before Weibull |

Not RoHS Compliant



CWR29 P/N CROSS REFERENCE:

| CWR29 | D | ^ | 227 | * | @ | H | + | □ |
|-------------|---|--|---|---|--|------------------|--|--|
| Type | Voltage Code C = 4Vdc D = 6Vdc F = 10Vdc H = 15Vdc J = 20Vdc K = 25Vdc M = 35Vdc N = 50Vdc | Termination Finish H = Solder Plated K = Solder Fused Dipped B = Gold Plated | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Capacitance Tolerance M = ±20% K = ±10% J = ±5% | Reliability Grade Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. T = T Level A = Non-ER | Case Size | Surge Test Option A = 10 cycles, +25°C B = 10 cycles, -55°C & +85°C C = 10 cycles, -55°C & +85°C before Weibull Z = None required | Packaging Bulk = Standard TR = 7" T&R TR13 = 13" T&R W = Waffle See page 7 for additional packaging options. |

Not RoHS Compliant

SPACE LEVEL OPTIONS TO SRC9000*:

| TAZ | H | 227 | * | 006 | C | □ | L | @ | 9 | ^ | ++ |
|-------------|------------------|---|---|---|--|---|--|---|---|---|--|
| Type | Case Size | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Capacitance Tolerance M = ±20% K = ±10% J = ±5% | Voltage Code 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 015 = 15Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc | Standard or Low ESR Range C = Std ESR L = Low ESR | Packaging B = Bulk R = 7" T&R S = 13" T&R W = Waffle See page 7 for additional packaging options. | Inspection Level L = Group A | Reliability Grade Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. | Qualification Level 9 = SRC9000 | Termination Finish H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated | Surge Test Option 45 = 10 cycles, -55°C & +85°C before Weibull |

Not RoHS Compliant

*Contact factory for AVX SRC9000 Space Level SCD details.

TECHNICAL SPECIFICATIONS

| | | | | | | | | | |
|-------------------------------------|---|-----|-----|------|------|------|------|------|------|
| Technical Data: | Unless otherwise specified, all technical data relate to an ambient temperature of 25°C | | | | | | | | |
| Capacitance Range: | 0.1 μF to 330 μF | | | | | | | | |
| Capacitance Tolerance: | ±5%; ±10%; ±20% | | | | | | | | |
| Rated Voltage: (V _R) | ≤85°C: | 4 | 6 | 10 | 15 | 20 | 25 | 35 | 50 |
| Category Voltage: (V _C) | 125°C: | 2.7 | 4 | 6.7 | 10 | 13.3 | 16.7 | 23.3 | 33.3 |
| Surge Voltage: (V _S) | ≤85°C: | 5.3 | 8 | 13.3 | 20 | 26.7 | 33.3 | 46.7 | 66.7 |
| | 125°C: | 3.5 | 5.3 | 8.7 | 13.3 | 17.8 | 22.2 | 31.1 | 44.5 |
| Temperature Range: | -55°C to +125°C | | | | | | | | |



TAZ Series



CWR29 - MIL-PRF-55365/11 Established Reliability, COTS-Plus & Space Level

| RATING & PART NUMBER REFERENCE | | | | Parametric Specifications by Rating per MIL-PRF-55365/11 | | | | | | | Typical Ripple Data by Rating | | | | | | | | |
|--------------------------------|--------------------------------|------------------------------|---|--|-------------------------------------|------------------------------------|--------------------------|---------------|----------------|--------------|-------------------------------|--------------|---------------------------|---------------------------------|---------------------------------|----------------------------------|---------------------------------|---------------------------------|----------------------------------|
| | | | | Cap @ 120Hz μF @ 25°C | DC Rated Voltage V @ +85°C | ESR @ 100kHz Ohms @ +25°C | DCL max +25°C (μA) | +85°C (μA) | +125°C (μA) | +25°C (%) | DF Max +(85/125)°C (%) | -55°C (%) | Power Dissipation W | 25°C Ripple A (100kHz) | 85°C Ripple A (100kHz) | 125°C Ripple A (100kHz) | 25°C Ripple V (100kHz) | 85°C Ripple V (100kHz) | 125°C Ripple V (100kHz) |
| CWR29N^224^@B+□ | TAZ B 224 * 050 L □ # @ 0 ^ ++ | TAZ B 224 * 050 L L @ 9 ^ ++ | B | 0.22 | 50 | 6.8 | 1 | 10 | 12 | 6 | 8 | 8 | 0.070 | 0.10 | 0.09 | 0.04 | 0.69 | 0.62 | 0.28 |
| CWR29N^334^@B+□ | TAZ B 334 * 050 L □ # @ 0 ^ ++ | TAZ B 334 * 050 L L @ 9 ^ ++ | B | 0.33 | 50 | 4.8 | 1 | 10 | 12 | 6 | 8 | 8 | 0.070 | 0.12 | 0.11 | 0.05 | 0.58 | 0.52 | 0.23 |
| CWR29N^474^@C+□ | TAZ C 474 * 050 L □ # @ 0 ^ ++ | TAZ C 474 * 050 L L @ 9 ^ ++ | C | 0.47 | 50 | 3.2 | 1 | 10 | 12 | 6 | 8 | 8 | 0.075 | 0.15 | 0.14 | 0.06 | 0.49 | 0.44 | 0.20 |
| CWR29N^684^@D+□ | TAZ D 684 * 050 L □ # @ 0 ^ ++ | TAZ D 684 * 050 L L @ 9 ^ ++ | D | 0.68 | 50 | 2.3 | 1 | 10 | 12 | 6 | 8 | 8 | 0.080 | 0.19 | 0.17 | 0.07 | 0.43 | 0.39 | 0.17 |
| CWR29N^105^@E+□ | TAZ E 105 * 050 L □ # @ 0 ^ ++ | TAZ E 105 * 050 L L @ 9 ^ ++ | E | 1 | 50 | 1.7 | 1 | 10 | 12 | 6 | 8 | 8 | 0.090 | 0.23 | 0.21 | 0.09 | 0.39 | 0.35 | 0.16 |
| CWR29N^155^@F+□ | TAZ F 155 * 050 L □ # @ 0 ^ ++ | TAZ F 155 * 050 L L @ 9 ^ ++ | F | 1.5 | 50 | 1.1 | 1 | 10 | 12 | 6 | 8 | 8 | 0.100 | 0.30 | 0.27 | 0.12 | 0.33 | 0.30 | 0.13 |
| CWR29N^225^@F+□ | TAZ F 225 * 050 L □ # @ 0 ^ ++ | TAZ F 225 * 050 L L @ 9 ^ ++ | F | 2.2 | 50 | 0.7 | 2 | 20 | 24 | 6 | 8 | 8 | 0.100 | 0.38 | 0.34 | 0.15 | 0.26 | 0.24 | 0.11 |
| CWR29N^335^@G+□ | TAZ G 335 * 050 L □ # @ 0 ^ ++ | TAZ G 335 * 050 L L @ 9 ^ ++ | G | 3.3 | 50 | 0.5 | 2 | 20 | 24 | 6 | 8 | 8 | 0.125 | 0.50 | 0.45 | 0.20 | 0.25 | 0.23 | 0.10 |
| CWR29N^475^@H+□ | TAZ H 475 * 050 L □ # @ 0 ^ ++ | TAZ H 475 * 050 L L @ 9 ^ ++ | H | 4.7 | 50 | 0.5 | 3 | 30 | 36 | 6 | 8 | 8 | 0.150 | 0.55 | 0.49 | 0.22 | 0.27 | 0.25 | 0.11 |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.



TAZ Series



HRC5000 Medical Grade



The TAZ HRC5000 Medical Grade series is designed for use in medical implantable applications. These are based off of the MIL-PRF-55365 case sizes and feature extremely low DC leakage levels well below typical values.


These components are manufactured and tested in the AVX Biddeford Maine factory which is ISO 13485 certified. Weibull grading and surge current testing options per MIL-PRF-55365 are

available along with several plating options including tin/lead solder, 100% tin, or gold terminations.

To request a specific rating or for more information on HRC5000 testing details please contact the factory.

CASE DIMENSIONS:

millimeters (inches)

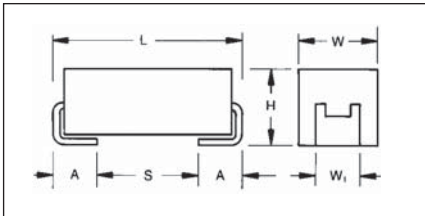

MARKING

(White marking on black body)



Polarity Stripe (+)

**Capacitance Code
Rated Voltage**

| Case Code | Length (L) ±0.38 (0.015) | Width (W) ±0.38 (0.015) | Height (H) ±0.38 (0.015) | Term. Width (W _t) | Term. Length (A) +0.25/-0.13 (+0.010/-0.005) | S min | Typical Weight (g) |
|-----------|-----------------------------|----------------------------|-----------------------------|---|--|--------------|--------------------|
| A | 2.54 (0.100) | 1.27 (0.050) | 1.27 (0.050) | 1.27±0.13 (0.050±0.005) | 0.76 (0.030) | 0.38 (0.015) | 0.016 |
| B | 3.81 (0.150) | 1.27 (0.050) | 1.27 (0.050) | 1.27±0.13 (0.050±0.005) | 0.76 (0.030) | 1.65 (0.065) | 0.025 |
| C | 5.08 (0.200) | 1.27 (0.050) | 1.27 (0.050) | 1.27±0.13 (0.050±0.005) | 0.76 (0.030) | 2.92 (0.115) | 0.035 |
| D | 3.81 (0.150) | 2.54 (0.100) | 1.27 (0.050) | 2.41+0.13/-0.25 (0.095+0.005/-0.010) | 0.76 (0.030) | 1.65 (0.065) | 0.045 |
| E | 5.08 (0.200) | 2.54 (0.100) | 1.27 (0.050) | 2.41+0.13/-0.25 (0.095+0.005/-0.010) | 0.76 (0.030) | 2.92 (0.115) | 0.065 |
| F | 5.59 (0.220) | 3.43 (0.135) | 1.78 (0.070) | 3.30±0.13 (0.130±0.005) | 0.76 (0.030) | 3.43 (0.135) | 0.125 |
| G | 6.73 (0.265) | 2.79 (0.110) | 2.79 (0.110) | 2.67±0.13 (0.105±0.005) | 1.27 (0.050) | 3.56 (0.140) | 0.205 |
| H | 7.24 (0.285) | 3.81 (0.150) | 2.79 (0.110) | 3.68+0.13/-0.51 (0.145+0.005/-0.020) | 1.27 (0.050) | 4.06 (0.160) | 0.335 |

TECHNICAL SPECIFICATIONS

| | | | | | | | | | | |
|-------------------------------------|---|-----|-----|------|------|------|------|------|------|--|
| Technical Data: | Unless otherwise specified, all technical data relate to an ambient temperature of 25°C | | | | | | | | | |
| Capacitance Range: | 0.1 µF to 330 µF | | | | | | | | | |
| Capacitance Tolerance: | ±5%; ±10%; ±20% | | | | | | | | | |
| Rated Voltage: (V _R) | ≤85°C: | 4 | 6 | 10 | 15 | 20 | 25 | 35 | 50 | |
| Category Voltage: (V _C) | 125°C: | 2.7 | 4 | 6.7 | 10 | 13.3 | 16.7 | 23.3 | 33.3 | |
| Surge Voltage: (V _S) | ≤85°C: | 5.3 | 8 | 13.3 | 20 | 26.7 | 33.3 | 46.7 | 66.7 | |
| | 125°C: | 3.5 | 5.3 | 8.7 | 13.3 | 17.8 | 22.2 | 31.1 | 44.5 | |
| Temperature Range: | -55°C to +125°C | | | | | | | | | |



TAZ Series



HRC5000 Medical Grade

CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

| Capacitance | | Rated Voltage | | | | | | | | |
|---------------|------|---------------|---------|-------|-----|-------|-----|-----|-----|-----|
| μF | Code | 4V | 6V | 10V | 12V | 15V | 20V | 25V | 35V | 50V |
| 0.1 | 104 | | | | | | | | | A |
| 0.15 | 154 | | | | | | | | | A |
| 0.22 | 224 | | | | | | | | A | |
| 0.33 | 334 | | | | | | | A | | |
| 0.47 | 474 | | | | | | A | | B | |
| 0.68 | 684 | | | | | A | | | | |
| 1 | 105 | | | A | | A | A/B | B | D | E |
| 1.5 | 155 | | A | A | | B | D | | | |
| 2.2 | 225 | A | A | A/B | | A/B/C | B/D | D/E | | F |
| 3.3 | 335 | | A/B | A/B | | B/D | E | E | F | G |
| 4.7 | 475 | A/B | A | B/D | | B/D/E | D/E | F | | |
| 6 | 605 | | | | | | | | | |
| 6.8 | 685 | A | D | B/D/E | | | D/E | F | | |
| 10 | 106 | D | B/D/E | B/D/E | | D/E/F | E | G | H | |
| 14 | 146 | | | E | | | | | | |
| 15 | 156 | | B/D/F | D/E/F | | E | F/G | H | | |
| 22 | 226 | | F | D/E/F | E | F/G | G/H | | | |
| 33 | 336 | E/F | E | F/G | | F/H | | | | |
| 47 | 476 | E | E/F/G | F/G/H | | G | H | | | |
| 68 | 686 | E/G | E/F/G/H | G | | | | | | |
| 100 | 107 | F | G | H | | H | | | | |
| 150 | 157 | | G | H | | | | | | |
| 220 | 227 | | | H | | | | | | |
| 300 | 307 | | H | | | | | | | |
| 330 | 337 | | H | | | | | | | |

HOW TO ORDER

| | | | | | | | | | | | |
|------------|-----------|--|---|--|----------------------------|--------------------------------------|------------------|---|---------------------|--|---|
| TAZ | E | 106 | * | 010 | C | □ | L | @ | 5 | ^ | ++ |
| Type | Case Size | Capacitance Code | Capacitance Tolerance | Voltage Code | ESR | Packaging | Inspection Level | Reliability Grade | Qualification Level | Termination Finish | Surge Test Option |
| | | pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | J = $\pm 5\%$ K = $\pm 10\%$ M = $\pm 20\%$ | 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 015 = 15Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc | C = Std ESR L = Low ESR | B = Bulk R = 7* T&R W = Waffle | L = Group A | Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. | 5 = HRC5000 | H = Solder Plated 0 = Solder Fused 9 = Gold Plated 7 = 100% Tin | 00 = None 23 = 10 Cycles, +25°C 24 = 10 Cycles, -55°C & +85°C 45 = 10 Cycles, -55°C & +85°C before Weibull |

*Contact factory for AVX HRC5000 Medical Grade SCD details.

Not RoHS Compliant



TAZ Series

HRC5000 Medical Grade



| RATING & PART NUMBER REFERENCE | | Parametric Specifications by Rating | | | | | | | | | Typical Ripple Data by Rating | | | | | | |
|--------------------------------|------|-------------------------------------|------------------|--------------|---------|--------|--------|--------|-------------|-------|-------------------------------|---------------------|---------------------|----------------------|---------------------|---------------------|----------------------|
| | | Cap @ 120Hz | DC Rated Voltage | ESR @ 100kHz | DCL max | | | DF max | | | Power Dissipation | 25°C Ripple Current | 85°C Ripple Current | 125°C Ripple Current | 25°C Ripple Voltage | 85°C Ripple Voltage | 125°C Ripple Voltage |
| | | | | | +25°C | +85°C | +125°C | +25°C | +(85/125)°C | -55°C | | | | | | | |
| AVX P/N | Case | µF @ 25°C | V @ +85°C | Ohms @ +25°C | (µA) | (µA) | (µA) | (%) | (%) | (%) | | | | | | | |
| TAZA225*004L□□@5^++ | A | 2.2 | 4 | 4 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.050 | 0.112 | 0.101 | 0.045 | 0.447 | 0.402 | 0.179 |
| TAZA475*004L□□@5^++ | A | 4.7 | 4 | 6 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.050 | 0.091 | 0.082 | 0.037 | 0.548 | 0.493 | 0.219 |
| TAZB475*004L□□@5^++ | B | 4.7 | 4 | 3.2 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.070 | 0.148 | 0.133 | 0.059 | 0.473 | 0.426 | 0.189 |
| TAZA685*004L□□@5^++ | A | 6.8 | 4 | 6 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.050 | 0.091 | 0.082 | 0.037 | 0.548 | 0.493 | 0.219 |
| TAZD106*004L□□@5^++ | D | 10 | 4 | 1.3 | 0.100 | 1.000 | 1.200 | 8 | 8 | 10 | 0.080 | 0.248 | 0.223 | 0.099 | 0.322 | 0.290 | 0.129 |
| TAZE336*004L□□@5^++ | E | 33 | 4 | 0.9 | 0.330 | 3.300 | 3.960 | 8 | 10 | 12 | 0.090 | 0.316 | 0.285 | 0.126 | 0.285 | 0.256 | 0.114 |
| TAZF336*004L□□@5^++ | F | 33 | 4 | 0.6 | 0.330 | 3.300 | 3.960 | 8 | 10 | 12 | 0.100 | 0.408 | 0.367 | 0.163 | 0.245 | 0.220 | 0.098 |
| TAZE476*004L□□@5^++ | E | 47 | 4 | 0.9 | 0.470 | 4.700 | 5.640 | 8 | 10 | 12 | 0.090 | 0.316 | 0.285 | 0.126 | 0.285 | 0.256 | 0.114 |
| TAZE686*004L□□@5^++ | E | 68 | 4 | 0.9 | 0.680 | 6.800 | 8.160 | 8 | 10 | 12 | 0.090 | 0.316 | 0.285 | 0.126 | 0.285 | 0.256 | 0.114 |
| TAZG686*004L□□@5^++ | G | 68 | 4 | 0.275 | 0.680 | 6.800 | 8.160 | 10 | 12 | 12 | 0.125 | 0.674 | 0.607 | 0.270 | 0.185 | 0.167 | 0.074 |
| TAZF107*004L□□@5^++ | F | 100 | 4 | 0.55 | 1.000 | 10.000 | 12.000 | 10 | 12 | 12 | 0.100 | 0.426 | 0.384 | 0.171 | 0.235 | 0.211 | 0.094 |
| TAZA155*006L□□@5^++ | A | 1.5 | 6 | 4 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.050 | 0.112 | 0.101 | 0.045 | 0.447 | 0.402 | 0.179 |
| TAZA225*006C□□@5^++ | A | 2.2 | 6 | 12 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.050 | 0.065 | 0.058 | 0.026 | 0.775 | 0.697 | 0.310 |
| TAZA335*006L□□@5^++ | A | 3.3 | 6 | 6 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.050 | 0.091 | 0.082 | 0.037 | 0.548 | 0.493 | 0.219 |
| TAZB335*006L□□@5^++ | B | 3.3 | 6 | 3.2 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.070 | 0.148 | 0.133 | 0.059 | 0.473 | 0.426 | 0.189 |
| TAZA475*006L□□@5^++ | A | 4.7 | 6 | 6 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.050 | 0.091 | 0.082 | 0.037 | 0.548 | 0.493 | 0.219 |
| TAZD685*006L□□@5^++ | D | 6.8 | 6 | 1.5 | 0.102 | 1.020 | 1.224 | 6 | 8 | 8 | 0.080 | 0.231 | 0.208 | 0.092 | 0.346 | 0.312 | 0.139 |
| TAZB106*006L□□@5^++ | B | 10 | 6 | 3.2 | 0.150 | 1.500 | 1.800 | 6 | 8 | 8 | 0.070 | 0.148 | 0.133 | 0.059 | 0.473 | 0.426 | 0.189 |
| TAZD106*006C□□@5^++ | D | 10 | 6 | 6 | 0.150 | 1.500 | 1.800 | 6 | 8 | 8 | 0.080 | 0.115 | 0.104 | 0.046 | 0.693 | 0.624 | 0.277 |
| TAZE106*006L□□@5^++ | E | 10 | 6 | 1 | 0.150 | 1.500 | 1.800 | 8 | 10 | 12 | 0.090 | 0.300 | 0.270 | 0.120 | 0.300 | 0.270 | 0.120 |
| TAZB156*006L□□@5^++ | B | 15 | 6 | 3.2 | 0.225 | 2.250 | 2.700 | 8 | 10 | 10 | 0.070 | 0.148 | 0.133 | 0.059 | 0.473 | 0.426 | 0.189 |
| TAZD156*006L□□@5^++ | D | 15 | 6 | 1.7 | 0.225 | 2.250 | 2.700 | 8 | 10 | 12 | 0.080 | 0.217 | 0.195 | 0.087 | 0.369 | 0.332 | 0.148 |
| TAZF156*006C□□@5^++ | F | 15 | 6 | 0.3 | 0.225 | 2.250 | 2.700 | 6 | 8 | 8 | 0.100 | 0.577 | 0.520 | 0.231 | 0.173 | 0.156 | 0.069 |
| TAZF226*006L□□@5^++ | F | 22 | 6 | 0.6 | 0.330 | 3.300 | 3.960 | 8 | 10 | 12 | 0.100 | 0.408 | 0.367 | 0.163 | 0.245 | 0.220 | 0.098 |
| TAZE336*006L□□@5^++ | E | 33 | 6 | 1 | 0.495 | 4.950 | 5.940 | 6 | 8 | 8 | 0.090 | 0.300 | 0.270 | 0.120 | 0.300 | 0.270 | 0.120 |
| TAZE476*006C□□@5^++ | E | 47 | 6 | 5 | 0.705 | 7.050 | 8.460 | 6 | 8 | 8 | 0.090 | 0.134 | 0.121 | 0.054 | 0.671 | 0.604 | 0.268 |
| TAZF476*006L□□@5^++ | F | 47 | 6 | 1 | 0.705 | 7.050 | 8.460 | 8 | 10 | 12 | 0.100 | 0.316 | 0.285 | 0.126 | 0.316 | 0.285 | 0.126 |
| TAZG476*006L□□@5^++ | G | 47 | 6 | 0.275 | 0.705 | 7.050 | 8.460 | 10 | 12 | 12 | 0.125 | 0.674 | 0.607 | 0.270 | 0.185 | 0.167 | 0.074 |
| TAZE686*006C□□@5^++ | E | 68 | 6 | 2 | 1.020 | 10.200 | 12.240 | 10 | 12 | 12 | 0.090 | 0.212 | 0.191 | 0.085 | 0.424 | 0.382 | 0.170 |
| TAZF686*006L□□@5^++ | F | 68 | 6 | 0.4 | 1.020 | 10.200 | 12.240 | 10 | 12 | 12 | 0.100 | 0.500 | 0.450 | 0.200 | 0.200 | 0.180 | 0.080 |
| TAZG686*006L□□@5^++ | G | 68 | 6 | 0.25 | 1.020 | 10.200 | 12.240 | 10 | 12 | 12 | 0.125 | 0.707 | 0.636 | 0.283 | 0.177 | 0.159 | 0.071 |
| TAZH686*006L□□@5^++ | H | 68 | 6 | 0.18 | 1.020 | 10.200 | 12.240 | 10 | 12 | 12 | 0.150 | 0.913 | 0.822 | 0.365 | 0.164 | 0.148 | 0.066 |
| TAZG107*006L□□@5^++ | G | 100 | 6 | 0.275 | 1.500 | 15.000 | 18.000 | 10 | 12 | 12 | 0.125 | 0.674 | 0.607 | 0.270 | 0.185 | 0.167 | 0.074 |
| TAZG157*006L□□@5^++ | G | 150 | 6 | 0.275 | 2.250 | 22.500 | 27.000 | 10 | 12 | 12 | 0.125 | 0.674 | 0.607 | 0.270 | 0.185 | 0.167 | 0.074 |
| TAZH307*006C□□@5^++ | H | 300 | 6 | 0.9 | 4.500 | 45.000 | 54.000 | 15 | 18 | 18 | 0.150 | 0.408 | 0.367 | 0.163 | 0.367 | 0.331 | 0.147 |
| TAZH337*006L□□@5^++ | H | 330 | 6 | 0.18 | 4.950 | 49.500 | 59.400 | 10 | 12 | 12 | 0.150 | 0.913 | 0.822 | 0.365 | 0.164 | 0.148 | 0.066 |
| TAZR334*010C□□@5^++ | R | 0.33 | 10 | 50 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.030 | 0.024 | 0.022 | 0.010 | 1.225 | 1.102 | 0.490 |
| TAZA105*010L□□@5^++ | A | 1 | 10 | 5 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.050 | 0.100 | 0.090 | 0.040 | 0.500 | 0.450 | 0.200 |
| TAZA155*010C□□@5^++ | A | 1.5 | 10 | 12 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.050 | 0.065 | 0.058 | 0.026 | 0.775 | 0.697 | 0.310 |
| TAZA225*010L□□@5^++ | A | 2.2 | 10 | 6 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.050 | 0.091 | 0.082 | 0.037 | 0.548 | 0.493 | 0.219 |
| TAZR225*010L□□@5^++ | B | 2.2 | 10 | 3.2 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.070 | 0.148 | 0.133 | 0.059 | 0.473 | 0.426 | 0.189 |
| TAZA335*010L□□@5^++ | A | 3.3 | 10 | 6 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.050 | 0.091 | 0.082 | 0.037 | 0.548 | 0.493 | 0.219 |
| TAZB335*010C□□@5^++ | B | 3.3 | 10 | 18 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.070 | 0.062 | 0.056 | 0.025 | 1.122 | 1.010 | 0.449 |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.



TAZ Series

HRC5000 Medical Grade



| RATING & PART NUMBER REFERENCE | | Parametric Specifications by Rating | | | | | | | | | Typical Ripple Data by Rating | | | | | | |
|--------------------------------|------|-------------------------------------|------------------|--------------|---------|--------|--------|--------|-------------|-------|-------------------------------|---------------------|---------------------|----------------------|---------------------|---------------------|----------------------|
| | | Cap @ 120Hz | DC Rated Voltage | ESR @ 100kHz | DCL max | | | DF max | | | Power Dissipation | 25°C Ripple Current | 85°C Ripple Current | 125°C Ripple Current | 25°C Ripple Voltage | 85°C Ripple Voltage | 125°C Ripple Voltage |
| | | | | | +25°C | +85°C | +125°C | +25°C | +(85/125)°C | -55°C | | | | | | | |
| AVX P/N | Case | µF @ 25°C | V @ +85°C | Ohms @ +25°C | (µA) | (µA) | (µA) | (%) | (%) | (%) | | | | | | | |
| TAZB475*010L□□@5^++ | B | 4.7 | 10 | 3.2 | 0.200 | 2.000 | 2.400 | 6 | 8 | 8 | 0.070 | 0.148 | 0.133 | 0.059 | 0.473 | 0.426 | 0.189 |
| TAZD475*010L□□@5^++ | D | 4.7 | 10 | 1.5 | 0.200 | 2.000 | 2.400 | 6 | 8 | 8 | 0.080 | 0.231 | 0.208 | 0.092 | 0.346 | 0.312 | 0.139 |
| TAZB685*010L□□@5^++ | B | 6.8 | 10 | 3.2 | 0.170 | 1.700 | 2.040 | 6 | 8 | 8 | 0.070 | 0.148 | 0.133 | 0.059 | 0.473 | 0.426 | 0.189 |
| TAZD685*010L□□@5^++ | D | 6.8 | 10 | 1.7 | 0.170 | 1.700 | 2.040 | 6 | 8 | 8 | 0.080 | 0.217 | 0.195 | 0.087 | 0.369 | 0.332 | 0.148 |
| TAZE685*010L□□@5^++ | E | 6.8 | 10 | 1 | 0.170 | 1.700 | 2.040 | 6 | 8 | 8 | 0.090 | 0.300 | 0.270 | 0.120 | 0.300 | 0.270 | 0.120 |
| TAZB106*010L□□@5^++ | B | 10 | 10 | 3.2 | 0.250 | 2.500 | 3.000 | 8 | 10 | 10 | 0.070 | 0.148 | 0.133 | 0.059 | 0.473 | 0.426 | 0.189 |
| TAZD106*010L□□@5^++ | D | 10 | 10 | 1.3 | 0.250 | 2.500 | 3.000 | 6 | 8 | 8 | 0.080 | 0.248 | 0.223 | 0.099 | 0.322 | 0.290 | 0.129 |
| TAZE106*010L□□@5^++ | E | 10 | 10 | 1 | 0.250 | 2.500 | 3.000 | 6 | 8 | 8 | 0.090 | 0.300 | 0.270 | 0.120 | 0.300 | 0.270 | 0.120 |
| TAZE146*010C□□@5^++ | E | 14 | 10 | 3 | 0.350 | 3.500 | 4.200 | 6 | 8 | 8 | 0.090 | 0.173 | 0.156 | 0.069 | 0.520 | 0.468 | 0.208 |
| TAZD156*010L□□@5^++ | D | 15 | 10 | 1.7 | 0.375 | 3.750 | 4.500 | 6 | 8 | 8 | 0.080 | 0.217 | 0.195 | 0.087 | 0.369 | 0.332 | 0.148 |
| TAZE156*010L□□@5^++ | E | 15 | 10 | 0.9 | 0.375 | 3.750 | 4.500 | 8 | 10 | 10 | 0.090 | 0.316 | 0.285 | 0.126 | 0.285 | 0.256 | 0.114 |
| TAZF156*010L□□@5^++ | F | 15 | 10 | 0.7 | 0.375 | 3.750 | 4.500 | 8 | 8 | 10 | 0.100 | 0.378 | 0.340 | 0.151 | 0.265 | 0.238 | 0.106 |
| TAZD226*010C□□@5^++ | D | 22 | 10 | 8 | 0.550 | 5.500 | 6.600 | 6 | 8 | 8 | 0.080 | 0.100 | 0.090 | 0.040 | 0.800 | 0.720 | 0.320 |
| TAZE226*010L□□@5^++ | E | 22 | 10 | 0.6 | 0.550 | 5.500 | 6.600 | 8 | 10 | 10 | 0.090 | 0.387 | 0.349 | 0.155 | 0.232 | 0.209 | 0.093 |
| TAZF226*010C□□@5^++ | F | 22 | 10 | 3 | 0.550 | 5.500 | 6.600 | 8 | 10 | 10 | 0.100 | 0.183 | 0.164 | 0.073 | 0.548 | 0.493 | 0.219 |
| TAZF336*010L□□@5^++ | F | 33 | 10 | 0.4 | 0.825 | 8.250 | 9.900 | 8 | 10 | 10 | 0.100 | 0.500 | 0.450 | 0.200 | 0.200 | 0.180 | 0.080 |
| TAZG336*010L□□@5^++ | G | 33 | 10 | 0.275 | 0.825 | 8.250 | 9.900 | 10 | 12 | 12 | 0.125 | 0.674 | 0.607 | 0.270 | 0.185 | 0.167 | 0.074 |
| TAZF476*010L□□@5^++ | F | 47 | 10 | 0.4 | 1.175 | 11.750 | 14.100 | 10 | 12 | 12 | 0.100 | 0.500 | 0.450 | 0.200 | 0.200 | 0.180 | 0.080 |
| TAZG476*010L□□@5^++ | G | 47 | 10 | 0.25 | 1.175 | 11.750 | 14.100 | 10 | 12 | 12 | 0.125 | 0.707 | 0.636 | 0.283 | 0.177 | 0.159 | 0.071 |
| TAZH476*010L□□@5^++ | H | 47 | 10 | 0.18 | 1.175 | 11.750 | 14.100 | 10 | 12 | 12 | 0.150 | 0.913 | 0.822 | 0.365 | 0.164 | 0.148 | 0.066 |
| TAZG686*010L□□@5^++ | G | 68 | 10 | 0.275 | 1.700 | 17.000 | 20.400 | 10 | 12 | 12 | 0.125 | 0.674 | 0.607 | 0.270 | 0.185 | 0.167 | 0.074 |
| TAZH107*010L□□@5^++ | H | 100 | 10 | 0.18 | 2.500 | 25.000 | 30.000 | 10 | 12 | 12 | 0.150 | 0.913 | 0.822 | 0.365 | 0.164 | 0.148 | 0.066 |
| TAZH157*010L□□@5^++ | H | 150 | 10 | 0.18 | 3.750 | 37.500 | 45.000 | 10 | 12 | 12 | 0.150 | 0.913 | 0.822 | 0.365 | 0.164 | 0.148 | 0.066 |
| TAZH227*010L□□@5^++ | H | 220 | 10 | 0.18 | 5.500 | 55.000 | 66.000 | 10 | 12 | 12 | 0.150 | 0.913 | 0.822 | 0.365 | 0.164 | 0.148 | 0.066 |
| TAZE226*012C□□@5^++ | E | 22 | 12 | 0.5 | 0.660 | 6.600 | 7.920 | 6 | 8 | 8 | 0.090 | 0.424 | 0.382 | 0.170 | 0.212 | 0.191 | 0.085 |
| TAZA684*015L□□@5^++ | A | 0.68 | 15 | 6 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.050 | 0.091 | 0.082 | 0.037 | 0.548 | 0.493 | 0.219 |
| TAZA105*015L□□@5^++ | A | 1 | 15 | 7.5 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.050 | 0.082 | 0.073 | 0.033 | 0.612 | 0.551 | 0.245 |
| TAZA225*015L□□@5^++ | A | 2.2 | 15 | 7.5 | 0.200 | 2.000 | 2.400 | 6 | 8 | 8 | 0.050 | 0.082 | 0.073 | 0.033 | 0.612 | 0.551 | 0.245 |
| TAZB225*015C□□@5^++ | B | 2.2 | 15 | 5.5 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.070 | 0.113 | 0.102 | 0.045 | 0.620 | 0.558 | 0.248 |
| TAZB335*015L□□@5^++ | B | 3.3 | 15 | 3.6 | 0.290 | 2.900 | 3.480 | 6 | 8 | 8 | 0.070 | 0.139 | 0.125 | 0.056 | 0.502 | 0.452 | 0.201 |
| TAZD335*015L□□@5^++ | D | 3.3 | 15 | 1.7 | 0.124 | 1.238 | 1.485 | 6 | 8 | 8 | 0.080 | 0.217 | 0.195 | 0.087 | 0.369 | 0.332 | 0.148 |
| TAZB475*015L□□@5^++ | B | 4.7 | 15 | 2 | 0.250 | 2.500 | 3.000 | 6 | 8 | 8 | 0.070 | 0.187 | 0.168 | 0.075 | 0.374 | 0.337 | 0.150 |
| TAZD475*015L□□@5^++ | D | 4.7 | 15 | 2 | 0.250 | 2.500 | 3.000 | 6 | 8 | 8 | 0.080 | 0.200 | 0.180 | 0.080 | 0.400 | 0.360 | 0.160 |
| TAZE475*015L□□@5^++ | E | 4.7 | 15 | 1.2 | 0.245 | 2.450 | 2.940 | 6 | 8 | 8 | 0.090 | 0.274 | 0.246 | 0.110 | 0.329 | 0.296 | 0.131 |
| TAZD106*015L□□@5^++ | D | 10 | 15 | 2 | 0.375 | 3.750 | 4.500 | 6 | 8 | 8 | 0.080 | 0.200 | 0.180 | 0.080 | 0.400 | 0.360 | 0.160 |
| TAZE106*015L□□@5^++ | E | 10 | 15 | 1.2 | 0.375 | 3.750 | 4.500 | 6 | 8 | 8 | 0.090 | 0.274 | 0.246 | 0.110 | 0.329 | 0.296 | 0.131 |
| TAZF106*015L□□@5^++ | F | 10 | 15 | 0.667 | 0.375 | 3.750 | 4.500 | 6 | 8 | 8 | 0.100 | 0.387 | 0.348 | 0.155 | 0.258 | 0.232 | 0.103 |
| TAZE156*015L□□@5^++ | E | 15 | 15 | 1.2 | 0.563 | 5.625 | 6.750 | 6 | 8 | 8 | 0.090 | 0.274 | 0.246 | 0.110 | 0.329 | 0.296 | 0.131 |
| TAZF226*015L□□@5^++ | F | 22 | 15 | 0.8 | 0.825 | 8.250 | 9.900 | 8 | 10 | 10 | 0.100 | 0.354 | 0.318 | 0.141 | 0.283 | 0.255 | 0.113 |
| TAZG226*015L□□@5^++ | G | 22 | 15 | 0.275 | 0.825 | 8.250 | 9.900 | 6 | 8 | 8 | 0.125 | 0.674 | 0.607 | 0.270 | 0.185 | 0.167 | 0.074 |
| TAZF336*015L□□@5^++ | F | 33 | 15 | 0.8 | 1.238 | 12.375 | 14.850 | 6 | 8 | 8 | 0.100 | 0.354 | 0.318 | 0.141 | 0.283 | 0.255 | 0.113 |
| TAZH336*015L□□@5^++ | H | 33 | 15 | 0.18 | 1.238 | 12.375 | 14.850 | 8 | 8 | 10 | 0.150 | 0.913 | 0.822 | 0.365 | 0.164 | 0.148 | 0.066 |
| TAZG476*015L□□@5^++ | G | 47 | 15 | 0.275 | 1.763 | 17.625 | 21.150 | 8 | 10 | 10 | 0.125 | 0.674 | 0.607 | 0.270 | 0.185 | 0.167 | 0.074 |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.



TAZ Series

HRC5000 Medical Grade



| RATING & PART NUMBER REFERENCE | | Parametric Specifications by Rating | | | | | | | | | Typical Ripple Data by Rating | | | | | | |
|--------------------------------|------|-------------------------------------|------------------|--------------|---------|--------|--------|--------|-------------|-------|-------------------------------|---------------------|---------------------|----------------------|---------------------|---------------------|----------------------|
| | | Cap @ 120Hz | DC Rated Voltage | ESR @ 100kHz | DCL max | | | DF max | | | Power Dissipation | 25°C Ripple Current | 85°C Ripple Current | 125°C Ripple Current | 25°C Ripple Voltage | 85°C Ripple Voltage | 125°C Ripple Voltage |
| | | | | | +25°C | +85°C | +125°C | +25°C | +(85/125)°C | -55°C | | | | | | | |
| AVX P/N | Case | µF @ 25°C | V @ +85°C | Ohms @ +25°C | (µA) | (µA) | (µA) | (%) | (%) | (%) | | | | | | | |
| TAZH107*015L□L@5^++ | H | 100 | 15 | 0.18 | 3.750 | 37.500 | 45.000 | 10 | 12 | 12 | 0.150 | 0.913 | 0.822 | 0.365 | 0.164 | 0.148 | 0.066 |
| TAZA474*020L□L@5^++ | A | 0.47 | 20 | 7.5 | 0.100 | 1.000 | 1.200 | 8 | 8 | 10 | 0.050 | 0.082 | 0.073 | 0.033 | 0.612 | 0.551 | 0.245 |
| TAZA105*020L□L@5^++ | A | 1 | 20 | 7.5 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.050 | 0.082 | 0.073 | 0.033 | 0.612 | 0.551 | 0.245 |
| TAZB105*020L□L@5^++ | B | 1 | 20 | 4.8 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.070 | 0.121 | 0.109 | 0.048 | 0.580 | 0.522 | 0.232 |
| TAZB155*020L□L@5^++ | B | 1.5 | 20 | 3.6 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.070 | 0.139 | 0.125 | 0.056 | 0.502 | 0.452 | 0.201 |
| TAZB225*020L□L@5^++ | B | 2.2 | 20 | 3.6 | 0.110 | 1.100 | 1.320 | 6 | 8 | 8 | 0.070 | 0.139 | 0.125 | 0.056 | 0.502 | 0.452 | 0.201 |
| TAZD225*020L□L@5^++ | D | 2.2 | 20 | 1.7 | 0.225 | 2.250 | 2.700 | 6 | 8 | 8 | 0.080 | 0.217 | 0.195 | 0.087 | 0.369 | 0.332 | 0.148 |
| TAZE335*020L□L@5^++ | E | 3.3 | 20 | 1.2 | 0.165 | 1.650 | 1.980 | 6 | 8 | 8 | 0.090 | 0.274 | 0.246 | 0.110 | 0.329 | 0.296 | 0.131 |
| TAZD475*020C□L@5^++ | D | 4.7 | 20 | 6 | 0.235 | 2.350 | 2.820 | 6 | 8 | 8 | 0.080 | 0.115 | 0.104 | 0.046 | 0.693 | 0.624 | 0.277 |
| TAZE475*020L□L@5^++ | E | 4.7 | 20 | 1.7 | 0.235 | 2.350 | 2.820 | 6 | 8 | 8 | 0.090 | 0.230 | 0.207 | 0.092 | 0.391 | 0.352 | 0.156 |
| TAZD685*020C□L@5^++ | D | 6.8 | 20 | 4 | 0.450 | 4.500 | 5.400 | 6 | 8 | 8 | 0.080 | 0.141 | 0.127 | 0.057 | 0.566 | 0.509 | 0.226 |
| TAZE685*020L□L@5^++ | E | 6.8 | 20 | 1.5 | 0.450 | 4.500 | 5.400 | 6 | 8 | 8 | 0.090 | 0.245 | 0.220 | 0.098 | 0.367 | 0.331 | 0.147 |
| TAZE106*020L□L@5^++ | E | 10 | 20 | 1.5 | 0.500 | 5.000 | 6.000 | 6 | 8 | 8 | 0.090 | 0.245 | 0.220 | 0.098 | 0.367 | 0.331 | 0.147 |
| TAZF156*020L□L@5^++ | F | 15 | 20 | 0.8 | 0.750 | 7.500 | 9.000 | 6 | 8 | 8 | 0.100 | 0.354 | 0.318 | 0.141 | 0.283 | 0.255 | 0.113 |
| TAZG156*020L□L@5^++ | G | 15 | 20 | 0.275 | 0.750 | 7.500 | 9.000 | 6 | 8 | 8 | 0.125 | 0.674 | 0.607 | 0.270 | 0.185 | 0.167 | 0.074 |
| TAZG226*020L□L@5^++ | G | 22 | 20 | 0.625 | 1.100 | 11.000 | 13.200 | 6 | 8 | 8 | 0.125 | 0.447 | 0.402 | 0.179 | 0.280 | 0.252 | 0.112 |
| TAZH226*020L□L@5^++ | H | 22 | 20 | 0.18 | 1.100 | 11.000 | 13.200 | 6 | 8 | 8 | 0.150 | 0.913 | 0.822 | 0.365 | 0.164 | 0.148 | 0.066 |
| TAZH476*020L□L@5^++ | H | 47 | 20 | 0.18 | 2.350 | 23.500 | 28.200 | 8 | 10 | 10 | 0.150 | 0.913 | 0.822 | 0.365 | 0.164 | 0.148 | 0.066 |
| TAZA334*025L□L@5^++ | A | 0.33 | 25 | 15 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.050 | 0.058 | 0.052 | 0.023 | 0.866 | 0.779 | 0.346 |
| TAZB105*025L□L@5^++ | B | 1 | 25 | 4 | 0.160 | 1.600 | 1.920 | 6 | 8 | 8 | 0.070 | 0.132 | 0.119 | 0.053 | 0.529 | 0.476 | 0.212 |
| TAZD155*025L□L@5^++ | D | 1.5 | 25 | 1.7 | 0.200 | 2.000 | 2.400 | 6 | 8 | 8 | 0.080 | 0.217 | 0.195 | 0.087 | 0.369 | 0.332 | 0.148 |
| TAZD225*025L□L@5^++ | D | 2.2 | 25 | 2 | 0.215 | 2.150 | 2.580 | 6 | 8 | 8 | 0.080 | 0.200 | 0.180 | 0.080 | 0.400 | 0.360 | 0.160 |
| TAZE225*025L□L@5^++ | E | 2.2 | 25 | 1 | 0.230 | 2.300 | 2.760 | 6 | 8 | 8 | 0.090 | 0.300 | 0.270 | 0.120 | 0.300 | 0.270 | 0.120 |
| TAZE335*025L□L@5^++ | E | 3.3 | 25 | 1.2 | 0.245 | 2.450 | 2.940 | 6 | 8 | 8 | 0.090 | 0.274 | 0.246 | 0.110 | 0.329 | 0.296 | 0.131 |
| TAZF475*025L□L@5^++ | F | 4.7 | 25 | 0.7 | 0.294 | 2.938 | 3.525 | 6 | 8 | 8 | 0.100 | 0.378 | 0.340 | 0.151 | 0.265 | 0.238 | 0.106 |
| TAZF685*025L□L@5^++ | F | 6.8 | 25 | 0.8 | 0.425 | 4.250 | 5.100 | 6 | 8 | 8 | 0.100 | 0.354 | 0.318 | 0.141 | 0.283 | 0.255 | 0.113 |
| TAZG106*025L□L@5^++ | G | 10 | 25 | 0.35 | 0.625 | 6.250 | 7.500 | 6 | 8 | 8 | 0.125 | 0.598 | 0.538 | 0.239 | 0.209 | 0.188 | 0.084 |
| TAZH226*025L□L@5^++ | H | 22 | 25 | 0.18 | 1.375 | 13.750 | 16.500 | 6 | 8 | 8 | 0.150 | 0.913 | 0.822 | 0.365 | 0.164 | 0.148 | 0.066 |
| TAZA224*035L□L@5^++ | A | 0.22 | 35 | 12 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.050 | 0.065 | 0.058 | 0.026 | 0.775 | 0.697 | 0.310 |
| TAZB474*035L□L@5^++ | B | 0.47 | 35 | 6.8 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.070 | 0.101 | 0.091 | 0.041 | 0.690 | 0.621 | 0.276 |
| TAZD105*035L□L@5^++ | D | 1 | 35 | 2.2 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.080 | 0.191 | 0.172 | 0.076 | 0.420 | 0.378 | 0.168 |
| TAZF335*035L□L@5^++ | F | 3.3 | 35 | 0.7 | 0.289 | 2.888 | 3.465 | 6 | 8 | 8 | 0.100 | 0.378 | 0.340 | 0.151 | 0.265 | 0.238 | 0.106 |
| TAZH106*035L□L@5^++ | H | 10 | 35 | 0.5 | 0.875 | 8.750 | 10.500 | 8 | 10 | 10 | 0.150 | 0.548 | 0.493 | 0.219 | 0.274 | 0.246 | 0.110 |
| TAZA104*050L□L@5^++ | A | 0.1 | 50 | 12 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.050 | 0.065 | 0.058 | 0.026 | 0.775 | 0.697 | 0.310 |
| TAZA154*050L□L@5^++ | A | 0.15 | 50 | 12 | 0.100 | 1.000 | 1.200 | 6 | 8 | 8 | 0.050 | 0.065 | 0.058 | 0.026 | 0.775 | 0.697 | 0.310 |
| TAZE105*050L□L@5^++ | E | 1 | 50 | 1.7 | 0.125 | 1.250 | 1.500 | 6 | 8 | 8 | 0.090 | 0.230 | 0.207 | 0.092 | 0.391 | 0.352 | 0.156 |
| TAZF225*050L□L@5^++ | F | 2.2 | 50 | 0.7 | 0.275 | 2.750 | 3.300 | 6 | 8 | 8 | 0.100 | 0.378 | 0.340 | 0.151 | 0.265 | 0.238 | 0.106 |
| TAZG335*050L□L@5^++ | G | 3.3 | 50 | 0.5 | 0.413 | 4.125 | 4.950 | 6 | 8 | 8 | 0.125 | 0.500 | 0.450 | 0.200 | 0.250 | 0.225 | 0.100 |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.



TAZ Cots+, CWR09, CWR19, CWR29 and TAZ HRC5000 Series



Tape & Reel Packaging

Solid Tantalum Chip TAZ Tape and reel packaging for automatic component placement.

Please enter required Suffix on order. Bulk packaging is standard.

TAZ TAPING SUFFIX TABLE

| Case Size reference | Tape width mm | P mm | 180mm (7") reel | | 330mm (13") reel | |
|---------------------|---------------|------|-----------------|------|------------------|------|
| | | | Suffix | Qty. | Suffix | Qty. |
| A | 8 | 4 | R | 2500 | S | 9000 |
| R | 8 | 4 | R | 2500 | S | - |
| B | 12 | 4 | R | 2500 | S | 9000 |
| C | 12 | 4 | R | 2500 | S | 9000 |
| D | 12 | 4 | R | 2500 | S | 8000 |
| E | 12 | 4 | R | 2500 | S | 8000 |
| F | 12 | 8 | R | 1000 | S | 3000 |
| G | 12 | 8 | R | 500 | S | 2500 |
| H | 12 | 8 | R | 500 | S | 2500 |
| X | 12 | 8 | R | 500 | S | 2000 |

| Total Tape Thickness – K max | |
|------------------------------|--------------------------|
| TAZ | |
| Case size reference | Millimeters (Inches) DIM |
| A | 2.0 (0.079) |
| R | 2.0 (0.079) |
| B | 4.0 (0.157) |
| D | 4.0 (0.157) |
| E | 4.0 (0.157) |
| F | 4.0 (0.157) |
| G | 4.0 (0.157) |
| H | 4.0 (0.157) |
| X | 4.0 (0.157) |

| Code | 8mm Tape | | 12mm Tape | |
|----------------|----------------------|--------------------------------|----------------------|--------------------------------|
| P* | 4±0.1 or 8±0.1 | (0.157±0.004) (0.315±0.004) | 4±0.1 or 8±0.1 | (0.157±0.004) (0.315±0.004) |
| G | 0.75 min | (0.03 min) | 0.75 min | (0.03 min) |
| F | 3.5±0.04 | (0.138±0.002) | 5.5±0.05 | (0.22±0.002) |
| E | 1.75±0.1 | (0.069±0.004) | 1.75±0.1 | (0.069±0.004) |
| W | 8±0.3 | (0.315±0.012) | 12±0.3 | (0.472±0.012) |
| P ₂ | 2±0.05 | (0.079±0.002) | 2±0.05 | (0.079±0.002) |
| P ₀ | 4±0.1 | (0.157±0.004) | 4±0.1 | (0.157±0.004) |
| D | 1.5±0.1 -0 | (0.059±0.004) (-0) | 1.5±0.1 -0 | (0.059±0.004) (-0) |
| D ₁ | 1.0 min | (0.039 min) | 1.5 min | (0.059 min) |


*See taping suffix tables for actual P dimension (component pitch).

TAPE SPECIFICATION

Tape dimensions comply to EIA RS 481 A. Dimensions A₀ and B₀ of the pocket and the tape thickness, K, are dependent on the component size.

Tape materials do not affect component solderability during storage.

Carrier Tape Thickness <0.4mm

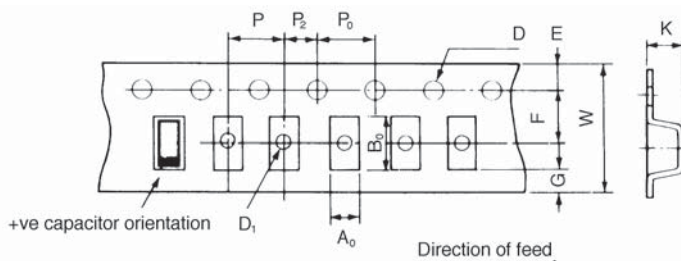

TCP Series



TCP Series Low ESR Tantalum Modules



TCP Series tantalum modules represents the highest packing density for high capacitance / voltage available in surface mount tantalum.

These modules feature stacked assemblies of CWR29 capacitors which provide ultra low ESR and utilize established reliability capacitors (Weibull Grade voltage conditioning) in accordance with MIL-PRF-55365. They can also be supplied with SRC9000 Space Level components.


The stacked construction of fully molded capacitors is compatible with

a wide range of SMT board assembly processes including wave or reflow solder or conductive epoxy.

There are two termination finishes available: hot solder dipped ("C") and gold plated ("B").

The molding compound has been selected to meet the requirements of UL94V-0 and outgassing requirements of NASA SP-R-0022A.

This product is considered to be MSL 3 in accordance with J-STD-020.

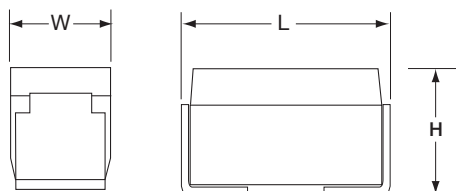

Note: Additional form factors and ratings are available. Contact plant for details.

CAPACITANCE AND RATED VOLTAGE CASE SIZE (ESR IN mΩ)

| Capacitance | | Rated voltage DC (V_R) to 85°C | | | | | | |
|---------------|------|------------------------------------|---------|---------|---------|---------|----------|----------|
| μF | Code | 6V | 10V | 15V | 20V | 25V | 35V | 50V |
| 9.4 | 945 | | | | | | | 2H (200) |
| 18.8 | 196 | | | | | | | 4H (100) |
| 20 | 206 | | | | | | 2H (200) | |
| 28.2 | 286 | | | | | | | 6H (67) |
| 40 | 406 | | | | | | 4H (100) | |
| 60 | 606 | | | | | | 6H (67) | |
| 66 | 666 | | | | | 2H (85) | | |
| 94 | 946 | | | | 2H (75) | | | |
| 132 | 137 | | | | | 4H (43) | | |
| 188 | 197 | | | | 4H (38) | | | |
| 198 | 207 | | | | | 6H (28) | | |
| 200 | 207 | | | 2H (63) | | | | |
| 282 | 287 | | | | 6H (25) | | | |
| 400 | 407 | | | 4H (31) | | | | |
| 440 | 447 | | 2H (50) | | | | | |
| 600 | 607 | | | 6H (21) | | | | |
| 660 | 667 | 2H (50) | | | | | | |
| 880 | 887 | | 4H (25) | | | | | |
| 1,320 | 138 | 4H (25) | 6H (17) | | | | | |
| 1,980 | 208 | 6H (17) | | | | | | |




TCP Series



TCP Series Low ESR Tantalum Modules

DIMENSIONS

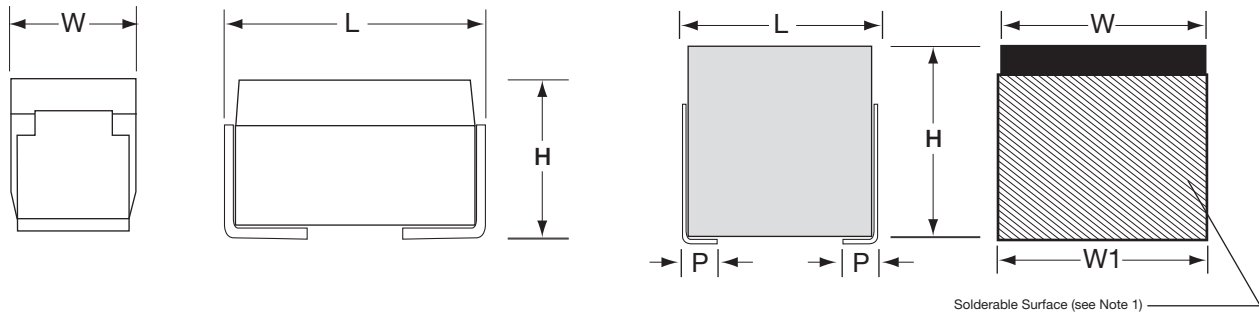

CASE DIMENSIONS:

millimeters (inches)

| Case Code | Length (L) ±0.38 (0.015) | Width (W) ±0.38 (0.015) | Height (H) ±0.38 (0.015) | Term. Width (W ₁) ±0.38 (0.015) | Term. Length (P) For Reference Only |
|-----------|-----------------------------|----------------------------|-----------------------------|--|--|
| 2H | 7.82 (0.308) | 4.06 (0.160) | 6.10 (0.240) | 4.06 (0.160) | 1.52 (0.060) |
| 4H | 7.82 (0.308) | 8.13 (0.320) | 6.10 (0.240) | 8.13 (0.320) | 1.52 (0.060) |
| 6H | 7.82 (0.308) | 8.13 (0.320) | 9.14 (0.360) | 8.13 (0.320) | 1.52 (0.060) |

Additional form factors and ratings are available – contact plant for details.

HOW TO ORDER

| | | | | | | | | | | | |
|-----------|-----------|--|---------------------------------|--|---------------------------|------------------------|--|---|------------------------|--|---|
| TC | 2H | 945 | K | 050 | L | R | # | @ | 0 | ^ | ++ |
| Type | Case Size | Capacitance Code | Capacitance Tolerance | Voltage Code | Standard or Low ESR Range | Packaging | Inspection Level | Reliability Grade | Qualification Level | Termination Finish | Surge Test Option |
| | | pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | M = ±20% K = ±10% J = ±5% | 006 = 6Vdc 010 = 10Vdc 015 = 15Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc | L = Low ESR | B = Bulk R = 7" T&R | S = Std. Conformance L = Group A D = DSCC DWG | Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. Z = Non-ER | 0 = N/A 9 = SRC9000 | 8 = Hot Solder Dipped 9 = Gold Plated | 00 = None 23 = 10 Cycles, +25°C 24 = 10 Cycles, -55°C & +85°C 45 = 10 cycles, -55°C & +85°C before Weibull |

Not RoHS Compliant

TECHNICAL SPECIFICATIONS

| | | | | | | | | |
|-------------------------------------|---|-----|------|------|------|------|------|------|
| Technical Data: | Unless otherwise specified, all technical data relate to an ambient temperature of 25°C | | | | | | | |
| Capacitance Range: | 9.4 μF to 1,980 μF | | | | | | | |
| Capacitance Tolerance: | ±5%; ±10%; ±20% | | | | | | | |
| Rated Voltage: (V _R) | ≤85°C: | 6 | 10 | 15 | 20 | 25 | 35 | 50 |
| Category Voltage: (V _C) | 125°C: | 4 | 6.7 | 10 | 13.3 | 16.7 | 23.3 | 33.3 |
| Surge Voltage: (V _S) | ≤85°C: | 8 | 13.3 | 20 | 26.7 | 33.3 | 46.7 | 66.7 |
| | 125°C: | 5.3 | 8.7 | 13.3 | 17.8 | 22.2 | 31.1 | 44.5 |
| Temperature Range: | -55°C to +125°C | | | | | | | |



TCP Series



TCP Series Low ESR Tantalum Modules

RATINGS & PART NUMBER REFERENCE

| 2-STACK | | Parametric Specifications by Rating | | | | | | | | | | Typical Ripple Data by Rating | | | | | |
|----------|--------------|-------------------------------------|-----------|------------------------------|---------------------|-------|--------|----------------------------|-------------|-------|------------------------------|-------------------------------|--------|------------------------------|-------|--------|------|
| AVX P/N | Case | Cap μF | Volt V | ESR @ 100 kHz +25°C mΩ | DC Leakage (max) μA | | | Dissipation Factor (max) % | | | 100kHz Ripple Current Rating | | | 100kHz Ripple Voltage Rating | | | |
| | | | | | +25°C | +85°C | +125°C | +25°C | +(85/125)°C | -55°C | A | A | A | V | V | V | |
| | | | | | +25°C | +85°C | +125°C | +25°C | +(85/125)°C | -55°C | +25°C | +85°C | +125°C | +25°C | +85°C | +125°C | |
| TC2H 667 | *006L#D^00++ | 2H | 660 | 6 | 50 | 39.6 | 396 | 495 | 10 | 12 | 12 | 2.4 | 2.2 | 1.0 | 0.12 | 0.11 | 0.05 |
| TC2H 447 | *010L#D^00++ | 2H | 440 | 10 | 50 | 44 | 440 | 550 | 10 | 12 | 12 | 2.4 | 2.2 | 1.0 | 0.12 | 0.11 | 0.05 |
| TC2H 207 | *015L#D^00++ | 2H | 200 | 15 | 63 | 30 | 300 | 375 | 10 | 12 | 12 | 2.2 | 2.0 | 0.9 | 0.14 | 0.12 | 0.05 |
| TC2H 946 | *020L#D^00++ | 2H | 94 | 20 | 75 | 18.8 | 188 | 235 | 8 | 10 | 10 | 2.0 | 1.8 | 0.8 | 0.15 | 0.14 | 0.06 |
| TC2H 666 | *025L#D^00++ | 2H | 66 | 25 | 85 | 16.5 | 165 | 206 | 8 | 10 | 10 | 1.9 | 1.7 | 0.8 | 0.16 | 0.14 | 0.06 |
| TC2H 206 | *035L#D^00++ | 2H | 20 | 35 | 200 | 7 | 70 | 88 | 8 | 10 | 10 | 1.2 | 1.1 | 0.5 | 0.24 | 0.22 | 0.10 |
| TC2H 945 | *050L#D^00++ | 2H | 9.4 | 50 | 200 | 4.7 | 47 | 59 | 6 | 8 | 8 | 1.2 | 1.1 | 0.5 | 0.24 | 0.22 | 0.10 |

| 4-STACK | | Parametric Specifications by Rating | | | | | | | | | | Typical Ripple Data by Rating | | | | | |
|----------|--------------|-------------------------------------|-----------|------------------------------|---------------------|-------|--------|----------------------------|-------------|-------|------------------------------|-------------------------------|--------|------------------------------|-------|--------|------|
| AVX P/N | Case | Cap μF | Volt V | ESR @ 100 kHz +25°C mΩ | DC Leakage (max) μA | | | Dissipation Factor (max) % | | | 100kHz Ripple Current Rating | | | 100kHz Ripple Voltage Rating | | | |
| | | | | | +25°C | +85°C | +125°C | +25°C | +(85/125)°C | -55°C | A | A | A | V | V | V | |
| | | | | | +25°C | +85°C | +125°C | +25°C | +(85/125)°C | -55°C | +25°C | +85°C | +125°C | +25°C | +85°C | +125°C | |
| TC4H 138 | *006L#D^00++ | 4H | 1320 | 6 | 25 | 79.2 | 792 | 990 | 10 | 12 | 12 | 4.2 | 3.8 | 1.7 | 0.11 | 0.10 | 0.04 |
| TC4H 887 | *010L#D^00++ | 4H | 880 | 10 | 25 | 88 | 880 | 1100 | 10 | 12 | 12 | 4.2 | 3.8 | 1.7 | 0.11 | 0.10 | 0.04 |
| TC4H 407 | *015L#D^00++ | 4H | 400 | 15 | 31 | 60 | 600 | 750 | 10 | 12 | 12 | 3.8 | 3.4 | 1.5 | 0.12 | 0.11 | 0.05 |
| TC4H 197 | *020L#D^00++ | 4H | 188 | 20 | 38 | 37.6 | 376 | 470 | 8 | 10 | 10 | 3.5 | 3.2 | 1.4 | 0.13 | 0.12 | 0.05 |
| TC4H 137 | *025L#D^00++ | 4H | 132 | 25 | 43 | 33 | 330 | 413 | 8 | 10 | 10 | 3.2 | 2.9 | 1.3 | 0.14 | 0.13 | 0.06 |
| TC4H 406 | *035L#D^00++ | 4H | 40 | 35 | 100 | 14 | 140 | 175 | 8 | 10 | 10 | 2.1 | 1.9 | 0.8 | 0.21 | 0.19 | 0.08 |
| TC4H 196 | *050L#D^00++ | 4H | 18.8 | 50 | 100 | 9.4 | 94 | 118 | 6 | 8 | 8 | 2.1 | 1.9 | 0.8 | 0.21 | 0.19 | 0.08 |

| 6-STACK | | Parametric Specifications by Rating | | | | | | | | | | Typical Ripple Data by Rating | | | | | |
|----------|--------------|-------------------------------------|-----------|------------------------------|---------------------|-------|--------|----------------------------|-------------|-------|------------------------------|-------------------------------|--------|------------------------------|-------|--------|------|
| AVX P/N | Case | Cap μF | Volt V | ESR @ 100 kHz +25°C mΩ | DC Leakage (max) μA | | | Dissipation Factor (max) % | | | 100kHz Ripple Current Rating | | | 100kHz Ripple Voltage Rating | | | |
| | | | | | +25°C | +85°C | +125°C | +25°C | +(85/125)°C | -55°C | A | A | A | V | V | V | |
| | | | | | +25°C | +85°C | +125°C | +25°C | +(85/125)°C | -55°C | +25°C | +85°C | +125°C | +25°C | +85°C | +125°C | |
| TC6H 208 | *006L#D^00++ | 6H | 1980 | 6 | 17 | 118.8 | 1188 | 1485 | 10 | 12 | 12 | 5.9 | 5.3 | 2.4 | 0.10 | 0.09 | 0.04 |
| TC6H 138 | *010L#D^00++ | 6H | 1320 | 10 | 17 | 132 | 1320 | 1650 | 10 | 12 | 12 | 5.9 | 5.3 | 2.4 | 0.10 | 0.09 | 0.04 |
| TC6H 607 | *015L#D^00++ | 6H | 600 | 15 | 21 | 90 | 900 | 1125 | 10 | 12 | 12 | 5.2 | 4.7 | 2.1 | 0.11 | 0.10 | 0.04 |
| TC6H 287 | *020L#D^00++ | 6H | 282 | 20 | 25 | 56.4 | 564 | 705 | 8 | 10 | 10 | 4.8 | 4.3 | 1.9 | 0.12 | 0.11 | 0.05 |
| TC6H 207 | *025L#D^00++ | 6H | 198 | 25 | 28 | 49.5 | 495 | 619 | 8 | 10 | 10 | 4.5 | 4.1 | 1.8 | 0.13 | 0.11 | 0.05 |
| TC6H 606 | *035L#D^00++ | 6H | 60 | 35 | 67 | 21 | 210 | 263 | 8 | 10 | 10 | 2.9 | 2.6 | 1.2 | 0.19 | 0.17 | 0.08 |
| TC6H 286 | *050L#D^00++ | 6H | 28.2 | 50 | 67 | 14.1 | 141 | 176 | 6 | 8 | 8 | 2.9 | 2.6 | 1.2 | 0.19 | 0.17 | 0.08 |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.



TBJ Series



CWR11 - MIL-PRF-55365/8 Established Reliability, COTS-Plus & Space Level




Fully qualified to MIL-PRF-55365/8, the CWR11 is the military version of EIA-535BAAC, with four case sizes designed for maximum packaging efficiency on 8mm & 12mm tape for high volume production (ensuring no TCE mismatch with any substrate). This construction is compatible with a wide range of SMT board assembly processes including wave or reflow solder, conductive epoxy or compression bonding techniques. The part also carries full polarity, capacitance / voltage and JAN brand marking.

For Space Level applications, AVX SRC9000 qualification is recommended (see ratings table for part number availability).

There are four termination finishes available: solder plated, fused solder plated, hot solder dipped and gold plated (these are "H", "K", "C" and "B" termination, respectively, per MIL-PRF-55365).

The molding compound has been selected to meet the requirements of UL94V-0 (Flame Retardancy) and outgassing requirements of NASA SP-R-0022A.

The series is qualified to MIL-PRF-55365 Weibull "B", "C", "D" and "T" levels, with all surge options ("A", "B" & "C") available.

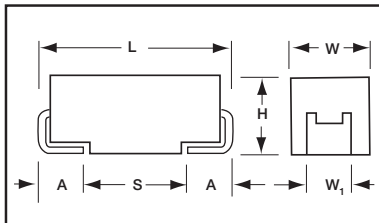

MARKING

(Brown marking on gold body)



Polarity Stripe (+)

"J" for "JAN" Brand
Capacitance Code

Rated Voltage
Manufacturer's ID

CASE DIMENSIONS: millimeters (inches)

| Case Code | EIA Metric | Length (L) | Width (W) | Height (H) | Term. Width (W _t) ±0.10 (±0.004) | Term. Length A ±0.30 (±0.012) | S min |
|-----------|------------|----------------------------|----------------------------|----------------------------|--|-------------------------------|--------------|
| A | 3216-18 | 3.20±0.20 (0.126±0.008) | 1.60±0.20 (0.063±0.008) | 1.60±0.20 (0.063±0.008) | 1.20 (0.047) | 0.80 (0.031) | 1.80 (0.071) |
| B | 3528-21 | 3.50±0.20 (0.138±0.008) | 2.80±0.20 (0.110±0.008) | 1.90±0.20 (0.075±0.008) | 2.20 (0.087) | 0.80 (0.031) | 1.40 (0.055) |
| C | 6032-28 | 6.00±0.30 (0.236±0.012) | 3.20±0.30 (0.126±0.012) | 2.50±0.30 (0.098±0.012) | 2.20 (0.087) | 1.30 (0.051) | 2.90 (0.114) |
| D | 7343-31 | 7.30±0.30 (0.287±0.012) | 4.30±0.30 (0.169±0.012) | 2.80±0.30 (0.110±0.012) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |

CAPACITANCE AND RATED VOLTAGE, V_R (MIL VOLTAGE CODE) RANGE CASE SIZE

| Capacitance | | Rated voltage DC (V _R) to 85°C | | | | | | | |
|-------------|------|--|--------|---------|---------|---------|---------|---------|---------|
| μF | Code | 4V (C) | 6V (D) | 10V (F) | 15V (H) | 20V (J) | 25V (K) | 35V (M) | 50V (N) |
| 0.10 | 104 | | | | | | | A | A |
| 0.15 | 154 | | | | | | | A | B |
| 0.22 | 224 | | | | | | | A | B |
| 0.33 | 334 | | | | | | A | A | B |
| 0.47 | 474 | | | | | A | A | B | C |
| 0.68 | 684 | | | | A | A | B | B | C |
| 1.0 | 105 | | | A | A | A | B | B | C |
| 1.5 | 155 | | A | A | A | B | B | C | D |
| 2.2 | 225 | A | A | A | B | B | C | C | D |
| 3.3 | 335 | | A | B | B | B | C | C | D |
| 4.7 | 475 | A | B | B | B | C | C | D | D |
| 6.8 | 685 | B | B | B | B | C | D | D | |
| 10 | 106 | B | B | | C | | D | | |
| 15 | 156 | B | C | C | | D | D | | |
| 22 | 226 | | C | | D | D | | | |
| 33 | 336 | C | | D | D | | | | |
| 47 | 476 | | D | | | | | | |
| 68 | 686 | D | D | | | | | | |
| 100 | 107 | D | | | | | | | |
| 150 | 157 | | | | | | | | |
| 220 | 227 | | | | | | | | |
| 330 | 337 | | | | | | | | |



TBJ Series



CWR11 - MIL-PRF-55365/8 Established Reliability, COTS-Plus & Space Level

HOW TO ORDER

COTS-PLUS & MIL QPL (CWR11):

| TBJ | D | 686 | * | 006 | C | □ | # | @ | 0 | ^ | ++ |
|-------------|------------------|---|---|---|--|---|---|---|---|--|---|
| Type | Case Size | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Capacitance Tolerance M = ±20% K = ±10% J = ±5% | Voltage Code 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 015 = 15Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc | Standard or Low ESR Range C = Std ESR L = Low ESR | Packaging B = Bulk R = 7" T&R S = 13" T&R W = Waffle See page 7 for additional packaging options. | Inspection Level S = Std. Conformance L = Group A M = MIL (JAN) CWR11 | Reliability Grade Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. Z = Non-ER | Qualification Level 0 = N/A T = T Level 9 = SRC9000 | Termination Finish H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated 7 = Matte Sn (COTS-Plus only) | Surge Test Option 00 = None 23 = 10 Cycles, +25°C 24 = 10 Cycles, -55°C & +85°C 45 = 10 cycles, -55°C & +85°C before Weibull |

Not RoHS Compliant



CWR11 P/N CROSS REFERENCE:

| CWR11 | D | ^ | 686 | * | @ | + | □ |
|-------------|---|--|---|---|--|--|--|
| Type | Voltage Code C = 4Vdc D = 6Vdc F = 10Vdc H = 15Vdc J = 20Vdc K = 25Vdc M = 35Vdc N = 50Vdc | Termination Finish H = Solder Plated K = Solder Fused C = Hot Solder Dipped B = Gold Plated | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Capacitance Tolerance M = ±20% K = ±10% J = ±5% | Reliability Grade Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. T = T Level A = Non-ER | Surge Test Option A = 10 cycles, +25°C B = 10 cycles, -55°C & +85°C C = 10 cycles, -55°C & +85°C before Weibull If blank, None required | Packaging Bulk = Standard TR = 7" T&R TR13 = 13" T&R W = Waffle See page 7 for additional packaging options. |

Not RoHS Compliant

SPACE LEVEL OPTIONS TO SRC9000*:

| TBJ | D | 686 | * | 006 | C | □ | L | @ | 9 | ^ | ++ |
|-------------|------------------|---|---|---|--|---|--|---|---|---|--|
| Type | Case Size | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Capacitance Tolerance M = ±20% K = ±10% J = ±5% | Voltage Code 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 015 = 15Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc | Standard or Low ESR Range C = Std ESR L = Low ESR | Packaging B = Bulk R = 7" T&R S = 13" T&R W = Waffle See page 7 for additional packaging options. | Inspection Level L = Group A | Reliability Grade Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. | Qualification Level 9 = SRC9000 | Termination Finish H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated | Surge Test Option 45 = 10 cycles, -55°C & +85°C before Weibull |

Not RoHS Compliant

*Contact factory for AVX SRC9000 Space Level SCD details.

TECHNICAL SPECIFICATIONS

| | | | | | | | | | | |
|-------------------------------------|---|-----|-----|------|------|------|------|------|------|--|
| Technical Data: | Unless otherwise specified, all technical data relate to an ambient temperature of 25°C | | | | | | | | | |
| Capacitance Range: | 0.1 µF to 100 µF | | | | | | | | | |
| Capacitance Tolerance: | ±5%; ±10%; ±20% | | | | | | | | | |
| Rated Voltage: (V _R) | ≤85°C: | 4 | 6 | 10 | 16 | 20 | 25 | 35 | 50 | |
| Category Voltage: (V _C) | 125°C: | 2.7 | 4 | 6.7 | 10 | 13.3 | 16.7 | 23.3 | 33.3 | |
| Surge Voltage: (V _S) | ≤85°C: | 5.3 | 8 | 13.3 | 20 | 26.7 | 33.3 | 46.7 | 66.7 | |
| | 125°C: | 3.5 | 5.3 | 8.7 | 13.3 | 17.8 | 22.2 | 31.1 | 44.5 | |
| Temperature Range: | -55°C to +125°C | | | | | | | | | |



TBJ Series



CWR11 - MIL-PRF-55365/8 Established Reliability, COTS-Plus & Space Level

| RATING & PART NUMBER REFERENCE | | | | Parametric Specifications by Rating per MIL-PRF-55365/8 | | | | | | | | | Typical Ripple Data by Rating | | | | | | |
|--------------------------------|--------------------------------|--------------------------------|---|---|-------------------------------------|------------------------------------|---------------|---------------|----------------|--------------|--------------------|--------------|-------------------------------|---------------------------------|---------------------------------|----------------------------------|---------------------------------|---------------------------------|----------------------------------|
| | | | | Cap @ 120Hz µF @ 25°C | DC Rated Voltage V @ +85°C | ESR @ 100kHz Ohms @ +25°C | DCL max | | | DF Max | | | Power Dissipation W | 25°C Ripple A (100kHz) | 85°C Ripple A (100kHz) | 125°C Ripple A (100kHz) | 25°C Ripple V (100kHz) | 85°C Ripple V (100kHz) | 125°C Ripple V (100kHz) |
| | | | | | | | +25°C (µA) | +85°C (µA) | +125°C (µA) | +25°C (%) | +(85/125)°C (%) | -55°C (%) | | | | | | | |
| CWR11K^106^@+□ | TBJ D 106 * 025 C □ # @ 0 ^ ++ | TBJ D 106 * 025 C □ L @ 9 ^ ++ | D | 10 | 25 | 1.2 | 2.5 | 25 | 30 | 6 | 8 | 9 | 0.150 | 0.35 | 0.32 | 0.14 | 0.42 | 0.38 | 0.17 |
| CWR11K^156^@+□ | TBJ D 156 * 025 C □ # @ 0 ^ ++ | TBJ D 156 * 025 C □ L @ 9 ^ ++ | D | 15 | 25 | 1 | 3.8 | 38 | 45.6 | 6 | 9 | 9 | 0.150 | 0.39 | 0.35 | 0.15 | 0.39 | 0.35 | 0.15 |
| CWR11M^104^@+□ | TBJ A 104 * 035 C □ # @ 0 ^ ++ | TBJ A 104 * 035 C □ L @ 9 ^ ++ | A | 0.1 | 35 | 24 | 0.5 | 5 | 6 | 4 | 6 | 6 | 0.075 | 0.06 | 0.05 | 0.02 | 1.34 | 1.21 | 0.54 |
| CWR11M^154^@+□ | TBJ A 154 * 035 C □ # @ 0 ^ ++ | TBJ A 154 * 035 C □ L @ 9 ^ ++ | A | 0.15 | 35 | 21 | 0.5 | 5 | 6 | 4 | 6 | 6 | 0.075 | 0.06 | 0.05 | 0.02 | 1.25 | 1.13 | 0.50 |
| CWR11M^224^@+□ | TBJ A 224 * 035 C □ # @ 0 ^ ++ | TBJ A 224 * 035 C □ L @ 9 ^ ++ | A | 0.22 | 35 | 18 | 0.5 | 5 | 6 | 4 | 6 | 6 | 0.075 | 0.06 | 0.06 | 0.03 | 1.16 | 1.05 | 0.46 |
| CWR11M^334^@+□ | TBJ A 334 * 035 C □ # @ 0 ^ ++ | TBJ A 334 * 035 C □ L @ 9 ^ ++ | A | 0.33 | 35 | 15 | 0.5 | 5 | 6 | 4 | 6 | 6 | 0.075 | 0.07 | 0.06 | 0.03 | 1.06 | 0.95 | 0.42 |
| CWR11M^474^@+□ | TBJ B 474 * 035 C □ # @ 0 ^ ++ | TBJ B 474 * 035 C □ L @ 9 ^ ++ | B | 0.47 | 35 | 10 | 0.5 | 5 | 6 | 4 | 6 | 6 | 0.085 | 0.09 | 0.08 | 0.04 | 0.92 | 0.83 | 0.37 |
| CWR11M^684^@+□ | TBJ B 684 * 035 C □ # @ 0 ^ ++ | TBJ B 684 * 035 C □ L @ 9 ^ ++ | B | 0.68 | 35 | 8 | 0.5 | 5 | 6 | 4 | 6 | 6 | 0.085 | 0.10 | 0.09 | 0.04 | 0.82 | 0.74 | 0.33 |
| CWR11M^105^@+□ | TBJ B 105 * 035 C □ # @ 0 ^ ++ | TBJ B 105 * 035 C □ L @ 9 ^ ++ | B | 1 | 35 | 6.5 | 0.5 | 5 | 6 | 4 | 6 | 6 | 0.085 | 0.11 | 0.10 | 0.05 | 0.74 | 0.67 | 0.30 |
| CWR11M^155^@+□ | TBJ C 155 * 035 C □ # @ 0 ^ ++ | TBJ C 155 * 035 C □ L @ 9 ^ ++ | C | 1.5 | 35 | 4.5 | 0.5 | 5 | 6 | 6 | 8 | 9 | 0.110 | 0.16 | 0.14 | 0.06 | 0.70 | 0.63 | 0.28 |
| CWR11M^225^@+□ | TBJ C 225 * 035 C □ # @ 0 ^ ++ | TBJ C 225 * 035 C □ L @ 9 ^ ++ | C | 2.2 | 35 | 3.5 | 0.8 | 8 | 9.6 | 6 | 8 | 9 | 0.110 | 0.18 | 0.16 | 0.07 | 0.62 | 0.56 | 0.25 |
| CWR11M^335^@+□ | TBJ C 335 * 035 C □ # @ 0 ^ ++ | TBJ C 335 * 035 C □ L @ 9 ^ ++ | C | 3.3 | 35 | 2.5 | 1.2 | 12 | 14.4 | 6 | 8 | 9 | 0.110 | 0.21 | 0.19 | 0.08 | 0.52 | 0.47 | 0.21 |
| CWR11M^475^@+□ | TBJ D 475 * 035 C □ # @ 0 ^ ++ | TBJ D 475 * 035 C □ L @ 9 ^ ++ | D | 4.7 | 35 | 1.5 | 1.7 | 17 | 20.4 | 6 | 8 | 9 | 0.150 | 0.32 | 0.28 | 0.13 | 0.47 | 0.43 | 0.19 |
| CWR11M^685^@+□ | TBJ D 685 * 035 C □ # @ 0 ^ ++ | TBJ D 685 * 035 C □ L @ 9 ^ ++ | D | 6.8 | 35 | 1.3 | 2.4 | 24 | 28.8 | 6 | 9 | 9 | 0.150 | 0.34 | 0.31 | 0.14 | 0.44 | 0.40 | 0.18 |
| CWR11N^104^@+□ | TBJ A 104 * 050 C □ # @ 0 ^ ++ | TBJ A 104 * 050 C □ L @ 9 ^ ++ | A | 0.1 | 50 | 22 | 0.5 | 5 | 12 | 6 | 8 | 8 | 0.075 | 0.06 | 0.05 | 0.02 | 1.28 | 1.16 | 0.51 |
| CWR11N^154^@+□ | TBJ B 154 * 050 C □ # @ 0 ^ ++ | TBJ B 154 * 050 C □ L @ 9 ^ ++ | B | 0.15 | 50 | 17 | 0.5 | 5 | 6 | 4 | 6 | 6 | 0.085 | 0.07 | 0.06 | 0.03 | 1.20 | 1.08 | 0.48 |
| CWR11N^224^@+□ | TBJ B 224 * 050 C □ # @ 0 ^ ++ | TBJ B 224 * 050 C □ L @ 9 ^ ++ | B | 0.22 | 50 | 14 | 0.5 | 5 | 6 | 4 | 6 | 6 | 0.085 | 0.08 | 0.07 | 0.03 | 1.09 | 0.98 | 0.44 |
| CWR11N^334^@+□ | TBJ B 334 * 050 C □ # @ 0 ^ ++ | TBJ B 334 * 050 C □ L @ 9 ^ ++ | B | 0.33 | 50 | 12 | 0.5 | 5 | 6 | 4 | 6 | 6 | 0.085 | 0.08 | 0.08 | 0.03 | 1.01 | 0.91 | 0.40 |
| CWR11N^474^@+□ | TBJ C 474 * 050 C □ # @ 0 ^ ++ | TBJ C 474 * 050 C □ L @ 9 ^ ++ | C | 0.47 | 50 | 8 | 0.5 | 5 | 6 | 4 | 6 | 6 | 0.110 | 0.12 | 0.11 | 0.05 | 0.94 | 0.84 | 0.38 |
| CWR11N^684^@+□ | TBJ C 684 * 050 C □ # @ 0 ^ ++ | TBJ C 684 * 050 C □ L @ 9 ^ ++ | C | 0.68 | 50 | 7 | 0.5 | 5 | 6 | 4 | 6 | 6 | 0.110 | 0.13 | 0.11 | 0.05 | 0.88 | 0.79 | 0.35 |
| CWR11N^105^@+□ | TBJ C 105 * 050 C □ # @ 0 ^ ++ | TBJ C 105 * 050 C □ L @ 9 ^ ++ | C | 1 | 50 | 6 | 0.5 | 5 | 6 | 4 | 6 | 6 | 0.110 | 0.14 | 0.12 | 0.05 | 0.81 | 0.73 | 0.32 |
| CWR11N^155^@+□ | TBJ D 155 * 050 C □ # @ 0 ^ ++ | TBJ D 155 * 050 C □ L @ 9 ^ ++ | D | 1.5 | 50 | 4 | 0.8 | 8 | 9.6 | 6 | 8 | 9 | 0.150 | 0.19 | 0.17 | 0.08 | 0.77 | 0.70 | 0.31 |
| CWR11N^225^@+□ | TBJ D 225 * 050 C □ # @ 0 ^ ++ | TBJ D 225 * 050 C □ L @ 9 ^ ++ | D | 2.2 | 50 | 2.5 | 1.1 | 11 | 13.2 | 6 | 8 | 9 | 0.150 | 0.24 | 0.22 | 0.10 | 0.61 | 0.55 | 0.24 |
| CWR11N^335^@+□ | TBJ D 335 * 050 C □ # @ 0 ^ ++ | TBJ D 335 * 050 C □ L @ 9 ^ ++ | D | 3.3 | 50 | 2 | 1.7 | 17 | 20.4 | 6 | 9 | 9 | 0.150 | 0.27 | 0.25 | 0.11 | 0.55 | 0.49 | 0.22 |
| CWR11N^475^@+□ | TBJ D 475 * 050 C □ # @ 0 ^ ++ | TBJ D 475 * 050 C □ L @ 9 ^ ++ | D | 4.7 | 50 | 1.5 | 2.4 | 24 | 28.8 | 6 | 9 | 9 | 0.150 | 0.32 | 0.28 | 0.13 | 0.47 | 0.43 | 0.19 |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.


NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.



TBJ Series



COTS-Plus



The TBJ COTS-Plus series, based on the CWR11 form factor, is a high reliability series encompassing the current range of EIA Low ESR ratings. These ratings are available with Weibull grading (B and C), surge current testing (A, B, C) per MIL-PRF-55365 Rev. G, and optional Group A from MIL-PRF-55365.

For Space Level applications, AVX SRC 9000 qualification is recommended. Please refer to the TBJ COTS-Plus SRC9000 Datasheet for part number availability.

There are five termination finishes available: solder plated, fused solder plated, hot solder dipped, 100% Tin and gold plated (these correspond to "H", "K", "C", "7" and "B" termination, respectively). The molding compound has been selected to meet the requirements of UL94V-0 (Flame Retardancy) and outgassing requirements of NASA SP-R-0022A.

The TBJ "E" and "V" case size components are considered to be MSL 3 in accordance with J-STD-020.

CASE DIMENSIONS: millimeters (inches)

| Code | EIA Code | EIA Metric | L±0.20 (0.008) | W+0.20 (0.008) -0.10 (0.004) | H+0.20 (0.008) -0.10 (0.004) | W ₁ ±0.20 (0.008) | A+0.30 (0.012) -0.20 (0.008) | S Min. |
|------|----------|------------|----------------|---------------------------------|---------------------------------|------------------------------|---------------------------------|--------------|
| A | 1206 | 3216-18 | 3.20 (0.126) | 1.60 (0.063) | 1.60 (0.063) | 1.20 (0.047) | 0.80 (0.031) | 1.10 (0.043) |
| B | 1210 | 3528-21 | 3.50 (0.138) | 2.80 (0.110) | 1.90 (0.075) | 2.20 (0.087) | 0.80 (0.031) | 1.40 (0.055) |
| C | 2312 | 6032-28 | 6.00 (0.236) | 3.20 (0.126) | 2.60 (0.102) | 2.20 (0.087) | 1.30 (0.051) | 2.90 (0.114) |
| D | 2917 | 7343-31 | 7.30 (0.287) | 4.30 (0.169) | 2.90 (0.114) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |
| E | 2917 | 7343-43 | 7.30 (0.287) | 4.30 (0.169) | 4.10 (0.162) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |
| U | 2924 | 7361-43 | 7.30 (0.287) | 6.10 (0.240) | 4.10 (0.162) | 3.10 (0.120) | 1.30 (0.051) | 4.40 (0.173) |

W₁ dimension applies to the termination width for A dimensional area only.

HOW TO ORDER

AVX PART NUMBER:

| | | | | | | | | | | | |
|------------|-----------|---|-----------------------|--|----------------------------|---|--|---|---------------------|---|---|
| TBJ | D | 227 | * | 035 | C | B | S | Z | 0 | 0 | 00 |
| Type | Case Size | Capacitance Code | Capacitance Tolerance | Voltage Code | ESR | Packaging | Inspection Level | Reliability Grade | Qualification Level | Termination Finish | Surge Test Option |
| | | pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | K = ±10% M = ±20% | 006 = 6.3Vdc 010 = 10Vdc 016 = 16Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc | C = Std ESR L = Low ESR | B = Bulk R = 7* T&R S = 13* T&R W = Waffle | S = Std. Conformance L = Group A | Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. Z = Non-ER | 0 = N/A | H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated 7 = Matte Sn (COTS-Plus only) | 00 = None 23 = 10 Cycles, +25°C 24 = 10 Cycles, -55°C & +85°C 45 = 10 cycles, -55°C & +85°C before Weibull |

Not RoHS Compliant



TECHNICAL SPECIFICATIONS

| | | | | | | | | | | |
|-------------------------------------|---|-----|-----|---|----|----|----|----|----|----|
| Technical Data: | Unless otherwise specified, all technical data relate to an ambient temperature of 25°C | | | | | | | | | |
| Capacitance Range: | 0.10 µF to 1500 µF | | | | | | | | | |
| Capacitance Tolerance: | ±10%; ±20% | | | | | | | | | |
| Rated Voltage: (V _R) | ≤85°C: | 2 | 4 | 6 | 10 | 16 | 20 | 25 | 35 | 50 |
| Category Voltage: (V _C) | 125°C: | 1.4 | 2.7 | 4 | 7 | 10 | 13 | 17 | 23 | 33 |
| Surge Voltage: (V _S) | ≤85°C: | 2.6 | 5.2 | 8 | 13 | 20 | 26 | 32 | 46 | 65 |
| | 125°C: | 1.7 | 3.4 | 5 | 8 | 13 | 16 | 20 | 28 | 40 |
| Temperature Range: | -55°C to +125°C | | | | | | | | | |



TBJ Series



COTS-Plus

| Capacitance | | Rated Voltage DC (V _R) to 85°C | | | | | | | | | |
|-------------|------|--|------------------------------------|--|---|----------|---|--|--|---|----------------------------|
| µF | Code | 2V | 4V | 6V | 10V | 15V | 16V | 20V | 25V | 35V | 50V |
| 0.10 | 104 | | | | | | | | | A(24000) | A(22000) |
| 0.15 | 154 | | | | | | | | | A(21000) | A(9000, 21000) B(17000) |
| 0.22 | 224 | | | | | | | | | A(6000, 18000) | A(7000, 18000) B(14000) |
| 0.33 | 334 | | | | | | | | | A(6000, 15000) | B(12000) |
| 0.47 | 474 | | | | | | | A(14000) | A(7000, 14000) | A(6000, 12000) B(4000, 10000) | C(8000) |
| 0.68 | 684 | | | | | A(12000) | A(12000) | A(12000) | A(6000, 10000) B(7500) | A(6000, 8000) B(8000) | A(7900) C(7000) |
| 1.0 | 105 | | | | A(10000) | A(10000) | A(10000) | A(3000, 10000) | A(8000) B(6500) | A(3000, 7500) B(2000, 6500) | C(2500, 6000) |
| 1.5 | 155 | | | A(8000) | A(8000) | A(8000) | | A(6500) B(6000) | A(3000, 7500) B(1800, 6500) | A(7500) B(2500, 5200) C(4500) | C(1500, 5000) D(4000) |
| 2.2 | 225 | | A(8000) | A(8000) | A(1800, 8000) | B(5500) | A(1800, 5500) B(5000) | A(3000, 5300) B(5000) | A(7000) B(900, 4500) C(3500) | A(1500, 4500) B(2000, 4200) C(1000, 3500) | D(1200, 2500) |
| 3.3 | 335 | | | A(8000) | A(5500) B(5500) | B(5000) | A(3500, 5000) B(4500) | A(2500) B(1300, 4000) | A(1000, 1500) B(750, 3500) C(3500) | B(1000, 3500) C(700, 2500) | D(800, 2000) |
| 4.7 | 475 | | A(8000) | A(6000) B(5500) | A(1400, 5000) B(4500) | B(4000) | A(2000, 4000) B(800, 3100) | A(1800, 4000) B(750, 3000) C(3000) | A(2800) B(1500, 2800) C(2500) | B(700, 3100) C(600, 2200) D(500, 1500) | D(300, 1500) |
| 6.8 | 685 | | A(6500) B(5500) | A(1800, 5000) B(4500) | A(1800, 4000) B(3500) | | A(1500, 2500) B(60, 2500) C(2500) | A(1000) B(600, 2500) C(700, 2400) | B(700, 2800) C(500, 2000) D(1400) | C(350, 1800) D(500, 1300) | D(500, 1000) |
| 10 | 106 | | A(6000) B(4000) | A(1500, 4000) B(3500) | A(1800, 3000) B(2500) C(2500) | C(2500) | A(1000, 3000) B(500, 2800) C(500, 2500) | B(1000, 2100) C(500, 1900) | C(500, 1800) D(1200) | C(600, 1600) D(300, 1000) E(200, 250) | E(400, 500) V(650) |
| 15 | 156 | | A(4000) B(3500) | A(1500, 3500) B(3500) C(3000) | A(1000, 3200) B(450, 2800) C(2500) | | B(800, 2500) C(1800) | B(500, 2000) C(400, 1700) D(1100) | C(220, 300) D(300, 1000) | C(350, 1400) D(300, 900) | D(600) E(250, 600) |
| 22 | 226 | | A(3500) | A(500, 3000) B(375, 2500) C(2200) | B(700, 2400) C(300, 1000) | D(1100) | B(600, 2300) C(375, 1600) D(1100) | B(400, 600) C(150, 1600) D(200, 900) | C(275, 1400) D(200, 900) | D(400, 900) E(300, 900) | V(390, 600) |
| 33 | 336 | | A(3000) B(2800) C(2200) | A(600) B(600, 2200) C(1800) | A(700, 1700) B(250, 1800) C(150, 1600) D(1100) | D(900) | B(350) C(300, 1500) D(200, 900) | C(300, 1500) D(100, 900) | D(100, 900) E(300, 900) | D(300, 900) E(100, 250) V(200) | |
| 47 | 476 | | A(500) B(2400) | A(800) B(250, 350) C(300, 1600) D(1100) | B(250, 350) C(200, 1200) D(100, 900) | | C(350, 1500) D(150, 900) | D(100, 200) E(70, 250) | D(250, 900) E(80, 100) | E(200, 250) V(200, 400) | |
| 68 | 686 | | C(1600) D(1100) | B(250, 1800) C(150, 1600) D(900) | B(600) C(80, 1200) D(100, 900) | | C(125, 200) D(70, 900) | D(70, 900) E(150, 900) | E(125, 200) V(95) | V(150, 200) | |
| 100 | 107 | | A(1400) B(200, 1600) C(1300) | B(250, 400) C(150, 900) D(900) | B(400) C(200, 1200) D(100, 900) E(125) | | D(125, 900) E(100, 900) | D(85, 100) E(100, 150) V(85, 200) | V(100) | | |
| 150 | 157 | B(150) | B(250) C(70, 80) | C(50, 90) D(50, 900) | D(150, 900) E(100) | | D(150, 900) E(100, 300) V(45, 75) | E(300) V(80) | | | |
| 220 | 227 | B(150, 200) D(45) | D(40, 900) | C(70, 1200) D(100, 900) E(100) | D(150, 900) E(100, 900) | | E(100, 150) V(75, 150) | | | | |
| 330 | 337 | | C(100) D(35, 45) E(900) | D(45, 50) E(100, 900) V(100) | D(150, 900) E(60, 900) V(60, 100) | | | | | | |
| 470 | 477 | D(35) | D(45, 100) E(35) | D(45, 60) E(50, 900) V(55, 100) | E(50, 900) V(60, 100) | | | | | | |
| 680 | 687 | D(35, 50) E(35, 50) | D(45, 60) E(40, 60) | E(45, 60) V(35, 40) | | | | | | | |
| 1000 | 108 | E(30, 40) | E(60) V(25, 35) | V(40, 50) | | | | | | | |
| 1500 | 158 | D(100) E(60) V(30, 40) | E(50, 75) V(50, 75) | | | | | | | | |

Available Ratings: ESR limits quoted in brackets (mOhms)

Notes: Voltage ratings are minimum values. AVX reserves the right to supply higher ratings in the same case size, to the same reliability standards.



TBJ Series

COTS-Plus



| RATING & PART NUMBER REFERENCE | | Parametric Specifications by Rating per MIL-PRF-55365/4 | | | | | | | | | Typical Power Dissipation Data by Rating | | | | | | |
|--------------------------------|---|---|-------------------------------|------------------------------|---------------|--------------------------|----------------|--------------|------------------------------|--------------|--|--------------------------------------|--------------------------------------|---------------------------------------|--------------------------------------|--------------------------------------|---------------------------------------|
| | | Cap @ 120Hz µF @ 25°C | DC Rated Voltage V @ +85°C | ESR @ 100kHz Ohms @ +25°C | +25°C (µA) | DCL max +85°C (µA) | +125°C (µA) | +25°C (%) | DF Max +(85/125)°C (%) | -55°C (%) | Power Dissipation W | 25°C Ripple Current A (100kHz) | 85°C Ripple Current A (100kHz) | 125°C Ripple Current A (100kHz) | 25°C Ripple Voltage V (100kHz) | 85°C Ripple Voltage V (100kHz) | 125°C Ripple Voltage V (100kHz) |
| TBJD225*050C□#@0^++ | D | 2.2 | 50 | 2.5 | 1.1 | 11 | 13.2 | 6 | 8 | 9 | 0.150 | 0.245 | 0.220 | 0.098 | 0.612 | 0.551 | 0.245 |
| TBJD225*050L□#@0^++ | D | 2.2 | 50 | 1.2 | 1.1 | 11 | 22 | 6 | 9 | 10 | 0.150 | 0.354 | 0.318 | 0.141 | 0.424 | 0.382 | 0.170 |
| TBJD335*050C□#@0^++ | D | 3.3 | 50 | 2 | 1.65 | 16.5 | 19.8 | 6 | 9 | 9 | 0.150 | 0.274 | 0.246 | 0.110 | 0.548 | 0.493 | 0.219 |
| TBJD335*050L□#@0^++ | D | 3.3 | 50 | 0.8 | 1.65 | 16.5 | 33 | 6 | 9 | 10 | 0.150 | 0.433 | 0.390 | 0.173 | 0.346 | 0.312 | 0.139 |
| TBJD475*050C□#@0^++ | D | 4.7 | 50 | 1.5 | 2.35 | 23.5 | 28.2 | 6 | 9 | 9 | 0.150 | 0.316 | 0.285 | 0.126 | 0.474 | 0.427 | 0.190 |
| TBJD475*050L□#@0^++ | D | 4.7 | 50 | 0.3 | 2.35 | 23.5 | 47 | 6 | 9 | 9 | 0.150 | 0.707 | 0.636 | 0.283 | 0.212 | 0.191 | 0.085 |
| TBJD685*050C□#@0^++ | D | 6.8 | 50 | 1 | 3.4 | 34 | 68 | 6 | 9 | 9 | 0.150 | 0.387 | 0.349 | 0.155 | 0.387 | 0.349 | 0.155 |
| TBJD685*050L□#@0^++ | D | 6.8 | 50 | 0.5 | 3.4 | 34 | 68 | 6 | 9 | 9 | 0.150 | 0.548 | 0.493 | 0.219 | 0.274 | 0.246 | 0.110 |
| TBJE106*050C□#@0^++ | E | 10 | 50 | 0.5 | 5 | 50 | 100 | 6 | 9 | 10 | 0.165 | 0.574 | 0.517 | 0.230 | 0.287 | 0.259 | 0.115 |
| TBJE106*050L□#@0^++ | E | 10 | 50 | 0.4 | 5 | 50 | 100 | 6 | 9 | 10 | 0.165 | 0.642 | 0.578 | 0.257 | 0.257 | 0.231 | 0.103 |
| TBJV106*050C□#@0^++ | V | 10 | 50 | 0.65 | 5 | 50 | 100 | 3 | | | 0.250 | 0.620 | 0.558 | 0.248 | 0.403 | 0.363 | 0.161 |
| TBJD156*050C□#@0^++ | D | 15 | 50 | 0.6 | 7.5 | 75 | 150 | 4 | 6 | 6 | 0.150 | 0.500 | 0.450 | 0.200 | 0.300 | 0.270 | 0.120 |
| TBJE156*050C□#@0^++ | E | 15 | 50 | 0.6 | 7.5 | 75 | 150 | 8 | 10 | 12 | 0.165 | 0.524 | 0.472 | 0.210 | 0.315 | 0.283 | 0.126 |
| TBJE156*050L□#@0^++ | E | 15 | 50 | 0.25 | 7.5 | 75 | 150 | 6 | 9 | 10 | 0.165 | 0.812 | 0.731 | 0.325 | 0.203 | 0.183 | 0.081 |
| TBJV226*050C□#@0^++ | V | 22 | 50 | 0.6 | 11 | 110 | 220 | 8 | 10 | 12 | 0.250 | 0.645 | 0.581 | 0.258 | 0.387 | 0.349 | 0.155 |
| TBJV226*050L□#@0^++ | V | 22 | 50 | 0.39 | 11 | 110 | 220 | 8 | 10 | 12 | 0.250 | 0.801 | 0.721 | 0.320 | 0.312 | 0.281 | 0.125 |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.



TBJ Series



COTS-Plus – SRC9000 Space Level



The TBJ COTS-Plus –SRC9000 series has been refined to incorporate only those commercially up-screened ratings which have been deemed suitable for mission critical and space level applications.

These capacitors have a more conservative design approach when compared to other up-screened components utilizing established CV powders and higher dielectric formation ratios. The DCL is typically 25% lower while still offering aggressive ESR values.

Currently there are 5 case sizes available with a 6th in development to expand the maximum capacitance available in a given voltage range.


These ratings are available with Weibull grading (B and C), surge current testing MIL-PRF-55365 Rev. G (A, B, C), optional Group A from MIL-PRF-55365, and the extensive SRC9000 space level screening.

The TBJ “E” and “U” case size components are considered to be MSL 3 in accordance with J-STD-020.

CASE DIMENSIONS: millimeters (inches)

| Code | EIA Code | EIA Metric | L±0.20 (0.008) | W+0.20 (0.008) -0.10 (0.004) | H+0.20 (0.008) -0.10 (0.004) | W ₁ ±0.20 (0.008) | A+0.30 (0.012) -0.20 (0.008) | S Min. |
|------|----------|------------|----------------|------------------------------|------------------------------|------------------------------|------------------------------|--------------|
| A | 1206 | 3216-18 | 3.20 (0.126) | 1.60 (0.063) | 1.60 (0.063) | 1.20 (0.047) | 0.80 (0.031) | 1.10 (0.043) |
| B | 1210 | 3528-21 | 3.50 (0.138) | 2.80 (0.110) | 1.90 (0.075) | 2.20 (0.087) | 0.80 (0.031) | 1.40 (0.055) |
| C | 2312 | 6032-28 | 6.00 (0.236) | 3.20 (0.126) | 2.60 (0.102) | 2.20 (0.087) | 1.30 (0.051) | 2.90 (0.114) |
| D | 2917 | 7343-31 | 7.30 (0.287) | 4.30 (0.169) | 2.90 (0.114) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |
| E | 2917 | 7343-43 | 7.30 (0.287) | 4.30 (0.169) | 4.10 (0.162) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |
| U | 2924 | 7361-43 | 7.30 (0.287) | 6.10 (0.240) | 4.10 (0.162) | 3.10 (0.120) | 1.30 (0.051) | 4.40 (0.173) |

W₁ dimension applies to the termination width for A dimensional area only.



| Capacitance | | Rated Voltage DC (V _r) to 85°C | | | | | | |
|-------------|------|--|---|---|--|--------------------------------|--|--------------------------------|
| μF | Code | 6.3V (J) | 10V (A) | 16V (C) | 20V (D) | 25V (E) | 35V (V) | 50V (T) |
| 0.1 | 104 | | | | | | A(20000) | |
| 0.15 | 154 | | | | | | A(6000, 16470) | |
| 0.22 | 224 | | | | | | A(6000, 13710) | A(7000, 7500) |
| 0.33 | 334 | | | | | | A(6000, 11280) | A(7000) |
| 0.47 | 474 | | | | | A(7000, 9530) | A(4000, 9530) | B(5000) |
| 0.68 | 684 | | | | | A(6000, 7980) | A(6000, 8000) | B(2000, 4000) |
| 1.0 | 105 | | | A(10000) | A(3000, 6630) | A(3000, 6630) | A(3000, 6630) B(2000, 3400) | B(2000, 3400) C(3000) |
| 1.5 | 155 | | A(7000) | | A(3000, 5640) | A(3000, 5640) B(5000) | A(2000, 3100) B(2500, 5460) | C(1500, 2500) |
| 2.2 | 225 | | A(7000) | A(3500, 4550) | A(3000, 4550) | A(1600, 2900) B(1200, 4550) | B(2000, 4550) | C(1000, 1700) D(1200, 2000) |
| 3.3 | 335 | | | A(3500, 3750) B(4500) | A(2500, 3750) B(1300, 3740) | B(2000, 3740) | B(1000, 3740) C(800, 1840) D(2000) | C(1000, 1400) D(800, 1100) |
| 4.7 | 475 | | A(2000, 2900) | A(2000, 3160) B(1500, 3160) | A(1800, 2500) B(1000, 3160) | B(1000, 3160) | B(1500, 2200) C(600, 1410) D(1500) | D(600, 900) |
| 6.8 | 685 | | A(1800, 4000) B(3000) | A(1500, 2000) B(1200, 2650) C(2500) | B(1000, 2650) C(2000) | B(1000, 1500) C(600, 1070) | C(600, 1070) D(1300) | D(700) |
| 10 | 106 | A(1500, 2000) B(3000) | A(1800, 2200) B(800, 2200) | B(800, 2200) C(2000) | B(1000, 2200) C(500, 800) | C(600, 800) D(1200) | C(600, 800) D(250, 800) | E(300, 700) |
| 15 | 156 | A(1500, 2030) B(700, 2030) | A(1000, 1800) B(600, 2030) C(2000) | B(800, 2000) | B(500, 1400) C(400, 750) D(1100) | C(500, 720) D(300, 720) | D(225, 720) | U |
| 22 | 226 | A(900, 1700) B(600, 1880) C(2000) | B(700, 1800) | B(600, 1100) C(350, 700) D(1100) | C(400, 650) D(150, 650) | D(300, 650) | D(200, 650) | |
| 33 | 336 | B(600, 1740) C(1800) | B(650, 1000) C(300, 590) D(1100) | C(300, 590) | C(300, 590) D(250, 590) | D(400, 590) | E(250, 590) | |
| 47 | 476 | B(500, 1620) C(250, 540) | C(300, 540) D(400) | C(350, 540) D(200, 340) | D(200, 540) | D(250, 540) E(150, 540) | U(200,400) | |
| 68 | 686 | C(200, 490) | C(300, 490) | D(150, 490) | D(200, 490) E(125, 490) | U | | |
| 100 | 107 | C(300, 440) | C(200, 500) D(150, 440) E(100, 440) | D(150, 450) E(150, 450) | E(150, 300) | | | |
| 150 | 157 | C(300, 500) D(150, 400) | D(150, 400) E(150, 400) | E(150, 300) | U | | | |
| 220 | 227 | D(150, 360) | D(500) E(150, 360) | U(200,500) | | | | |
| 330 | 337 | D(400) E(150, 330) | E(100, 300) U | | | | | |
| 470 | 477 | E(200, 250) | | | | | | |
| 1000 | 108 | | | | | | | |

Available Ratings: ESR limits quoted in brackets (mOhms)

Engineering samples - please contact manufacturer

*Codes under development - subject to change.

Notes: Voltage ratings are minimum values. AVX reserves the right to supply higher ratings in the same case size, to the same reliability standards.



TBJ Series

COTS-Plus – SRC9000 Space Level

HOW TO ORDER

AVX PART NUMBER:

| | | | | | | | | | | | |
|-------------|------------------|--|------------------------------|--|----------------------------|--|--|---|-------------------------------|---|---|
| TBJ | D | 227 | * | 035 | R | B | S | Z | 0 | 0 | 00 |
| Type | Case Size | Capacitance Code | Capacitance Tolerance | Voltage Code | ESR | Packaging | Inspection Level | Reliability Grade | Qualification Level | Termination Finish | Surge Test Option |
| | | pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | M = ±20% K = ±10% | 006 = 6.3Vdc 010 = 10Vdc 016 = 16Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc | R = Std ESR J = Low ESR | B = Bulk R = 7" T&R S = 13" T&R W = Waffle* | S = Std. Conformance L = Group A | Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. Z = Non-ER | 0 = N/A 9 = SRC9000 | H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated 7 = Matte Sn (COTS-Plus only) | 00 = None 23 = 10 Cycles, +25°C 24 = 10 Cycles, -55°C & +85°C 45 = 10 cycles, -55°C & +85°C before Weibull |

*Waffle packaging not available for the TBJ U case

Not RoHS Compliant



SPACE LEVEL OPTIONS TO SRC9000*:

| | | | | | | | | | | | |
|-------------|------------------|--|------------------------------|---------------------|----------------------------|--|-------------------------|----------------------------------|----------------------------|--|--|
| TBJ | D | 227 | * | 035 | R | B | L | C | 9 | 0 | 45 |
| Type | Case Size | Capacitance Code | Capacitance Tolerance | Voltage Code | ESR | Packaging | Inspection Level | Reliability Grade | Qualification Level | Termination Finish | Surge Test Option |
| | | pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | M = ±20% K = ±10% | | R = Std ESR J = Low ESR | B = Bulk R = 7" T&R S = 13" T&R W = Waffle* See page 7 for additional packaging options. | L = Group A | C = 0.01%/1000 hrs. 90% conf. | 9 = SRC9000 | H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated | 45 = 10 cycles, -55°C & +85°C before Weibull |

*Waffle packaging not available for the TBJ U case

*Contact factory for AVX SRC9000 Space Level SCD details.

Not RoHS Compliant



TECHNICAL SPECIFICATIONS

| | | | | | | | | | | |
|-------------------------------------|---|-----|-----|----|----|----|----|----|----|--|
| Technical Data: | All technical data relate to an ambient temperature of 25°C | | | | | | | | | |
| Capacitance Range: | 0.15 µF to 470 µF | | | | | | | | | |
| Capacitance Tolerance: | ±10%; ±20% | | | | | | | | | |
| Leakage Current DCL: | 0.0075CV | | | | | | | | | |
| Rated Voltage: (V _R) | ≤85°C: | 4 | 6.3 | 10 | 16 | 20 | 25 | 35 | 50 | |
| Category Voltage: (V _C) | 125°C: | 2.7 | 4 | 7 | 10 | 13 | 17 | 23 | 33 | |
| Surge Voltage: (V _S) | ≤85°C: | 5.2 | 8 | 13 | 20 | 26 | 32 | 46 | 65 | |
| | 125°C: | 3.4 | 5 | 8 | 13 | 16 | 20 | 28 | 40 | |
| Temperature Range: | -55°C to +125°C | | | | | | | | | |

DSCC Dwgs 07016 & 95158



COTS-Plus

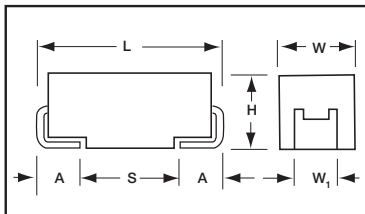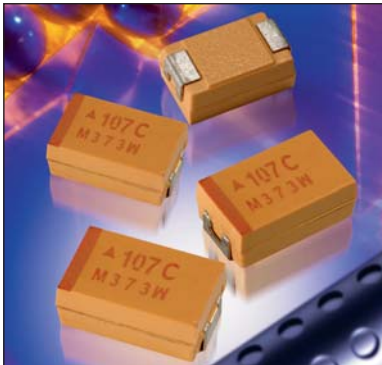

MARKING

(Brown marking on gold body)



Polarity Stripe (+)
Capacitance Code
Rated Voltage
Manufacturer's ID
Lot Number

The DSCC 07016 & 95158 families, based on the CWR11 form factor, are high reliability series encompassing the current range of EIA Low ESR ratings. DSCC 07016 has the widest range of case sizes, capacitance / voltage ratings, and is offered with Weibull Grade "B" and "C" reliability with all MIL-PRF-55365 Rev. G surge test options ("A", "B" & "C").

For Space Level applications, AVX SRC9000 qualification is recommend. Please refer to the TBJ COTS-Plus SRC9000 datasheet for part number availability.

There are four termination finishes available: solder plated, fused solder plated, hot solder dipped and gold plated (these correspond to "H", "K", "C" and "B" termination, respectively, per MIL-PRF-55365).

The molding compound has been selected to meet the requirements of UL94V-0 (Flame Retardancy) and outgassing requirements of NASA SP-R-0022A.

The "E" and "V" case size components are considered to be MSL 3 in accordance with J-STD-020.

CASE DIMENSIONS: millimeters (inches)

| Code | EIA Code | EIA Metric | L±0.20 (0.008) | W+0.20 (0.008) -0.10 (0.004) | H+0.20 (0.008) -0.10 (0.004) | W ₁ ±0.20 (0.008) | A+0.30 (0.012) -0.20 (0.008) | S Min. |
|------|----------|------------|----------------|------------------------------|------------------------------|------------------------------|------------------------------|--------------|
| A | 1206 | 3216-18 | 3.20 (0.126) | 1.60 (0.063) | 1.60 (0.063) | 1.20 (0.047) | 0.80 (0.031) | 1.10 (0.043) |
| B | 1210 | 3528-21 | 3.50 (0.138) | 2.80 (0.110) | 1.90 (0.075) | 2.20 (0.087) | 0.80 (0.031) | 1.40 (0.055) |
| C | 2312 | 6032-28 | 6.00 (0.236) | 3.20 (0.126) | 2.60 (0.102) | 2.20 (0.087) | 1.30 (0.051) | 2.90 (0.114) |
| D | 2917 | 7343-31 | 7.30 (0.287) | 4.30 (0.169) | 2.90 (0.114) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |
| E | 2917 | 7343-43 | 7.30 (0.287) | 4.30 (0.169) | 4.10 (0.162) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |
| V | 2924 | 7361-38 | 7.30 (0.287) | 6.10 (0.240) | 3.55 (0.140) | 3.10 (0.120) | 1.30 (0.051) | 4.40 (0.173) |

W₁ dimension applies to the termination width for A dimensional area only.

CAPACITANCE AND RATED VOLTAGE, V_R (EIA VOLTAGE CODE) RANGE LETTER DENOTES CASE SIZE (ESR LIMITS IN PARENTHESES)

| Capacitance | | Rated Voltage DC (V _R) to 85°C | | | | | | | |
|-------------|------|--|-------------------------|-------------------------------|--------------------------|-------------------------|---------------------------------|------------------------------|-----------------|
| μF | Code | 4V (G) | 6V (J) | 10V (A) | 16V (C) | 20V (D) | 25V (E) | 35V (V) | 50V (T) |
| 0.15 | 154 | | | | | | | | A(15000) |
| 0.22 | 224 | | | | | | | | A(18000) |
| 0.47 | 474 | | | | | | | A(12000) | A(9500)/B(9500) |
| 0.68 | 684 | | | | | | A(10000) | A(8000) | A(7900) |
| 1.0 | 105 | | | | | | A(8000) | A(7500) | A(6600)/B(7000) |
| 1.5 | 155 | | | | | A(6500) | A(3000,7500) | A(7500)/B(5200) | C(2000)/D(1500) |
| 2.2 | 225 | | | | A(5500) | A(3000) | A(7000)/B(2000) | B(2000) | D(1200) |
| 3.3 | 335 | | A(8000) | | A(3500,5000) | | B(2000) | B(1000) | D(800) |
| 4.7 | 475 | | A(6000) | A(5000) | A(2000) | A(1800,4000) B(1000) | A(3100) B(700,1500) | B(1500) C(600)/D(450) | D(300) |
| 6.8 | 685 | | A(5000) | A(4000) | A(1500)/B(1200) | B(1000) | B(700,2800) C(700) | C(350)/D(400) E(300) | D(300,600) |
| 10 | 106 | | A(4000) | A(1800,3000) | A(3000)/B(900) | B(500,1000) C(700) | C(300,500) | C(1600)/D(125,300) E(250) | |
| 15 | 156 | | A(3500) | A(1000,3200) B(600) | B(500,800) | B(500)/C(450) D(275) | D(275)/E(200) | C(450)/D(100,300) E(225) | |
| 22 | 226 | | A(3000)/B(600) | B(500,700) C(300) | B(500,600) C(150,375) | B(600)/C(400) D(275) | C(275,400) D(100,200)/E(225) | D(125,400) E(125,300) | |
| 33 | 336 | A(3000) | B(600) | A(700)/B(425,650) C(500) | C(100,300) D(250) | C(300) D(100,200) | D(90,300) E(100,175) | D(200,300) E(300) | |
| 47 | 476 | | C(300) | C(200,350) D(200) | C(110,350) D(80,200) | D(100,200) E(150) | D(175,250) | E(250)/V(200) | |
| 68 | 686 | A(1500) | B(500)/C(200) D(175) | C(80,300) D(150)/E(150) | D(150) | D(70,200) E(150,200) | V(95) | | |
| 100 | 107 | A(1400) B(900) | C(75,150) | C(75,200) D(50,100)/E(100) | D(50,125) E(125) | V(60) | | | |
| 150 | 157 | | D(125)/E(125) | D(50,100)/E(100) | D(60,150)/V(45) | | | | |
| 220 | 227 | | D(100,125) E(100) | D(50,150) E(50,100) | V(50) | | | | |
| 330 | 337 | | E(50,150) | D(50,150) E(50,100)/V(40) | | | | | |
| 470 | 477 | | E(50,200)/V(40) | E(50,200)/V(40) | | | | | |
| 1000 | 108 | E(200) | | | | | | | |

NOTE: EIA standards for Low ESR solid tantalum capacitors allow an ESR movement of 1.25 times initial limit post mounting.




DSCC Dwgs 07016 & 95158



COTS-Plus

HOW TO ORDER

DSCC DWG P/N:

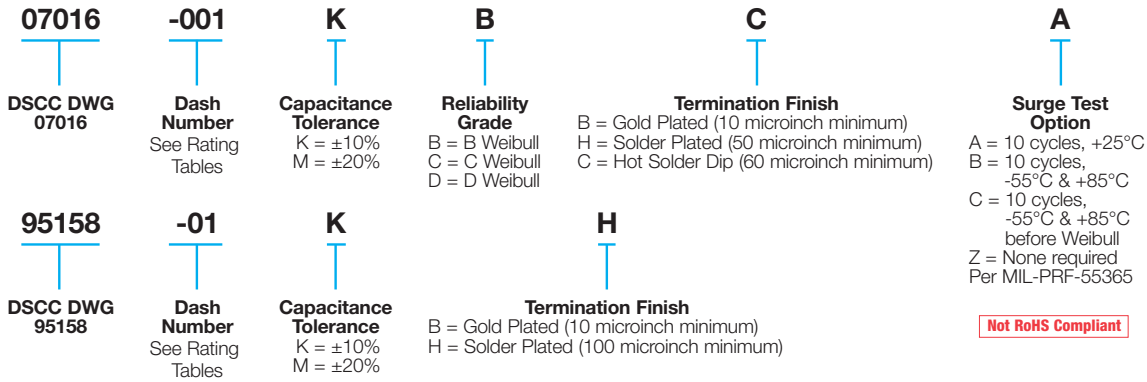

TECHNICAL SPECIFICATIONS

| | | | | | | | | | | |
|-------------------------------------|---|-----|---|----|----|----|----|----|----|--|
| Technical Data: | Unless otherwise specified, all technical data relate to an ambient temperature of 25°C | | | | | | | | | |
| Capacitance Range: | 0.15 µF to 1000 µF | | | | | | | | | |
| Capacitance Tolerance: | ±5%; ±10%; ±20% | | | | | | | | | |
| Rated Voltage: (V _R) | ≤85°C: | 4 | 6 | 10 | 16 | 20 | 25 | 35 | 50 | |
| Category Voltage: (V _C) | 125°C: | 2.7 | 4 | 7 | 10 | 13 | 17 | 23 | 33 | |
| Surge Voltage: (V _S) | ≤85°C: | 5.2 | 8 | 13 | 20 | 26 | 32 | 46 | 65 | |
| | 125°C: | 3.4 | 5 | 8 | 12 | 16 | 20 | 28 | 40 | |
| Temperature Range: | -55°C to +125°C | | | | | | | | | |



DSCC Dwgs 07016 & 95158



COTS-Plus

| RATING & PART NUMBER REFERENCE | | Parametric Specifications by Rating per DSCC 95158 or 07016 where applicable | | | | | | | | | Typical Ripple Data by Rating | | | | | | | |
|--------------------------------|---------|--|-------------------------------|-------------------------------|---------------|---------------|----------------|--------------|--------------------|--------------|-------------------------------|---------------------------|---------------------------|----------------------------|---------------------------|---------------------------|----------------------------|------|
| | | Cap @ 120Hz µF @ 25°C | DC Rated Voltage V @ +85°C | ESR @ 100kHz mOhms @ +25°C | DCL max | | | DF Max | | | Power Dissipation W | 25°C Ripple A (100kHz) | 85°C Ripple A (100kHz) | 125°C Ripple A (100kHz) | 25°C Ripple V (100kHz) | 85°C Ripple V (100kHz) | 125°C Ripple V (100kHz) | |
| | | | | | +25°C (µA) | +85°C (µA) | +125°C (µA) | +25°C (%) | +(85/125)°C (%) | -55°C (%) | | | | | | | | |
| DSCC P/N | Case | | | | | | | | | | | | | | | | | |
| 95158 20 | * @ ^ + | E | 6.8 | 35 | 300 | 1.9 | 11.4 | 19 | 4 | 6 | 6 | 0.165 | 0.74 | 0.67 | 0.30 | 0.22 | 0.20 | 0.09 |
| 07016 144 | * @ ^ + | C | 10 | 35 | 1600 | 3.5 | 35 | 42 | 6 | 9 | 9 | 0.110 | 0.26 | 0.24 | 0.10 | 0.42 | 0.38 | 0.17 |
| 95158 27 | * @ ^ + | D | 10 | 35 | 300 | 3.5 | 35 | 42 | 4 | 6 | 6 | 0.150 | 0.71 | 0.64 | 0.28 | 0.21 | 0.19 | 0.08 |
| 07016 145 | * @ ^ + | D | 10 | 35 | 125 | 3.5 | 35 | 42 | 6 | 9 | 9 | 0.150 | 1.10 | 0.99 | 0.44 | 0.14 | 0.12 | 0.05 |
| 95158 21 | * @ ^ + | E | 10 | 35 | 250 | 2.8 | 16.8 | 28 | 4 | 6 | 6 | 0.165 | 0.81 | 0.73 | 0.32 | 0.20 | 0.18 | 0.08 |
| 07016 146 | * @ ^ + | C | 15 | 35 | 450 | 5.3 | 53 | 64 | 6 | 9 | 9 | 0.110 | 0.49 | 0.44 | 0.20 | 0.22 | 0.20 | 0.09 |
| 07016 147 | * @ ^ + | D | 15 | 35 | 300 | 5.3 | 53 | 64 | 6 | 9 | 9 | 0.150 | 0.71 | 0.64 | 0.28 | 0.21 | 0.19 | 0.08 |
| 07016 148 | * @ ^ + | D | 15 | 35 | 100 | 5.3 | 53 | 64 | 6 | 9 | 9 | 0.150 | 1.22 | 1.10 | 0.49 | 0.12 | 0.11 | 0.05 |
| 95158 22 | * @ ^ + | E | 15 | 35 | 225 | 5.3 | 53 | 65.6 | 6 | 9 | 9 | 0.165 | 0.86 | 0.77 | 0.34 | 0.19 | 0.17 | 0.08 |
| 07016 149 | * @ ^ + | D | 22 | 35 | 400 | 7.7 | 77 | 92 | 6 | 9 | 9 | 0.150 | 0.61 | 0.55 | 0.24 | 0.24 | 0.22 | 0.10 |
| 07016 150 | * @ ^ + | D | 22 | 35 | 125 | 7.7 | 77 | 92 | 6 | 9 | 9 | 0.150 | 1.10 | 0.99 | 0.44 | 0.14 | 0.12 | 0.05 |
| 95158 23 | * @ ^ + | E | 22 | 35 | 300 | 7.7 | 77 | 96.3 | 6 | 9 | 9 | 0.165 | 0.74 | 0.67 | 0.30 | 0.22 | 0.20 | 0.09 |
| 07016 151 | * @ ^ + | E | 22 | 35 | 125 | 7.7 | 77 | 92 | 6 | 9 | 9 | 0.165 | 1.15 | 1.03 | 0.46 | 0.14 | 0.13 | 0.06 |
| 07016 152 | M @ ^ + | D | 33 | 35 | 300 | 11.6 | 116 | 139 | 6 | 9 | 9 | 0.150 | 0.71 | 0.64 | 0.28 | 0.21 | 0.19 | 0.08 |
| 07016 153 | M @ ^ + | D | 33 | 35 | 200 | 11.6 | 116 | 139 | 6 | 9 | 9 | 0.150 | 0.87 | 0.78 | 0.35 | 0.17 | 0.16 | 0.07 |
| 07016 154 | M @ ^ + | E | 33 | 35 | 300 | 11.6 | 116 | 139 | 6 | 9 | 9 | 0.165 | 0.74 | 0.67 | 0.30 | 0.22 | 0.20 | 0.09 |
| 07016 155 | M @ ^ + | E | 47 | 35 | 250 | 16.5 | 165 | 197 | 6 | 9 | 9 | 0.165 | 0.81 | 0.73 | 0.32 | 0.20 | 0.18 | 0.08 |
| 07016 156 | M @ ^ + | V | 47 | 35 | 200 | 16.5 | 165 | 197 | 6 | 9 | 9 | 0.250 | 1.12 | 1.01 | 0.45 | 0.22 | 0.20 | 0.09 |
| 07016 157 | M @ ^ + | A | 0.15 | 50 | 15000 | 0.5 | 5 | 6 | 4 | 6 | 6 | 0.075 | 0.07 | 0.06 | 0.03 | 1.06 | 0.95 | 0.42 |
| 07016 158 | M @ ^ + | A | 0.22 | 50 | 18000 | 0.5 | 5 | 6 | 4 | 6 | 6 | 0.075 | 0.06 | 0.06 | 0.03 | 1.16 | 1.05 | 0.46 |
| 07016 159 | * @ ^ + | A | 0.47 | 50 | 9500 | 0.5 | 5 | 6 | 4 | 6 | 6 | 0.075 | 0.09 | 0.08 | 0.04 | 0.84 | 0.76 | 0.34 |
| 07016 160 | * @ ^ + | B | 0.47 | 50 | 9500 | 0.5 | 5 | 6 | 4 | 6 | 6 | 0.085 | 0.09 | 0.09 | 0.04 | 0.90 | 0.81 | 0.36 |
| 07016 161 | * @ ^ + | A | 0.68 | 50 | 7900 | 0.5 | 5 | 6 | 4 | 6 | 6 | 0.075 | 0.10 | 0.09 | 0.04 | 0.77 | 0.69 | 0.31 |
| 07016 162 | M @ ^ + | A | 1.0 | 50 | 6600 | 0.5 | 5 | 6 | 4 | 6 | 6 | 0.075 | 0.11 | 0.10 | 0.04 | 0.70 | 0.63 | 0.28 |
| 07016 163 | * @ ^ + | B | 1.0 | 50 | 7000 | 0.5 | 5 | 6 | 4 | 6 | 6 | 0.085 | 0.11 | 0.10 | 0.04 | 0.77 | 0.69 | 0.31 |
| 07016 164 | * @ ^ + | C | 1.5 | 50 | 2000 | 0.8 | 8 | 10 | 6 | 8 | 9 | 0.110 | 0.23 | 0.21 | 0.09 | 0.47 | 0.42 | 0.19 |
| 07016 165 | * @ ^ + | D | 1.5 | 50 | 1500 | 0.8 | 8 | 10 | 6 | 8 | 9 | 0.150 | 0.32 | 0.28 | 0.13 | 0.47 | 0.43 | 0.19 |
| 07016 166 | * @ ^ + | D | 2.2 | 50 | 1200 | 1.1 | 11 | 13 | 6 | 8 | 9 | 0.150 | 0.35 | 0.32 | 0.14 | 0.42 | 0.38 | 0.17 |
| 07016 167 | * @ ^ + | D | 3.3 | 50 | 800 | 1.7 | 17 | 20 | 6 | 9 | 9 | 0.150 | 0.43 | 0.39 | 0.17 | 0.35 | 0.31 | 0.14 |
| 07016 168 | * @ ^ + | D | 4.7 | 50 | 300 | 2.4 | 24 | 29 | 6 | 9 | 9 | 0.150 | 0.71 | 0.64 | 0.28 | 0.21 | 0.19 | 0.08 |
| 07016 169 | * @ ^ + | D | 6.8 | 50 | 600 | 3.4 | 34 | 41 | 6 | 6 | 6 | 0.150 | 0.50 | 0.45 | 0.20 | 0.30 | 0.27 | 0.12 |
| 07016 170 | * @ ^ + | D | 6.8 | 50 | 300 | 3.4 | 34 | 41 | 6 | 6 | 6 | 0.150 | 0.71 | 0.64 | 0.28 | 0.21 | 0.19 | 0.08 |


All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.



TBM Multianode

Tantalum Ultra Low ESR Space Level

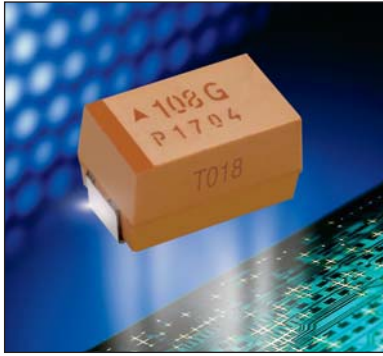

TBM Space Level series is screened to SRC9000 and utilizes an internal multi-anode design to achieve ultra-low ESR which improves performance in high ripple power application.


TBM Space Level is available with Weibull Grade "C" reliability and MIL-PRF-55365 Rev. G surge test option "C".

There are four termination finishes available: solder plated, fused solder plated, hot solder dipped and gold

plated (these correspond to "H", "K", "C" and "B" termination, respectively, per MIL-PRF-55365).

The molding compound has been selected to meet the requirements of UL94V-0 (Flame Retardancy) and outgassing requirements of NASA SP-R-0022A.

This product is considered MSL 3 in accordance with J-STD-020.

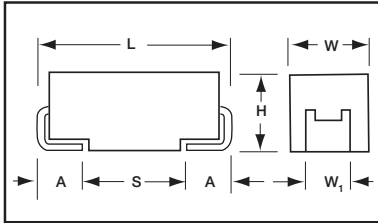

CASE DIMENSIONS: millimeters (inches)

| Code | L±0.20 (0.008) | W+0.20 (0.008) -0.10 (0.004) | H+0.20 (0.008) -0.10 (0.004) | W ₁ ±0.20 (0.008) | A+0.30 (0.012) -0.20 (0.008) | S Min. |
|------|-------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|--------------|
| D | 7.30 (0.287) | 4.30 (0.169) | 2.90 (0.114) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |
| E | 7.30 (0.287) | 4.30 (0.169) | 4.10 (0.162) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |

W₁ dimension applies to the termination width for A dimensional area only.


CAPACITANCE AND RATED VOLTAGE RANGE LETTER DENOTES CASE SIZE ESR LIMIT IN BRACKETS

| Capacitance | | Rated Voltage DC (V _R) to 85°C | | | | | | | | |
|-------------|------|--|--------|--------|---------|---------|----------|----------|---------|--------------------|
| µF | Code | 2.5V (e) | 4V (G) | 6V (J) | 10V (A) | 12V (B) | 16V (C) | 20V (D) | 25V (E) | 35V (V) |
| 10 | 106 | | | | | | | | | |
| 15 | 156 | | | | | | | | | |
| 22 | 226 | | | | | | | | | D(70) E(60,100) |
| 33 | 336 | | | | | | | | D(65) | E(50,65) |
| 47 | 476 | | | | | | | | E(65) | |
| 68 | 686 | | | | | | | | | |
| 100 | 107 | | | | | | | E(35,45) | | |
| 150 | 157 | | | | | | E(30,40) | | | |
| 220 | 227 | | | | D(35) | E(35) | | | | |
| 330 | 337 | | D(35) | D(35) | E(35) | | | | | |
| 470 | 477 | | D(35) | E(30) | | | | | | |
| 680 | 687 | | E(23) | | | | | | | |
| 1000 | 108 | D(25) | E(23) | | | | | | | |
| 1500 | 158 | E(18) | | | | | | | | |


Available Ratings: ESR limits quoted in brackets (mOhms)
Engineering samples - please contact manufacturer
*Codes under development - subject to change.

Notes: Voltage ratings are minimum values. AVX reserves the right to supply higher ratings in the same case size, to the same reliability standards.
EIA standards for Low ESR solid tantalum capacitors allow an ESR movement of 1.25 times initial limit post mounting.

TBM D MULTIANODE CONSTRUCTION



TBM E MULTIANODE CONSTRUCTION



TBM Multianode



Tantalum Ultra Low ESR Space Level

HOW TO ORDER

SPACE LEVEL OPTIONS TO SRC9000:

| TBM | E | 477 | * | 006 | L | □ | L | @ | 9 | ^ | ++ |
|------|-----------|---|-----------------------|--|----------------------------|---|------------------|--|---------------------|--|---|
| Type | Case Size | Capacitance Code | Capacitance Tolerance | Voltage Code | Standard or Low ESR Range | Packaging | Inspection Level | Reliability Grade | Qualification Level | Termination Finish | Surge Test Option |
| | | pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | M = ±20% K = ±10% | 002 = 2.5Vdc 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 012 = 12Vdc 016 = 16Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc | C = Std ESR L = Low ESR | B = Bulk R = 7" T&R S = 13" T&R W = Waffle See page 7 for additional packaging options. | L = Group A | Weibull: C = 0.01%/1000 hrs. 90% conf. | 9 = SRC9000 | H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated | 45 = 10 cycles, -55°C & +85°C before Weibull Not RoHS Compliant |

TECHNICAL SPECIFICATIONS

| | | | | | | | | | | | |
|----------------------------|--|-----|-----|---|----|------|----|----|----|----|--|
| Technical Data: | Unless otherwise specified, all technical data relate to an ambient temperature of +25°C | | | | | | | | | | |
| Capacitance Range: | 22 µF to 1500 µF | | | | | | | | | | |
| Capacitance Tolerance: | ±10%; ±20% | | | | | | | | | | |
| Rated Voltage DC (V_R) | ≤+85°C: | 2.5 | 4 | 6 | 10 | 12 | 16 | 20 | 25 | 35 | |
| Category Voltage (V_C) | ≤+125°C: | 1.7 | 2.7 | 4 | 7 | 8.4 | 10 | 13 | 17 | 23 | |
| Surge Voltage (V_S) | ≤+85°C: | 3.3 | 5.2 | 8 | 13 | 15.6 | 20 | 26 | 32 | 46 | |
| | ≤+125°C: | 2.2 | 3.4 | 5 | 8 | 9.6 | 12 | 16 | 20 | 28 | |
| Temperature Range: | -55°C to +125°C | | | | | | | | | | |



TBM Multianode



Tantalum Ultra Low ESR Space Level

| RATING & PART NUMBER REFERENCE | | Parametric Specifications by Rating | | | | | | | | | Typical Ripple Data by Rating | | | | | | |
|---|------|-------------------------------------|-------------------------------|-------------------------------|------------|------------|-------------|-----------|---------------|-----------|-------------------------------|---------------------------|---------------------------|----------------------------|---------------------------|---------------------------|----------------------------|
| | | Cap @ 120Hz µF @ 25°C | DC Rated Voltage V @ +85°C | ESR @ 100kHz mOhms @ +25°C | DCL max | | | DF max | | | Power Dissipation W | 25°C Ripple A (100kHz) | 85°C Ripple A (100kHz) | 125°C Ripple A (100kHz) | 25°C Ripple V (100kHz) | 85°C Ripple V (100kHz) | 125°C Ripple V (100kHz) |
| | | | | | +25°C (µA) | +85°C (µA) | +125°C (µA) | +25°C (%) | +85/125°C (%) | -55°C (%) | | | | | | | |
| AVX P/N | Case | | | | | | | | | | | | | | | | |
| 2.5 Volt @ 85°C (1.7 Volt @ 125°C) | | | | | | | | | | | | | | | | | |
| TBMD108*002L□LC9^45 | D | 1000 | 2.5 | 25 | 18.8 | 188 | 376 | 8 | 11 | 12 | 0.255 | 3.194 | 2.874 | 1.277 | 0.080 | 0.072 | 0.032 |
| TBME158*002C□LC9^45 | E | 1500 | 2.5 | 18 | 28.1 | 281 | 562 | 6 | 9 | 10 | 0.270 | 3.873 | 3.486 | 1.549 | 0.070 | 0.063 | 0.028 |
| 4 Volt @ 85°C (2.7 Volt @ 125°C) | | | | | | | | | | | | | | | | | |
| TBMD337*004L□LC9^45 | D | 330 | 4 | 35 | 9.9 | 99 | 198 | 8 | 11 | 12 | 0.255 | 2.699 | 2.429 | 1.080 | 0.094 | 0.085 | 0.038 |
| TBMD477*004L□LC9^45 | D | 470 | 4 | 35 | 14.1 | 141 | 282 | 8 | 11 | 12 | 0.255 | 2.699 | 2.429 | 1.080 | 0.094 | 0.085 | 0.038 |
| TBME687*004C□LC9^45 | E | 680 | 4 | 23 | 20.4 | 204 | 408 | 6 | 9 | 10 | 0.270 | 3.426 | 3.084 | 1.370 | 0.079 | 0.071 | 0.032 |
| TBME108*004C□LC9^45 | E | 1000 | 4 | 23 | 30 | 300 | 600 | 6 | 9 | 10 | 0.270 | 3.426 | 3.084 | 1.370 | 0.079 | 0.071 | 0.032 |
| 6 Volt @ 85°C (4 Volt @ 125°C) | | | | | | | | | | | | | | | | | |
| TBMD337*006L□LC9^45 | D | 330 | 6 | 35 | 14.9 | 149 | 298 | 8 | 11 | 12 | 0.255 | 2.699 | 2.429 | 1.080 | 0.094 | 0.085 | 0.038 |
| TBME477*006C□LC9^45 | E | 470 | 6 | 30 | 21.2 | 212 | 424 | 6 | 9 | 10 | 0.270 | 3.000 | 2.700 | 1.200 | 0.090 | 0.081 | 0.036 |
| 10 Volt @ 85°C (7 Volt @ 125°C) | | | | | | | | | | | | | | | | | |
| TBMD227*010L□LC9^45 | D | 220 | 10 | 35 | 16.5 | 165 | 330 | 8 | 11 | 12 | 0.255 | 2.699 | 2.429 | 1.080 | 0.094 | 0.085 | 0.038 |
| TBME337*010C□LC9^45 | E | 330 | 10 | 35 | 24.8 | 248 | 496 | 6 | 9 | 10 | 0.270 | 2.777 | 2.500 | 1.111 | 0.097 | 0.087 | 0.039 |
| 12 Volt @ 85°C (8.4 Volt @ 125°C) | | | | | | | | | | | | | | | | | |
| TBME227*012C□LC9^45 | E | 220 | 12 | 35 | 19.8 | 198 | 396 | 6 | 9 | 10 | 0.270 | 2.777 | 2.500 | 1.111 | 0.097 | 0.087 | 0.039 |
| 16 Volt @ 85°C (10 Volt @ 125°C) | | | | | | | | | | | | | | | | | |
| TBME157*016L□LC9^45 | E | 150 | 16 | 30 | 18 | 180 | 360 | 6 | 9 | 10 | 0.270 | 3.000 | 2.700 | 1.200 | 0.090 | 0.081 | 0.036 |
| TBME157*016C□LC9^45 | E | 150 | 16 | 40 | 18 | 180 | 360 | 6 | 9 | 10 | 0.270 | 2.598 | 2.338 | 1.039 | 0.104 | 0.094 | 0.042 |
| 20 Volt @ 85°C (13 Volt @ 125°C) | | | | | | | | | | | | | | | | | |
| TBME107*020L□LC9^45 | E | 100 | 20 | 35 | 15 | 150 | 300 | 6 | 9 | 10 | 0.270 | 2.777 | 2.500 | 1.111 | 0.097 | 0.087 | 0.039 |
| TBME107*020C□LC9^45 | E | 100 | 20 | 45 | 15 | 150 | 300 | 6 | 9 | 10 | 0.270 | 2.449 | 2.205 | 0.980 | 0.110 | 0.099 | 0.044 |
| 25 Volt @ 85°C (17 Volt @ 125°C) | | | | | | | | | | | | | | | | | |
| TBMD336*025L□LC9^45 | D | 33 | 25 | 65 | 6.2 | 62 | 124 | 8 | 11 | 12 | 0.255 | 1.981 | 1.783 | 0.792 | 0.129 | 0.116 | 0.051 |
| TBME476*025L□LC9^45 | E | 47 | 25 | 65 | 8.8 | 88 | 176 | 6 | 9 | 10 | 0.270 | 2.038 | 1.834 | 0.815 | 0.132 | 0.119 | 0.053 |
| 35 Volt @ 85°C (23 Volt @ 125°C) | | | | | | | | | | | | | | | | | |
| TBMD226*035L□LC9^45 | D | 22 | 35 | 70 | 5.8 | 58 | 116 | 8 | 11 | 12 | 0.255 | 1.909 | 1.718 | 0.763 | 0.134 | 0.120 | 0.053 |
| TBME226*035L□LC9^45 | E | 22 | 35 | 60 | 5.8 | 58 | 116 | 6 | 9 | 10 | 0.270 | 2.121 | 1.909 | 0.849 | 0.127 | 0.115 | 0.051 |
| TBME226*035C□LC9^45 | E | 22 | 35 | 100 | 5.8 | 58 | 116 | 6 | 9 | 10 | 0.270 | 1.643 | 1.479 | 0.657 | 0.164 | 0.148 | 0.066 |
| TBME336*035L□LC9^45 | E | 33 | 35 | 50 | 8.7 | 87 | 174 | 6 | 9 | 10 | 0.270 | 2.324 | 2.091 | 0.930 | 0.116 | 0.105 | 0.046 |
| TBME336*035C□LC9^45 | E | 33 | 35 | 65 | 8.7 | 87 | 174 | 6 | 9 | 10 | 0.270 | 2.038 | 1.834 | 0.815 | 0.132 | 0.119 | 0.053 |


All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.



TBM Multianode

Tantalum Ultra Low ESR COTS-Plus

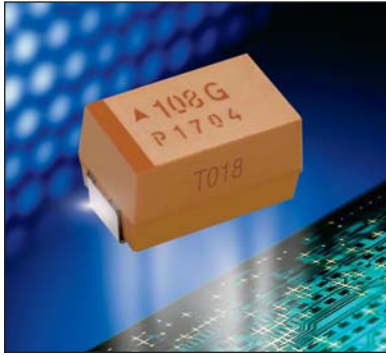

TBM COTS-Plus series uses an internal multi-anode design to achieve ultra-low ESR which improves performance in high ripple power applications.


TBM is available with Weibull Grade “B” reliability and all MIL-PRF-55365 Rev. G surge test options (“A”, “B” & “C”).

There are four termination finishes available: solder plated, fused solder plated, hot solder dipped and gold plated

(these correspond to “H”, “K”, “C” and “B” termination, respectively, per MIL-PRF-55365).

The molding compound has been selected to meet the requirements of UL94V-0 (Flame Retardancy) and outgassing requirements of NASA SP-R-0022A.

This product is considered MSL 3 in accordance with J-STD-020.

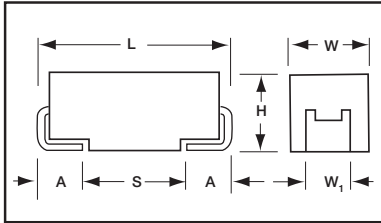

CASE DIMENSIONS: millimeters (inches)

| Code | L±0.20 (0.008) | W+0.20 (0.008) -0.10 (0.004) | H+0.20 (0.008) -0.10 (0.004) | W ₁ ±0.20 (0.008) | A+0.30 (0.012) -0.20 (0.008) | S Min. |
|------|-------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|--------------|
| D | 7.30 (0.287) | 4.30 (0.169) | 2.90 (0.114) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |
| E | 7.30 (0.287) | 4.30 (0.169) | 4.10 (0.162) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |
| V | 7.30 (0.287) | 6.10 (0.240) | 3.55 (0.140) | 3.10 (0.120) | 1.30 (0.051) | 4.40 (0.173) |

W₁ dimension applies to the termination width for A dimensional area only.

CAPACITANCE AND RATED VOLTAGE RANGE LETTER DENOTES CASE SIZE ESR LIMIT IN BRACKETS

| Capacitance | | Rated Voltage DC (V _R) to 85°C | | | | | | | | |
|-------------|------|--|-------------------|--------------|----------|---------|----------|----------|---------|--------------------|
| µF | Code | 2.5V (e) | 4V (G) | 6V (J) | 10V (A) | 12V (B) | 16V (C) | 20V (D) | 25V (E) | 35V (V) |
| 15 | 156 | | | | | | | | | |
| 22 | 226 | | | | | | | | | D(70) E(60,100) |
| 33 | 336 | | | | | | | | D(65) | E(50,65) |
| 47 | 476 | | | | | | | | E(65) | E(55) |
| 68 | 686 | | | | | | | | E(45) | |
| 100 | 107 | | | | | | | E(35,45) | | |
| 150 | 157 | | | | | | E(30,40) | | | |
| 220 | 227 | | | | D(35) | E(35) | E(25) | | | |
| 330 | 337 | | D(35) | D(35) | E(23,35) | | | | | |
| 470 | 477 | | D(35) | E(18,30) | E(23) | | | | | |
| 680 | 687 | | E(18,23) | E(18), V(23) | | | | | | |
| 1000 | 108 | D(25) | E(18,23) V(18) | | | | | | | |
| 1500 | 158 | E(12,18) | E(15) | | | | | | | |
| 2000 | 208 | | | | | | | | | |

Available Ratings: ESR limits quoted in brackets (mOhms)


Engineering samples - please contact manufacturer

*Codes under development - subject to change.

Notes: Voltage ratings are minimum values. AVX reserves the right to supply higher ratings in the same case size, to the same reliability standards.

EIA standards for Low ESR solid tantalum capacitors allow an ESR movement of 1.25 times initial limit post mounting.

TBM D MULTIANODE CONSTRUCTION



TBM Multianode



Tantalum Ultra Low ESR COTS-Plus

HOW TO ORDER

COTS-PLUS:

| TBM | E | 477 | * | 006 | L | □ | # | @ | 0 | ^ | ++ |
|------|-----------|---|-----------------------|--|----------------------------|---|-------------------------------------|--|---------------------|---|---|
| Type | Case Size | Capacitance Code | Capacitance Tolerance | Voltage Code | Standard or Low ESR Range | Packaging | Inspection Level | Reliability Grade | Qualification Level | Termination Finish | Surge Test Option |
| | | pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | M = ±20% K = ±10% | 002 = 2.5Vdc 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 012 = 12Vdc 016 = 16Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc | C = Std ESR L = Low ESR | B = Bulk R = 7" T&R S = 13" T&R W = Waffle See page 7 for additional packaging options. | S = Std. Conformance L = Group A | Weibull: B = 0.1%/1000 hrs. 90% conf. Z = Non-ER | 0 = N/A | H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated 7 = Matte Sn (COTS-Plus only) | 00 = None 23 = 10 Cycles, +25°C 24 = 10 Cycles, -55°C & +85°C 45 = 10 cycles, -55°C & +85°C before Weibull |

Not RoHS Compliant



TECHNICAL SPECIFICATIONS

| | | | | | | | | | | | |
|------------------------------------|--|-----|-----|---|----|------|----|----|----|----|--|
| Technical Data: | Unless otherwise specified, all technical data relate to an ambient temperature of +25°C | | | | | | | | | | |
| Capacitance Range: | 22 µF to 1500 µF | | | | | | | | | | |
| Capacitance Tolerance: | ±10%; ±20% | | | | | | | | | | |
| Rated Voltage DC (V _R) | ≤+85°C: | 2.5 | 4 | 6 | 10 | 12 | 16 | 20 | 25 | 35 | |
| Category Voltage (V _C) | ≤+125°C: | 1.7 | 2.7 | 4 | 7 | 8.4 | 10 | 13 | 17 | 23 | |
| Surge Voltage (V _S) | ≤+85°C: | 3.3 | 5.2 | 8 | 13 | 15.6 | 20 | 26 | 32 | 46 | |
| | ≤+125°C: | 2.2 | 3.4 | 5 | 8 | 9.6 | 12 | 16 | 20 | 28 | |
| Temperature Range: | -55°C to +125°C | | | | | | | | | | |



TBM Multianode

Tantalum Ultra Low ESR COTS-Plus



| RATING & PART NUMBER REFERENCE | | Parametric Specifications by Rating | | | | | | | | | Typical Ripple Data by Rating | | | | | | |
|---|------|-------------------------------------|------------------|---------------|---------|-------|--------|--------|-----------|-------|-------------------------------|---------------------|---------------------|----------------------|---------------------|---------------------|----------------------|
| | | Cap @ 120Hz | DC Rated Voltage | ESR @ 100kHz | DCL max | | | DF max | | | Power Dissipation | 25°C Ripple Current | 85°C Ripple Current | 125°C Ripple Current | 25°C Ripple Voltage | 85°C Ripple Voltage | 125°C Ripple Voltage |
| | | | | | +25°C | +85°C | +125°C | +25°C | +85/125°C | -55°C | | | | | | | |
| AVX P/N | Case | µF @ 25°C | V @ +85°C | mOhms @ +25°C | (µA) | (µA) | (µA) | (%) | (%) | (%) | | | | | | | |
| 2.5 Volt @ 85°C (1.7 Volt @ 125°C) | | | | | | | | | | | | | | | | | |
| TBMD108*002L□SB0^++ | D | 1000 | 2.5 | 25 | 18.8 | 188 | 376 | 8 | 11 | 12 | 0.255 | 3.194 | 2.874 | 1.277 | 0.080 | 0.072 | 0.032 |
| TBME158*002C□SB0^++ | E | 1500 | 2.5 | 18 | 28.1 | 281 | 562 | 6 | 9 | 10 | 0.270 | 3.873 | 3.486 | 1.549 | 0.070 | 0.063 | 0.028 |
| TBME158*002L□SB0^++ | E | 1500 | 2.5 | 12 | 38 | 380 | 760 | 6 | 9 | 10 | 0.270 | 4.743 | 4.269 | 1.897 | 0.057 | 0.051 | 0.023 |
| 4 Volt @ 85°C (2.7 Volt @ 125°C) | | | | | | | | | | | | | | | | | |
| TBMD337*004L□SB0^++ | D | 330 | 4 | 35 | 9.9 | 99 | 198 | 8 | 11 | 12 | 0.255 | 2.699 | 2.429 | 1.080 | 0.094 | 0.085 | 0.038 |
| TBMD477*004L□SB0^++ | D | 470 | 4 | 35 | 14.1 | 141 | 282 | 8 | 11 | 12 | 0.255 | 2.699 | 2.429 | 1.080 | 0.094 | 0.085 | 0.038 |
| TBME687*004C□SB0^++ | E | 680 | 4 | 23 | 20.4 | 204 | 408 | 6 | 9 | 10 | 0.270 | 3.426 | 3.084 | 1.370 | 0.079 | 0.071 | 0.032 |
| TBME687*004L□SB0^++ | E | 680 | 4 | 18 | 27 | 270 | 540 | 6 | 9 | 10 | 0.270 | 3.873 | 3.486 | 1.549 | 0.070 | 0.063 | 0.028 |
| TBME108*004C□SB0^++ | E | 1000 | 4 | 23 | 30 | 300 | 600 | 6 | 9 | 10 | 0.270 | 3.426 | 3.084 | 1.370 | 0.079 | 0.071 | 0.032 |
| TBME108*004L□SB0^++ | E | 1000 | 4 | 18 | 40 | 400 | 800 | 6 | 9 | 10 | 0.270 | 3.873 | 3.486 | 1.549 | 0.070 | 0.063 | 0.028 |
| TBMV108*004L□SB0^++ | V | 1000 | 4 | 18 | 40 | 400 | 800 | 6 | 9 | 10 | 0.285 | 3.979 | 3.581 | 1.592 | 0.072 | 0.064 | 0.029 |
| TBME158*004L□SB0^++ | E | 1500 | 4 | 15 | 40 | 400 | 800 | 6 | 9 | 10 | 0.270 | 4.243 | 3.818 | 1.697 | 0.064 | 0.057 | 0.025 |
| 6 Volt @ 85°C (4 Volt @ 125°C) | | | | | | | | | | | | | | | | | |
| TBMD337*006L□SB0^++ | D | 330 | 6 | 35 | 14.9 | 149 | 298 | 8 | 11 | 12 | 0.255 | 2.699 | 2.429 | 1.080 | 0.094 | 0.085 | 0.038 |
| TBME477*006C□SB0^++ | E | 470 | 6 | 30 | 21.2 | 212 | 424 | 6 | 9 | 10 | 0.270 | 3.000 | 2.700 | 1.200 | 0.090 | 0.081 | 0.036 |
| TBME477*006L□SB0^++ | E | 470 | 6 | 18 | 28 | 280 | 560 | 6 | 9 | 10 | 0.270 | 3.873 | 3.486 | 1.549 | 0.070 | 0.063 | 0.028 |
| TBME687*006L□SB0^++ | E | 680 | 6 | 18 | 41 | 410 | 820 | 6 | 9 | 10 | 0.270 | 3.873 | 3.486 | 1.549 | 0.070 | 0.063 | 0.028 |
| TBMV687*006L□SB0^++ | V | 680 | 6 | 23 | 41 | 410 | 820 | 6 | 9 | 10 | 0.285 | 3.520 | 3.168 | 1.408 | 0.081 | 0.073 | 0.032 |
| 10 Volt @ 85°C (7 Volt @ 125°C) | | | | | | | | | | | | | | | | | |
| TBMD227*010L□SB0^++ | D | 220 | 10 | 35 | 16.5 | 165 | 330 | 8 | 11 | 12 | 0.255 | 2.699 | 2.429 | 1.080 | 0.094 | 0.085 | 0.038 |
| TBME337*010C□SB0^++ | E | 330 | 10 | 35 | 24.8 | 248 | 496 | 6 | 9 | 10 | 0.270 | 2.777 | 2.500 | 1.111 | 0.097 | 0.087 | 0.039 |
| TBME337*010L□SB0^++ | E | 330 | 10 | 23 | 33 | 330 | 660 | 6 | 9 | 10 | 0.270 | 3.426 | 3.084 | 1.370 | 0.079 | 0.071 | 0.032 |
| TBME477*010L□SB0^++ | E | 470 | 10 | 23 | 47 | 470 | 940 | 6 | 9 | 10 | 0.270 | 3.426 | 3.084 | 1.370 | 0.079 | 0.071 | 0.032 |
| 12 Volt @ 85°C (8.4 Volt @ 125°C) | | | | | | | | | | | | | | | | | |
| TBME227*012C□SB0^++ | E | 220 | 12 | 35 | 19.8 | 198 | 396 | 6 | 9 | 10 | 0.270 | 2.777 | 2.500 | 1.111 | 0.097 | 0.087 | 0.039 |
| 16 Volt @ 85°C (10 Volt @ 125°C) | | | | | | | | | | | | | | | | | |
| TBME157*016C□SB0^++ | E | 150 | 16 | 40 | 18 | 180 | 360 | 6 | 9 | 10 | 0.270 | 2.598 | 2.338 | 1.039 | 0.104 | 0.094 | 0.042 |
| TBME157*016L□SB0^++ | E | 150 | 16 | 30 | 18 | 180 | 360 | 6 | 9 | 10 | 0.270 | 3.000 | 2.700 | 1.200 | 0.090 | 0.081 | 0.036 |
| TBME227*016L□SB0^++ | E | 220 | 16 | 25 | 35 | 350 | 700 | 6 | 9 | 10 | 0.270 | 3.286 | 2.958 | 1.315 | 0.082 | 0.074 | 0.033 |
| 20 Volt @ 85°C (13 Volt @ 125°C) | | | | | | | | | | | | | | | | | |
| TBME107*020C□SB0^++ | E | 100 | 20 | 45 | 15 | 150 | 300 | 6 | 9 | 10 | 0.270 | 2.449 | 2.205 | 0.980 | 0.110 | 0.099 | 0.044 |
| TBME107*020L□SB0^++ | E | 100 | 20 | 35 | 15 | 150 | 300 | 6 | 9 | 10 | 0.270 | 2.777 | 2.500 | 1.111 | 0.097 | 0.087 | 0.039 |
| 25 Volt @ 85°C (17 Volt @ 125°C) | | | | | | | | | | | | | | | | | |
| TBMD336*025L□SB0^++ | D | 33 | 25 | 65 | 6.2 | 62 | 124 | 8 | 11 | 12 | 0.255 | 1.981 | 1.783 | 0.792 | 0.129 | 0.116 | 0.051 |
| TBME476*025L□SB0^++ | E | 47 | 25 | 65 | 8.8 | 88 | 176 | 6 | 9 | 10 | 0.270 | 2.038 | 1.834 | 0.815 | 0.132 | 0.119 | 0.053 |
| TBME686*025L□SB0^++ | E | 68 | 25 | 45 | 17 | 170 | 340 | 6 | 9 | 10 | 0.270 | 2.449 | 2.205 | 0.980 | 0.110 | 0.099 | 0.044 |
| 35 Volt @ 85°C (23 Volt @ 125°C) | | | | | | | | | | | | | | | | | |
| TBMD226*035L□SB0^++ | D | 22 | 35 | 70 | 5.8 | 58 | 116 | 8 | 11 | 12 | 0.255 | 1.909 | 1.718 | 0.763 | 0.134 | 0.120 | 0.053 |
| TBME226*035C□SB0^++ | E | 22 | 35 | 100 | 5.8 | 58 | 116 | 6 | 9 | 10 | 0.270 | 1.643 | 1.479 | 0.657 | 0.164 | 0.148 | 0.066 |
| TBME226*035L□SB0^++ | E | 22 | 35 | 60 | 5.8 | 58 | 116 | 6 | 9 | 10 | 0.270 | 2.121 | 1.909 | 0.849 | 0.127 | 0.115 | 0.051 |
| TBME336*035C□SB0^++ | E | 33 | 35 | 65 | 8.7 | 87 | 174 | 6 | 9 | 10 | 0.270 | 2.038 | 1.834 | 0.815 | 0.132 | 0.119 | 0.053 |
| TBME336*035L□SB0^++ | E | 33 | 35 | 50 | 8.7 | 87 | 174 | 6 | 9 | 10 | 0.270 | 2.324 | 2.091 | 0.930 | 0.116 | 0.105 | 0.046 |
| TBME476*035L□SB0^++ | E | 47 | 35 | 55 | 16 | 160 | 320 | 6 | 9 | 10 | 0.270 | 2.216 | 1.994 | 0.886 | 0.122 | 0.110 | 0.049 |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.



TBC Series



CWR15 MIL-PRF-55365/12 Established Reliability, COTS-Plus & Space Level




AVX announces the world's smallest military approved tantalum chip capacitors. The CWR15 offers 0603, 0805 and 1206 case sizes in capacitance/voltage combinations previously only available in much larger packages. The revolutionary AVX TACmicrochip® technology offers designers significant

opportunity to downsize circuits for military and aerospace applications. The product is manufactured in the AVX Tantalum high reliability facility in Biddeford, Maine which is also home to the CWR09, CWR11, CWR19 and CWR29 product lines.

CASE DIMENSIONS: millimeters (inches)

| Case Code | Length (L) | Width (W) | Height (H) | Term. Width (W _t) |
|-----------|---|---|---|---|
| A | 3.20±0.20 (0.126±0.008) | 1.60±0.20 (0.063±0.008) | 1.60±0.20 (0.063±0.008) | 0.15+0.35/-0.00 (0.006+0.014/-0.000) |
| L | 1.60+0.25/-0.15 (0.063+0.010/-0.006) | 0.84+0.20/-0.10 (0.033+0.008/-0.004) | 0.84+0.20/-0.10 (0.033+0.008/-0.004) | 0.15+0.35/-0.00 (0.006+0.014/-0.000) |
| R | 2.00+0.25/-0.15 (0.079+0.010/-0.006) | 1.35+0.20/-0.10 (0.053+0.008/-0.004) | 1.35+0.20/-0.10 (0.053+0.008/-0.004) | 0.15+0.35/-0.00 (0.006+0.014/-0.000) |

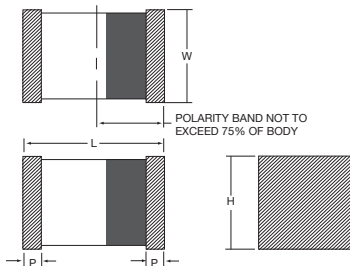

CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

| Capacitance | | Voltage Rating DC (V _R) at 85°C | | | | |
|-------------|------|---|--------|---------|---------|---------|
| μF | Code | 4V (C) | 6V (D) | 10V (F) | 15V (H) | 20V (J) |
| 0.33 | 334 | | | | | |
| 0.47 | 474 | | | L | | L |
| 0.68 | 684 | | | L | | |
| 1.0 | 105 | | | L | | |
| 1.5 | 155 | | | L | | |
| 2.2 | 225 | | | L | | |
| 3.3 | 335 | | L | R | | |
| 4.7 | 475 | | L | R | | |
| 6.8 | 685 | L | R | R | | |
| 10 | 106 | R | R | R | | |
| 15 | 156 | R | R | A | | |
| 22 | 226 | R | A | | | |
| 33 | 336 | R | A | | | |
| 47 | 476 | | A | | | |
| 68 | 686 | A | | | | |

Further extensions of the CWR15 product are planned for later in 2009. A new case size will be added, and the voltage range will be extended to 20 volts. Ratings of 100 μF at 4 volts to 10 μF at 20 volts will be included in this extension of the product line.



HOW TO ORDER

COTS-PLUS & MIL QPL (CWR15):

| | | | | | | | | | | | |
|-------------|------------------|---|---------------------------------|--|----------------------------------|---|--|---|---------------------------------------|---|---|
| TBC | L | 685 | * | 004 | C | □ | # | @ | 0 | ^ | ++ |
| Type | Case Size | Capacitance Code | Capacitance Tolerance | Voltage Code | Standard or Low ESR Range | Packaging | Inspection Level | Reliability Grade | Qualification Level | Termination Finish | Surge Test Option |
| | | pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | M = ±20% K = ±10% J = ±5% | 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 020 = 20Vdc | C = Std ESR | B = Bulk R = 7" T&R S = 13" T&R W = Waffle See page 7 for additional packaging options. | S = Std. Conformance L = Group A M = MIL (JAN) CWR15 | Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. Z = Non-ER | 0 = N/A T = T Level 9 = SRC9000 | 0 = Fused Solder Plated 9 = Gold Plated 7 = Matte Sn (COTS-Plus only) | 00 = None 23 = 10 Cycles, +25°C 24 = 10 Cycles, -55°C & +85°C 45 = 10 cycles, -55°C & +85°C before Weibull |

Not RoHS Compliant

LEAD-FREE COMPATIBLE COMPONENT
For RoHS compliant products, please select correct termination style.

CWR15 P/N CROSS REFERENCE:

| | | | | | | | |
|--------------|--|-------------------------------------|--|---------------------------------|--|------------------|---|
| CWR15 | F | C | 685 | * | - | L | + |
| Style | Voltage Code | Termination Finish | Capacitance Code | Capacitance Tolerance | Product Level Designator | Case Size | Surge Test Option |
| | C = 4Vdc D = 6Vdc F = 10Vdc J = 20Vdc | B = Gold Plated K = Solder Fused | pF code: 1st two digits represent significant figures 3rd digit represents number of zeros to follow | J = ±5% K = ±10% M = ±20% | Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. T = T Level A = Non-ER | | A = +25°C after Weibull B = -55°C & +85°C after Weibull C = -55°C & +85°C before Weibull Z = None Required |

Not RoHS Compliant

SPACE LEVEL OPTIONS TO SRC9000*:

| | | | | | | | | | | | |
|-------------|------------------|---|---------------------------------|--|----------------------------------|---|-------------------------|---|----------------------------|--|--|
| TBC | L | 685 | * | 004 | C | □ | L | @ | 9 | ^ | ++ |
| Type | Case Size | Capacitance Code | Capacitance Tolerance | Voltage Code | Standard or Low ESR Range | Packaging | Inspection Level | Reliability Grade | Qualification Level | Termination Finish | Surge Test Option |
| | | pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | M = ±20% K = ±10% J = ±5% | 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 020 = 20Vdc | C = Std ESR L = Low ESR | B = Bulk R = 7" T&R S = 13" T&R W = Waffle See page 7 for additional packaging options. | L = Group A | Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. | 9 = SRC9000 | 0 = Fused Solder Plated 9 = Gold Plated | 45 = 10 cycles, -55°C & +85°C before Weibull |

Not RoHS Compliant

*Contact factory for AVX SRC9000 Space Level SCD details.

TECHNICAL SPECIFICATIONS

| | | | | | |
|-------------------------------------|---|-----|-----|------|------|
| Technical Data: | Unless otherwise specified, all technical data relate to an ambient temperature of 25°C | | | | |
| Capacitance Range: | 0.47 µF to 68 µF | | | | |
| Capacitance Tolerance: | ±5%; ±10%; ±20% | | | | |
| Rated Voltage: (V _R) | ≤85°C: | 4 | 6 | 10 | 20 |
| Category Voltage: (V _C) | 125°C: | 2.7 | 4 | 6.7 | 13.3 |
| Surge Voltage: (V _S) | ≤85°C: | 5.3 | 8 | 13.3 | 26.7 |
| | 125°C: | 3.5 | 5.3 | 8.7 | 17.8 |
| Temperature Range: | -55°C to +125°C | | | | |

TBC Series



CWR15 MIL-PRF-55365/12 Established Reliability, COTS-Plus & Space Level

| RATING & PART NUMBER REFERENCE | | | | Parametric Specifications by Rating per MIL-PRF-55365/12 | | | | | | | Typical Ripple Data by Rating | | | | | | | | |
|--------------------------------|--------------------------------|--------------------------------|------|--|-------------------------------------|------------------------------------|---------|-------|--------|--------|-------------------------------|--------|---------------------------|---------------------------------|---------------------------------|----------------------------------|---------------------------------|---------------------------------|----------------------------------|
| | | | | Cap @ 120Hz μF @ 25°C | DC Rated Voltage V @ +85°C | ESR @ 100kHz Ohms @ +25°C | DCL max | | | DF Max | | | Power Dissipation W | 25°C Ripple A (100kHz) | 85°C Ripple A (100kHz) | 125°C Ripple A (100kHz) | 25°C Ripple V (100kHz) | 85°C Ripple V (100kHz) | 125°C Ripple V (100kHz) |
| CWR15 P/N | AVX MIL & COTS-Plus P/N | AVX SRC9000 P/N | Case | +25°C | +85°C | +125°C | +25°C | +85°C | +125°C | +25°C | +85°C | +125°C | | | | | | | |
| CWR15CK685^L+ | TBC L 685 * 004 C □ # @ 0 ^ + | TBC L 685 * 004 C □ L @ 9 ^ + | L | 6.8 | 4 | 10 | 0.5 | 5 | 6 | 8 | 16 | 12 | 0.025 | 0.05 | 0.05 | 0.02 | 0.50 | 0.45 | 0.20 |
| CWR15CK106^R+ | TBC R 106 * 004 C □ # @ 0 ^ ++ | TBC R 106 * 004 C □ L @ 9 ^ ++ | R | 10 | 4 | 6 | 0.5 | 5 | 6 | 8 | 16 | 12 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| CWR15CK156^R+ | TBC R 156 * 004 C □ # @ 0 ^ ++ | TBC R 156 * 004 C □ L @ 9 ^ ++ | R | 15 | 4 | 6 | 0.6 | 6 | 7 | 8 | 16 | 12 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| CWR15CK226^R+ | TBC R 226 * 004 C □ # @ 0 ^ + | TBC R 226 * 004 C □ L @ 9 ^ + | R | 22 | 4 | 6 | 0.9 | 9 | 11 | 8 | 16 | 12 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| CWR15CK336^R+ | TBC R 336 * 004 C □ # @ 0 ^ + | TBC R 336 * 004 C □ L @ 9 ^ + | R | 33 | 4 | 6 | 1.3 | 13 | 16 | 10 | 20 | 15 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| CWR15CK686^A+ | TBC A 686 * 004 C □ # @ 0 ^ + | TBC A 686 * 004 C □ L @ 9 ^ + | A | 68 | 4 | 1 | 2.7 | 27 | 33 | 15 | 30 | 23 | 0.040 | 0.20 | 0.18 | 0.08 | 0.20 | 0.18 | 0.08 |
| CWR15DK335^L+ | TBC L 335 * 006 C □ # @ 0 ^ + | TBC L 335 * 006 C □ L @ 9 ^ + | L | 3.3 | 6 | 10 | 0.5 | 5 | 6 | 6 | 12 | 9 | 0.025 | 0.05 | 0.05 | 0.02 | 0.50 | 0.45 | 0.20 |
| CWR15DK475^L+ | TBC L 475 * 006 C □ # @ 0 ^ + | TBC L 475 * 006 C □ L @ 9 ^ + | L | 4.7 | 6 | 10 | 0.5 | 5 | 6 | 8 | 16 | 12 | 0.025 | 0.05 | 0.05 | 0.02 | 0.50 | 0.45 | 0.20 |
| CWR15DK685^R+ | TBC R 685 * 006 C □ # @ 0 ^ ++ | TBC R 685 * 006 C □ L @ 9 ^ ++ | R | 6.8 | 6 | 6 | 0.5 | 5 | 6 | 8 | 16 | 12 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| CWR15DK106^R+ | TBC R 106 * 006 C □ # @ 0 ^ ++ | TBC R 106 * 006 C □ L @ 9 ^ ++ | R | 10 | 6 | 6 | 0.6 | 6 | 7 | 8 | 16 | 12 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| CWR15DK156^R+ | TBC R 156 * 006 C □ # @ 0 ^ ++ | TBC R 156 * 006 C □ L @ 9 ^ ++ | R | 15 | 6 | 6 | 0.9 | 9 | 11 | 8 | 16 | 12 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| CWR15DK226^A+ | TBC A 226 * 006 C □ # @ 0 ^ + | TBC A 226 * 006 C □ L @ 9 ^ + | A | 22 | 6 | 6 | 1.4 | 14 | 17 | 10 | 20 | 15 | 0.040 | 0.08 | 0.07 | 0.03 | 0.49 | 0.44 | 0.20 |
| CWR15DK336^A+ | TBC A 336 * 006 C □ # @ 0 ^ + | TBC A 336 * 006 C □ L @ 9 ^ + | A | 33 | 6 | 6 | 2 | 20 | 24 | 10 | 20 | 15 | 0.040 | 0.08 | 0.07 | 0.03 | 0.49 | 0.44 | 0.20 |
| CWR15DK476^A+ | TBC A 476 * 006 C □ # @ 0 ^ + | TBC A 476 * 006 C □ L @ 9 ^ + | A | 47 | 6 | 4 | 2.8 | 28 | 34 | 15 | 30 | 23 | 0.040 | 0.10 | 0.09 | 0.04 | 0.40 | 0.36 | 0.16 |
| CWR15FK474^L+ | TBC L 474 * 010 C □ # @ 0 ^ + | TBC L 474 * 010 C □ L @ 9 ^ + | L | 0.47 | 10 | 12 | 0.5 | 5 | 6 | 6 | 12 | 9 | 0.025 | 0.05 | 0.04 | 0.02 | 0.55 | 0.49 | 0.22 |
| CWR15FK684^L+ | TBC L 684 * 010 C □ # @ 0 ^ + | TBC L 684 * 010 C □ L @ 9 ^ + | L | 0.68 | 10 | 10 | 0.5 | 5 | 6 | 6 | 12 | 9 | 0.025 | 0.05 | 0.05 | 0.02 | 0.50 | 0.45 | 0.20 |
| CWR15FK105^L+ | TBC L 105 * 010 C □ # @ 0 ^ + | TBC L 105 * 010 C □ L @ 9 ^ + | L | 1 | 10 | 10 | 0.5 | 5 | 6 | 6 | 12 | 9 | 0.025 | 0.05 | 0.05 | 0.02 | 0.50 | 0.45 | 0.20 |
| CWR15FK155^L+ | TBC L 155 * 010 C □ # @ 0 ^ + | TBC L 155 * 010 C □ L @ 9 ^ + | L | 1.5 | 10 | 10 | 0.5 | 5 | 6 | 6 | 12 | 9 | 0.025 | 0.05 | 0.05 | 0.02 | 0.50 | 0.45 | 0.20 |
| CWR15FK225^L+ | TBC L 225 * 010 C □ # @ 0 ^ + | TBC L 225 * 010 C □ L @ 9 ^ + | L | 2.2 | 10 | 10 | 0.5 | 5 | 6 | 6 | 12 | 9 | 0.025 | 0.05 | 0.05 | 0.02 | 0.50 | 0.45 | 0.20 |
| CWR15FK335^R+ | TBC R 335 * 010 C □ # @ 0 ^ + | TBC R 335 * 010 C □ L @ 9 ^ + | R | 3.3 | 10 | 6 | 0.5 | 5 | 6 | 8 | 16 | 12 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| CWR15FK475^R+ | TBC R 475 * 010 C □ # @ 0 ^ + | TBC R 475 * 010 C □ L @ 9 ^ + | R | 4.7 | 10 | 6 | 0.5 | 5 | 6 | 8 | 16 | 12 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| CWR15FK685^R+ | TBC R 685 * 010 C □ # @ 0 ^ + | TBC R 685 * 010 C □ L @ 9 ^ + | R | 6.8 | 10 | 6 | 0.7 | 7 | 8.5 | 8 | 16 | 12 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| CWR15FK106^R+ | TBC R 106 * 010 C □ # @ 0 ^ + | TBC R 106 * 010 C □ L @ 9 ^ + | R | 10 | 10 | 6 | 1 | 10 | 12 | 8 | 16 | 12 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| CWR15FK156^R+ | TBC A 156 * 010 C □ # @ 0 ^ + | TBC A 156 * 010 C □ L @ 9 ^ + | A | 15 | 10 | 6 | 1.5 | 15 | 18 | 10 | 20 | 15 | 0.040 | 0.08 | 0.07 | 0.03 | 0.49 | 0.44 | 0.20 |
| CWR15JK474^R+ | TBC L 474 * 020 C □ # @ 0 ^ + | TBC L 474 * 020 C □ L @ 9 ^ + | L | 0.47 | 20 | 24 | 0.5 | 5 | 6 | 6 | 12 | 9 | 0.025 | 0.03 | 0.03 | 0.01 | 0.77 | 0.70 | 0.31 |


All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.



TBC Series

TBC COTS-Plus

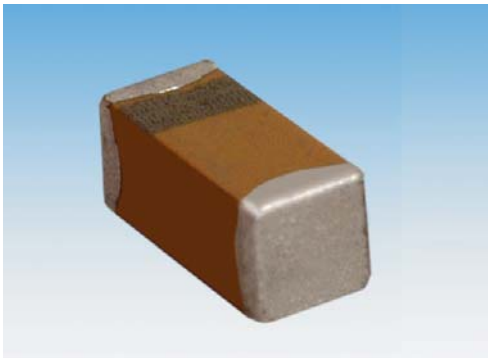


TBC COTS-Plus series extends the range of CWR15. TBC is available with Weibull grade “B” reliability and all MIL-PRF-55365 Rev. G surge test options (“A”, “B” & “C”).

For Space Level applications, AVX SRC9000 ratings are available as shown in the rating table.

There are three termination finishes available: fused solder plated, gold plated, and 100% tin.

CASE DIMENSIONS: millimeters (inches)



| Code | EIA Code | EIA Metric | Length (L) | Width (W) | Height (H) | Termination Spacing(S) | Minimum Termination Length (Lt) | Average Mass |
|------|----------|------------|--|--|--|---------------------------|---------------------------------|--------------|
| A | 1206 | 3216-18 | 3.20±0.20 (0.126±0.008) | 1.60±0.20 (0.063±0.008) | 1.60±0.20 (0.063±0.008) | 1.80 min. (0.071 min.) | 0.15 (0.006) | 44.6mg |
| L | 0603 | 1608-10 | 1.60 ^{+0.25} _{-0.15} (0.063 ^{+0.010} _{-0.006}) | 0.84 ^{+0.20} _{-0.10} (0.033 ^{+0.008} _{-0.004}) | 0.84 ^{+0.20} _{-0.10} (0.033 ^{+0.008} _{-0.004}) | 0.55 min. (0.022 min.) | 0.15 (0.006) | 8.6mg |
| R | 0805 | 2012-15 | 2.00 ^{+0.25} _{-0.15} (0.079 ^{+0.010} _{-0.006}) | 1.35 ^{+0.20} _{-0.10} (0.053 ^{+0.008} _{-0.004}) | 1.35 ^{+0.20} _{-0.10} (0.053 ^{+0.008} _{-0.004}) | 0.70 min. (0.027 min.) | 0.15 (0.006) | 29.9mg |

CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

| Capacitance | | Voltage Rating DC (V _R) at 85°C | | | | | |
|-------------|------|---|------|-----|-----|-----|-----|
| µF | Code | 4V | 6.3V | 10V | 16V | 20V | 25V |
| 0.33 | 334 | | | L | L | L | L |
| 0.47 | 474 | | | L | L | L | L |
| 0.68 | 684 | | | L | L | L | L |
| 1.0 | 105 | | | L | | | |
| 1.5 | 155 | | | L | | | |
| 2.2 | 225 | | | L | | | |
| 3.3 | 335 | | | R | | R | |
| 4.7 | 475 | | L | R | R | | |
| 6.8 | 685 | | R | R | R | | |
| 10 | 106 | R | R | R | A | | |
| 15 | 156 | R | R | A | | | |
| 22 | 226 | R | A | | | | |
| 33 | 336 | R | A | | | | |
| 47 | 476 | | A | | | | |
| 68 | 686 | A | | | | | |



TBC Series



TBC COTS-Plus

HOW TO ORDER

COTS-PLUS:

| TBC | L | 685 | * | 004 | C | □ | # | @ | 0 | ^ | ++ |
|-------------|------------------|---|---|---|---|---|--|--|--|--|---|
| Type | Case Size | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Capacitance Tolerance M = ±20% K = ±10% J = ±5% | Voltage Code 004 = 4Vdc 006 = 6.3Vdc 010 = 10Vdc 016 = 16Vdc 020 = 20Vdc 025 = 25Vdc | Standard or Low ESR Range C = Std ESR | Packaging B = Bulk R = 7" T&R S = 13" T&R W = Waffle See page 7 for additional packaging options. | Inspection Level S = Std. Conformance L = Group A | Reliability Grade Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. Z = Non-ER None required | Qualification Level 0 = N/A 9 = SRC9000 | Termination Finish 0 = Fused Solder Plated 9 = Gold Plated 7 = Matte Sn (COTS-Plus only) | Surge Test Option 00 = None 23 = 10 Cycles, +25°C 24 = 10 Cycles, -55°C & +85°C 45 = 10 cycles, -55°C & +85°C before Weibull |

Not RoHS Compliant



SPACE LEVEL OPTIONS TO SRC9000*:

| TBC | L | 685 | * | 004 | C | □ | L | @ | 9 | ^ | ++ |
|-------------|------------------|---|---|---|--|---|--|---|---|---|--|
| Type | Case Size | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Capacitance Tolerance M = ±20% K = ±10% J = ±5% | Voltage Code 004 = 4Vdc 006 = 6.3Vdc 010 = 10Vdc 016 = 16Vdc 020 = 20Vdc 025 = 25Vdc | Standard or Low ESR Range C = Std ESR L = Low ESR | Packaging B = Bulk R = 7" T&R S = 13" T&R W = Waffle See page 7 for additional packaging options. | Inspection Level L = Group A | Reliability Grade Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. | Qualification Level 9 = SRC9000 | Termination Finish 0 = Fused Solder Plated 9 = Gold Plated | Surge Test Option 45 = 10 cycles, -55°C & +85°C before Weibull |

Not RoHS Compliant

*Contact factory for AVX SRC9000 Space Level SCD details.

TECHNICAL SPECIFICATIONS

| | | | | | | | | |
|------------------------------------|--|-----|-----|----|----|----|----|--|
| Technical Data: | All technical data relate to an ambient temperature of +25°C | | | | | | | |
| Capacitance Range: | 0.33 µF to 68 µF | | | | | | | |
| Capacitance Tolerance: | ±5%; ±10%; ±20% | | | | | | | |
| Leakage Current DCL: | 0.01CV or 0.5µA whichever is the greater | | | | | | | |
| Rated Voltage (V _R) | ≧ +85°C: | 4 | 6.3 | 10 | 16 | 20 | 25 | |
| Category Voltage (V _C) | ≧ +125°C: | 2.7 | 4 | 7 | 10 | 13 | 17 | |
| Surge Voltage (V _S) | ≧ +85°C: | 5.2 | 8 | 13 | 20 | 26 | 32 | |
| Surge Voltage (V _S) | ≧ +125°C: | 3.2 | 5 | 8 | 12 | 16 | 20 | |
| Temperature Range: | -55°C to +125°C | | | | | | | |



TBC Series

TBC COTS-Plus



| RATING & PART NUMBER REFERENCE | | | | Parametric Specifications by Rating | | | | | | | | | Typical Ripple Data by Rating | | | | | | |
|---|------------------------------|------|---|-------------------------------------|---------------------|-----------------|---------|-------|--------|--------|-------------|-------|-------------------------------|----------------|----------------|-----------------|----------------|----------------|-----------------|
| | | | | Cap @ 120Hz | DC Rated Voltage | ESR @ 100kHz | DCL max | | | DF Max | | | Power Dissipation | 25°C Ripple | 85°C Ripple | 125°C Ripple | 25°C Ripple | 85°C Ripple | 125°C Ripple |
| | | | | | | | +25°C | +85°C | +125°C | +25°C | +(85/125)°C | -55°C | | | | | | | |
| AVX P/N | AVX SRC9000 P/N | Case | | μF @ 25°C | V @ +85°C | Ohms @ 25°C | (μA) | (μA) | (μA) | (%) | (%) | (%) | W | A (100kHz) | A (100kHz) | V (100kHz) | V (100kHz) | V (100kHz) | |
| 4 Volt @ 85°C (2.7 Volt @ 125°C) | | | | | | | | | | | | | | | | | | | |
| TBC R 106 * 004 C # @ 0 ^ ++ | TBC R 106 * 004 C L @ 9 ^ ++ | 0805 | R | 10 | 4.0 | 6 | 0.5 | 5.0 | 6.3 | 8 | 16 | 12 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| TBC R 156 * 004 C # @ 0 ^ ++ | TBC R 156 * 004 C L @ 9 ^ ++ | 0805 | R | 15 | 4.0 | 6 | 0.6 | 6.0 | 7.5 | 8 | 16 | 12 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| TBC R 226 * 004 C # @ 0 ^ ++ | TBC R 226 * 004 C L @ 9 ^ ++ | 0805 | R | 22 | 4.0 | 6 | 0.9 | 8.8 | 11.0 | 15 | 30 | 23 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| TBC R 336 * 004 C # @ 0 ^ ++ | TBC R 336 * 004 C L @ 9 ^ ++ | 0805 | R | 33 | 4.0 | 6 | 1.3 | 13.2 | 16.5 | 10 | 20 | 15 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| TBC A 686 * 004 C # @ 0 ^ ++ | TBC A 686 * 004 C L @ 9 ^ ++ | 1206 | A | 68 | 4.0 | 1 | 2.7 | 27.2 | 34.0 | 15 | 30 | 23 | 0.040 | 0.20 | 0.18 | 0.08 | 0.20 | 0.18 | 0.08 |
| 6.3 Volt @ 85°C (4 Volt @ 125°C) | | | | | | | | | | | | | | | | | | | |
| TBC L 475 * 006 C # @ 0 ^ ++ | TBC L 475 * 006 C L @ 9 ^ ++ | 0603 | L | 4.7 | 6.3 | 10 | 0.5 | 5.0 | 6.3 | 8 | 16 | 12 | 0.025 | 0.05 | 0.05 | 0.02 | 0.50 | 0.45 | 0.20 |
| TBC R 685 * 006 C # @ 0 ^ ++ | TBC R 685 * 006 C L @ 9 ^ ++ | 0805 | R | 6.8 | 6.3 | 6 | 0.5 | 5.0 | 6.3 | 8 | 16 | 12 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| TBC R 106 * 006 C # @ 0 ^ ++ | TBC R 106 * 006 C L @ 9 ^ ++ | 0805 | R | 10 | 6.3 | 6 | 0.6 | 6.3 | 7.9 | 8 | 16 | 12 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| TBC A 226 K 006 C # @ 0 ^ ++ | TBC A 226 K 006 C L @ 9 ^ ++ | 1206 | A | 22 | 6.3 | 6 | 1.4 | 13.9 | 17.3 | 10 | 20 | 15 | 0.040 | 0.08 | 0.07 | 0.03 | 0.49 | 0.44 | 0.20 |
| TBC A 336 K 006 C # @ 0 ^ ++ | TBC A 336 K 006 C L @ 9 ^ ++ | 1206 | A | 33 | 6.3 | 6 | 2.1 | 20.8 | 26.0 | 10 | 20 | 15 | 0.040 | 0.08 | 0.07 | 0.03 | 0.49 | 0.44 | 0.20 |
| TBC A 476 * 006 C # @ 0 ^ ++ | TBC A 476 * 006 C L @ 9 ^ ++ | 1206 | A | 47 | 6.3 | 1 | 3.0 | 29.6 | 37.0 | 15 | 30 | 23 | 0.040 | 0.20 | 0.18 | 0.08 | 0.20 | 0.18 | 0.08 |
| 10 Volt @ 85°C (7 Volt @ 125°C) | | | | | | | | | | | | | | | | | | | |
| TBC L 474 * 010 C # @ 0 ^ ++ | TBC L 474 * 010 C L @ 9 ^ ++ | 0603 | L | 0.47 | 10 | 12 | 0.5 | 5.0 | 6.3 | 6 | 12 | 9 | 0.025 | 0.05 | 0.04 | 0.02 | 0.55 | 0.49 | 0.22 |
| TBC L 684 * 010 C # @ 0 ^ ++ | TBC L 684 * 010 C L @ 9 ^ ++ | 0603 | L | 0.68 | 10 | 10 | 0.5 | 5.0 | 6.3 | 6 | 12 | 9 | 0.025 | 0.05 | 0.05 | 0.02 | 0.50 | 0.45 | 0.20 |
| TBC L 105 * 010 C # @ 0 ^ ++ | TBC L 105 * 010 C L @ 9 ^ ++ | 0603 | L | 1.0 | 10 | 10 | 0.5 | 5.0 | 6.3 | 6 | 12 | 9 | 0.025 | 0.05 | 0.05 | 0.02 | 0.50 | 0.45 | 0.20 |
| TBC L 155 * 010 C # @ 0 ^ ++ | TBC L 155 * 010 C L @ 9 ^ ++ | 0603 | L | 1.5 | 10 | 10 | 0.5 | 5.0 | 6.3 | 6 | 12 | 9 | 0.025 | 0.05 | 0.05 | 0.02 | 0.50 | 0.45 | 0.20 |
| TBC L 225 * 010 C # @ 0 ^ ++ | TBC L 225 * 010 C L @ 9 ^ ++ | 0603 | L | 2.2 | 10 | 10 | 0.5 | 5.0 | 6.3 | 6 | 12 | 9 | 0.025 | 0.05 | 0.05 | 0.02 | 0.50 | 0.45 | 0.20 |
| TBC R 335 * 010 C # @ 0 ^ ++ | TBC R 335 * 010 C L @ 9 ^ ++ | 0805 | R | 3.3 | 10 | 6 | 0.5 | 5.0 | 6.3 | 8 | 16 | 12 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| TBC R 475 * 010 C # @ 0 ^ ++ | TBC R 475 * 010 C L @ 9 ^ ++ | 0805 | R | 4.7 | 10 | 6 | 0.5 | 4.7 | 5.9 | 8 | 16 | 12 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| TBC R 685 * 010 C # @ 0 ^ ++ | TBC R 685 * 010 C L @ 9 ^ ++ | 0805 | R | 6.8 | 10 | 6 | 0.7 | 6.8 | 8.5 | 8 | 16 | 12 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| TBC R 106 * 010 C # @ 0 ^ ++ | TBC R 106 * 010 C L @ 9 ^ ++ | 0805 | R | 10 | 10 | 6 | 1.0 | 10.0 | 12.5 | 8 | 16 | 12 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| TBC A 156 * 010 C # @ 0 ^ ++ | TBC A 156 * 010 C L @ 9 ^ ++ | 1206 | A | 15 | 10 | 6 | 1.5 | 15.0 | 18.8 | 10 | 20 | 15 | 0.040 | 0.08 | 0.07 | 0.03 | 0.49 | 0.44 | 0.20 |
| 16 Volt @ 85°C (10 Volt @ 125°C) | | | | | | | | | | | | | | | | | | | |
| TBC L 474 * 016 C # @ 0 ^ ++ | TBC L 474 * 016 C L @ 9 ^ ++ | 0603 | L | 0.47 | 16 | 10 | 0.5 | 5.0 | 6.3 | 6 | 12 | 9 | 0.025 | 0.05 | 0.05 | 0.02 | 0.50 | 0.45 | 0.20 |
| TBC L 684 * 016 C # @ 0 ^ ++ | TBC L 684 * 016 C L @ 9 ^ ++ | 0603 | L | 0.68 | 16 | 10 | 0.5 | 5.0 | 6.3 | 6 | 12 | 9 | 0.025 | 0.05 | 0.05 | 0.02 | 0.50 | 0.45 | 0.20 |
| TBC R 475 * 016 C # @ 0 ^ ++ | TBC R 475 * 016 C L @ 9 ^ ++ | 0805 | R | 4.7 | 16 | 6 | 0.8 | 7.5 | 9.0 | 10 | 20 | 15 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| TBC A 106 * 016 C # @ 0 ^ ++ | TBC A 106 * 016 C L @ 9 ^ ++ | 1206 | A | 10 | 16 | 3 | 1.6 | 16.0 | 19.2 | 8 | 16 | 12 | 0.040 | 0.12 | 0.10 | 0.05 | 0.20 | 0.18 | 0.08 |
| 20 Volt @ 85°C (13 Volt @ 125°C) | | | | | | | | | | | | | | | | | | | |
| TBC L 474 * 020 C # @ 0 ^ ++ | TBC L 474 * 020 C L @ 9 ^ ++ | 0603 | L | 0.47 | 20 | 24 | 0.5 | 5.0 | 6.3 | 6 | 12 | 9 | 0.025 | 0.03 | 0.03 | 0.01 | 0.77 | 0.70 | 0.31 |
| TBC R 335 * 020 C # @ 0 ^ ++ | TBC R 335 * 020 C L @ 9 ^ ++ | 0805 | R | 3.3 | 20 | 6 | 0.7 | 6.6 | 8.3 | 8 | 16 | 12 | 0.045 | 0.09 | 0.08 | 0.03 | 0.52 | 0.47 | 0.21 |
| 25 Volt @ 85°C (17 Volt @ 125°C) | | | | | | | | | | | | | | | | | | | |
| TBC L 334 M 025 C # @ 0 ^ ++ | TBC L 334 M 025 C L @ 9 ^ ++ | 0603 | L | 0.33 | 25 | 30 | 0.5 | 5.0 | 6.3 | 6 | 12 | 9 | 0.025 | 0.03 | 0.03 | 0.01 | 0.87 | 0.78 | 0.35 |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.



TBC Series



HRC5000 Medical Grade



The TBC HRC5000 Medical Grade series is designed for use in medical implantable applications. These are some of the smallest surface mount tantalum capacitors available on the market which feature extremely low DC leakage limits well below typical values.




These components are manufactured and tested in the AVX Biddeford Maine factory which is ISO 13485 certified. Weibull grading and surge current testing options per MIL-PRF-55365 are available along with several plating options including tin/lead solder, 100% tin, or gold terminations.

To request a specific rating or for more information on HRC5000 testing details please contact the factory.

CASE DIMENSIONS: millimeters (inches)

| Case Code | EIA Code | Length (L) | Width (W) | Height (H) | Term. Width (P) min. |
|-----------|----------|--|--|--|----------------------|
| A | 1206 | 3.20±0.20 (0.126±0.008) | 1.60±0.20 (0.063±0.008) | 1.60±0.20 (0.063±0.008) | 0.15 (0.006) |
| B | 1411 | 3.60±0.20 (0.141±0.008) | 2.90±0.15 (0.114±0.006) | 1.50 max (0.06 max) | 0.15 (0.006) |
| L | 0603 | 1.60 ^{+0.25} _{-0.15} (0.063 ^{+0.010} _{-0.006}) | 0.84 ^{+0.20} _{-0.10} (0.033 ^{+0.008} _{-0.004}) | 0.84 ^{+0.20} _{-0.10} (0.033 ^{+0.008} _{-0.004}) | 0.15 (0.006) |
| R | 0805 | 2.00 ^{+0.25} _{-0.15} (0.079 ^{+0.010} _{-0.006}) | 1.35 ^{+0.20} _{-0.10} (0.053 ^{+0.008} _{-0.004}) | 1.35 ^{+0.20} _{-0.10} (0.053 ^{+0.008} _{-0.004}) | 0.15 (0.006) |
| S | 1207 | 3.20±0.20 (0.126±0.008) | 1.80±0.20 (0.071±0.008) | 1.50 max (0.06 max) | 0.15 (0.006) |

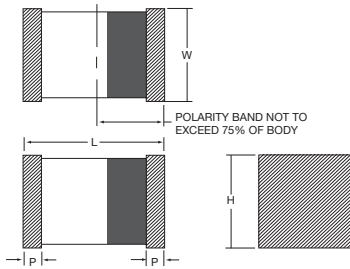

TECHNICAL SPECIFICATIONS

| | | | | | | | |
|------------------------------------|---|-----|-----|------|------|------|------|
| Technical Data: | Unless otherwise specified, all technical data relate to an ambient temperature of 25°C | | | | | | |
| Capacitance Range: | 0.47 µF to 47 µF | | | | | | |
| Capacitance Tolerance: | ±5%; ±10%; ±20% | | | | | | |
| Rated Voltage (V _R) | ≧ +85°C: | 4 | 6 | 10 | 16 | 20 | 40 |
| Category Voltage (V _C) | ≧ +125°C: | 2.7 | 4 | 6.7 | 10.7 | 13.3 | 26.7 |
| Surge Voltage (V _S) | ≧ +85°C: | 5.3 | 8 | 13.3 | 20.8 | 26.7 | 52 |
| Surge Voltage (V _S) | ≧ +125°C: | 3.5 | 5.3 | 8.7 | 13.9 | 17.8 | 34.7 |
| Temperature Range: | -55°C to +125°C | | | | | | |



HRC5000 Medical Grade

CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

| Capacitance | | Rated Voltage | | | | | | | |
|---------------|------|---------------|----|-----|-----------|-----|-----|-----|-----|
| μF | Code | 4V | 6V | 10V | 16V | 20V | 25V | 35V | 40V |
| 0.10 | 104 | | | | | | | | |
| 0.22 | 224 | | | | | | | | |
| 0.33 | 334 | | | | | | | | |
| 0.47 | 474 | | | L | | | | | |
| 0.68 | 684 | | | | | | | | |
| 1 | 105 | | | L | | R | | | A |
| 1.5 | 155 | | | | | | | | |
| 2.2 | 225 | | | L | | | | | |
| 3.3 | 335 | | L | R | | | | | |
| 4.7 | 475 | | | R | R | | | | |
| 6.8 | 685 | | | R | | | | | |
| 10 | 106 | | | R | R/A (17v) | | | | |
| 15 | 156 | R | | | | | | | |
| 22 | 226 | | | | | | | | |
| 33 | 336 | | | | | | | | |
| 47 | 476 | | S | B | | | | | |
| 68 | 686 | | | | | | | | |

HOW TO ORDER

| | | | | | | | | | | | |
|------------|-----------|--|---|---|-------------|--------------------------------------|------------------|---|---------------------|---|---|
| TBC | R | 106 | * | 010 | C | □ | L | @ | 5 | ^ | ++ |
| Type | Case Size | Capacitance Code | Capacitance Tolerance | Voltage Code | ESR | Packaging | Inspection Level | Reliability Grade | Qualification Level | Termination Finish | Surge Test Option |
| | | pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | J = $\pm 5\%$ K = $\pm 10\%$ M = $\pm 20\%$ | 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 016 = 16Vdc 017 = 17Vdc 020 = 20Vdc 040 = 40Vdc | C = Std ESR | B = Bulk R = 7" T&R W = Waffle | L = Group A | Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. | 5 = HRC5000 | 0 = Solder Fused 9 = Gold Plated 7 = 100% Tin | 00 = None 23 = 10 Cycles, +25°C 24 = 10 Cycles, -55°C & +85°C 45 = 10 Cycles, -55°C & +85°C before Weibull |

*Contact factory for AVX HRC5000 Medical Grade SCD details.

Not RoHS Compliant



TBC Series

HRC5000 Medical Grade



| RATING & PART NUMBER REFERENCE | | Parametric Specifications by Rating | | | | | | | | | Typical Ripple Data by Rating | | | | | | |
|--------------------------------|------|-------------------------------------|------------------|--------------|---------|--------|--------|--------|-----------|-------|-------------------------------|---------------------|---------------------|----------------------|---------------------|---------------------|----------------------|
| | | Cap @ 120Hz | DC Rated Voltage | ESR @ 100kHz | DCL max | | | DF max | | | Power Dissipation | 25°C Ripple Current | 85°C Ripple Current | 125°C Ripple Current | 25°C Ripple Voltage | 85°C Ripple Voltage | 125°C Ripple Voltage |
| | | | | | +25°C | +85°C | +125°C | +25°C | +85/125°C | -55°C | | | | | | | |
| AVX HRC5000 P/N | Case | µF @ 25°C | V @ +85°C | Ohms @ +25°C | (µA) | (µA) | (µA) | (%) | (%) | (%) | | | | | | | |
| TBCR156*004C□L@5^++ | R | 15 | 4 | 6 | 0.150 | 1.500 | 1.800 | 8 | 16 | 12 | 0.045 | 0.087 | 0.078 | 0.035 | 0.014 | 0.013 | 0.006 |
| TBCL335*006C□L@5^++ | L | 3.3 | 6 | 10 | 0.100 | 1.000 | 1.200 | 6 | 12 | 9 | 0.025 | 0.050 | 0.045 | 0.020 | 0.005 | 0.005 | 0.002 |
| TBCS476*006C□L@5^++ | S | 47 | 6 | 4 | 0.470 | 4.7 | 5.64 | 6 | 8 | 9 | 0.040 | 0.100 | 0.090 | 0.040 | 0.025 | 0.023 | 0.010 |
| TBCL474*010C□L@5^++ | L | 0.47 | 10 | 12 | 0.100 | 1.000 | 1.200 | 6 | 12 | 9 | 0.025 | 0.046 | 0.041 | 0.018 | 0.004 | 0.003 | 0.002 |
| TBCL105*010C□L@5^++ | L | 1 | 10 | 10 | 0.100 | 1.000 | 1.200 | 6 | 12 | 9 | 0.025 | 0.050 | 0.045 | 0.020 | 0.005 | 0.005 | 0.002 |
| TBCL225*010C□L@5^++ | L | 2.2 | 10 | 10 | 0.100 | 1.000 | 1.200 | 6 | 12 | 9 | 0.025 | 0.050 | 0.045 | 0.020 | 0.005 | 0.005 | 0.002 |
| TBCR335*010C□L@5^++ | R | 3.3 | 10 | 6 | 0.100 | 1.000 | 1.200 | 8 | 16 | 12 | 0.045 | 0.087 | 0.078 | 0.035 | 0.014 | 0.013 | 0.006 |
| TBCR475*010C□L@5^++ | R | 4.7 | 10 | 6 | 0.118 | 1.175 | 1.410 | 8 | 16 | 12 | 0.045 | 0.087 | 0.078 | 0.035 | 0.014 | 0.013 | 0.006 |
| TBCR685*010C□L@5^++ | R | 6.8 | 10 | 6 | 0.170 | 1.700 | 2.040 | 8 | 16 | 12 | 0.045 | 0.087 | 0.078 | 0.035 | 0.014 | 0.013 | 0.006 |
| TBCR106*010C□L@5^++ | R | 10 | 10 | 6 | 0.250 | 2.500 | 3.000 | 8 | 16 | 12 | 0.045 | 0.087 | 0.078 | 0.035 | 0.014 | 0.013 | 0.006 |
| TBCB476*010C□L@5^++ | B | 47 | 10 | 1 | 1.175 | 11.750 | 14.100 | 15 | 30 | 23 | 0.040 | 0.200 | 0.180 | 0.080 | 0.200 | 0.180 | 0.080 |
| TBCR475*016C□L@5^++ | R | 4.7 | 16 | 6 | 0.188 | 1.880 | 2.256 | 8 | 10 | 12 | 0.045 | 0.087 | 0.078 | 0.035 | 0.014 | 0.013 | 0.006 |
| TBCR106*016C□L@5^++ | R | 10 | 16 | 5 | 0.400 | 4.000 | 4.800 | 8 | 16 | 12 | 0.045 | 0.095 | 0.085 | 0.038 | 0.019 | 0.017 | 0.008 |
| TBCA106*017C□L@5^++ | A | 10 | 17 | 3 | 0.425 | 4.250 | 5.100 | 8 | 16 | 12 | 0.040 | 0.115 | 0.104 | 0.046 | 0.038 | 0.035 | 0.015 |
| TBCR105*020C□L@5^++ | R | 1 | 20 | 6 | 0.100 | 1.000 | 1.200 | 8 | 16 | 12 | 0.045 | 0.087 | 0.078 | 0.035 | 0.014 | 0.013 | 0.006 |
| TBCA105*040C□L@5^++ | A | 1 | 40 | 6 | 0.100 | 1.000 | 1.200 | 8 | 16 | 12 | 0.040 | 0.082 | 0.073 | 0.033 | 0.014 | 0.012 | 0.005 |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.



TBC Series



HRC6000 Medical Grade




The TBC HRC6000 Medical Grade series is the next generation of our internally qualified medical grade tantalum capacitors. These components are screened using our newly designed Q-Process to effectively remove components that may experience parametric shifts through customer processing or display instability through life testing.



Due to the deficiencies of Weibull grading and its tendency to Burn-In potentially unstable units, this Q-Process utilizes a Product Level Designation system based on a simulated production routine performed on a sample from the population. Once that is completed a calculation is done based on the performance of the sample which can take into account the application conditions of the end customer. This system also allows for derating recommendations to be relaxed as illustrated by the section below.

These components are manufactured and tested in the AVX Biddeford Maine factory which is ISO 13485 certified. For more information on this process or to request a specific rating please contact the factory.

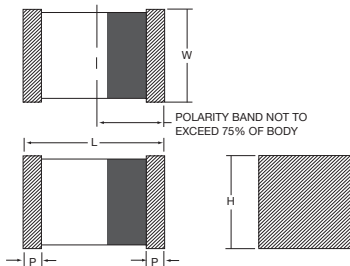

CASE DIMENSIONS: millimeters (inches)

| Case Code | EIA Code | Length (L) | Width (W) | Height (H) | Term. Width (P) min. |
|-----------|----------|--|--|--|----------------------|
| L | 0603 | 1.60 ^{+0.25} _{-0.15} (0.063 ^{+0.010} _{-0.006}) | 0.84 ^{+0.20} _{-0.10} (0.033 ^{+0.008} _{-0.004}) | 0.84 ^{+0.20} _{-0.10} (0.033 ^{+0.008} _{-0.004}) | 0.15 (0.006) |
| R | 0805 | 2.00 ^{+0.25} _{-0.15} (0.079 ^{+0.010} _{-0.006}) | 1.35 ^{+0.20} _{-0.10} (0.053 ^{+0.008} _{-0.004}) | 1.35 ^{+0.20} _{-0.10} (0.053 ^{+0.008} _{-0.004}) | 0.15 (0.006) |

TECHNICAL SPECIFICATIONS

| | | | |
|------------------------------------|--|-----|--|
| Technical Data: | Unless otherwise specified, all technical data relate to an ambient temperature of +25°C | | |
| Capacitance Range: | 2.2 μF to 10 μF | | |
| Capacitance Tolerance: | ±5%; ±10%; ±20% | | |
| Rated Voltage (V _R) | ≧ +85°C: | 10 | |
| Category Voltage (V _C) | ≧ +125°C: | 6.7 | |
| Temperature Range: | -55°C to +125°C | | |



TBC Series



HRC6000 Medical Grade

CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

| Capacitance | | Rated Voltage | | | | | | | |
|---------------|------|---------------|----|-----|-----|-----|-----|-----|-----|
| μF | Code | 4V | 6V | 10V | 16V | 20V | 25V | 35V | 40V |
| 0.33 | 334 | | | | | | | | |
| 0.47 | 474 | | | | | | | | |
| 0.68 | 684 | | | | | | | | |
| 1 | 105 | | | | | | | | |
| 1.5 | 155 | | | | | | | | |
| 2.2 | 225 | | | L | | | | | |
| 3.3 | 335 | | | | | | | | |
| 4.7 | 475 | | | | | | | | |
| 6.8 | 685 | | | | | | | | |
| 10 | 106 | | | R | | | | | |
| 15 | 156 | | | | | | | | |
| 22 | 226 | | | | | | | | |

HOW TO ORDER

| | | | | | | | | | | | |
|------------|-----------|---|---|--------------|-------------|--------------------------------------|------------------|--|---------------------|---|---------------|
| TBC | R | 106 | * | 010 | C | □ | L | @ | 6 | ^ | ++ |
| Type | Case Size | Capacitance Code | Capacitance Tolerance | Voltage Code | ESR | Packaging | Inspection Level | Reliability Grade | Qualification Level | Termination Finish | Custom Option |
| | | pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | J = $\pm 5\%$ K = $\pm 10\%$ M = $\pm 20\%$ | 010 = 10Vdc | C = Std ESR | B = Bulk R = 7* T&R W = Waffle | L = Group A | Product Level Designator: P = 0.1%/1000 hrs. 60% conf. R = 0.01%/1000 hrs. 60% conf. | 6 = HRC6000 | 0 = Solder Fused 9 = Gold Plated 7 = 100% Matte Tin | 00 = Std |

*Contact factory for AVX HRC6000 Medical Grade SCD details.

Not RoHS Compliant



TBC Series



HRC6000 Medical Grade

| RATING & PART NUMBER REFERENCE | | Parametric Specifications by Rating | | | | | | | | | Typical Ripple Data by Rating | | | | | | |
|--------------------------------|------|-------------------------------------|------------------|--------------|---------|-------|--------|--------|-----------|-------|-------------------------------|---------------------|---------------------|----------------------|---------------------|---------------------|----------------------|
| | | Cap @ 120Hz | DC Rated Voltage | ESR @ 100kHz | DCL max | | | DF max | | | Power Dissipation | 25°C Ripple Current | 85°C Ripple Current | 125°C Ripple Current | 25°C Ripple Voltage | 85°C Ripple Voltage | 125°C Ripple Voltage |
| | | | | | +25°C | +85°C | +125°C | +25°C | +85/125°C | -55°C | | | | | | | |
| AVX HRC6000 P/N | Case | µF @ 25°C | V @ +85°C | Ohms @ +25°C | (µA) | (µA) | (µA) | (%) | (%) | (%) | W | A (100kHz) | A (100kHz) | A (100kHz) | V (100kHz) | V (100kHz) | V (100kHz) |
| TBCL225*010C□L@6^++ | L | 2.2 | 10 | 10 | 0.055 | 0.550 | 0.660 | 6 | 12 | 9 | 0.025 | 0.050 | 0.045 | 0.020 | 0.005 | 0.005 | 0.002 |
| TBCR106*010C□L@6^++ | R | 10 | 10 | 6 | 0.250 | 2.500 | 3.000 | 8 | 16 | 12 | 0.045 | 0.087 | 0.078 | 0.035 | 0.014 | 0.013 | 0.006 |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.


HRC6000 DERATING GUIDELINES

Due to our new Q-Process test procedures the need for a typical 50% derating of the capacitors rated voltage in application can be relaxed. Below is a table outlining some of the common applications where these components are utilized along with appropriate derating recommendations. When determining the appropriate capacitor voltage rating to utilize, the application voltage is determined by the maximum D.C. voltage with the addition of any A.C. ripple voltage that may be present.

| Recommended Derating | Application |
|----------------------|-------------|
| 20% | Filtering |
| 0% | Pacing |
| 0% | Hold-Up |
| 0% | Charging |



Niobium Oxide Capacitor Weibull Grade

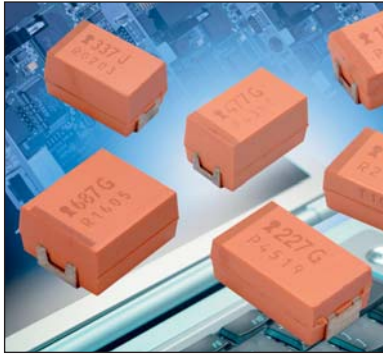


NBS, Niobium Oxide COTS+ Capacitors offer a non-burn solution for Military and Space applications. Niobium Oxide COTS+ Capacitors may be specified with failure rate grading to Weibull "B" or "C"

and surge current tested in accordance with MIL-PRF-55365 Rev. G options A or B.

CASE DIMENSIONS: millimeters (inches)

| Code | EIA Code | L±0.20 (0.008) | W+0.20 (0.008) -0.10 (0.004) | H+0.20 (0.008) -0.10 (0.004) | W ₁ ±0.20 (0.008) | A+0.30 (0.012) -0.20 (0.008) | S Min. |
|------|----------|-------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|--------------|
| A | 3216 | 3.20 (0.126) | 1.60 (0.063) | 1.60 (0.063) | 1.20 (0.047) | 0.80 (0.031) | 1.80 (0.071) |
| B | 3528 | 3.50 (0.138) | 2.80 (0.110) | 1.90 (0.075) | 2.20 (0.087) | 0.80 (0.031) | 1.40 (0.055) |
| C | 6032 | 6.00 (0.236) | 3.20 (0.126) | 2.60 (0.102) | 2.20 (0.087) | 1.30 (0.051) | 2.90 (0.114) |
| D | 7343 | 7.30 (0.287) | 4.30 (0.169) | 2.90 (0.114) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |
| E | 7343 | 7.30 (0.287) | 4.30 (0.169) | 4.10 (0.162) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |
| V | 7361 | 7.30 (0.287) | 6.10 (0.240) | 3.55 (0.140) | 3.10 (0.120) | 1.30 (0.051) | 1.80 (0.071) |

W₁ dimension applies to the termination width for A dimensional area only.

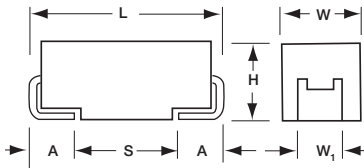

CAPACITANCE AND RATED VOLTAGE RANGE (LETTER DENOTES CASE SIZE)

| Capacitance | | Rated Voltage DC (V _R) to 85°C / 0.66 DC to 105°C / 0.5 DC to 125°C | | | |
|-------------|------|---|------------------|---------------------|------------------------|
| μF | Code | 1.8V (x) | 2.5V (e) | 4.0V (G) | 6.3V (J) |
| 4.7 | 475 | | | | |
| 6.8 | 685 | | | | |
| 10 | 106 | | | | A(1000,2000) |
| 15 | 156 | | | A(1500) | B(600) |
| 22 | 226 | | A(900) | B(600) | B(600) |
| 33 | 336 | | | B(600) | B(600)/C(500) |
| 47 | 476 | | B(500) | B(500)/C(300) | C(300) |
| 68 | 686 | | C(200) | C(200) | C(75,200) |
| 100 | 107 | B(350) | C(150) | C(70,150) | C(150)/D(80,100) |
| 150 | 157 | | C(65,150) | C(90,150) | D(50,70,100) |
| 220 | 227 | C(125) | C(80,125) | D(60,100) | D(60,100) E(80,100) |
| 330 | 337 | | D(35,50,100) | D(55,100)/E(100) | E(80,100) |
| 470 | 477 | | D(55,100)/E(100) | D(100) E(75,100) | V(75) |
| 680 | 687 | | E(60) | V(75) | |
| 1000 | 108 | | V(50) | | |
| 1500 | 158 | | | | |

Available Ratings: ESR limits quoted in brackets (mOhms)

Niobium Oxide Capacitor Weibull Grade

HOW TO ORDER

| NBS | E | 227 | * | 006 | C | □ | # | @ | 0 | ^ | ++ |
|------|-----------|---|-----------------------|--|---------------------------|---|---|---|---------------------|---|---|
| Type | Case Size | Capacitance Code | Capacitance Tolerance | Voltage Code | Standard or Low ESR Range | Packaging | Inspection Level | Reliability Grade | Qualification Level | Termination Finish | Surge Test Option |
| | | pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | M = ±20% | 001 = 1.8Vdc 002 = 2.5Vdc 004 = 4Vdc 006 = 6.3Vdc | L = Low ESR | B = Bulk R = 7* T&R S = 13* T&R W = Waffle See page 7 for additional packaging options. | S = Std. Conformance L = Group A D = DSCC DWG | Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. | 0 = N/A | H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated 7 = Matte Sn (COTS-Plus only) | 00 = None 23 = 10 Cycles, +25°C 24 = 10 Cycles, -55°C & +85°C 45 = 10 cycles, -55°C & +85°C before Weibull |

Not RoHS Compliant




TECHNICAL SPECIFICATIONS

| | | | | | |
|------------------------------------|--|-----|-----|-----|-----|
| Technical Data: | All technical data relate to an ambient temperature of +25°C is not stated | | | | |
| Capacitance Range: | 10 µF to 1000 µF | | | | |
| Capacitance Tolerance: | ±20% | | | | |
| Leakage Current DCL: | 0.02CV | | | | |
| Rated Voltage (V _R) | ≤+85°C: | 1.8 | 2.5 | 4 | 6.3 |
| Category Voltage (V _C) | ≤+125°C: | 0.9 | 1.3 | 2 | 3 |
| Surge Voltage (V _S) | ≤+85°C: | 2.3 | 3.3 | 5.2 | 8 |
| | ≤+125°C: | 1.2 | 1.7 | 2.6 | 4 |
| Temperature Range: | -55°C to +125°C | | | | |

NBM Multianodes




OxiCap® Ultra Low ESR Capacitor COTS-Plus Weibull Grade

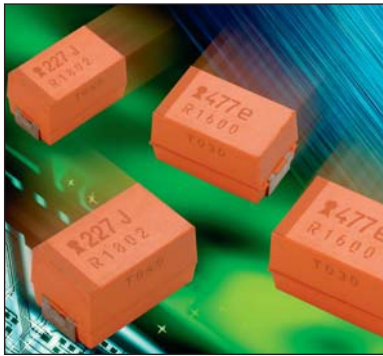

NBM OxiCap® capacitors are the COTS-Plus version of the popular NOM Low ESR multianode capacitor. Capacitors are available to Weibull failure rates B and C along with surge current testing per

MIL-PRF-55365 Rev. G. Niobium oxide technology offers non-burn characteristics along with excellent reliability and reduced derating.

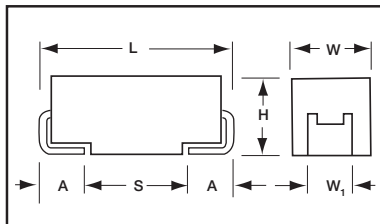

CASE DIMENSIONS: millimeters (inches)

| Code | EIA Code | L±0.20 (0.008) | W+0.20 (0.008) -0.10 (0.004) | H+0.20 (0.008) -0.10 (0.004) | W ₁ ±0.20 (0.008) | A+0.30 (0.012) -0.20 (0.008) | S Min. |
|------|----------|----------------|------------------------------|------------------------------|------------------------------|------------------------------|--------------|
| E | 7343-43 | 7.30 (0.287) | 4.30 (0.169) | 4.10 (0.162) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |

W₁ dimension applies to the termination width for A dimensional area only.

CAPACITANCE AND RATED VOLTAGE RANGE (LETTER DENOTES CASE SIZE)

| Capacitance | | Rated Voltage DC (V _R) to 85°C / 0.66 DC to 105°C / 0.5 DC to 125°C | | | |
|-------------|------|---|----------|----------|----------|
| μF | Code | 1.8V (x) | 2.5V (e) | 4.0V (G) | 6.0V (J) |
| 150 | 157 | | | | |
| 220 | 227 | | | | E(40) |
| 330 | 337 | | | E(35) | E(23) |
| 470 | 477 | | E(30) | E(23) | |
| 680 | 687 | E(23) | E(23) | | |
| 1000 | 108 | | | | |

Available Ratings: ESR limits quoted in brackets (mOhms)

TECHNICAL SPECIFICATIONS

| | | | | | |
|------------------------------------|--|-----|-----|-----|---|
| Technical Data: | All technical data relate to an ambient temperature of +25°C is not stated | | | | |
| Capacitance Range: | 220 μF to 680 μF | | | | |
| Capacitance Tolerance: | ±20% | | | | |
| Leakage Current DCL: | 0.02CV | | | | |
| Rated Voltage DC (V _R) | ≤+85°C: | 1.8 | 2.5 | 4 | 6 |
| Category Voltage (V _C) | ≤+125°C: | 0.9 | 1.3 | 2 | 3 |
| Surge Voltage (V _S) | ≤+85°C: | 2.3 | 3.3 | 5.2 | 8 |
| | ≤+125°C: | 1.2 | 1.7 | 2.6 | 4 |
| Temperature Range: | -55°C to +125°C | | | | |



HOW TO ORDER

| NBM | E | 227 | * | 006 | C | □ | # | @ | 0 | ^ | ++ |
|------|-----------|--|-----------------------------------|--|--|--|---|---|--------------------------------|---|--|
| Type | Case Size | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Capacitance Tolerance M = ±20% | Voltage Code 001 = 1.8Vdc 002 = 2.5Vdc 004 = 4Vdc 006 = 6Vdc | Standard or Low ESR Range L = Low ESR | Packaging B = Bulk R = 7" T&R S = 13" T&R W = Waffle See page 7 for additional packaging options. | Inspection Level S = Std. Conformance L = Group A D = DSCC DWG | Reliability Grade Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. | Qualification Level 0 = N/A | Termination Finish H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated 7 = Matte Sn (COTS-Plus only) | Surge Test Option 00 = None 23 = 10 Cycles, +25°C 24 = 10 Cycles, -55°C & +85°C 45 = 10 cycles, -55°C & +85°C before Weibull |

Not RoHS Compliant



RATINGS & PART NUMBER REFERENCE

| AVX Part No. | Case Size | Capacitance (µF) | Rated Voltage(V) | DCL (µA) | DF % | ESR Max. (mΩ) | 100kHz Ripple Current Ratings (A) | | | 100kHz Ripple Voltage Ratings (V) | | |
|---|-----------|------------------|------------------|----------|------|---------------|-----------------------------------|-------|-------|-----------------------------------|-------|-------|
| | | | | | | | 25°C | 85°C | 125°C | 25°C | 85°C | 125°C |
| 1.8 Volt @ 85°C (1.2 Volt @ 105°C, 0.9 Volt @ 125°C) | | | | | | | | | | | | |
| NBME687M001C□SB07++ | E | 680 | 1.8 | 24.5 | 6 | 23 | 3.753 | 3.378 | 1.501 | 0.086 | 0.078 | 0.035 |
| 2.5 Volt @ 85°C (1.7 Volt @ 105°C, 1.3 Volt @ 125°C) | | | | | | | | | | | | |
| NBME477M002C□SB07++ | E | 470 | 2.5 | 23.5 | 10 | 30 | 3.286 | 2.958 | 1.315 | 0.099 | 0.089 | 0.039 |
| NBME687M002C□SB07++ | E | 680 | 2.5 | 34 | 6 | 23 | 3.753 | 3.378 | 1.501 | 0.086 | 0.078 | 0.035 |
| 4 Volt @ 85°C (2.7 Volt @ 105°C, 2 Volt @ 125°C) | | | | | | | | | | | | |
| NBME337M004C□SB07++ | E | 330 | 4 | 26.4 | 8 | 35 | 3.043 | 2.738 | 1.217 | 0.106 | 0.096 | 0.043 |
| NBME477M004C□SB07++ | E | 470 | 4 | 37.6 | 6 | 23 | 3.753 | 3.378 | 1.501 | 0.086 | 0.078 | 0.035 |
| 6 Volt @ 85°C (4 Volt @ 105°C, 3 Volt @ 125°C) | | | | | | | | | | | | |
| NBME227M006C□SB07++ | E | 220 | 6 | 26.4 | 12 | 40 | 2.846 | 2.561 | 1.138 | 0.114 | 0.102 | 0.046 |
| NBME337M006C□SB07++ | E | 330 | 6 | 39.6 | 6 | 23 | 3.753 | 3.378 | 1.501 | 0.086 | 0.078 | 0.035 |


All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2V. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the rights to supply higher voltage rating in the same case size, to the same reliability standards.

TWA Series – DSCC 93026



TWA Wet Electrolytic Tantalum Capacitor

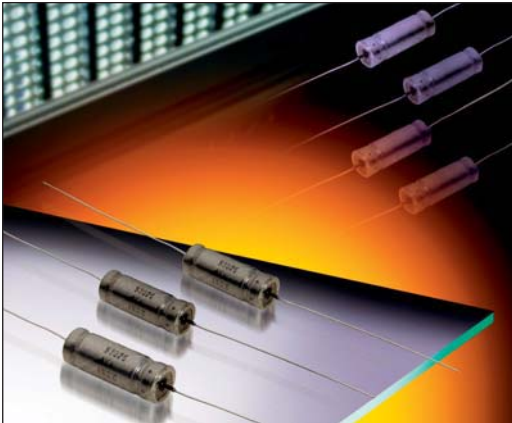


The TWA series is an axial leaded wet electrolytic tantalum capacitor and represents a new level of high CV (capacitance/voltage) previously unavailable in this technology. TWA incorporates a novel, very high capacitance cathode system that allows for higher CV designs, well beyond values specified in the Mil-PRF-39006 drawing.

TWA products are listed in DSCC 93026, which includes new high capacitance/voltage ratings. This design includes a welded tantalum can and header assembly that provides a hermetic seal to withstand harsh shock and vibration requirements of 39006. Wet tantalums do not require the same derating as solid tantalums. AVX recommends derating components by only 20% in order to enhance reliability.

Customized capacitance and voltage packages are possible and welcomed. Contact the factory about design possibilities beyond those contained in this datasheet.

OUTLINE DIMENSIONS

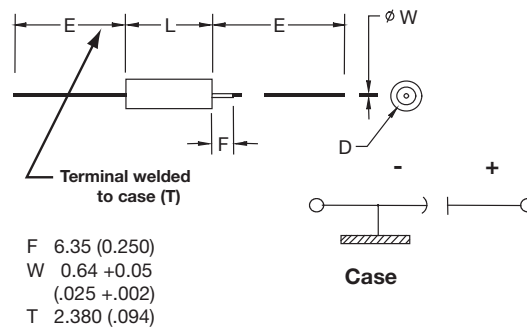

CASE DIMENSIONS: millimeters (inches)

| DSCC Case Size | AVX Case Size | L | D | | E |
|----------------|---------------|--------------------------------|---------------------------|----------------------------|---------------|
| | | | Without Insulating Sleeve | With Insulating Sleeve Max | |
| | | +0.79 (0.031) -0.41 (0.016) | ±0.41 (0.016) | | ±6.35 (0.250) |
| T1 | A | 11.51 (0.453) | 4.78 (0.188) | 5.56 (0.219) | 38.10 (1.500) |
| T2 | B | 16.28 (0.641) | 7.14 (0.281) | 7.92 (0.312) | 57.15 (2.250) |
| T3 | D | 19.46 (0.766) | 9.52 (0.375) | 10.31 (0.406) | 57.15 (2.250) |
| T4 | E | 26.97 (1.062) | 9.52 (0.375) | 10.31 (0.406) | 57.15 (2.250) |

VOLTAGE RATINGS (Operating Temperature -55°C to 125°C)

| Voltage (DC) | | | | | | | | |
|-----------------------|-------|------|------|------|----|------|-----|-----|
| Rated Voltage: (Ur) | 85°C | 25 | 30 | 50 | 60 | 75 | 100 | 125 |
| Derated Voltage: (Uc) | 125°C | 15 | 20 | 30 | 40 | 50 | 65 | 85 |
| Surge Voltage: (Us) | 85°C | 28.8 | 34.5 | 57.5 | 69 | 86.3 | 115 | 144 |




TWA Series – DSCC 93026



TWA Wet Electrolytic Tantalum Capacitor

HOW TO ORDER

AVX PART NUMBER:

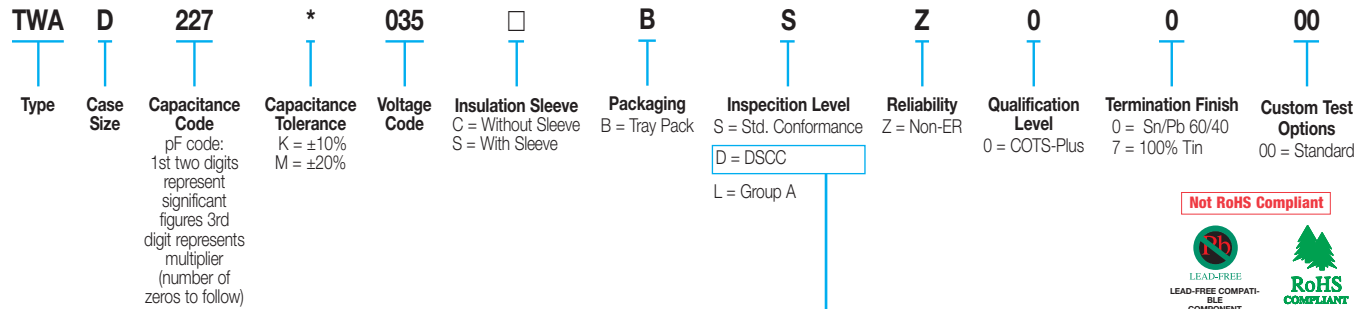

Not RoHS Compliant



DSCC PART IDENTIFICATION NUMBER (PIN):



RIPPLE CURRENT MULTIPLIERS vs. Frequency, temperature and applied voltage^{1/2/}

| Frequency of Applied Ripple Current | 120Hz | | | | 800Hz | | | | 1kHz | | | |
|-------------------------------------|-------|------|------|------|-------|------|------|------|------|------|------|------|
| | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 |
| Ambient Still Air Temperature (°C) | | | | | | | | | | | | |
| % of 100% | 0.60 | 0.39 | – | – | 0.71 | 0.43 | – | – | 0.72 | 0.45 | – | – |
| 85°C | 0.60 | 0.46 | – | – | 0.71 | 0.55 | – | – | 0.72 | 0.55 | – | – |
| Rated | 0.60 | 0.52 | 0.35 | – | 0.71 | 0.62 | 0.42 | – | 0.72 | 0.62 | 0.42 | – |
| Peak | 0.60 | 0.58 | 0.44 | – | 0.71 | 0.69 | 0.52 | – | 0.72 | 0.70 | 0.52 | – |
| Voltage | 0.60 | 0.60 | 0.46 | 0.27 | 0.71 | 0.71 | 0.55 | 0.32 | 0.72 | 0.72 | 0.55 | 0.32 |

| Frequency of Applied Ripple Current | 10kHz | | | | 40kHz | | | | 100kHz | | | |
|-------------------------------------|-------|------|------|------|-------|------|------|------|--------|------|------|------|
| | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 |
| Ambient Still Air Temperature (°C) | | | | | | | | | | | | |
| % of 100% | 0.88 | 0.55 | – | – | 1.00 | 0.63 | – | – | 1.10 | 0.69 | – | – |
| 85°C | 0.88 | 0.67 | – | – | 1.00 | 0.77 | – | – | 1.10 | 0.85 | – | – |
| Rated | 0.88 | 0.76 | 0.52 | – | 1.00 | 0.87 | 0.59 | – | 1.10 | 0.96 | 0.65 | – |
| Peak | 0.88 | 0.85 | 0.64 | – | 1.00 | 0.97 | 0.73 | – | 1.10 | 1.07 | 0.80 | – |
| Voltage | 0.88 | 0.88 | 0.68 | 0.40 | 1.00 | 1.00 | 0.77 | 0.45 | 1.10 | 1.10 | 0.85 | 0.50 |

1/ At 125°C the rated voltage of the capacitors decreases to 66 2/3 of the 85°C rated voltage.

2/ The peak of the applied ac ripple voltage plus the applied dc voltage must not exceed the dc voltage rating of the capacitors.



TWA Series – DSCC 93026



TWA Wet Electrolytic Tantalum Capacitor

RATINGS & PART NUMBER REFERENCE


| AVX Part Number | DSCC Part Number | Cap (µF) 25°C at 120Hz | DC Rated Voltage (V) at 85°C | ESR max (ohms) at 120Hz | DC Leakage max (µA) | | Impedance max (Ohms) -55°C at 120Hz | Maximum Capacitance Change (%) | | | AC Ripple (mA rms) 85°C at 40kHz | Case Size | |
|--|------------------|------------------------------|---------------------------------|----------------------------|---------------------|---------------|--|--------------------------------|-------|--------|-------------------------------------|-----------|------|
| | | | | | +25°C | +85°C & 125°C | | -55°C | +85°C | +125°C | | AVX | DSCC |
| 25 VDC at 85°C 15 VDC at 125°C | | | | | | | | | | | | | |
| TWAA127*025□BSZ0000 | 93026- 29□ | 120 | 25 | 1.3 | 1 | 5 | 25 | -42 | 8 | 12 | 1250 | A | T1 |
| TWAB567*025□BSZ0000 | 93026- 30□ | 560 | 25 | 0.83 | 2 | 10 | 12 | -65 | 10 | 15 | 2100 | B | T2 |
| TWAD128*025□BSZ0000 | 93026- 31□ | 1200 | 25 | 0.65 | 5 | 20 | 7 | -70 | 12 | 18 | 2600 | D | T3 |
| TWAE188*025□BSZ0000 | 93026- 32□ | 1800 | 25 | 0.5 | 6 | 25 | 7 | -75 | 12 | 20 | 3100 | E | T4 |
| TWAE228*025□BSZ0000 | 93026- 64□ | 2200 | 25 | 0.5 | 10 | 80 | 10 | -90 | 30 | 50 | 3200 | E | T4 |
| 30 VDC at 85°C 20 VDC at 125°C | | | | | | | | | | | | | |
| TWAA107*030□BSZ0000 | 93026- 33□ | 100 | 30 | 1.3 | 1 | 5 | 25 | -38 | 8 | 12 | 1200 | A | T1 |
| TWAB477*030□BSZ0000 | 93026- 34□ | 470 | 30 | 0.85 | 2 | 10 | 15 | -65 | 10 | 18 | 1800 | B | T2 |
| TWAD108*030□BSZ0000 | 93026- 35□ | 1000 | 30 | 0.7 | 7 | 25 | 7 | -70 | 10 | 18 | 2500 | D | T3 |
| TWAE158*030□BSZ0000 | 93026- 36□ | 1500 | 30 | 0.6 | 12 | 35 | 6 | -72 | 10 | 20 | 3000 | E | T4 |
| 50 VDC at 85°C 30 VDC at 125°C | | | | | | | | | | | | | |
| TWAA686*050□BSZ0000 | 93026- 37□ | 68 | 50 | 1.5 | 1 | 5 | 35 | -25 | 8 | 15 | 1050 | A | T1 |
| TWAB227*050□BSZ0000 | 93026- 38□ | 220 | 50 | 0.9 | 2 | 10 | 17.5 | -50 | 8 | 15 | 1800 | B | T2 |
| TWAD477*050□BSZ0000 | 93026- 39□ | 470 | 50 | 0.75 | 3 | 25 | 10 | -50 | 8 | 15 | 2100 | D | T3 |
| TWAE687*050□BSZ0000 | 93026- 40□ | 680 | 50 | 0.7 | 5 | 40 | 8 | -58 | 10 | 20 | 2750 | E | T4 |
| 60 VDC at 85°C 40 VDC at 125°C | | | | | | | | | | | | | |
| TWAA476*060□BSZ0000 | 93026- 41□ | 47 | 60 | 2 | 1 | 5 | 44 | -25 | 8 | 12 | 1050 | A | T1 |
| TWAB157*060□BSZ0000 | 93026- 42□ | 150 | 60 | 1.1 | 2 | 10 | 20 | -40 | 8 | 15 | 1650 | B | T2 |
| TWAD397*060□BSZ0000 | 93026- 43□ | 390 | 60 | 0.9 | 3 | 25 | 15 | -60 | 8 | 15 | 2100 | D | T3 |
| TWAE567*060□BSZ0000 | 93026- 44□ | 560 | 60 | 0.8 | 5 | 40 | 10 | -58 | 8 | 15 | 2750 | E | T4 |
| TWAE108*060□BSZ0000 | 93026- 65□ | 1000 | 60 | 1 | 12 | 90 | 20 | -90 | 30 | 50 | 3200 | E | T4 |
| 75 VDC at 85°C 50 VDC at 125°C | | | | | | | | | | | | | |
| TWAA336*075□BSZ0000 | 93026- 45□ | 33 | 75 | 2.5 | 1 | 5 | 66 | -25 | 5 | 9 | 1050 | A | T1 |
| TWAB117*075□BSZ0000 | 93026- 46□ | 110 | 75 | 1.3 | 2 | 10 | 24 | -35 | 6 | 10 | 1650 | B | T2 |
| TWAD337*075□BSZ0000 | 93026- 47□ | 330 | 75 | 1 | 3 | 30 | 12 | -45 | 6 | 10 | 2100 | D | T3 |
| TWAE477*075□BSZ0000 | 93026- 48□ | 470 | 75 | 0.9 | 5 | 50 | 12 | -55 | 6 | 10 | 2750 | E | T4 |
| 100 VDC at 85°C 65 VDC at 125°C | | | | | | | | | | | | | |
| TWAA156*100□BSZ0000 | 93026- 49□ | 15 | 100 | 3.5 | 1 | 5 | 125 | -18 | 3 | 10 | 1050 | A | T1 |
| TWAB686*100□BSZ0000 | 93026- 50□ | 68 | 100 | 2.1 | 2 | 10 | 37 | -30 | 4 | 12 | 1650 | B | T2 |
| TWAD157*100□BSZ0000 | 93026- 51□ | 150 | 100 | 1.6 | 3 | 25 | 22 | -35 | 6 | 12 | 2100 | D | T3 |
| TWAE227*100□BSZ0000 | 93026- 52□ | 220 | 100 | 1.2 | 5 | 50 | 15 | -40 | 6 | 12 | 2750 | E | T4 |
| 125 VDC at 85°C 85 VDC at 125°C | | | | | | | | | | | | | |
| TWAA106*125□BSZ0000 | 93026- 53□ | 10 | 125 | 5.5 | 1 | 5 | 175 | -15 | 3 | 10 | 1050 | A | T1 |
| TWAB476*125□BSZ0000 | 93026- 54□ | 47 | 125 | 2.3 | 2 | 10 | 47 | -25 | 5 | 12 | 1650 | B | T2 |
| TWAD107*125□BSZ0000 | 93026- 55□ | 100 | 125 | 1.8 | 3 | 25 | 35 | -35 | 5 | 12 | 2100 | D | T3 |
| TWAE157*125□BSZ0000 | 93026- 56□ | 150 | 125 | 1.6 | 5 | 50 | 20 | -35 | 6 | 12 | 2750 | E | T4 |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2V. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the rights to supply higher voltage rating in the same case size, to the same reliability standards.



CECC Wet Electrolytic Tantalum Capacitor

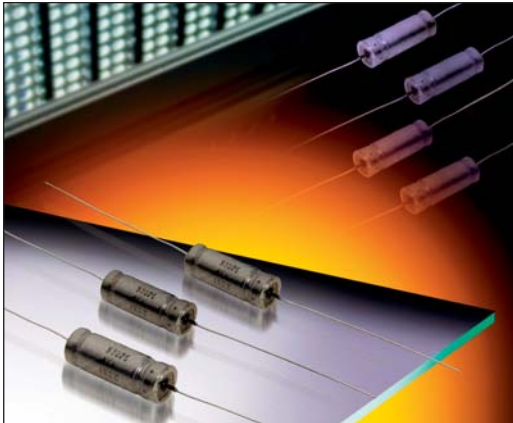


The TWA-E series is an axial leaded wet electrolytic tantalum capacitor manufactured in EU in accordance with CECC 30 202-001. High capacitance cathode system allows high level of CV (Capacitance/Voltage) in DSCC compatible case sizes.

This design includes a welded tantalum can and header assembly that provides a hermetic seal to withstand harsh shock and vibration requirements of MIL-PRF-39006.

Customized capacitance and voltage packages are possible and welcomed. Contact the factory about design possibilities beyond those contained in this datasheet.

OUTLINE DIMENSIONS

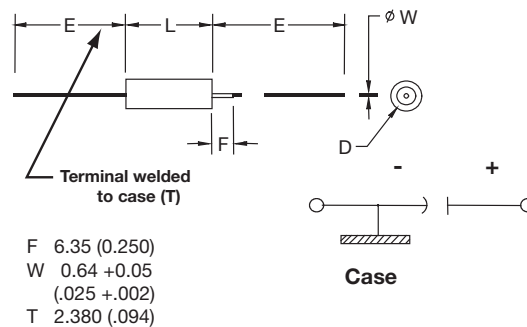

CASE DIMENSIONS: millimeters (inches)

| DSCC Case Size | AVX Case Size | L +0.79 (0.031) -0.41 (0.016) | D | | E ±6.35 (0.250) |
|----------------|---------------|-------------------------------------|--|-------------------------------|--------------------|
| | | | Without Insulating Sleeve ±0.41 (0.016) | With Insulating Sleeve Max | |
| T1 | A | 11.51 (0.453) | 4.78 (0.188) | 5.56 (0.219) | 38.10 (1.500) |
| T2 | B | 16.28 (0.641) | 7.14 (0.281) | 7.92 (0.312) | 57.15 (2.250) |
| T3 | D | 19.46 (0.766) | 9.52 (0.375) | 10.31 (0.406) | 57.15 (2.250) |
| T4 | E | 26.97 (1.062) | 9.52 (0.375) | 10.31 (0.406) | 57.15 (2.250) |

VOLTAGE RATINGS (Operating Temperature -55°C to 125°C)

| Voltage (DC) | | | | | | | | |
|------------------------------------|-------|------|------|------|----|------|-----|-----|
| Rated Voltage: (V _R) | 85°C | 25 | 30 | 50 | 60 | 75 | 100 | 125 |
| Derated Voltage: (V _C) | 125°C | 15 | 20 | 30 | 40 | 50 | 65 | 85 |
| Surge Voltage: (V _S) | 85°C | 28.8 | 34.5 | 57.5 | 69 | 86.3 | 115 | 144 |

TWA-E Series



CECC Wet Electrolytic Tantalum Capacitor

HOW TO ORDER

AVX PART NUMBER:

| | | | | | | | | | | | |
|------------|-----------|--|-----------------------|--------------|---------------------------------------|---------------|-------------------------------------|-------------|---------------------|----------------------------------|---------------------|
| TWA | D | 337 | * | 050 | □ | B | E | Z | 0 | ^ | 00 |
| Type | Case Size | Capacitance Code | Capacitance Tolerance | Voltage Code | Insulation Sleeve | Packaging | Inspection Level | Reliability | Qualification Level | Termination Finish | Custom Test Options |
| | | pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | K = ±10% M = ±20% | | C = Without Sleeve S = With Sleeve | B = Tray Pack | E = In accordance with CECC testing | Z = Non-ER | 0 = N/A | 0 = Sn/Pb 60/40 7 = Matte tin | 00 = Standard |

Not RoHS Compliant



RIPPLE CURRENT MULTIPLIERS vs. Frequency, temperature and applied voltage^{1/2/}

| Frequency of Applied Ripple Current | | 120Hz | | | | 800Hz | | | | 1kHz | | | |
|-------------------------------------|---------|-------|------|------|------|-------|------|------|------|------|------|------|------|
| Ambient Still Air Temperature (°C) | | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 |
| % of | 100% | 0.60 | 0.39 | – | – | 0.71 | 0.43 | – | – | 0.72 | 0.45 | – | – |
| 85°C | 90% | 0.60 | 0.46 | – | – | 0.71 | 0.55 | – | – | 0.72 | 0.55 | – | – |
| Rated Peak | 80% | 0.60 | 0.52 | 0.35 | – | 0.71 | 0.62 | 0.42 | – | 0.72 | 0.62 | 0.42 | – |
| | 70% | 0.60 | 0.58 | 0.44 | – | 0.71 | 0.69 | 0.52 | – | 0.72 | 0.70 | 0.52 | – |
| Voltage | 66-2/3% | 0.60 | 0.60 | 0.46 | 0.27 | 0.71 | 0.71 | 0.55 | 0.32 | 0.72 | 0.72 | 0.55 | 0.32 |

| Frequency of Applied Ripple Current | | 10kHz | | | | 40kHz | | | | 100kHz | | | |
|-------------------------------------|---------|-------|------|------|------|-------|------|------|------|--------|------|------|------|
| Ambient Still Air Temperature (°C) | | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 |
| % of | 100% | 0.88 | 0.55 | – | – | 1.00 | 0.63 | – | – | 1.10 | 0.69 | – | – |
| 85°C | 90% | 0.88 | 0.67 | – | – | 1.00 | 0.77 | – | – | 1.10 | 0.85 | – | – |
| Rated Peak | 80% | 0.88 | 0.76 | 0.52 | – | 1.00 | 0.87 | 0.59 | – | 1.10 | 0.96 | 0.65 | – |
| | 70% | 0.88 | 0.85 | 0.64 | – | 1.00 | 0.97 | 0.73 | – | 1.10 | 1.07 | 0.80 | – |
| Voltage | 66-2/3% | 0.88 | 0.88 | 0.68 | 0.40 | 1.00 | 1.00 | 0.77 | 0.45 | 1.10 | 1.10 | 0.85 | 0.50 |

1/ At 125°C the rated voltage of the capacitors decreases to 66 2/3 of the 85°C rated voltage.

2/ The peak of the applied ac ripple voltage plus the applied dc voltage must not exceed the dc voltage rating of the capacitors.



TWA-E Series



CECC Wet Electrolytic Tantalum Capacitor

CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

| Capacitance | | Rated Voltage DC (V_R) to 85°C | | | | | | |
|---------------|------|------------------------------------|-----|------|-----|------|------|------|
| μF | Code | 25V | 30V | 50V | 60V | 75V | 100V | 125V |
| 15 | 156 | | | | | | | A* |
| 22 | 226 | | | | | | A* | |
| 33 | 336 | | | | | A* | | |
| 47 | 476 | | | A* | | | | B* |
| 68 | 686 | A | | | | | B | |
| 100 | 107 | | | | B | B | | |
| 120 | 127 | | | B | | | | D* |
| 150 | 157 | | | B | | | D | E* |
| 220 | 227 | | B | | | D*,E | E | |
| 330 | 337 | B | | D*,E | | E | E | |
| 470 | 477 | | | D,E | | E | | |
| 560 | 567 | D* | | | E | | | |
| 680 | 687 | E | D | E | | | | |
| 750 | 757 | D,E | D | | | E | E* | |
| 1000 | 108 | D,E | E | D* | | | | |
| 1500 | 158 | E | | | | | | |
| 4700 | 478 | E | | | | | | |

Released codes

Engineering samples - please contact manufacturer

*Codes under development

TWA-E Series



CECC Wet Electrolytic Tantalum Capacitor

RATINGS & PART NUMBER REFERENCE

| AVX Part Number | Cap (µF) 25°C at 120Hz | DC Rated Voltage (V) at 85°C | ESR Max (ohms) at 120Hz | DC Leakage max (µA) | | TANG δ Max +25°C (%) | Impedance max (Ohms) -55°C at 120Hz | Maximum Capacitance Change (%) | | | Case Size | |
|---|------------------------------|------------------------------------|-------------------------------|---------------------|-----------------|-------------------------|---|-----------------------------------|-------|--------|-----------|------|
| | | | | +25°C | +85 & +125°C | | | -55°C | +85°C | +125°C | AVX | DSCC |
| 25 VDC at 85°C 15 VDC at 125°C | | | | | | | | | | | | |
| TWAA686*025□BEZ0^00 | 68 | 25 | 2.5 | 0.6 | 3 | 12 | 45 | -40 | 12 | 15 | A | T1 |
| TWAB337*025□BEZ0^00 | 330 | 25 | 1.3 | 2 | 20 | 30 | 25 | -60 | 10 | 15 | B | T2 |
| TWAE687*025□BEZ0^00 | 680 | 25 | 0.75 | 3 | 12 | 45 | 12 | -50 | 8 | 15 | E | T4 |
| TWAD757*025□BEZ0^00 | 750 | 25 | 1 | 3 | 25 | 45 | 15 | -50 | 8 | 15 | D | T3 |
| TWAE757*025□BEZ0^00 | 750 | 25 | 0.75 | 3.5 | 16 | 50 | 9 | -55 | 10 | 18 | E | T4 |
| TWAD108*025□BEZ0^00 | 1000 | 25 | 1 | 4 | 30 | 45 | 15 | -50 | 8 | 15 | D | T3 |
| TWAE108*025□BEZ0^00 | 1000 | 25 | 0.7 | 4 | 20 | 60 | 9 | -55 | 10 | 18 | E | T4 |
| TWAE158*025□BEZ0^00 | 1500 | 25 | 0.5 | 6 | 24 | 65 | 7 | -65 | 15 | 20 | E | T4 |
| TWAE478*025□BEZ0^00 | 4700 | 25 | 0.25 | 18 | 92 | 90 | 1.8 | -74 | 32 | 34 | E | T4 |
| 30 VDC at 85°C 20 VDC at 125°C | | | | | | | | | | | | |
| TWAB227*030□BEZ0^00 | 220 | 30 | 2 | 1.9 | 10 | 15 | 30 | -40 | 8 | 15 | B | T2 |
| TWAD687*030□BEZ0^00 | 680 | 30 | 1 | 3.3 | 25 | 45 | 15 | -50 | 8 | 15 | D | T3 |
| TWAD757*030□BEZ0^00 | 750 | 30 | 1 | 3.6 | 30 | 45 | 15 | -50 | 8 | 15 | D | T3 |
| TWAE108*030□BEZ0^00 | 1000 | 30 | 0.7 | 5 | 20 | 55 | 7 | -70 | 10 | 18 | E | T4 |
| 50 VDC at 85°C 30 VDC at 125°C | | | | | | | | | | | | |
| TWAA476*050□BEZ0^00 | 47 | 50 | 2 | 1 | 5 | 9 | 35 | -25 | 8 | 15 | A | T1 |
| TWAB127*050□BEZ0^00 | 120 | 50 | 2 | 2 | 10 | 14 | 30 | -45 | 8 | 15 | B | T2 |
| TWAB157*050□BEZ0^00 | 150 | 50 | 2 | 2 | 10 | 16 | 25 | -50 | 8 | 15 | B | T2 |
| TWAD337*050□BEZ0^00 | 330 | 50 | 0.85 | 3 | 25 | 25 | 15 | -50 | 8 | 15 | D | T3 |
| TWAE337*050□BEZ0^00 | 330 | 50 | 0.8 | 2.5 | 25 | 24 | 15 | -50 | 8 | 15 | E | T4 |
| TWAD477*050□BEZ0^00 | 470 | 50 | 1 | 3 | 25 | 35 | 11 | -50 | 8 | 15 | D | T3 |
| TWAE477*050□BEZ0^00 | 470 | 50 | 0.75 | 3 | 30 | 32 | 10 | -50 | 8 | 15 | E | T4 |
| TWAE687*050□BEZ0^00 | 680 | 50 | 0.7 | 5 | 40 | 42 | 8 | -58 | 10 | 20 | E | T4 |
| TWAD108*050□BEZ0^00 | 1000 | 50 | 1.2 | 15 | 125 | 100 | 15 | -90 | 100 | 140 | D | T3 |
| 60 VDC at 85°C 40 VDC at 125°C | | | | | | | | | | | | |
| TWAB107*060□BEZ0^00 | 100 | 60 | 2.5 | 1.7 | 10 | 12 | 30 | -40 | 8 | 15 | B | T2 |
| TWAE567*060□BEZ0^00 | 560 | 60 | 0.8 | 5 | 40 | 45 | 10 | -58 | 8 | 15 | E | T4 |
| 75 VDC at 85°C 50 VDC at 125°C | | | | | | | | | | | | |
| TWAA336*075□BEZ0^00 | 33 | 75 | 2.5 | 1 | 5 | 8 | 66 | -25 | 5 | 9 | A | T1 |
| TWAB107*075□BEZ0^00 | 100 | 75 | 2.5 | 2 | 10 | 12 | 24 | -35 | 6 | 10 | B | T2 |
| TWAD227*075□BEZ0^00 | 220 | 75 | 1.2 | 3 | 30 | 24 | 20 | -45 | 6 | 10 | D | T3 |
| TWAE227*075□BEZ0^00 | 220 | 75 | 1.1 | 2.5 | 30 | 22 | 20 | -50 | 6 | 10 | E | T4 |
| TWAE337*075□BEZ0^00 | 330 | 75 | 1 | 3 | 40 | 30 | 12 | -50 | 6 | 10 | E | T4 |
| TWAE477*075□BEZ0^00 | 470 | 75 | 0.9 | 5 | 50 | 38 | 12 | -55 | 6 | 10 | E | T4 |
| TWAE757*075□BEZ0^00 | 750 | 75 | 0.7 | 12 | 120 | 60 | 10 | -40 | 20 | 30 | E | T4 |
| 100 VDC at 85°C 65 VDC at 125°C | | | | | | | | | | | | |
| TWAA226*100□BEZ0^00 | 22 | 100 | 3.5 | 1 | 5 | 7 | 125 | -18 | 3 | 10 | A | T1 |
| TWAB686*100□BEZ0^00 | 68 | 100 | 2.5 | 2 | 10 | 13 | 37 | -30 | 4 | 12 | B | T2 |
| TWAD157*100□BEZ0^00 | 150 | 100 | 1.6 | 3 | 25 | 22 | 22 | -35 | 6 | 12 | D | T3 |
| TWAE227*100□BEZ0^00 | 220 | 100 | 1.2 | 5 | 50 | 24 | 15 | -40 | 6 | 12 | E | T4 |
| TWAE337*100□BEZ0^00 | 330 | 100 | 0.8 | 6 | 60 | 30 | 10 | -45 | 7 | 20 | E | T4 |
| TWAE757*100□BEZ0^00 | 750 | 100 | 0.7 | 20 | 200 | 45 | 10 | -40 | 20 | 50 | E | T4 |


All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2V. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the rights to supply higher voltage rating in the same case size, to the same reliability standards.

MIL-PRF-39006 Series



Military Conventional Wet Tantalum

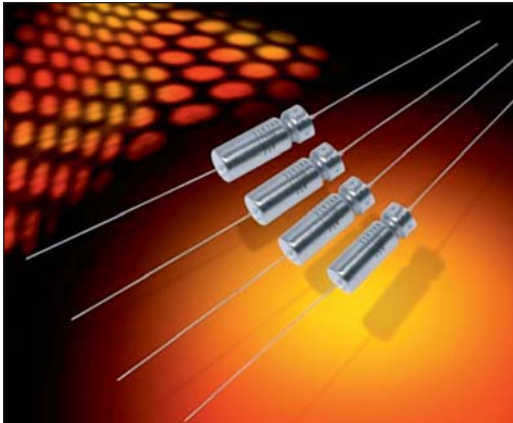


This data sheet contains the MIL-PRF-39006 ratings for which AVX is a qualified approved supplier. This will be continually updated as the qualification expands. For COTS-Plus equivalent ratings please refer to the TWC data sheet located on the website.

This design is an axial leaded tubular case. It includes a welded tantalum can and header assembly that provides a hermetic seal to withstand harsh environments. The 1000 hour failure rates of 1%, 0.1% and 0.01% correspond to "M", "P", and "R" respectively. For details on testing conditions please refer to MIL-PRF-39006.

Currently qualified M39006 ratings include T2-T4 case sizes:

| | M Level Reliability Dashes | P Level Reliability Dashes | R Level Reliability Dashes |
|-----------|-------------------------------|-------------------------------|-------------------------------|
| M39006/22 | 6V-100V | 6V-100V | 6V-100V |
| M39006/25 | 6V-100V | 6V-100V | 6V-100V |
| M39006/30 | 6V-100V | 6V-100V | 6V-100V |
| M39006/31 | 6V-100V | 6V-100V | 6V-100V |

OUTLINE DIMENSIONS

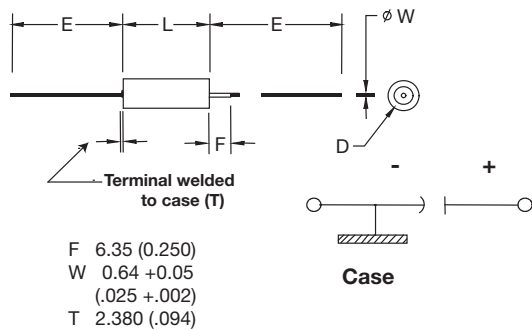

CASE DIMENSIONS: millimeters (inches)

| DSCC Case Size | AVX Case Size | L | D | D | E |
|----------------|---------------|--------------------------------|-----------------------------|-----------------------|---------------|
| | | +0.79 (0.031) -0.41 (0.016) | Basic Case ±0.41 (0.016) | Insulated Case Max | ±6.35 (0.250) |
| T1 | A | 11.51 (0.453) | 4.78 (0.188) | 5.56 (0.219) | 38.10 (1.500) |
| T2 | B | 16.28 (0.641) | 7.14 (0.281) | 7.92 (0.312) | 57.15 (2.250) |
| T3 | D | 19.46 (0.766) | 9.52 (0.375) | 10.31 (0.406) | 57.15 (2.250) |
| T4 | E | 26.97 (1.062) | 9.52 (0.375) | 10.31 (0.406) | 57.15 (2.250) |

VOLTAGE RATINGS (Operating Temperature -55°C to 125°C)

| Voltage (DC) | | | | | | | | | | | | |
|----------------------------|-------|-----|-----|------|------|------|------|------|----|------|-----|-----|
| Rated Voltage: (V_r) | 85°C | 6 | 8 | 10 | 15 | 25 | 30 | 50 | 60 | 75 | 100 | 125 |
| Derated Voltage: (V_d) | 125°C | 4 | 5 | 6 | 10 | 15 | 20 | 30 | 40 | 50 | 65 | 85 |
| Surge Voltage: (V_s) | 85°C | 6.9 | 9.2 | 11.5 | 17.3 | 28.8 | 34.5 | 57.5 | 69 | 86.3 | 115 | 144 |




MIL-PRF-39006 Series



Military Conventional Wet Tantalum

HOW TO ORDER MILITARY M39006 PART NUMBER:

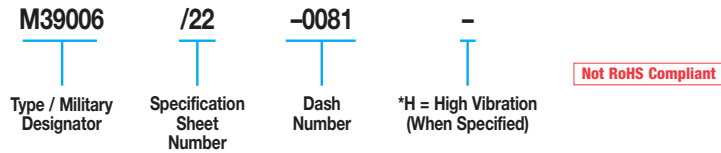

*High vibration qualified parts are currently under development. Please contact the factory for additional details and availability.

RIPPLE CURRENT MULTIPLIERS vs. Frequency, temperature and applied voltage^{1/2/3/}

| Frequency of Applied Ripple Current | | 120Hz | | | | 800Hz | | | | 1kHz | | | |
|-------------------------------------|---------|-------|------|------|------|-------|------|------|------|------|------|------|------|
| Ambient Still Air Temperature (°C) | | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 |
| % of | 100% | 0.60 | 0.39 | - | - | 0.71 | 0.43 | - | - | 0.72 | 0.45 | - | - |
| 85°C | 90% | 0.60 | 0.46 | - | - | 0.71 | 0.55 | - | - | 0.72 | 0.55 | - | - |
| Rated | 80% | 0.60 | 0.52 | 0.35 | - | 0.71 | 0.62 | 0.42 | - | 0.72 | 0.62 | 0.42 | - |
| Peak | 70% | 0.60 | 0.58 | 0.44 | - | 0.71 | 0.69 | 0.52 | - | 0.72 | 0.70 | 0.52 | - |
| Voltage | 66-2/3% | 0.60 | 0.60 | 0.46 | 0.27 | 0.71 | 0.71 | 0.55 | 0.32 | 0.72 | 0.72 | 0.55 | 0.32 |

| Frequency of Applied Ripple Current | | 10kHz | | | | 40kHz | | | | 100kHz | | | |
|-------------------------------------|---------|-------|------|------|------|-------|------|------|------|--------|------|------|------|
| Ambient Still Air Temperature (°C) | | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 |
| % of | 100% | 0.88 | 0.55 | - | - | 1.00 | 0.63 | - | - | 1.10 | 0.69 | - | - |
| 85°C | 90% | 0.88 | 0.67 | - | - | 1.00 | 0.77 | - | - | 1.10 | 0.85 | - | - |
| Rated | 80% | 0.88 | 0.76 | 0.52 | - | 1.00 | 0.87 | 0.59 | - | 1.10 | 0.96 | 0.65 | - |
| Peak | 70% | 0.88 | 0.85 | 0.64 | - | 1.00 | 0.97 | 0.73 | - | 1.10 | 1.07 | 0.80 | - |
| Voltage | 66-2/3% | 0.88 | 0.88 | 0.68 | 0.40 | 1.00 | 1.00 | 0.77 | 0.45 | 1.10 | 1.10 | 0.85 | 0.50 |

1/ At 125°C the rated voltage of the capacitors decreases to 66 2/3 of the 85°C rated voltage.

2/ The peak of the applied ac ripple voltage plus the applied dc voltage must not exceed the dc voltage rating of the capacitors.

3/ The ripple current listed in the parametric tables represents a rating calculated by using a maximum internal temperature rise (ΔT) at 50°C at 40 kHz at 85°C ambient temperature, with a maximum peak rated voltage of 66.67 percent of the 85°C peak voltage rating.



MIL-PRF-39006 Series



Military Conventional Wet Tantalum

M39006 /22 RATINGS AND DASH NUMBER REFERENCE

| M39006/22 Dashes | | | Tolerance ± (%) | Cap (µF) 25°C at 120Hz | DC Rated Voltage (V) at 85°C | DC Leakage (µA) | | DF max (%) | ESR max (Ohms) at 120Hz | Impedance max (Ohms) -55°C at 120Hz | Maximum Capacitance Change (%) | | | AC Ripple (mA rms) 85°C at 40kHz | Case Size | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------|---------|---------|-----------------|------------------------|------------------------------|-----------------|---------------|------------|-------------------------|-------------------------------------|--------------------------------|-------|--------|----------------------------------|-----------|----|-------|-------|-------|---|-------|-------|-------|----|-------|-------|-------|----|-------|-------|-------|---|-------|-------|-------|----|-------|-------|-------|----|-------|-------|-------|---|-------|-------|-------|----|-------|-------|-------|----|-------|-------|-------|---|
| M Level | P Level | R Level | | | | +25°C | +85°C & 125°C | | | | -55°C | +85°C | +125°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0007 | -0227 | -0447 | 20 | 140 | 6 | 1 | 3 | 21 | 1.99 | 40 | -40 | 14 | 16 | 1200 | T2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0008 | -0228 | -0448 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0009 | -0229 | -0449 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0010 | -0230 | -0450 | 20 | 270 | 6 | 1 | 6.5 | 45 | 2.21 | 25 | -44 | 17.5 | 20 | 1375 | T2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0011 | -0231 | -0451 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0012 | -0232 | -0452 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0013 | -0233 | -0453 | 20 | 330 | 6 | 2 | 7.9 | 36 | 1.45 | 20 | -44 | 14 | 16 | 1800 | T3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0014 | -0234 | -0454 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0015 | -0235 | -0455 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0016 | -0236 | -0456 | 20 | 560 | 6 | 2 | 13 | 55 | 1.3 | 25 | -64 | 17.5 | 20 | 1900 | T3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0017 | -0237 | -0457 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0018 | -0238 | -0458 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0019 | -0239 | -0459 | 20 | 1200 | 6 | 3 | 14 | 90 | 1 | 20 | -80 | 25 | 25 | 2265 | T4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0020 | -0240 | -0460 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0021 | -0241 | -0461 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0022 | -0242 | -0462 | 20 | 120 | 8 | 1 | 2 | 20 | 2.21 | 50 | -44 | 17.5 | 20 | 1220 | T2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0023 | -0243 | -0463 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0024 | -0244 | -0464 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0025 | -0245 | -0465 | 20 | 220 | 8 | 1 | 7 | 37 | 2.23 | 30 | -44 | 17.5 | 20 | 1370 | T2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0026 | -0246 | -0466 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0027 | -0247 | -0467 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0028 | -0248 | -0468 | 20 | 290 | 8 | 2 | 6 | 34 | 1.56 | 25 | -64 | 17.5 | 20 | 1770 | T3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0029 | -0249 | -0469 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0030 | -0250 | -0470 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0031 | -0251 | -0471 | 20 | 430 | 8 | 2 | 14 | 46 | 1.42 | 25 | -64 | 17.5 | 20 | 1825 | T3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0032 | -0252 | -0472 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0033 | -0253 | -0473 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0034 | -0254 | -0474 | 20 | 850 | 8 | 4 | 16 | 60 | 0.94 | 22 | -80 | 25 | 25 | 2330 | T4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0035 | -0255 | -0475 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0036 | -0256 | -0476 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0037 | -0257 | -0477 | 20 | 100 | 10 | 1 | 4 | 15 | 1.99 | 60 | -36 | 14 | 16 | 1200 | T2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0038 | -0258 | -0478 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0039 | -0259 | -0479 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0040 | -0260 | -0480 | 20 | 180 | 10 | 1 | 7 | 30 | 2.21 | 40 | -36 | 14 | 16 | 1.365 | T2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0041 | -0261 | -0481 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0042 | -0262 | -0482 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0043 | -0263 | -0483 | 20 | 250 | 10 | 2 | 10 | 30 | 1.59 | 30 | -40 | 14 | 16 | 1720 | T3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0044 | -0264 | -0484 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0045 | -0265 | -0485 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0046 | -0266 | -0486 | 20 | 390 | 10 | 2 | 16 | 44 | 1.5 | 25 | -64 | 17.5 | 20 | 1800 | T3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0047 | -0267 | -0487 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0048 | -0268 | -0488 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0049 | -0269 | -0489 | 20 | 750 | 10 | 4 | 16 | 50 | 0.88 | 23 | -80 | 25 | 25 | 2360 | T4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0050 | -0270 | -0490 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0051 | -0271 | -0491 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0052 | -0272 | -0492 | 20 | 70 | 15 | 1 | 4 | 13 | 2.46 | 75 | -28 | 14 | 16 | 1150 | T2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0053 | -0273 | -0493 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0054 | -0274 | -0494 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0055 | -0275 | -0495 | 20 | 120 | 15 | 1 | 7 | 18 | 1.99 | 50 | -28 | 17.5 | 20 | 1450 | T2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0056 | -0276 | -0496 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0057 | -0277 | -0497 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0058 | -0278 | -0498 | 20 | 170 | 15 | 2 | 10 | 25 | 1.95 | 35 | -32 | 14 | 16 | 1480 | T3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0059 | -0279 | -0499 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0060 | -0280 | -0500 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0061 | -0281 | -0501 | 20 | 270 | 15 | 2 | 16 | 32 | 1.57 | 30 | -56 | 17.5 | 20 | 1740 | T3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0062 | -0282 | -0502 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0063 | -0283 | -0503 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0064 | -0284 | -0504 | 20 | 540 | 15 | 6 | 24 | 40 | 0.98 | 23 | -80 | 25 | 25 | 2330 | T4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0065 | -0285 | -0505 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0066 | -0286 | -0506 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0067 | -0287 | -0507 | 20 | 50 | 25 | 1 | 2 | 11 | 2.92 | 70 | -28 | 13 | 15 | 1130 | T2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0068 | -0288 | -0508 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0069 | -0289 | -0509 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0070 | -0290 | -0510 | 20 | 100 | 25 | 1 | 10 | 15 | 1.99 | 50 | -28 | 13 | 15 | 1435 | T2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0071 | -0291 | -0511 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0072 | -0292 | -0512 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0073 | -0293 | -0513 | 20 | 120 | 25 | 2 | 6 | 21 | 2.32 | 38 | -32 | 13 | 15 | 1450 | T3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0074 | -0294 | -0514 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0075 | -0295 | -0515 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0076 | -0296 | -0516 | 20 | 180 | 25 | 2 | 18 | 26 | 1.92 | 32 | -48 | 13 | 15 | 1525 | T3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0077 | -0297 | -0517 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0078 | -0298 | -0518 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -0079 | -0299 | -0519 | 20 | -0080 | -0300 | -0520 | 10 | 20 | -0087 | -0307 | -0527 | 20 | -0088 | -0308 | -0528 | 10 | -0089 | -0309 | -0529 | 5 | -0090 | -0310 | -0530 | 20 | -0091 | -0311 | -0531 | 10 | -0092 | -0312 | -0532 | 5 | -0093 | -0313 | -0533 | 20 | -0094 | -0314 | -0534 | 10 | -0095 | -0315 | -0535 | 5 | -0096 | -0316 | -0536 | 20 | -0097 | -0317 | -0537 | 10 | -0098 | -0318 | -0538 | 5 |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2V. DCL is measured at rated voltage after 5 minutes.



MIL-PRF-39006 Series



Military Conventional Wet Tantalum

| M39006/22 Dashes | | | Tolerance ± (%) | Cap (µF) 25°C at 120Hz | DC Rated Voltage (V) at 85°C | DC Leakage (µA) | | DF max (%) | ESR max (Ohms) at 120Hz | Impedance max (Ohms) -55°C at 120Hz | Maximum Capacitance Change (%) | | | AC Ripple (mA rms) 85°C at 40kHz | Case Size |
|------------------|---------|---------|-----------------|------------------------|------------------------------|-----------------|---------------|------------|-------------------------|-------------------------------------|--------------------------------|-------|--------|----------------------------------|-----------|
| M Level | P Level | R Level | | | | +25°C | +85°C & 125°C | | | | -55°C | +85°C | +125°C | | |
| -0099 | -0319 | -0539 | 20 | 350 | 25 | 7 | 28 | 35 | 1.33 | 24 | -70 | 25 | 25 | 1970 | T4 |
| -0100 | -0320 | -0540 | 10 | | | | | | | | | | | | |
| -0107 | -0327 | -0547 | 20 | 40 | 30 | 1 | 5 | 10 | 3.32 | 65 | -24 | 10.5 | 12 | 1120 | T2 |
| -0108 | -0328 | -0548 | 10 | | | | | | | | | | | | |
| -0109 | -0329 | -0549 | 5 | | | | | | | | | | | | |
| -0110 | -0330 | -0550 | 20 | 68 | 30 | 1 | 8 | 13 | 2.54 | 60 | -24 | 13 | 15 | 1285 | T2 |
| -0111 | -0331 | -0551 | 10 | | | | | | | | | | | | |
| -0112 | -0332 | -0552 | 5 | | | | | | | | | | | | |
| -0113 | -0333 | -0553 | 20 | 100 | 30 | 2 | 12 | 17 | 2.26 | 40 | -28 | 10.5 | 12 | 1450 | T3 |
| -0114 | -0334 | -0554 | 10 | | | | | | | | | | | | |
| -0115 | -0335 | -0555 | 5 | | | | | | | | | | | | |
| -0116 | -0336 | -0556 | 20 | 150 | 30 | 2 | 18 | 23 | 2.03 | 35 | -48 | 13 | 15 | 1525 | T3 |
| -0117 | -0337 | -0557 | 10 | | | | | | | | | | | | |
| -0118 | -0338 | -0558 | 5 | | | | | | | | | | | | |
| -0119 | -0339 | -0559 | 20 | 300 | 30 | 8 | 32 | 31 | 1.37 | 25 | -60 | 25 | 25 | 1950 | T4 |
| -0120 | -0340 | -0560 | 10 | | | | | | | | | | | | |
| -0127 | -0347 | -0567 | 20 | | | | | | | | | | | | |
| -0128 | -0348 | -0568 | 10 | 25 | 50 | 1 | 5 | 8 | 4.25 | 95 | -20 | 10.5 | 12 | 1005 | T2 |
| -0129 | -0349 | -0569 | 5 | | | | | | | | | | | | |
| -0130 | -0350 | -0570 | 20 | | | | | | | | | | | | |
| -0131 | -0351 | -0571 | 10 | 47 | 50 | 1 | 9 | 11 | 3.11 | 70 | -28 | 13 | 15 | 1155 | T2 |
| -0132 | -0352 | -0572 | 5 | | | | | | | | | | | | |
| -0133 | -0353 | -0573 | 20 | | | | | | | | | | | | |
| -0134 | -0354 | -0574 | 10 | 60 | 50 | 2 | 12 | 12 | 2.65 | 45 | -16 | 10.5 | 12 | 1335 | T3 |
| -0135 | -0355 | -0575 | 5 | | | | | | | | | | | | |
| -0136 | -0356 | -0576 | 20 | | | | | | | | | | | | |
| -0137 | -0357 | -0577 | 10 | 82 | 50 | 2 | 16 | 15 | 2.43 | 45 | -32 | 13 | 15 | 1400 | T3 |
| -0138 | -0358 | -0578 | 5 | | | | | | | | | | | | |
| -0139 | -0359 | -0579 | 20 | | | | | | | | | | | | |
| -0140 | -0360 | -0580 | 10 | 160 | 50 | 8 | 32 | 17 | 1.41 | 27 | -50 | 25 | 25 | 1900 | T4 |
| -0147 | -0367 | -0587 | 20 | | | | | | | | | | | | |
| -0148 | -0368 | -0588 | 10 | | | | | | | | | | | | |
| -0149 | -0369 | -0589 | 5 | 20 | 60 | 1 | 5 | 7 | 4.64 | 105 | -16 | 10.5 | 12 | 930 | T2 |
| -0150 | -0370 | -0590 | 20 | | | | | | | | | | | | |
| -0151 | -0371 | -0591 | 10 | | | | | | | | | | | | |
| -0152 | -0372 | -0592 | 5 | 39 | 60 | 1 | 9 | 10 | 3.4 | 90 | -28 | 10.5 | 12 | 1110 | T2 |
| -0153 | -0373 | -0593 | 20 | | | | | | | | | | | | |
| -0154 | -0374 | -0594 | 10 | | | | | | | | | | | | |
| -0155 | -0375 | -0595 | 5 | 50 | 60 | 2 | 12 | 10 | 2.65 | 50 | -16 | 10.5 | 12 | 1330 | T3 |
| -0156 | -0376 | -0596 | 20 | | | | | | | | | | | | |
| -0157 | -0377 | -0597 | 10 | | | | | | | | | | | | |
| -0158 | -0378 | -0598 | 5 | 68 | 60 | 2 | 16 | 13 | 2.54 | 50 | -32 | 10.5 | 12 | 1365 | T3 |
| -0159 | -0379 | -0599 | 20 | | | | | | | | | | | | |
| -0160 | -0380 | -0600 | 10 | | | | | | | | | | | | |
| -0167 | -0387 | -0607 | 20 | 140 | 60 | 8 | 32 | 16 | 1.52 | 28 | -40 | 20 | 20 | 1850 | T4 |
| -0168 | -0388 | -0608 | 10 | | | | | | | | | | | | |
| -0169 | -0389 | -0609 | 5 | | | | | | | | | | | | |
| -0170 | -0390 | -0610 | 20 | 15 | 75 | 1 | 5 | 6 | 5.31 | 150 | -16 | 8 | 9 | 890 | T2 |
| -0171 | -0391 | -0611 | 10 | | | | | | | | | | | | |
| -0172 | -0392 | -0612 | 5 | | | | | | | | | | | | |
| -0173 | -0393 | -0613 | 20 | 33 | 75 | 1 | 10 | 10 | 4.02 | 90 | -24 | 10.5 | 15 | 1000 | T2 |
| -0174 | -0394 | -0614 | 10 | | | | | | | | | | | | |
| -0175 | -0395 | -0615 | 5 | | | | | | | | | | | | |
| -0176 | -0396 | -0616 | 20 | 40 | 75 | 2 | 12 | 9 | 2.99 | 60 | -16 | 10.5 | 12 | 1250 | T3 |
| -0177 | -0397 | -0617 | 10 | | | | | | | | | | | | |
| -0178 | -0398 | -0618 | 5 | | | | | | | | | | | | |
| -0179 | -0399 | -0619 | 20 | 56 | 75 | 2 | 17 | 11 | 2.61 | 60 | -28 | 10.5 | 15 | 1335 | T3 |
| -0180 | -0400 | -0620 | 10 | | | | | | | | | | | | |
| -0187 | -0407 | -0627 | 20 | | | | | | | | | | | | |
| -0188 | -0408 | -0628 | 10 | 11 | 100 | 1 | 4 | 5 | 6.03 | 200 | -16 | 8 | 8 | 835 | T2 |
| -0189 | -0409 | -0629 | 5 | | | | | | | | | | | | |
| -0190 | -0410 | -0630 | 20 | | | | | | | | | | | | |
| -0191 | -0411 | -0631 | 10 | 22 | 100 | 1 | 9 | 7.5 | 4.52 | 100 | -16 | 8 | 8 | 965 | T2 |
| -0192 | -0412 | -0632 | 5 | | | | | | | | | | | | |
| -0193 | -0413 | -0633 | 20 | | | | | | | | | | | | |
| -0194 | -0414 | -0634 | 10 | 30 | 100 | 2 | 12 | 7 | 3.1 | 80 | -16 | 8 | 8 | 1240 | T3 |
| -0195 | -0415 | -0635 | 5 | | | | | | | | | | | | |
| -0196 | -0416 | -0636 | 20 | | | | | | | | | | | | |
| -0197 | -0417 | -0637 | 10 | 43 | 100 | 2 | 17 | 8.5 | 2.62 | 70 | -20 | 8 | 8 | 1335 | T3 |
| -0198 | -0418 | -0638 | 5 | | | | | | | | | | | | |
| -0199 | -0419 | -0639 | 20 | | | | | | | | | | | | |
| -0200 | -0420 | -0640 | 10 | 86 | 100 | 9 | 36 | 10 | 1.54 | 30 | -25 | 15 | 15 | 1800 | T4 |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2V. DCL is measured at rated voltage after 5 minutes.



MIL-PRF-39006 Series



Military Conventional Wet Tantalum

M39006/25 RATINGS AND DASH NUMBER REFERENCE

| M39006/25 Dashes | | | Tolerance ± (%) | Cap (µF) 25°C at 120Hz | DC Rated Voltage (V) at 85°C | DC Leakage (µA) | | DF max (%) | ESR max (Ohms) at 120Hz | Impedance max (Ohms) -55°C at 120Hz | Maximum Capacitance Change (%) | | | AC Ripple (mA rms) 85°C at 40kHz | Case Size |
|------------------|---------|---------|-----------------|------------------------|------------------------------|-----------------|---------------|------------|-------------------------|-------------------------------------|--------------------------------|-------|--------|----------------------------------|-----------|
| M Level | P Level | R Level | | | | +25°C | +85°C & 125°C | | | | -55°C | +85°C | +125°C | | |
| -0003 | -0091 | -0179 | 20 | 820 | 6 | 3 | 14 | 155 | 2.51 | 18 | -88 | 16 | 20 | 1500 | T2 |
| -0004 | -0092 | -0180 | 10 | | | | | | | | | | | | |
| -0005 | -0093 | -0181 | 20 | 1500 | 6 | 5 | 20 | 172 | 1.52 | 18 | -90 | 20 | 25 | 1900 | T3 |
| -0006 | -0094 | -0182 | 10 | | | | | | | | | | | | |
| -0007 | -0095 | -0183 | 20 | 2200 | 6 | 6 | 24 | 170 | 1.03 | 13 | -90 | 25 | 30 | 2300 | T4 |
| -0008 | -0096 | -0184 | 10 | | | | | | | | | | | | |
| -0011 | -0099 | -0187 | 20 | 680 | 8 | 3 | 14 | 130 | 2.54 | 22 | -83 | 16 | 20 | 1500 | T2 |
| -0012 | -0100 | -0188 | 10 | | | | | | | | | | | | |
| -0013 | -0101 | -0189 | 20 | 1500 | 8 | 5 | 20 | 170 | 1.5 | 18 | -90 | 20 | 25 | 1900 | T3 |
| -0014 | -0102 | -0190 | 10 | | | | | | | | | | | | |
| -0015 | -0103 | -0191 | 20 | 1800 | 8 | 7 | 25 | 138 | 1.02 | 14 | -90 | 25 | 30 | 2300 | T4 |
| -0016 | -0104 | -0192 | 10 | | | | | | | | | | | | |
| -0019 | -0107 | -0195 | 20 | 560 | 10 | 3 | 16 | 106 | 2.51 | 27 | -77 | 16 | 20 | 1450 | T2 |
| -0020 | -0108 | -0196 | 10 | | | | | | | | | | | | |
| -0021 | -0109 | -0197 | 20 | 1200 | 10 | 5 | 20 | 137 | 1.51 | 18 | -88 | 20 | 25 | 1850 | T3 |
| -0022 | -0110 | -0198 | 10 | | | | | | | | | | | | |
| -0023 | -0111 | -0199 | 20 | 1500 | 10 | 7 | 25 | 114 | 1.01 | 15 | -88 | 25 | 30 | 2300 | T4 |
| -0024 | -0112 | -0200 | 10 | | | | | | | | | | | | |
| -0027 | -0115 | -0203 | 20 | 390 | 15 | 3 | 16 | 74 | 2.52 | 31 | -66 | 16 | 20 | 1450 | T2 |
| -0028 | -0116 | -0204 | 10 | | | | | | | | | | | | |
| -0029 | -0117 | -0205 | 20 | 820 | 15 | 6 | 24 | 111 | 1.8 | 22 | -77 | 20 | 25 | 1800 | T3 |
| -0030 | -0118 | -0206 | 10 | | | | | | | | | | | | |
| -0031 | -0119 | -0207 | 20 | 1000 | 15 | 8 | 32 | 92 | 1.22 | 17 | -77 | 25 | 30 | 2300 | T4 |
| -0032 | -0120 | -0208 | 10 | | | | | | | | | | | | |
| -0035 | -0123 | -0211 | 20 | 270 | 25 | 3 | 16 | 55 | 2.7 | 33 | -62 | 13 | 16 | 1400 | T2 |
| -0036 | -0124 | -0212 | 10 | | | | | | | | | | | | |
| -0037 | -0125 | -0213 | 20 | 560 | 25 | 7 | 28 | 76 | 1.8 | 24 | -72 | 20 | 25 | 1750 | T3 |
| -0038 | -0126 | -0214 | 10 | | | | | | | | | | | | |
| -0039 | -0127 | -0215 | 20 | 680 | 25 | 8 | 32 | 63 | 1.23 | 19 | -72 | 25 | 30 | 2100 | T4 |
| -0040 | -0128 | -0216 | 10 | | | | | | | | | | | | |
| -0043 | -0131 | -0219 | 20 | 220 | 30 | 3 | 16 | 42 | 2.53 | 36 | -60 | 13 | 16 | 1200 | T2 |
| -0044 | -0132 | -0220 | 10 | | | | | | | | | | | | |
| -0045 | -0133 | -0221 | 20 | 470 | 30 | 8 | 32 | 64 | 1.81 | 25 | -65 | 20 | 25 | 1500 | T3 |
| -0046 | -0134 | -0222 | 10 | | | | | | | | | | | | |
| -0047 | -0135 | -0223 | 20 | 560 | 30 | 9 | 36 | 55 | 1.3 | 20 | -65 | 25 | 30 | 2000 | T4 |
| -0048 | -0136 | -0224 | 10 | | | | | | | | | | | | |
| -0051 | -0139 | -0227 | 20 | 120 | 50 | 4 | 24 | 22.5 | 2.49 | 49 | -42 | 12 | 15 | 1200 | T2 |
| -0052 | -0140 | -0228 | 10 | | | | | | | | | | | | |
| -0053 | -0141 | -0229 | 20 | 270 | 50 | 8 | 32 | 37 | 1.82 | 29 | -46 | 20 | 25 | 1450 | T3 |
| -0054 | -0142 | -0230 | 10 | | | | | | | | | | | | |
| -0055 | -0143 | -0231 | 20 | 330 | 50 | 9 | 36 | 38 | 1.53 | 22 | -46 | 25 | 30 | 1900 | T4 |
| -0056 | -0144 | -0232 | 10 | | | | | | | | | | | | |
| -0059 | -0147 | -0235 | 20 | 100 | 60 | 4 | 20 | 19 | 2.52 | 54 | -36 | 12 | 15 | 1100 | T2 |
| -0060 | -0148 | -0236 | 10 | | | | | | | | | | | | |
| -0061 | -0149 | -0237 | 20 | 220 | 60 | 8 | 32 | 30 | 1.81 | 29 | -40 | 16 | 20 | 1400 | T3 |
| -0062 | -0150 | -0238 | 10 | | | | | | | | | | | | |
| -0063 | -0151 | -0239 | 20 | 270 | 60 | 9 | 36 | 27 | 1.33 | 23 | -45 | 20 | 25 | 1850 | T4 |
| -0064 | -0152 | -0240 | 10 | | | | | | | | | | | | |
| -0067 | -0155 | -0243 | 20 | 82 | 75 | 4 | 24 | 15.2 | 2.46 | 63 | -30 | 12 | 15 | 1000 | T2 |
| -0068 | -0156 | -0244 | 10 | | | | | | | | | | | | |
| -0069 | -0157 | -0245 | 20 | 180 | 75 | 9 | 36 | 24.4 | 2.23 | 30 | -35 | 16 | 20 | 1300 | T3 |
| -0070 | -0158 | -0246 | 10 | | | | | | | | | | | | |
| -0071 | -0159 | -0247 | 20 | 220 | 75 | 10 | 40 | 37 | 1.8 | 24 | -40 | 20 | 25 | 1800 | T4 |
| -0072 | -0160 | -0248 | 10 | | | | | | | | | | | | |
| -0075 | -0163 | -0251 | 20 | 39 | 100 | 5 | 24 | 10.4 | 3.54 | 80 | -20 | 12 | 15 | 1300 | T2 |
| -0076 | -0164 | -0252 | 10 | | | | | | | | | | | | |
| -0077 | -0165 | -0253 | 20 | 68 | 100 | 10 | 40 | 11.3 | 2.21 | 40 | -30 | 14 | 16 | 1600 | T3 |
| -0078 | -0166 | -0254 | 10 | | | | | | | | | | | | |
| -0079 | -0167 | -0255 | 20 | 120 | 100 | 12 | 48 | 25 | 2.76 | 30 | -35 | 15 | 17 | 2000 | T4 |
| -0080 | -0168 | -0256 | 10 | | | | | | | | | | | | |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2V. DCL is measured at rated voltage after 5 minutes.

MIL-PRF-39006 Series



Military Conventional Wet Tantalum

M39006 /30 RATINGS AND DASH NUMBER REFERENCE

| M39006/30 Dashes | | | Tolerance ± (%) | Cap (µF) 25°C at 120Hz | DC Rated Voltage (V) at 85°C | DC Leakage (µA) | | DF max (%) | ESR max (Ohms) at 120Hz | Impedance max (Ohms) -55°C at 120Hz | Maximum Capacitance Change (%) | | | AC Ripple (mA rms) 85°C at 40kHz | Case Size |
|------------------|---------|---------|-----------------|------------------------|------------------------------|-----------------|---------------|------------|-------------------------|-------------------------------------|--------------------------------|-------|--------|----------------------------------|-----------|
| M Level | P Level | R Level | | | | +25°C | +85°C & 125°C | | | | -55°C | +85°C | +125°C | | |
| -0007 | -0227 | -0447 | 20 | 140 | 6 | 1 | 3 | 10.5 | 0.99 | 40 | -40 | 14 | 16 | 1200 | T2 |
| -0008 | -0228 | -0448 | 10 | | | | | | | | | | | | |
| -0009 | -0229 | -0449 | 5 | | | | | | | | | | | | |
| -0010 | -0230 | -0450 | 20 | 270 | 6 | 1 | 6.5 | 22.5 | 1.11 | 25 | -44 | 17.5 | 20 | 1375 | T2 |
| -0011 | -0231 | -0451 | 10 | | | | | | | | | | | | |
| -0012 | -0232 | -0452 | 5 | | | | | | | | | | | | |
| -0013 | -0233 | -0453 | 20 | 330 | 6 | 2 | 7.9 | 18 | 0.73 | 20 | -44 | 14 | 16 | 1800 | T3 |
| -0014 | -0234 | -0454 | 10 | | | | | | | | | | | | |
| -0015 | -0235 | -0455 | 5 | | | | | | | | | | | | |
| -0016 | -0236 | -0456 | 20 | 560 | 6 | 2 | 13 | 27.5 | 0.65 | 25 | -64 | 17.5 | 20 | 1900 | T3 |
| -0017 | -0237 | -0457 | 10 | | | | | | | | | | | | |
| -0018 | -0238 | -0458 | 5 | | | | | | | | | | | | |
| -0019 | -0239 | -0459 | 20 | 1200 | 6 | 3 | 14 | 45 | 0.5 | 20 | -80 | 25 | 25 | 2265 | T4 |
| -0020 | -0240 | -0460 | 10 | | | | | | | | | | | | |
| -0027 | -0247 | -0467 | 20 | | | | | | | | | | | | |
| -0028 | -0248 | -0468 | 10 | 120 | 8 | 1 | 2 | 10 | 1.11 | 50 | -44 | 17.5 | 20 | 1220 | T2 |
| -0029 | -0249 | -0469 | 5 | | | | | | | | | | | | |
| -0030 | -0250 | -0470 | 20 | | | | | | | | | | | | |
| -0031 | -0251 | -0471 | 10 | 220 | 8 | 1 | 7 | 18.5 | 1.12 | 30 | -44 | 17.5 | 20 | 1370 | T2 |
| -0032 | -0252 | -0472 | 5 | | | | | | | | | | | | |
| -0033 | -0253 | -0473 | 20 | | | | | | | | | | | | |
| -0034 | -0254 | -0474 | 10 | 290 | 8 | 2 | 6 | 17 | 0.78 | 25 | -64 | 17.5 | 20 | 1770 | T3 |
| -0035 | -0255 | -0475 | 5 | | | | | | | | | | | | |
| -0036 | -0256 | -0476 | 20 | | | | | | | | | | | | |
| -0037 | -0257 | -0477 | 10 | 430 | 8 | 2 | 14 | 23 | 0.71 | 25 | -64 | 17.5 | 20 | 1825 | T3 |
| -0038 | -0258 | -0478 | 5 | | | | | | | | | | | | |
| -0039 | -0259 | -0479 | 20 | | | | | | | | | | | | |
| -0040 | -0260 | -0480 | 10 | 850 | 8 | 4 | 16 | 30 | 0.47 | 22 | -80 | 25 | 25 | 2330 | T4 |
| -0047 | -0267 | -0487 | 20 | | | | | | | | | | | | |
| -0048 | -0268 | -0488 | 10 | | | | | | | | | | | | |
| -0049 | -0269 | -0489 | 5 | 100 | 10 | 1 | 4 | 7.5 | 0.99 | 60 | -36 | 14 | 16 | 1200 | T2 |
| -0050 | -0270 | -0490 | 20 | | | | | | | | | | | | |
| -0051 | -0271 | -0491 | 10 | | | | | | | | | | | | |
| -0052 | -0272 | -0492 | 5 | 180 | 10 | 1 | 7 | 15 | 1.11 | 40 | -36 | 14 | 16 | 1.365 | T2 |
| -0053 | -0273 | -0493 | 20 | | | | | | | | | | | | |
| -0054 | -0274 | -0494 | 10 | | | | | | | | | | | | |
| -0055 | -0275 | -0495 | 5 | 250 | 10 | 2 | 10 | 15 | 0.8 | 30 | -40 | 14 | 16 | 1720 | T3 |
| -0056 | -0276 | -0496 | 20 | | | | | | | | | | | | |
| -0057 | -0277 | -0497 | 10 | | | | | | | | | | | | |
| -0058 | -0278 | -0498 | 5 | 390 | 10 | 2 | 16 | 22 | 0.75 | 25 | -64 | 17.5 | 20 | 1800 | T3 |
| -0059 | -0279 | -0499 | 20 | | | | | | | | | | | | |
| -0060 | -0280 | -0500 | 10 | | | | | | | | | | | | |
| -0067 | -0287 | -0507 | 20 | 750 | 10 | 4 | 16 | 25 | 0.44 | 23 | -80 | 25 | 25 | 2360 | T4 |
| -0068 | -0288 | -0508 | 10 | | | | | | | | | | | | |
| -0069 | -0289 | -0509 | 5 | | | | | | | | | | | | |
| -0070 | -0290 | -0510 | 20 | 70 | 15 | 1 | 4 | 6.5 | 1.23 | 75 | -28 | 14 | 16 | 1150 | T2 |
| -0071 | -0291 | -0511 | 10 | | | | | | | | | | | | |
| -0072 | -0292 | -0512 | 5 | | | | | | | | | | | | |
| -0073 | -0293 | -0513 | 20 | 120 | 15 | 1 | 7 | 9 | 0.99 | 50 | -28 | 17.5 | 20 | 1450 | T2 |
| -0074 | -0294 | -0514 | 10 | | | | | | | | | | | | |
| -0075 | -0295 | -0515 | 5 | | | | | | | | | | | | |
| -0076 | -0296 | -0516 | 20 | 170 | 15 | 2 | 10 | 12.5 | 0.98 | 35 | -32 | 14 | 16 | 1480 | T3 |
| -0077 | -0297 | -0517 | 10 | | | | | | | | | | | | |
| -0078 | -0298 | -0518 | 5 | | | | | | | | | | | | |
| -0079 | -0299 | -0519 | 20 | 270 | 15 | 2 | 16 | 16 | 0.79 | 30 | -56 | 17.5 | 20 | 1740 | T3 |
| -0080 | -0300 | -0520 | 10 | | | | | | | | | | | | |
| -0087 | -0307 | -0527 | 20 | | | | | | | | | | | | |
| -0088 | -0308 | -0528 | 10 | 540 | 15 | 6 | 24 | 20 | 0.49 | 23 | -80 | 25 | 25 | 2330 | T4 |
| -0089 | -0309 | -0529 | 5 | | | | | | | | | | | | |
| -0090 | -0310 | -0530 | 20 | | | | | | | | | | | | |
| -0091 | -0311 | -0531 | 10 | 50 | 25 | 1 | 2 | 5.5 | 1.46 | 70 | -28 | 13 | 15 | 1130 | T2 |
| -0092 | -0312 | -0532 | 5 | | | | | | | | | | | | |
| -0093 | -0313 | -0533 | 20 | | | | | | | | | | | | |
| -0094 | -0314 | -0534 | 10 | 100 | 25 | 1 | 10 | 7.5 | 0.99 | 50 | -28 | 13 | 15 | 1435 | T2 |
| -0095 | -0315 | -0535 | 5 | | | | | | | | | | | | |
| -0096 | -0316 | -0536 | 20 | | | | | | | | | | | | |
| -0097 | -0317 | -0537 | 10 | 120 | 25 | 2 | 6 | 10.5 | 1.16 | 38 | -32 | 13 | 15 | 1450 | T3 |
| -0098 | -0318 | -0538 | 5 | | | | | | | | | | | | |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2V. DCL is measured at rated voltage after 5 minutes.



MIL-PRF-39006 Series



Military Conventional Wet Tantalum

| M39006/30 Dashes | | | Tolerance ± (%) | Cap (µF) 25°C at 120Hz | DC Rated Voltage (V) at 85°C | DC Leakage (µA) | | DF max (%) | ESR max (Ohms) at 120Hz | Impedance max (Ohms) -55°C at 120Hz | Maximum Capacitance Change (%) | | | AC Ripple (mA rms) 85°C at 40kHz | Case Size |
|------------------|---------|---------|-----------------|------------------------|------------------------------|-----------------|---------------|------------|-------------------------|-------------------------------------|--------------------------------|-------|--------|----------------------------------|-----------|
| M Level | P Level | R Level | | | | +25°C | +85°C & 125°C | | | | -55°C | +85°C | +125°C | | |
| -0099 | -0319 | -0539 | 20 | 350 | 25 | 7 | 28 | 17.5 | 0.67 | 24 | -70 | 25 | 25 | 1970 | T4 |
| -0100 | -0320 | -0540 | 10 | | | | | | | | | | | | |
| -0107 | -0327 | -0547 | 20 | 40 | 30 | 1 | 5 | 5 | 1.66 | 65 | -24 | 10.5 | 12 | 1120 | T2 |
| -0108 | -0328 | -0548 | 10 | | | | | | | | | | | | |
| -0109 | -0329 | -0549 | 5 | | | | | | | | | | | | |
| -0110 | -0330 | -0550 | 20 | 68 | 30 | 1 | 8 | 6.5 | 1.27 | 60 | -24 | 13 | 15 | 1285 | T2 |
| -0111 | -0331 | -0551 | 10 | | | | | | | | | | | | |
| -0112 | -0332 | -0552 | 5 | | | | | | | | | | | | |
| -0113 | -0333 | -0553 | 20 | 100 | 30 | 2 | 12 | 8.5 | 1.13 | 40 | -28 | 10.5 | 12 | 1450 | T3 |
| -0114 | -0334 | -0554 | 10 | | | | | | | | | | | | |
| -0115 | -0335 | -0555 | 5 | | | | | | | | | | | | |
| -0116 | -0336 | -0556 | 20 | 150 | 30 | 2 | 18 | 11.5 | 1.02 | 35 | -48 | 13 | 15 | 1525 | T3 |
| -0117 | -0337 | -0557 | 10 | | | | | | | | | | | | |
| -0118 | -0338 | -0558 | 5 | | | | | | | | | | | | |
| -0119 | -0339 | -0559 | 20 | 300 | 30 | 8 | 32 | 15.5 | 0.69 | 25 | -60 | 25 | 25 | 1950 | T4 |
| -0120 | -0340 | -0560 | 10 | | | | | | | | | | | | |
| -0127 | -0347 | -0567 | 20 | | | | | | | | | | | | |
| -0128 | -0348 | -0568 | 10 | | | | | | | | | | | | |
| -0129 | -0349 | -0569 | 5 | | | | | | | | | | | | |
| -0130 | -0350 | -0570 | 20 | 47 | 50 | 1 | 9 | 5.5 | 1.56 | 70 | -28 | 13 | 15 | 1155 | T2 |
| -0131 | -0351 | -0571 | 10 | | | | | | | | | | | | |
| -0132 | -0352 | -0572 | 5 | | | | | | | | | | | | |
| -0133 | -0353 | -0573 | 20 | 60 | 50 | 2 | 12 | 6 | 1.33 | 45 | -16 | 10.5 | 12 | 1335 | T3 |
| -0134 | -0354 | -0574 | 10 | | | | | | | | | | | | |
| -0135 | -0355 | -0575 | 5 | | | | | | | | | | | | |
| -0136 | -0356 | -0576 | 20 | 82 | 50 | 2 | 16 | 7.5 | 1.22 | 45 | -32 | 13 | 15 | 1400 | T3 |
| -0137 | -0357 | -0577 | 10 | | | | | | | | | | | | |
| -0138 | -0358 | -0578 | 5 | | | | | | | | | | | | |
| -0139 | -0359 | -0579 | 20 | 160 | 50 | 8 | 32 | 8.5 | 0.71 | 27 | -50 | 25 | 25 | 1900 | T4 |
| -0140 | -0360 | -0580 | 10 | | | | | | | | | | | | |
| -0147 | -0367 | -0587 | 20 | | | | | | | | | | | | |
| -0148 | -0368 | -0588 | 10 | | | | | | | | | | | | |
| -0149 | -0369 | -0589 | 5 | | | | | | | | | | | | |
| -0150 | -0370 | -0590 | 20 | 39 | 60 | 1 | 9 | 5 | 1.7 | 90 | -28 | 10.5 | 12 | 1110 | T2 |
| -0151 | -0371 | -0591 | 10 | | | | | | | | | | | | |
| -0152 | -0372 | -0592 | 5 | | | | | | | | | | | | |
| -0153 | -0373 | -0593 | 20 | 50 | 60 | 2 | 12 | 5 | 1.33 | 50 | -16 | 10.5 | 12 | 1330 | T3 |
| -0154 | -0374 | -0594 | 10 | | | | | | | | | | | | |
| -0155 | -0375 | -0595 | 5 | | | | | | | | | | | | |
| -0156 | -0376 | -0596 | 20 | 68 | 60 | 2 | 16 | 6.5 | 1.27 | 50 | -32 | 10.5 | 12 | 1365 | T3 |
| -0157 | -0377 | -0597 | 10 | | | | | | | | | | | | |
| -0158 | -0378 | -0598 | 5 | | | | | | | | | | | | |
| -0159 | -0379 | -0599 | 20 | 140 | 60 | 8 | 32 | 8 | 0.76 | 28 | -40 | 20 | 20 | 1850 | T4 |
| -0160 | -0380 | -0600 | 10 | | | | | | | | | | | | |
| -0167 | -0387 | -0607 | 20 | | | | | | | | | | | | |
| -0168 | -0388 | -0608 | 10 | | | | | | | | | | | | |
| -0169 | -0389 | -0609 | 5 | | | | | | | | | | | | |
| -0170 | -0390 | -0610 | 20 | 33 | 75 | 1 | 10 | 5 | 2.01 | 90 | -24 | 10.5 | 15 | 1000 | T2 |
| -0171 | -0391 | -0611 | 10 | | | | | | | | | | | | |
| -0172 | -0392 | -0612 | 5 | | | | | | | | | | | | |
| -0173 | -0393 | -0613 | 20 | 40 | 75 | 2 | 12 | 4.5 | 1.5 | 60 | -16 | 10.5 | 12 | 1250 | T3 |
| -0174 | -0394 | -0614 | 10 | | | | | | | | | | | | |
| -0175 | -0395 | -0615 | 5 | | | | | | | | | | | | |
| -0176 | -0396 | -0616 | 20 | 56 | 75 | 2 | 17 | 5.5 | 1.31 | 60 | -28 | 10.5 | 15 | 1335 | T3 |
| -0177 | -0397 | -0617 | 10 | | | | | | | | | | | | |
| -0178 | -0398 | -0618 | 5 | | | | | | | | | | | | |
| -0179 | -0399 | -0619 | 20 | 110 | 75 | 9 | 36 | 6 | 0.73 | 29 | -35 | 20 | 20 | 1850 | T4 |
| -0180 | -0400 | -0620 | 10 | | | | | | | | | | | | |
| -0187 | -0407 | -0627 | 20 | | | | | | | | | | | | |
| -0188 | -0408 | -0628 | 10 | | | | | | | | | | | | |
| -0189 | -0409 | -0629 | 5 | | | | | | | | | | | | |
| -0190 | -0410 | -0630 | 20 | 22 | 100 | 1 | 9 | 3.75 | 2.26 | 100 | -16 | 8 | 8 | 965 | T2 |
| -0191 | -0411 | -0631 | 10 | | | | | | | | | | | | |
| -0192 | -0412 | -0632 | 5 | | | | | | | | | | | | |
| -0193 | -0413 | -0633 | 20 | 30 | 100 | 2 | 12 | 3.5 | 1.55 | 80 | -16 | 8 | 8 | 1240 | T3 |
| -0194 | -0414 | -0634 | 10 | | | | | | | | | | | | |
| -0195 | -0415 | -0635 | 5 | | | | | | | | | | | | |
| -0196 | -0416 | -0636 | 20 | 43 | 100 | 2 | 17 | 4.25 | 1.31 | 70 | -20 | 8 | 8 | 1335 | T3 |
| -0197 | -0417 | -0637 | 10 | | | | | | | | | | | | |
| -0198 | -0418 | -0638 | 5 | | | | | | | | | | | | |
| -0199 | -0419 | -0639 | 20 | 86 | 100 | 9 | 36 | 5 | 0.77 | 30 | -25 | 15 | 15 | 1800 | T4 |
| -0200 | -0420 | -0640 | 10 | | | | | | | | | | | | |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2V. DCL is measured at rated voltage after 5 minutes.



MIL-PRF-39006 Series



Military Conventional Wet Tantalum

M39006 /31 RATINGS AND DASH NUMBER REFERENCE

| M39006/31 Dashes | | | Tolerance ± (%) | Cap (µF) 25°C at 120Hz | DC Rated Voltage (V) at 85°C | DC Leakage (µA) | | DF max (%) | ESR max (Ohms) at 120Hz | Impedance max (Ohms) -55°C at 120Hz | Maximum Capacitance Change (%) | | | AC Ripple (mA rms) 85°C at 40kHz | Case Size |
|------------------|---------|---------|-----------------|------------------------|------------------------------|-----------------|---------------|------------|-------------------------|-------------------------------------|--------------------------------|-------|--------|----------------------------------|-----------|
| M Level | P Level | R Level | | | | +25°C | +85°C & 125°C | | | | -55°C | +85°C | +125°C | | |
| -0003 | -0091 | -0179 | 20 | 820 | 6 | 3 | 14 | 77.5 | 1.26 | 18 | -88 | 16 | 20 | 1500 | T2 |
| -0004 | -0092 | -0180 | 10 | | | | | | | | | | | | |
| -0005 | -0093 | -0181 | 20 | 1500 | 6 | 5 | 20 | 86 | 0.76 | 18 | -90 | 20 | 25 | 1900 | T3 |
| -0006 | -0094 | -0182 | 10 | | | | | | | | | | | | |
| -0007 | -0095 | -0183 | 20 | 2200 | 6 | 6 | 24 | 85 | 0.52 | 13 | -90 | 25 | 30 | 2300 | T4 |
| -0008 | -0096 | -0184 | 10 | | | | | | | | | | | | |
| -0011 | -0099 | -0187 | 20 | 680 | 8 | 3 | 14 | 65 | 1.27 | 22 | -83 | 16 | 20 | 1500 | T2 |
| -0012 | -0100 | -0188 | 10 | | | | | | | | | | | | |
| -0013 | -0101 | -0189 | 20 | 1500 | 8 | 5 | 20 | 85 | 0.75 | 18 | -90 | 20 | 25 | 1900 | T3 |
| -0014 | -0102 | -0190 | 10 | | | | | | | | | | | | |
| -0015 | -0103 | -0191 | 20 | 1800 | 8 | 7 | 25 | 69 | 0.51 | 14 | -90 | 25 | 30 | 2300 | T4 |
| -0016 | -0104 | -0192 | 10 | | | | | | | | | | | | |
| -0019 | -0107 | -0195 | 20 | 560 | 10 | 3 | 16 | 53 | 1.26 | 27 | -77 | 16 | 20 | 1450 | T2 |
| -0020 | -0108 | -0196 | 10 | | | | | | | | | | | | |
| -0021 | -0109 | -0197 | 20 | 1200 | 10 | 5 | 20 | 68.5 | 0.76 | 18 | -88 | 20 | 25 | 1850 | T3 |
| -0022 | -0110 | -0198 | 10 | | | | | | | | | | | | |
| -0023 | -0111 | -0199 | 20 | 1500 | 10 | 7 | 25 | 57 | 0.51 | 15 | -88 | 25 | 30 | 2300 | T4 |
| -0024 | -0112 | -0200 | 10 | | | | | | | | | | | | |
| -0027 | -0115 | -0203 | 20 | 390 | 15 | 3 | 16 | 37 | 1.26 | 31 | -66 | 16 | 20 | 1450 | T2 |
| -0028 | -0116 | -0204 | 10 | | | | | | | | | | | | |
| -0029 | -0117 | -0205 | 20 | 820 | 15 | 6 | 24 | 55.5 | 0.9 | 22 | -77 | 20 | 25 | 1800 | T3 |
| -0030 | -0118 | -0206 | 10 | | | | | | | | | | | | |
| -0031 | -0119 | -0207 | 20 | 1000 | 15 | 8 | 32 | 46 | 0.61 | 17 | -77 | 25 | 30 | 2300 | T4 |
| -0032 | -0120 | -0208 | 10 | | | | | | | | | | | | |
| -0035 | -0123 | -0211 | 20 | 270 | 25 | 3 | 16 | 27.5 | 1.35 | 33 | -62 | 13 | 16 | 1400 | T2 |
| -0036 | -0124 | -0212 | 10 | | | | | | | | | | | | |
| -0037 | -0125 | -0213 | 20 | 560 | 25 | 7 | 28 | 38 | 0.9 | 24 | -72 | 20 | 25 | 1750 | T3 |
| -0038 | -0126 | -0214 | 10 | | | | | | | | | | | | |
| -0039 | -0127 | -0215 | 20 | 680 | 25 | 8 | 32 | 31.5 | 0.62 | 19 | -72 | 25 | 30 | 2100 | T4 |
| -0040 | -0128 | -0216 | 10 | | | | | | | | | | | | |
| -0043 | -0131 | -0219 | 20 | 220 | 30 | 3 | 16 | 21 | 1.27 | 36 | -60 | 13 | 16 | 1200 | T2 |
| -0044 | -0132 | -0220 | 10 | | | | | | | | | | | | |
| -0045 | -0133 | -0221 | 20 | 470 | 30 | 8 | 32 | 32 | 0.91 | 25 | -65 | 20 | 25 | 1500 | T3 |
| -0046 | -0134 | -0222 | 10 | | | | | | | | | | | | |
| -0047 | -0135 | -0223 | 20 | 560 | 30 | 9 | 36 | 27.5 | 0.65 | 20 | -65 | 25 | 30 | 2000 | T4 |
| -0048 | -0136 | -0224 | 10 | | | | | | | | | | | | |
| -0051 | -0139 | -0227 | 20 | 120 | 50 | 4 | 24 | 11.3 | 1.25 | 49 | -42 | 12 | 15 | 1200 | T2 |
| -0052 | -0140 | -0228 | 10 | | | | | | | | | | | | |
| -0053 | -0141 | -0229 | 20 | 270 | 50 | 8 | 32 | 18.5 | 0.91 | 29 | -46 | 20 | 25 | 1450 | T3 |
| -0054 | -0142 | -0230 | 10 | | | | | | | | | | | | |
| -0055 | -0143 | -0231 | 20 | 330 | 50 | 9 | 36 | 19 | 0.77 | 22 | -46 | 25 | 30 | 1900 | T4 |
| -0056 | -0144 | -0232 | 10 | | | | | | | | | | | | |
| -0059 | -0147 | -0235 | 20 | 100 | 60 | 4 | 20 | 9.5 | 1.26 | 54 | -36 | 12 | 15 | 1100 | T2 |
| -0060 | -0148 | -0236 | 10 | | | | | | | | | | | | |
| -0061 | -0149 | -0237 | 20 | 220 | 60 | 8 | 32 | 15 | 0.91 | 29 | -40 | 16 | 20 | 1400 | T3 |
| -0062 | -0150 | -0238 | 10 | | | | | | | | | | | | |
| -0063 | -0151 | -0239 | 20 | 270 | 60 | 9 | 36 | 13.5 | 0.67 | 23 | -45 | 20 | 25 | 1850 | T4 |
| -0064 | -0152 | -0240 | 10 | | | | | | | | | | | | |
| -0067 | -0155 | -0243 | 20 | 82 | 75 | 4 | 24 | 7.6 | 1.23 | 63 | -30 | 12 | 15 | 1000 | T2 |
| -0068 | -0156 | -0244 | 10 | | | | | | | | | | | | |
| -0069 | -0157 | -0245 | 20 | 180 | 75 | 9 | 36 | 12.2 | 0.9 | 30 | -35 | 16 | 20 | 1300 | T3 |
| -0070 | -0158 | -0246 | 10 | | | | | | | | | | | | |
| -0071 | -0159 | -0247 | 20 | 220 | 75 | 10 | 40 | 18.5 | 1.12 | 24 | -40 | 20 | 25 | 1800 | T4 |
| -0072 | -0160 | -0248 | 10 | | | | | | | | | | | | |
| -0075 | -0163 | -0251 | 20 | 39 | 100 | 5 | 24 | 5.2 | 1.77 | 80 | -20 | 12 | 15 | 1300 | T2 |
| -0076 | -0164 | -0252 | 10 | | | | | | | | | | | | |
| -0077 | -0165 | -0253 | 20 | 68 | 100 | 10 | 40 | 5.65 | 1.11 | 40 | -30 | 14 | 16 | 1600 | T3 |
| -0078 | -0166 | -0254 | 10 | | | | | | | | | | | | |
| -0079 | -0167 | -0255 | 20 | 120 | 100 | 12 | 48 | 12.5 | 1.38 | 30 | -35 | 15 | 17 | 2000 | T4 |
| -0080 | -0168 | -0256 | 10 | | | | | | | | | | | | |


All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2V. DCL is measured at rated voltage after 5 minutes.



TWC Series



COTS-Plus Conventional Wet Tantalum

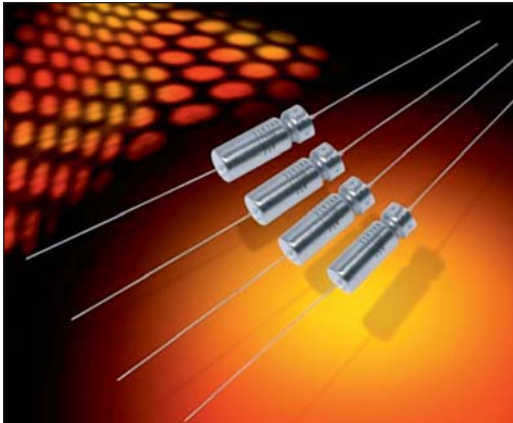


The TWC series represents a COTS-Plus version of conventional wet electrolytic tantalum capacitors. This data sheet incorporates all ratings available in MIL-PRF-39006 /22 /25 /30 and /31. Contact the factory about cap and voltage design possibilities beyond those contained in this datasheet.

This design includes a welded tantalum can and header assembly that provides a hermetic seal to withstand harsh environments and includes selected Group A testing from MIL-PRF-39006.

For military qualified versions please refer to the MIL-PRF-39006 datasheet located on the AVX website.

OUTLINE DIMENSIONS

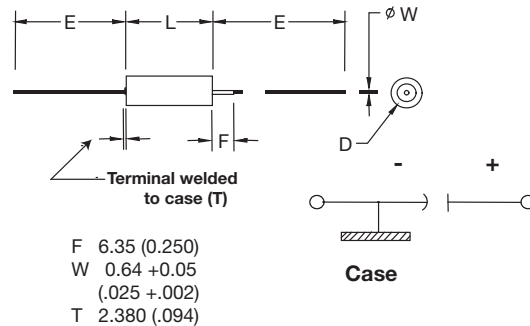

CASE DIMENSIONS: millimeters (inches)

| DSCC Case Size | AVX Case Size | L | D | | E |
|----------------|---------------|--------------------------------|---------------|--------------------|---------------|
| | | | Basic Case | Insulated Case Max | |
| | | +0.79 (0.031) -0.41 (0.016) | ±0.41 (0.016) | | ±6.35 (0.250) |
| T1 | A | 11.51 (0.453) | 4.78 (0.188) | 5.56 (0.219) | 38.10 (1.500) |
| T2 | B | 16.28 (0.641) | 7.14 (0.281) | 7.92 (0.312) | 57.15 (2.250) |
| T3 | D | 19.46 (0.766) | 9.52 (0.375) | 10.31 (0.406) | 57.15 (2.250) |
| T4 | E | 26.97 (1.062) | 9.52 (0.375) | 10.31 (0.406) | 57.15 (2.250) |

VOLTAGE RATINGS (Operating Temperature -55°C to 125°C)

| Voltage (DC) | | | | | | | | | | | | |
|------------------------------------|-------|-----|-----|------|------|------|------|------|----|------|-----|-----|
| Rated Voltage: (V _r) | 85°C | 6 | 8 | 10 | 15 | 25 | 30 | 50 | 60 | 75 | 100 | 125 |
| Derated Voltage: (V _d) | 125°C | 4 | 5 | 6 | 10 | 15 | 20 | 30 | 40 | 50 | 65 | 85 |
| Surge Voltage: (V _s) | 85°C | 6.9 | 9.2 | 11.5 | 17.3 | 28.8 | 34.5 | 57.5 | 69 | 86.3 | 115 | 144 |




TWC Series



COTS-Plus Conventional Wet Tantalum

HOW TO ORDER

AVX PART NUMBER:

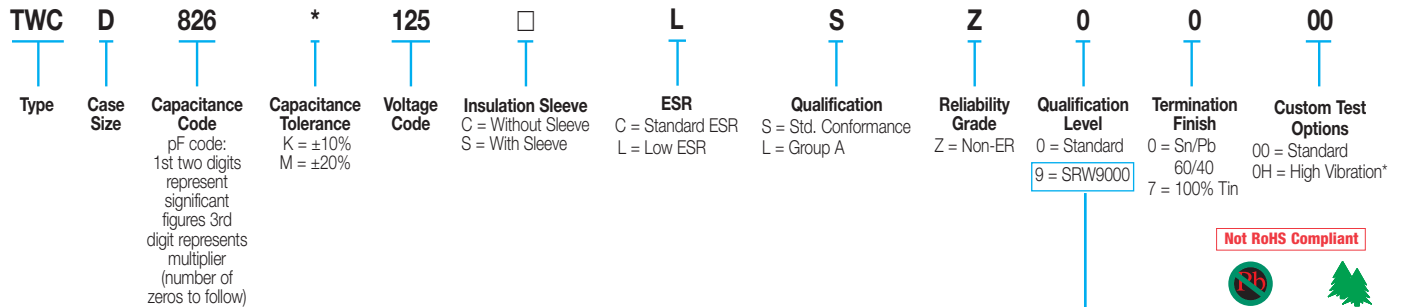


*High vibration qualified parts are currently under development. Please contact the factory for additional details and availability.

Not RoHS Compliant



SPACE LEVEL OPTIONS TO SRW9000*:

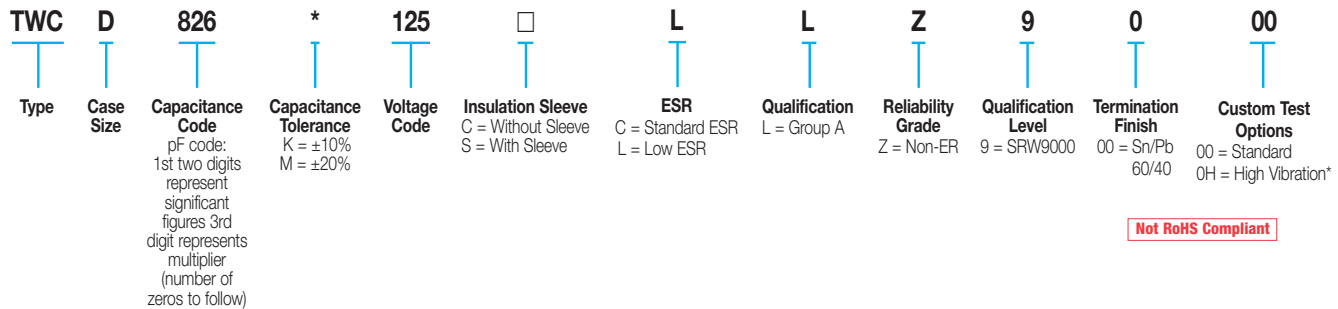

Not RoHS Compliant

*Check with factory for availability and testing details.

RIPPLE CURRENT MULTIPLIERS vs. Frequency, temperature and applied voltage^{1/2/}

| Frequency of Applied Ripple Current | Ambient Still Air Temperature (°C) | 120Hz | | | | 800Hz | | | | 1kHz | | | |
|-------------------------------------|------------------------------------|-------|------|------|------|-------|------|------|------|------|------|------|------|
| | | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 |
| % of Rated Peak Voltage | 100% | 0.60 | 0.39 | – | – | 0.71 | 0.43 | – | – | 0.72 | 0.45 | – | – |
| | 90% | 0.60 | 0.46 | – | – | 0.71 | 0.55 | – | – | 0.72 | 0.55 | – | – |
| | 80% | 0.60 | 0.52 | 0.35 | – | 0.71 | 0.62 | 0.42 | – | 0.72 | 0.62 | 0.42 | – |
| | 70% | 0.60 | 0.58 | 0.44 | – | 0.71 | 0.69 | 0.52 | – | 0.72 | 0.70 | 0.52 | – |
| | 66-2/3% | 0.60 | 0.60 | 0.46 | 0.27 | 0.71 | 0.71 | 0.55 | 0.32 | 0.72 | 0.72 | 0.55 | 0.32 |

| Frequency of Applied Ripple Current | Ambient Still Air Temperature (°C) | 10kHz | | | | 40kHz | | | | 100kHz | | | |
|-------------------------------------|------------------------------------|-------|------|------|------|-------|------|------|------|--------|------|------|------|
| | | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 |
| % of Rated Peak Voltage | 100% | 0.88 | 0.55 | – | – | 1.00 | 0.63 | – | – | 1.10 | 0.69 | – | – |
| | 90% | 0.88 | 0.67 | – | – | 1.00 | 0.77 | – | – | 1.10 | 0.85 | – | – |
| | 80% | 0.88 | 0.76 | 0.52 | – | 1.00 | 0.87 | 0.59 | – | 1.10 | 0.96 | 0.65 | – |
| | 70% | 0.88 | 0.85 | 0.64 | – | 1.00 | 0.97 | 0.73 | – | 1.10 | 1.07 | 0.80 | – |
| | 66-2/3% | 0.88 | 0.88 | 0.68 | 0.40 | 1.00 | 1.00 | 0.77 | 0.45 | 1.10 | 1.10 | 0.85 | 0.50 |

1/ At 125°C the rated voltage of the capacitors decreases to 66 2/3 of the 85°C rated voltage.

2/ The peak of the applied ac ripple voltage plus the applied dc voltage must not exceed the dc voltage rating of the capacitors.



TWC Series



COTS-Plus Conventional Wet Tantalum

STANDARD RATINGS & PART NUMBER REFERENCE

| AVX Part Number | Cap (µF) 25°C at 120Hz | DC Rated Voltage (V) at 85°C | DC Leakage (µA) | | DF (Max) | ESR Max (Ohms) at 120Hz | Impedance max (Ohms) -55°C at 120Hz | Maximum Capacitance Change (%) | | | AC Ripple (mA rms) 85°C at 40kHz | Case Size | |
|---------------------|------------------------------|------------------------------------|-----------------|------------------|-------------|-------------------------------|---|-----------------------------------|-------|--------|--|-----------|-----|
| | | | +25°C | +85°C & 125°C | | | | -55°C | +85°C | +125°C | | Standard | AVX |
| TWCA306*006□CSZ0000 | 30 | 6 | 1 | 2 | 9 | 3.98 | 100 | -40 | 10.5 | 12 | 820 | T1 | A |
| TWCA306*006□LSZ0000 | | | | | 4.5 | 1.99 | | | | | | | |
| TWCA686*006□CSZ0000 | 68 | 6 | 1 | 2 | 15 | 3.16 | 60 | -40 | 14 | 16 | 960 | T1 | A |
| TWCA686*006□LSZ0000 | | | | | 7.5 | 1.58 | | | | | | | |
| TWCB147*006□CSZ0000 | 140 | 6 | 1 | 3 | 21 | 1.99 | 40 | -40 | 14 | 16 | 1,200 | T2 | B |
| TWCB147*006□LSZ0000 | | | | | 10.5 | 0.99 | | | | | | | |
| TWCB277*006□CSZ0000 | 270 | 6 | 1 | 6.5 | 45 | 2.21 | 25 | -44 | 17.5 | 20 | 1,375 | T2 | B |
| TWCB277*006□LSZ0000 | | | | | 22.5 | 1.11 | | | | | | | |
| TWCD337*006□CSZ0000 | 330 | 6 | 2 | 7.9 | 36 | 1.45 | 20 | -44 | 14 | 16 | 1,800 | T3 | D |
| TWCD337*006□LSZ0000 | | | | | 18 | 0.73 | | | | | | | |
| TWCD567*006□CSZ0000 | 560 | 6 | 2 | 13 | 55 | 1.3 | 25 | -64 | 17.5 | 20 | 1,900 | T3 | D |
| TWCD567*006□LSZ0000 | | | | | 27.5 | 0.65 | | | | | | | |
| TWCE128*006□CSZ0000 | 1,200 | 6 | 3 | 14 | 90 | 1 | 20 | -80 | 25 | 25 | 2,265 | T4 | E |
| TWCE128*006□LSZ0000 | | | | | 45 | 0.5 | | | | | | | |
| TWCA256*008□CSZ0000 | 25 | 8 | 1 | 2 | 7.5 | 3.98 | 100 | -40 | 10.5 | 12 | 820 | T1 | A |
| TWCA256*008□LSZ0000 | | | | | 3.75 | 1.99 | | | | | | | |
| TWCA566*008□CSZ0000 | 56 | 8 | 1 | 2 | 14 | 3.32 | 59 | -40 | 14 | 16 | 900 | T1 | A |
| TWCA566*008□LSZ0000 | | | | | 7 | 1.66 | | | | | | | |
| TWCB127*008□CSZ0000 | 120 | 8 | 1 | 2 | 20 | 2.21 | 50 | -44 | 17.5 | 20 | 1,220 | T2 | B |
| TWCB127*008□LSZ0000 | | | | | 10 | 1.11 | | | | | | | |
| TWCB227*008□CSZ0000 | 220 | 8 | 1 | 7 | 37 | 2.23 | 30 | -44 | 17.5 | 20 | 1,370 | T2 | B |
| TWCB227*008□LSZ0000 | | | | | 18.5 | 1.12 | | | | | | | |
| TWCD297*008□CSZ0000 | 290 | 8 | 2 | 6 | 34 | 1.56 | 25 | -64 | 17.5 | 20 | 1,770 | T3 | D |
| TWCD297*008□LSZ0000 | | | | | 17 | 0.78 | | | | | | | |
| TWCD437*008□CSZ0000 | 430 | 8 | 2 | 14 | 46 | 1.42 | 25 | -64 | 17.5 | 20 | 1,825 | T3 | D |
| TWCD437*008□LSZ0000 | | | | | 23 | 0.71 | | | | | | | |
| TWCE857*008□CSZ0000 | 850 | 8 | 4 | 16 | 60 | 0.94 | 22 | -80 | 25 | 25 | 2,330 | T4 | E |
| TWCE857*008□LSZ0000 | | | | | 30 | 0.47 | | | | | | | |
| TWCA206*010□CSZ0000 | 20 | 10 | 1 | 2 | 6 | 3.98 | 175 | -32 | 10.5 | 12 | 820 | T1 | A |
| TWCA206*010□LSZ0000 | | | | | 3 | 1.99 | | | | | | | |
| TWCA476*010□CSZ0000 | 47 | 10 | 1 | 2 | 13 | 3.67 | 100 | -36 | 14 | 16 | 855 | T1 | A |
| TWCA476*010□LSZ0000 | | | | | 6.5 | 1.84 | | | | | | | |
| TWCB107*010□CSZ0000 | 100 | 10 | 1 | 4 | 15 | 1.99 | 60 | -36 | 14 | 16 | 1,200 | T2 | B |
| TWCB107*010□LSZ0000 | | | | | 7.5 | 0.99 | | | | | | | |
| TWCB187*010□CSZ0000 | 180 | 10 | 1 | 7 | 30 | 2.21 | 40 | -36 | 14 | 16 | 1,365 | T2 | B |
| TWCB187*010□LSZ0000 | | | | | 15 | 1.11 | | | | | | | |
| TWCD257*010□CSZ0000 | 250 | 10 | 2 | 10 | 30 | 1.59 | 30 | -40 | 14 | 16 | 1,720 | T3 | D |
| TWCD257*010□LSZ0000 | | | | | 15 | 0.8 | | | | | | | |
| TWCD397*010□CSZ0000 | 390 | 10 | 2 | 16 | 44 | 1.5 | 25 | -64 | 17.5 | 20 | 1,800 | T3 | D |
| TWCD397*010□LSZ0000 | | | | | 22 | 0.75 | | | | | | | |
| TWCE757*010□CSZ0000 | 750 | 10 | 4 | 16 | 50 | 0.88 | 23 | -80 | 25 | 25 | 2,360 | T4 | E |
| TWCE757*010□LSZ0000 | | | | | 25 | 0.44 | | | | | | | |
| TWCA156*015□CSZ0000 | 15 | 15 | 1 | 2 | 5 | 4.42 | 155 | -24 | 10.5 | 12 | 780 | T1 | A |
| TWCA156*015□LSZ0000 | | | | | 2.5 | 2.21 | | | | | | | |
| TWCA336*015□CSZ0000 | 33 | 15 | 1 | 2 | 10 | 4.02 | 90 | -28 | 14 | 16 | 820 | T1 | A |
| TWCA336*015□LSZ0000 | | | | | 5 | 2.01 | | | | | | | |
| TWCB706*015□CSZ0000 | 70 | 15 | 1 | 4 | 13 | 2.46 | 75 | -28 | 14 | 16 | 1,150 | T2 | B |
| TWCB706*015□LSZ0000 | | | | | 6.5 | 1.23 | | | | | | | |
| TWCB127*015□CSZ0000 | 120 | 15 | 1 | 7 | 18 | 1.99 | 50 | -28 | 17.5 | 20 | 1,450 | T2 | B |
| TWCB127*015□LSZ0000 | | | | | 9 | 0.99 | | | | | | | |
| TWCD177*015□CSZ0000 | 170 | 15 | 2 | 10 | 25 | 1.95 | 35 | -32 | 14 | 16 | 1,480 | T3 | D |
| TWCD177*015□LSZ0000 | | | | | 12.5 | 0.98 | | | | | | | |
| TWCD277*015□CSZ0000 | 270 | 15 | 2 | 16 | 32 | 1.57 | 30 | -56 | 17.5 | 20 | 1,740 | T3 | D |
| TWCD277*015□LSZ0000 | | | | | 16 | 0.79 | | | | | | | |
| TWCE547*015□CSZ0000 | 540 | 15 | 6 | 24 | 40 | 0.98 | 23 | -80 | 25 | 25 | 2,330 | T4 | E |
| TWCE547*015□LSZ0000 | | | | | 20 | 0.49 | | | | | | | |
| TWCA106*025□CSZ0000 | 10 | 25 | 1 | 2 | 4 | 5.31 | 220 | -16 | 8 | 9 | 715 | T1 | A |
| TWCA106*025□LSZ0000 | | | | | 2 | 2.66 | | | | | | | |
| TWCA226*025□CSZ0000 | 22 | 25 | 1 | 2 | 6.6 | 3.98 | 140 | -20 | 10.5 | 12 | 825 | T1 | A |
| TWCA226*025□LSZ0000 | | | | | 3.3 | 1.99 | | | | | | | |
| TWCB506*025□CSZ0000 | 50 | 25 | 1 | 2 | 11 | 2.92 | 70 | -28 | 13 | 15 | 1,130 | T2 | B |
| TWCB506*025□LSZ0000 | | | | | 5.5 | 1.46 | | | | | | | |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2V. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the rights to supply higher voltage rating in the same case size, to the same reliability standards.



TWC Series



COTS-Plus Conventional Wet Tantalum

STANDARD RATINGS & PART NUMBER REFERENCE

| AVX Part Number | Cap (µF) 25°C at 120Hz | DC Rated Voltage (V) at 85°C | DC Leakage (µA) | | DF (Max) | ESR Max (Ohms) at 120Hz | Impedance max (Ohms) -55°C at 120Hz | Maximum Capacitance Change (%) | | | AC Ripple (mA rms) 85°C at 40kHz | Case Size | |
|---------------------|------------------------------|------------------------------------|-----------------|------------------|-------------|-------------------------------|---|-----------------------------------|-------|--------|--|-----------|-----|
| | | | +25°C | +85°C & 125°C | | | | -55°C | +85°C | +125°C | | Standard | AVX |
| TWCB107*025□CSZ0000 | 100 | 25 | 1 | 10 | 15 | 1.99 | 50 | -28 | 13 | 15 | 1,435 | T2 | B |
| TWCB107*025□LSZ0000 | | | | | 7.5 | 0.99 | | | | | | | |
| TWCD127*025□CSZ0000 | 120 | 25 | 2 | 6 | 21 | 2.32 | 38 | -32 | 13 | 15 | 1,450 | T3 | D |
| TWCD127*025□LSZ0000 | | | | | 10.5 | 1.16 | | | | | | | |
| TWCD187*025□CSZ0000 | 180 | 25 | 2 | 18 | 26 | 1.92 | 32 | -48 | 13 | 15 | 1,525 | T3 | D |
| TWCD187*025□LSZ0000 | | | | | 13 | 0.96 | | | | | | | |
| TWCE357*025□CSZ0000 | 350 | 25 | 7 | 28 | 35 | 1.33 | 24 | -70 | 25 | 25 | 1,970 | T4 | E |
| TWCE357*025□LSZ0000 | | | | | 17.5 | 0.67 | | | | | | | |
| TWCA805*030□CSZ0000 | 8 | 30 | 1 | 2 | 4 | 6.64 | 275 | -16 | 8 | 12 | 640 | T1 | A |
| TWCA805*030□LSZ0000 | | | | | 2 | 3.32 | | | | | | | |
| TWCA156*030□CSZ0000 | 15 | 30 | 1 | 2 | 5 | 4.42 | 175 | -20 | 10.5 | 12 | 780 | T1 | A |
| TWCA156*030□LSZ0000 | | | | | 2.5 | 2.21 | | | | | | | |
| TWCB406*030□CSZ0000 | 40 | 30 | 1 | 5 | 10 | 3.32 | 65 | -24 | 10.5 | 12 | 1,120 | T2 | B |
| TWCB406*030□LSZ0000 | | | | | 5 | 1.66 | | | | | | | |
| TWCB686*030□CSZ0000 | 68 | 30 | 1 | 8 | 13 | 2.54 | 60 | -24 | 13 | 15 | 1,285 | T2 | B |
| TWCB686*030□LSZ0000 | | | | | 6.5 | 1.27 | | | | | | | |
| TWCD107*030□CSZ0000 | 100 | 30 | 2 | 12 | 17 | 2.26 | 40 | -28 | 10.5 | 12 | 1,450 | T3 | D |
| TWCD107*030□LSZ0000 | | | | | 8.5 | 1.13 | | | | | | | |
| TWCD157*030□CSZ0000 | 150 | 30 | 2 | 18 | 23 | 2.03 | 35 | -48 | 13 | 15 | 1,525 | T3 | D |
| TWCD157*030□LSZ0000 | | | | | 11.5 | 1.02 | | | | | | | |
| TWCE307*030□CSZ0000 | 300 | 30 | 8 | 32 | 31 | 1.37 | 25 | -60 | 25 | 25 | 1,950 | T4 | E |
| TWCE307*030□LSZ0000 | | | | | 15.5 | 0.69 | | | | | | | |
| TWCA505*050□CSZ0000 | 5 | 50 | 1 | 2 | 3 | 7.96 | 400 | -16 | 5 | 6 | 580 | T1 | A |
| TWCA505*050□LSZ0000 | | | | | 1.5 | 3.98 | | | | | | | |
| TWCA106*050□CSZ0000 | 10 | 50 | 1 | 2 | 4 | 5.31 | 250 | -24 | 8 | 9 | 715 | T1 | A |
| TWCA106*050□LSZ0000 | | | | | 2 | 2.66 | | | | | | | |
| TWCB256*050□CSZ0000 | 25 | 50 | 1 | 5 | 8 | 4.25 | 95 | -20 | 10.5 | 12 | 1,005 | T2 | B |
| TWCB256*050□LSZ0000 | | | | | 4 | 2.13 | | | | | | | |
| TWCB476*050□CSZ0000 | 47 | 50 | 1 | 9 | 11 | 3.11 | 70 | -28 | 13 | 15 | 1,155 | T2 | B |
| TWCB476*050□LSZ0000 | | | | | 5.5 | 1.56 | | | | | | | |
| TWCD606*050□CSZ0000 | 60 | 50 | 2 | 12 | 12 | 2.65 | 45 | -16 | 10.5 | 12 | 1,335 | T3 | D |
| TWCD606*050□LSZ0000 | | | | | 6 | 1.33 | | | | | | | |
| TWCD826*050□CSZ0000 | 82 | 50 | 2 | 16 | 15 | 2.43 | 45 | -32 | 13 | 15 | 1,400 | T3 | D |
| TWCD826*050□LSZ0000 | | | | | 7.5 | 1.22 | | | | | | | |
| TWCE167*050□CSZ0000 | 160 | 50 | 8 | 32 | 17 | 1.41 | 27 | -50 | 25 | 25 | 1,900 | T4 | E |
| TWCE167*050□LSZ0000 | | | | | 8.5 | 0.71 | | | | | | | |
| TWCA405*060□CSZ0000 | 4 | 60 | 1 | 2 | 2.8 | 9.29 | 550 | -16 | 5 | 6 | 525 | T1 | A |
| TWCA405*060□LSZ0000 | | | | | 1.4 | 4.65 | | | | | | | |
| TWCA825*060□CSZ0000 | 8.2 | 60 | 1 | 2 | 4 | 6.47 | 275 | -24 | 8 | 9 | 625 | T1 | A |
| TWCA825*060□LSZ0000 | | | | | 2 | 3.24 | | | | | | | |
| TWCB206*060□CSZ0000 | 20 | 60 | 1 | 5 | 7 | 4.64 | 105 | -16 | 10.5 | 12 | 930 | T2 | B |
| TWCB206*060□LSZ0000 | | | | | 3.5 | 2.32 | | | | | | | |
| TWCB396*060□CSZ0000 | 39 | 60 | 1 | 9 | 10 | 3.4 | 90 | -28 | 10.5 | 12 | 1,110 | T2 | B |
| TWCB396*060□LSZ0000 | | | | | 5 | 1.7 | | | | | | | |
| TWCD506*060□CSZ0000 | 50 | 60 | 2 | 12 | 10 | 2.65 | 50 | -16 | 10.5 | 12 | 1,330 | T3 | D |
| TWCD506*060□LSZ0000 | | | | | 5 | 1.33 | | | | | | | |
| TWCD686*060□CSZ0000 | 68 | 60 | 2 | 16 | 13 | 2.54 | 50 | -32 | 10.5 | 12 | 1,365 | T3 | D |
| TWCD686*060□LSZ0000 | | | | | 7 | 1.27 | | | | | | | |
| TWCE147*060□CSZ0000 | 140 | 60 | 8 | 32 | 16 | 1.52 | 28 | -40 | 20 | 20 | 1,850 | T4 | E |
| TWCE147*060□LSZ0000 | | | | | 8 | 0.76 | | | | | | | |
| TWCA355*075□CSZ0000 | 3.5 | 75 | 1 | 2 | 2.5 | 9.48 | 650 | -16 | 5 | 6 | 525 | T1 | A |
| TWCA355*075□LSZ0000 | | | | | 1.25 | 4.74 | | | | | | | |
| TWCA685*075□CSZ0000 | 6.8 | 75 | 1 | 2 | 3.5 | 6.83 | 300 | -20 | 8 | 9 | 610 | T1 | A |
| TWCA685*075□LSZ0000 | | | | | 1.75 | 3.42 | | | | | | | |
| TWCB156*075□CSZ0000 | 15 | 75 | 1 | 5 | 6 | 5.31 | 150 | -16 | 8 | 9 | 890 | T2 | B |
| TWCB156*075□LSZ0000 | | | | | 3 | 2.66 | | | | | | | |
| TWCB336*075□CSZ0000 | 33 | 75 | 1 | 10 | 10 | 4.02 | 90 | -24 | 10.5 | 15 | 1,000 | T2 | B |
| TWCB336*075□LSZ0000 | | | | | 5 | 2.01 | | | | | | | |
| TWCD406*075□CSZ0000 | 40 | 75 | 2 | 12 | 9 | 2.99 | 60 | -16 | 10.5 | 12 | 1,250 | T3 | D |
| TWCD406*075□LSZ0000 | | | | | 4.5 | 1.5 | | | | | | | |
| TWCD566*075□CSZ0000 | 56 | 75 | 2 | 17 | 11 | 2.61 | 60 | -28 | 10.5 | 15 | 1,335 | T3 | D |
| TWCD566*075□LSZ0000 | | | | | 5.5 | 1.31 | | | | | | | |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2V. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the rights to supply higher voltage rating in the same case size, to the same reliability standards.



STANDARD RATINGS & PART NUMBER REFERENCE

| AVX Part Number | Cap (µF) 25°C at 120Hz | DC Rated Voltage (V) at 85°C | DC Leakage (µA) | | DF (Max) | ESR Max (Ohms) at 120Hz | Impedance max (Ohms) -55°C at 120Hz | Maximum Capacitance Change (%) | | | AC Ripple (mA rms) 85°C at 40kHz | Case Size | |
|---------------------|------------------------------|------------------------------------|-----------------|------------------|-------------|-------------------------------|---|-----------------------------------|-------|--------|--|-----------|-----|
| | | | +25°C | +85°C & 125°C | | | | -55°C | +85°C | +125°C | | Standard | AVX |
| TWCE117*075□CSZ0000 | 110 | 75 | 9 | 36 | 12 | 1.45 | 29 | -35 | 20 | 20 | 1,850 | T4 | E |
| TWCE117*075□LSZ0000 | | | | | 6 | 0.73 | | | | | | | |
| TWCA255*100□CSZ0000 | 2.5 | 100 | 1 | 2 | 2 | 10.62 | 950 | -16 | 7 | 8 | 505 | T1 | A |
| TWCA255*100□LSZ0000 | | | | | 1 | 5.31 | | | | | | | |
| TWCA475*100□CSZ0000 | 4.7 | 100 | 1 | 2 | 3 | 8.47 | 500 | -16 | 7 | 8 | 565 | T1 | A |
| TWCA475*100□LSZ0000 | | | | | 1.5 | 4.24 | | | | | | | |
| TWCB116*100□CSZ0000 | 11 | 100 | 1 | 4 | 5 | 6.03 | 200 | -16 | 8 | 8 | 835 | T2 | B |
| TWCB116*100□LSZ0000 | | | | | 2.5 | 3.02 | | | | | | | |
| TWCB226*100□CSZ0000 | 22 | 100 | 1 | 9 | 7.5 | 4.52 | 100 | -16 | 8 | 8 | 965 | T2 | B |
| TWCB226*100□LSZ0000 | | | | | 3.75 | 2.26 | | | | | | | |
| TWCD306*100□CSZ0000 | 30 | 100 | 2 | 12 | 7 | 3.1 | 80 | -16 | 8 | 8 | 1,240 | T3 | D |
| TWCD306*100□LSZ0000 | | | | | 3.5 | 1.56 | | | | | | | |
| TWCD436*100□CSZ0000 | 43 | 100 | 2 | 17 | 8.5 | 2.62 | 70 | -20 | 8 | 8 | 1,335 | T3 | D |
| TWCD436*100□LSZ0000 | | | | | 4.25 | 1.31 | | | | | | | |
| TWCE866*100□CSZ0000 | 86 | 100 | 9 | 36 | 10 | 1.54 | 30 | -25 | 15 | 15 | 1,800 | T4 | E |
| TWCE866*100□LSZ0000 | | | | | 5 | 0.77 | | | | | | | |
| TWCA175*125□CSZ0000 | 1.7 | 125 | 1 | 2 | 2 | 15.61 | 1,250 | -16 | 7 | 8 | 415 | T1 | A |
| TWCA175*125□LSZ0000 | | | | | 1 | 7.81 | | | | | | | |
| TWCA365*125□CSZ0000 | 3.6 | 125 | 1 | 2 | 2.7 | 9.95 | 600 | -16 | 7 | 8 | 520 | T1 | A |
| TWCA365*125□LSZ0000 | | | | | 1.35 | 4.98 | | | | | | | |
| TWCB905*125□CSZ0000 | 9 | 125 | 1 | 5 | 5 | 7.37 | 240 | -16 | 7 | 8 | 755 | T2 | B |
| TWCB905*125□LSZ0000 | | | | | 2.5 | 3.69 | | | | | | | |
| TWCB146*125□CSZ0000 | 14 | 125 | 1 | 7 | 6 | 5.69 | 167 | -16 | 7 | 8 | 860 | T2 | B |
| TWCB146*125□LSZ0000 | | | | | 3 | 2.85 | | | | | | | |
| TWCD186*125□CSZ0000 | 18 | 125 | 2 | 9 | 5 | 3.69 | 129 | -16 | 7 | 8 | 1,130 | T3 | D |
| TWCD186*125□LSZ0000 | | | | | 2.5 | 1.85 | | | | | | | |
| TWCD256*125□CSZ0000 | 25 | 125 | 2 | 13 | 6 | 3.18 | 93 | -16 | 7 | 8 | 1,200 | T3 | D |
| TWCD256*125□LSZ0000 | | | | | 3 | 1.59 | | | | | | | |
| TWCE566*125□CSZ0000 | 56 | 125 | 10 | 40 | 6.5 | 1.54 | 32 | -25 | 15 | 15 | 1,800 | T4 | E |
| TWCE566*125□LSZ0000 | | | | | 3.25 | 0.77 | | | | | | | |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2V. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the rights to supply higher voltage rating in the same case size, to the same reliability standards.

TWC Series



COTS-Plus Conventional Wet Tantalum

EXTENDED RATINGS & PART NUMBER REFERENCE

| AVX Part Number | Cap (µF) 25°C at 120Hz | DC Rated Voltage (V) at 85°C | DC Leakage (µA) | | DF (Max) | ESR Max (Ohms) at 120Hz | Impedance max (Ohms) -55°C at 120Hz | Maximum Capacitance Change (%) | | | AC Ripple (mA rms) 85°C at 40kHz | Case Size | |
|---------------------|------------------------------|------------------------------------|-----------------|------------------|-------------|-------------------------------|---|-----------------------------------|-------|--------|--|-----------|-----|
| | | | +25°C | +85°C & 125°C | | | | -55°C | +85°C | +125°C | | Standard | AVX |
| TWCA227*006□CSZ0000 | 220 | 6 | 2 | 9 | 50 | 3.02 | 36 | -64 | 13 | 16 | 1,000 | T1 | A |
| TWCA227*006□LSZ0000 | | | | | 25 | 1.51 | | | | | | | |
| TWCB827*006□CSZ0000 | 820 | 6 | 3 | 14 | 155 | 2.51 | 18 | -88 | 16 | 20 | 1,500 | T2 | B |
| TWCB827*006□LSZ0000 | | | | | 77.5 | 1.26 | | | | | | | |
| TWCD158*006□CSZ0000 | 1,500 | 6 | 5 | 20 | 172 | 1.52 | 18 | -90 | 20 | 25 | 1,900 | T3 | D |
| TWCD158*006□LSZ0000 | | | | | 86 | 0.76 | | | | | | | |
| TWCE228*006□CSZ0000 | 2,200 | 6 | 6 | 24 | 170 | 1.03 | 13 | -90 | 25 | 30 | 2,300 | T4 | E |
| TWCE228*006□LSZ0000 | | | | | 85 | 0.52 | | | | | | | |
| TWCA187*008□CSZ0000 | 180 | 8 | 2 | 9 | 41 | 3.02 | 45 | -60 | 13 | 16 | 1,000 | T1 | A |
| TWCA187*008□LSZ0000 | | | | | 20.5 | 1.51 | | | | | | | |
| TWCB687*008□CSZ0000 | 680 | 8 | 3 | 14 | 130 | 2.54 | 22 | -83 | 16 | 20 | 1,500 | T2 | B |
| TWCB687*008□LSZ0000 | | | | | 65 | 1.27 | | | | | | | |
| TWCD158*008□CSZ0000 | 1,500 | 8 | 5 | 20 | 170 | 1.5 | 18 | -90 | 20 | 25 | 1,900 | T3 | D |
| TWCD158*008□LSZ0000 | | | | | 85 | 0.75 | | | | | | | |
| TWCE188*008□CSZ0000 | 1,800 | 8 | 7 | 25 | 138 | 1.02 | 14 | -90 | 25 | 30 | 2,300 | T4 | E |
| TWCE188*008□LSZ0000 | | | | | 69 | 0.51 | | | | | | | |
| TWCA157*010□CSZ0000 | 150 | 10 | 2 | 9 | 34 | 3.01 | 54 | -55 | 13 | 16 | 900 | T1 | A |
| TWCA157*010□LSZ0000 | | | | | 17 | 1.51 | | | | | | | |
| TWCB567*010□CSZ0000 | 560 | 10 | 3 | 16 | 106 | 2.51 | 27 | -77 | 16 | 20 | 1,450 | T2 | B |
| TWCB567*010□LSZ0000 | | | | | 53 | 1.26 | | | | | | | |
| TWCD128*010□CSZ0000 | 1,200 | 10 | 5 | 20 | 137 | 1.51 | 18 | -88 | 20 | 25 | 1,850 | T3 | D |
| TWCD128*010□LSZ0000 | | | | | 68.5 | 0.76 | | | | | | | |
| TWCE158*010□CSZ0000 | 1,500 | 10 | 7 | 25 | 114 | 1.01 | 15 | -88 | 25 | 30 | 2,300 | T4 | E |
| TWCE158*010□LSZ0000 | | | | | 57 | 0.51 | | | | | | | |
| TWCA107*015□CSZ0000 | 100 | 15 | 2 | 9 | 30 | 3.98 | 72 | -44 | 13 | 16 | 900 | T1 | A |
| TWCA107*015□LSZ0000 | | | | | 15 | 1.99 | | | | | | | |
| TWCB397*015□CSZ0000 | 390 | 15 | 3 | 16 | 74 | 2.52 | 31 | -66 | 16 | 20 | 1,450 | T2 | B |
| TWCB397*015□LSZ0000 | | | | | 37 | 1.26 | | | | | | | |
| TWCD827*015□CSZ0000 | 820 | 15 | 6 | 24 | 111 | 1.8 | 22 | -77 | 20 | 25 | 1,800 | T3 | D |
| TWCD827*015□LSZ0000 | | | | | 55.5 | 0.9 | | | | | | | |
| TWCE108*015□CSZ0000 | 1,000 | 15 | 8 | 32 | 92 | 1.22 | 17 | -77 | 25 | 30 | 2,300 | T4 | E |
| TWCE108*015□LSZ0000 | | | | | 46 | 0.61 | | | | | | | |
| TWCA686*025□CSZ0000 | 68 | 25 | 2 | 9 | 22 | 4.29 | 90 | -40 | 12 | 15 | 850 | T1 | A |
| TWCA686*025□LSZ0000 | | | | | 11 | 2.15 | | | | | | | |
| TWCB277*025□CSZ0000 | 270 | 25 | 3 | 16 | 55 | 2.7 | 33 | -62 | 13 | 16 | 1,400 | T2 | B |
| TWCB277*025□LSZ0000 | | | | | 27.5 | 1.35 | | | | | | | |
| TWCD567*025□CSZ0000 | 560 | 25 | 7 | 28 | 76 | 1.8 | 24 | -72 | 20 | 25 | 1,750 | T3 | D |
| TWCD567*025□LSZ0000 | | | | | 38 | 0.9 | | | | | | | |
| TWCE687*025□CSZ0000 | 680 | 25 | 8 | 32 | 63 | 1.23 | 19 | -72 | 25 | 30 | 2,100 | T4 | E |
| TWCE687*025□LSZ0000 | | | | | 31.5 | 0.62 | | | | | | | |
| TWCA566*030□CSZ0000 | 56 | 30 | 2 | 9 | 22 | 5.21 | 100 | -38 | 12 | 15 | 800 | T1 | A |
| TWCA566*030□LSZ0000 | | | | | 11 | 2.61 | | | | | | | |
| TWCB227*030□CSZ0000 | 220 | 30 | 3 | 16 | 42 | 2.53 | 36 | -60 | 13 | 16 | 1,200 | T2 | B |
| TWCB227*030□LSZ0000 | | | | | 21 | 1.27 | | | | | | | |
| TWCD477*030□CSZ0000 | 470 | 30 | 8 | 32 | 64 | 1.81 | 25 | -65 | 20 | 25 | 1,500 | T3 | D |
| TWCD477*030□LSZ0000 | | | | | 32 | 0.91 | | | | | | | |
| TWCE567*030□CSZ0000 | 560 | 30 | 9 | 36 | 55 | 1.3 | 20 | -65 | 25 | 30 | 2,000 | T4 | E |
| TWCE567*030□LSZ0000 | | | | | 27.5 | 0.65 | | | | | | | |
| TWCA336*050□CSZ0000 | 33 | 50 | 2 | 9 | 12.3 | 4.95 | 135 | -29 | 10 | 12 | 700 | T1 | A |
| TWCA336*050□LSZ0000 | | | | | 6.15 | 2.48 | | | | | | | |
| TWCB127*050□CSZ0000 | 120 | 50 | 4 | 24 | 22.5 | 2.49 | 49 | -42 | 12 | 15 | 1,200 | T2 | B |
| TWCB127*050□LSZ0000 | | | | | 11.3 | 1.25 | | | | | | | |
| TWCD277*050□CSZ0000 | 270 | 50 | 8 | 32 | 37 | 1.82 | 29 | -46 | 20 | 25 | 1,450 | T3 | D |
| TWCD277*050□LSZ0000 | | | | | 18.5 | 0.91 | | | | | | | |
| TWCE337*050□CSZ0000 | 330 | 50 | 9 | 36 | 38 | 1.53 | 22 | -46 | 25 | 30 | 1,900 | T4 | E |
| TWCE337*050□LSZ0000 | | | | | 19 | 0.77 | | | | | | | |
| TWCA276*060□CSZ0000 | 27 | 60 | 3 | 12 | 10.2 | 5.01 | 144 | -24 | 10 | 12 | 700 | T1 | A |
| TWCA276*060□LSZ0000 | | | | | 5.1 | 2.51 | | | | | | | |
| TWCB107*060□CSZ0000 | 100 | 60 | 4 | 20 | 19 | 2.52 | 54 | -36 | 12 | 15 | 1,100 | T2 | B |
| TWCB107*060□LSZ0000 | | | | | 9.5 | 1.26 | | | | | | | |
| TWCD227*060□CSZ0000 | 220 | 60 | 8 | 32 | 30 | 1.81 | 29 | -40 | 16 | 20 | 1,400 | T3 | D |
| TWCD227*060□LSZ0000 | | | | | 15 | 0.91 | | | | | | | |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2V. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the rights to supply higher voltage rating in the same case size, to the same reliability standards.



EXTENDED RATINGS & PART NUMBER REFERENCE

| AVX Part Number | Cap (µF) 25°C at 120Hz | DC Rated Voltage (V) at 85°C | DC Leakage (µA) | | DF (Max) | ESR Max (Ohms) at 120Hz | Impedance max (Ohms) -55°C at 120Hz | Maximum Capacitance Change (%) | | | AC Ripple (mA rms) 85°C at 40kHz | Case Size | |
|---------------------|------------------------------|------------------------------------|-----------------|------------------|-------------|-------------------------------|---|-----------------------------------|-------|--------|--|-----------|-----|
| | | | +25°C | +85°C & 125°C | | | | -55°C | +85°C | +125°C | | Standard | AVX |
| TWCE277*060□CSZ0000 | 270 | 60 | 9 | 36 | 27 | 1.33 | 23 | -45 | 20 | 25 | 1,850 | T4 | E |
| TWCE277*060□LSZ0000 | | | | | 13.5 | 0.67 | | | | | | | |
| TWCA226*075□CSZ0000 | 22 | 75 | 3 | 12 | 8.5 | 5.13 | 157 | -19 | 10 | 12 | 600 | T1 | A |
| TWCA226*075□LSZ0000 | | | | | 4.25 | 2.57 | | | | | | | |
| TWCB826*075□CSZ0000 | 82 | 75 | 4 | 24 | 15.2 | 2.46 | 63 | -30 | 12 | 15 | 1,000 | T2 | B |
| TWCB826*075□LSZ0000 | | | | | 7.6 | 1.23 | | | | | | | |
| TWCD187*075□CSZ0000 | 180 | 75 | 9 | 36 | 24.4 | 2.23 | 30 | -35 | 16 | 20 | 1,300 | T3 | D |
| TWCD187*075□LSZ0000 | | | | | 12.2 | 0.9 | | | | | | | |
| TWCE227*075□CSZ0000 | 220 | 75 | 10 | 40 | 37 | 1.8 | 24 | -40 | 20 | 25 | 1,800 | T4 | E |
| TWCE227*075□LSZ0000 | | | | | 18.5 | 1.12 | | | | | | | |
| TWCA106*100□CSZ0000 | 10 | 100 | 3 | 12 | 4.5 | 5.97 | 200 | -17 | 10 | 12 | 800 | T1 | A |
| TWCA106*100□LSZ0000 | | | | | 2.25 | 2.99 | | | | | | | |
| TWCB396*100□CSZ0000 | 39 | 100 | 5 | 24 | 10.4 | 3.54 | 80 | -20 | 12 | 15 | 1,300 | T2 | B |
| TWCB396*100□LSZ0000 | | | | | 5.2 | 1.77 | | | | | | | |
| TWCD686*100□CSZ0000 | 68 | 100 | 10 | 40 | 11.3 | 2.21 | 40 | -30 | 14 | 16 | 1,600 | T3 | D |
| TWCD686*100□LSZ0000 | | | | | 5.65 | 1.11 | | | | | | | |
| TWCE127*100□CSZ0000 | 120 | 100 | 12 | 48 | 25 | 2.76 | 30 | -35 | 15 | 17 | 2,000 | T4 | E |
| TWCE127*100□LSZ0000 | | | | | 12.5 | 1.38 | | | | | | | |
| TWCA685*125□CSZ0000 | 6.8 | 125 | 3 | 12 | 6 | 11.71 | 300 | -14 | 10 | 12 | 700 | T1 | A |
| TWCA685*125□LSZ0000 | | | | | 3 | 5.86 | | | | | | | |
| TWCB276*125□CSZ0000 | 27 | 125 | 5 | 24 | 7.2 | 3.54 | 90 | -18 | 12 | 15 | 1,200 | T2 | B |
| TWCB276*125□LSZ0000 | | | | | 3.6 | 1.77 | | | | | | | |
| TWCD476*125□CSZ0000 | 47 | 125 | 10 | 40 | 7.9 | 2.23 | 50 | -26 | 14 | 16 | 1,500 | T3 | D |
| TWCD476*125□LSZ0000 | | | | | 3.95 | 1.12 | | | | | | | |
| TWCE826*125□CSZ0000 | 82 | 125 | 12 | 48 | 17.4 | 2.82 | 32 | -30 | 15 | 17 | 1,900 | T4 | E |
| TWCE826*125□LSZ0000 | | | | | 8.7 | 1.41 | | | | | | | |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2V. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the rights to supply higher voltage rating in the same case size, to the same reliability standards.

TESTING

All TWC COTS-Plus product is tested using MIL-PRF-39006 test procedures.

Lot Conformance Testing*


| Inspection | Sampling Procedure |
|--|--------------------|
| Constant Voltage Conditioning DC Leakage Capacitance Dissipation Factor Seal, Condition A or D | 100% Inspection |
| Visual Examination Material Marking Workmanship | 13 Samples |

*Additional testing and inspection is available, please contact the factory for details.

TWC-Y High Temperature Series



COTS-Plus 200°C Wet Tantalum

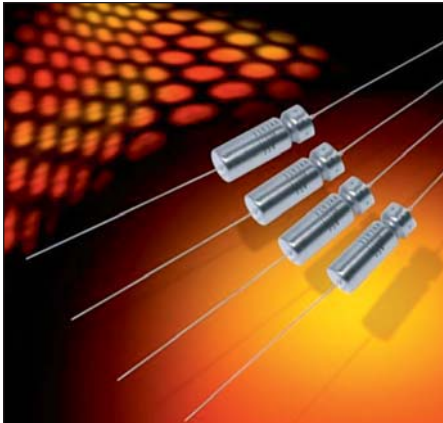

The TWC-Y high temperature series represents a COTS-Plus version of conventional wet electrolytic tantalum capacitors that are designed for use at 200°C. The majority of components listed are now capable of 500 hours of operation at extreme temperature with the applicable derated voltage.


This design includes a welded tantalum can and header assembly that provides a hermetic seal to withstand harsh environments.

This is a new product line so please contact the factory for availability and additional details.

CASE DIMENSIONS: millimeters (inches)

| Standard Case Size | AVX Case Size | L +0.79 (0.031) -0.41 (0.016) | D Basic Case ±0.41 (0.016) | D Insulated Case Max | E ±6.35 (0.250) |
|--------------------|---------------|-------------------------------------|----------------------------------|----------------------------|--------------------|
| T1 | A | 11.51 (0.453) | 4.78 (0.188) | 5.56 (0.219) | 38.10 (1.500) |
| T2 | B | 16.28 (0.641) | 7.14 (0.281) | 7.92 (0.312) | 57.15 (2.250) |
| T3 | D | 19.46 (0.766) | 9.52 (0.375) | 10.31 (0.406) | 57.15 (2.250) |
| T4 | E | 26.97 (1.062) | 9.52 (0.375) | 10.31 (0.406) | 57.15 (2.250) |

OUTLINE DIMENSIONS

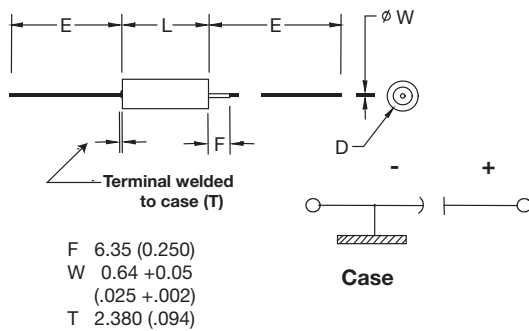

200°C LIFE TEST:

These components are capable of 500 hours of operation at 200°C with the applicable 60% derated voltage, with the exception of those ratings indicated in the table as having only 300 hour qualifications. These ratings will be extended to 500 hour capability after completion of further testing. Following the life test components which are stabilized at 25°C ± 5°C shall exhibit:

Leakage less than 200% the original requirement or ± 10µA (whichever is greater)

ESR not greater than 200% the original requirement

Capacitance increase less than 10% or decrease less than 20% the initial measurement

HOW TO ORDER

AVX PART NUMBER:

| | | | | | | | | | | |
|------------|-----------|--|---|--------------|--|-------------------------|---------------------------------|---------------------------|---|--------------------------------------|
| TWC | B | 476 | * | 050 | □ | C | Y | Z | 00 | 00 |
| Type | Case Size | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Capacitance Tolerance M = ±20% K = ±10% | Voltage Code | Insulation Sleeve C = Without Sleeve S = With Sleeve | ESR C = Standard ESR | Qualification Y = High Temp. | Reliability Z = Non-ER | Termination Finish 00 = Sn/Pb 60/40 07 = 100% Tin | Custom Test Options 00 = Standard |



Not RoHS Compliant

TECHNICAL SPECIFICATIONS

Technical Data: Unless otherwise specified, all technical data relate to an ambient temperature of +25°C

Capacitance Tolerance: ±10%; ±20%

| Rated Voltage (V _R) | ≤ 85°C | 6 | 8 | 10 | 15 | 25 | 30 | 50 | 60 | 75 | 100 | 125 |
|---|--------------|------------|------------|----------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Category Voltage (V _C) | 125°C | 4 | 5 | 7 | 10 | 15 | 20 | 30 | 40 | 50 | 65 | 85 |
| High Temp, Voltage (V_T) | 200°C | 3.6 | 4.8 | 6 | 9 | 12 | 18 | 30 | 36 | 45 | 60 | 75 |
| Surge Voltage (V _S) | ≤ 85°C | 6.9 | 9.2 | 11.5 | 17.3 | 28.8 | 34.5 | 57.5 | 69 | 86.3 | 115 | 144 |

Temperature Range: -55°C to +200°C



TWC-Y High Temperature Series



COTS-Plus 200°C Wet Tantalum

STANDARD RATINGS & PART NUMBER REFERENCE

| AVX Part Number | Cap (µF) +25°C at 120Hz | DC Rated Voltage (V) at +85°C | DC Leakage (µA) | | DF (max) | ESR Max (Ohms) at 120Hz | Maximum Capacitance Change (%) | | | Case Size | |
|--|-------------------------------|-------------------------------------|-----------------|-------------------|-------------|-------------------------------|-----------------------------------|-------|--------|-----------|-----|
| | | | +25°C | +85°C & +125°C | | | -55°C | +85°C | +125°C | Standard | AVX |
| 6 VDC at 85°C 4 VDC at 125°C 3.6 VDC at 200°C | | | | | | | | | | | |
| TWCB147*006□CYZ0000 | 140 | 6 | 1 | 3 | 21 | 1.99 | -40 | 14 | 16 | T2 | B |
| TWCD337*006□CYZ0000 | 330 | 6 | 2 | 7.9 | 36 | 1.45 | -44 | 14 | 16 | T3 | D |
| TWCD567*006□CYZ0000 | 560 | 6 | 2 | 13 | 55 | 1.30 | -64 | 17.5 | 20 | T3 | D |
| 8 VDC at 85°C 5 VDC at 125°C 4.8 VDC at 200°C | | | | | | | | | | | |
| TWCB127*008□CYZ0000 | 120 | 8 | 1 | 2 | 20 | 2.21 | -44 | 17.5 | 20 | T2 | B |
| TWCD297*008□CYZ0000 | 290 | 8 | 2 | 6 | 34 | 1.56 | -64 | 17.5 | 20 | T3 | D |
| TWCD437*008□CYZ0000 | 430 | 8 | 2 | 14 | 46 | 1.42 | -64 | 17.5 | 20 | T3 | D |
| 10 VDC at 85°C 7 VDC at 125°C 6 VDC at 200°C | | | | | | | | | | | |
| TWCB107*010□CYZ0000 | 100 | 10 | 1 | 4 | 15 | 1.99 | -36 | 14 | 16 | T2 | B |
| TWCD257*010□CYZ0000 | 250 | 10 | 2 | 10 | 30 | 1.59 | -40 | 14 | 16 | T3 | D |
| TWCD397*010□CYZ0000 | 390 | 10 | 2 | 16 | 44 | 1.50 | -64 | 17.5 | 20 | T3 | D |
| 15 VDC at 85°C 10 VDC at 125°C 9 VDC at 200°C | | | | | | | | | | | |
| TWCB706*015□CYZ0000 | 70 | 15 | 1 | 4 | 13 | 2.46 | -28 | 14 | 16 | T2 | B |
| TWCD177*015□CYZ0000 | 170 | 15 | 2 | 10 | 25 | 1.95 | -32 | 14 | 16 | T3 | D |
| TWCD277*015□CYZ0000 | 270 | 15 | 2 | 16 | 32 | 1.57 | -56 | 17.6 | 20 | T3 | D |
| 25 VDC at 85°C 15 VDC at 125°C 15 VDC at 200°C | | | | | | | | | | | |
| TWCA686*025□CYZ0000 | 68 | 25 | 2 | 9 | 22 | 4.29 | -50 | 12 | 15 | T1 | A |
| TWCB107*025□CYZ0000 | 100 | 25 | 1 | 10 | 15 | 1.99 | -28 | 13 | 15 | T2 | B |
| TWCD127*025□CYZ0000 | 120 | 25 | 2 | 6 | 21 | 2.32 | -32 | 13 | 15 | T3 | D |
| TWCD187*025□CYZ0000 | 180 | 25 | 2 | 18 | 26 | 1.92 | -48 | 13 | 15 | T3 | D |
| TWCB277*025□CYZ0000 | 270 | 25 | 3 | 16 | 55 | 2.70 | -62 | 13 | 16 | T2 | B |
| TWCD567*025□CYZ0000 | 560 | 25 | 7 | 28 | 76 | 1.80 | -77 | 20 | 25 | T3 | D |
| 30 VDC at 85°C 20 VDC at 125°C 18 VDC at 200°C | | | | | | | | | | | |
| TWCA566*030□CYZ0000 | 56 | 30 | 2 | 9 | 22 | 5.21 | -48 | 12 | 15 | T1 | A |
| TWCB686*030□CYZ0000 | 68 | 30 | 1 | 8 | 13 | 2.54 | -24 | 13 | 15 | T2 | B |
| TWCD107*030□CYZ0000 | 100 | 30 | 2 | 12 | 17 | 2.26 | -28 | 10.5 | 12 | T3 | D |
| TWCD157*030□CYZ0000 | 150 | 30 | 2 | 18 | 23 | 2.03 | -48 | 13 | 15 | T3 | D |
| TWCB227*030□CYZ0000 | 220 | 30 | 3 | 16 | 42 | 2.53 | -60 | 13 | 16 | T2 | B |
| TWCE307*030□CYZ0000 | 300 | 30 | 8 | 32 | 31 | 1.37 | -60 | 25 | 25 | T4 | E |
| TWCD397*030□CYZ0000 | 390 | 30 | 6 | 18 | 53 | 1.80 | -65 | 18 | 25 | T3 | D |
| TWCD477*030□CYZ0000 | 470 | 30 | 8 | 32 | 64 | 1.81 | -70 | 20 | 25 | T3 | D |
| TWCE567*030□CYZ0000 | 560 | 30 | 9 | 36 | 55 | 1.30 | -65 | 25 | 30 | T4 | E |
| 50 VDC at 85°C 30 VDC at 125°C 30 VDC at 200°C | | | | | | | | | | | |
| TWCA336*050□CYZ0000 | 33 | 50 | 2 | 9 | 12.3 | 4.95 | -39 | 10 | 12 | T1 | A |
| TWCB476*050□CYZ0000 | 47 | 50 | 1 | 9 | 11 | 3.11 | -28 | 13 | 15 | T2 | B |
| TWCD606*050□CYZ0000 | 60 | 50 | 2 | 12 | 12 | 2.65 | -16 | 10.5 | 12 | T3 | D |
| TWCD826*050□CYZ0000 | 82 | 50 | 2 | 16 | 15 | 2.43 | -32 | 13 | 15 | T3 | D |
| TWCB127*050□CYZ0000 | 120 | 50 | 4 | 24 | 22.5 | 2.49 | -42 | 12 | 15 | T2 | B |
| TWCE167*050□CYZ0000 | 160 | 50 | 8 | 32 | 17 | 1.41 | -50 | 25 | 25 | T4 | E |
| TWCD277*050□CYZ0000 | 270 | 50 | 8 | 32 | 37 | 1.82 | -51 | 20 | 25 | T3 | D |
| TWCE337*050□CYZ0000 | 330 | 50 | 9 | 36 | 38 | 1.53 | -46 | 25 | 30 | T4 | E |
| 60V VDC at 85°C 40 VDC at 125°C 36 VDC at 200°C | | | | | | | | | | | |
| TWCA276*060□CYZ0000 | 27 | 60 | 3 | 12 | 10.2 | 5.01 | -34 | 10 | 12 | T1 | A |
| TWCD506*060□CYZ0000 | 50 | 60 | 2 | 12 | 10 | 2.65 | -16 | 10.5 | 12 | T3 | D |
| TWCD686*060□CYZ0000 | 68 | 60 | 2 | 16 | 13 | 2.54 | -32 | 10.5 | 12 | T3 | D |
| TWCB107*060□CYZ0000 | 100 | 60 | 4 | 20 | 19 | 2.52 | .36 | 12 | 15 | T2 | B |
| TWCE147*060□CYZ0000 | 140 | 60 | 8 | 32 | 16 | 1.52 | -40 | 20 | 20 | T4 | E |
| TWCD227*060□CYZ0000 | 220 | 60 | 8 | 32 | 30 | 1.81 | -45 | 16 | 20 | T3 | D |
| TWCE277*060□CYZ0000 | 270 | 60 | 9 | 36 | 27 | 1.33 | -45 | 20 | 25 | T4 | E |
| 75V VDC at 85°C 50 VDC at 125°C 45 VDC at 200°C | | | | | | | | | | | |
| TWCA226*075□CYZ0000 | 22 | 75 | 3 | 12 | 8.5 | 5.13 | -29 | 10 | 12 | T1 | A |
| TWCD566*075□CYZ0000 | 56 | 75 | 2 | 17 | 11 | 2.61 | -28 | 10.5 | 15 | T3 | D |
| TWCB826*075□CYZ0000 | 82 | 75 | 4 | 24 | 15.2 | 2.46 | -30 | 12 | 15 | T2 | B |
| TWCE117*075□CYZ0000 | 110 | 75 | 9 | 36 | 12 | 1.45 | -35 | 20 | 20 | T4 | E |
| TWCD187*075□CYZ0000 | 180 | 75 | 9 | 36 | 24.4 | 2.23 | -40 | 16 | 20 | T3 | D |
| TWCE227*075□CYZ0000 | 220 | 75 | 10 | 40 | 37 | 1.80 | -40 | 20 | 25 | T4 | E |
| 100 VDC at 85°C 65 VDC at 125°C 60 VDC at 200°C | | | | | | | | | | | |
| +TWCB226*100□CYZ0000 | 22 | 100 | 1 | 9 | 7.5 | 4.52 | -16 | 8 | 8 | T2 | B |
| TWCE127*100□CYZ0000 | 120 | 100 | 12 | 48 | 25 | 2.76 | -35 | 15 | 17 | T4 | E |
| 125 VDC at 85°C 85 VDC at 125°C 75 VDC at 200°C | | | | | | | | | | | |
| +TWCB276*125□CYZ0000 | 27 | 125 | 5 | 24 | 7.2 | 3.54 | -18 | 12 | 15 | T2 | B |
| TWCE826*125□CYZ0000 | 82 | 125 | 12 | 48 | 17.4 | 2.82 | -30 | 15 | 17 | T4 | E |


All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2V. DCL is measured at rated voltage after 5 minutes.

Note: AVX reserves the right to supply higher voltage rating in the same case size to the same reliability standards.

+Ratings currently qualified to 300 hours of operation at 200°C with 60% rated voltage.



Wet Tantalum Super Capacitor

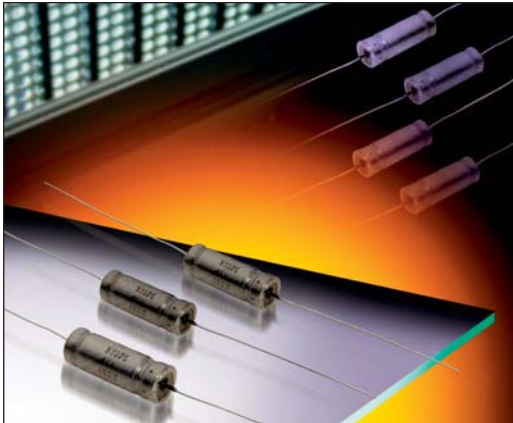


The TWD series is an axial leaded wet electrolytic tantalum capacitor designed for DC (hold-up) and low frequency pulse applications.

Utilising high CV tantalum powders allows achieving super high capacitance values similar to super capacitor range while bringing additional benefits in terms of extended temperature range up to 85°C, and reflow soldering capability and thus addressing the two main issues of super capacitors.

Well-established wet tantalum design is suitable for applications with hi-reliability requirements. Contact the factory about design possibilities beyond those contained in this datasheet.

OUTLINE DIMENSIONS

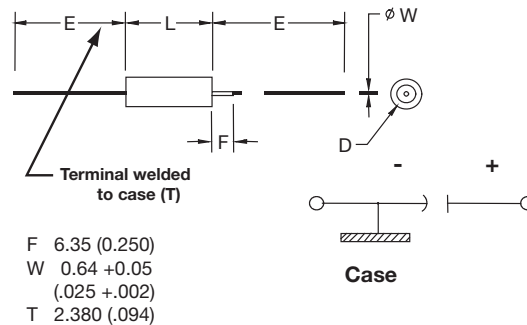

CASE DIMENSIONS: millimeters (inches)

| DSCC Case Size | AVX Case Size | L | D | | E |
|----------------|---------------|--------------------------------|---------------------------|------------------------|---------------|
| | | | Without Insulating Sleeve | With Insulating Sleeve | |
| | | +0.79 (0.031) -0.41 (0.016) | ±0.41 (0.016) | Max | ±6.35 (0.250) |
| T4 | E | 26.97 (1.062) | 9.52 (0.375) | 10.31 (0.406) | 57.15 (2.250) |

VOLTAGE RATINGS (Operating Temperature -55°C to 125°C)

| Voltage (DC) | Rated voltage DC (V _R) to 85°C | | | |
|----------------------------------|--|------|-----|------|
| | Rated Voltage: (V _R) | 85°C | 2.5 | 6.3 |
| Surge Voltage: (V _S) | 85°C | 2.8 | 7.2 | 11.5 |

CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

| DC Capacitance | | Rated Voltage DC (V _R) to 85°C | | |
|----------------|------|--|------|-----|
| mF | Code | 2.5V | 6.3V | 10V |
| 150 | 154 | E | | |
| 50 | 503 | | E | |
| 25 | 253 | | | E |

Released codes

Engineering samples - please contact manufacturer

*Codes under development

TWD DC UltraMax™ Series



Wet Tantalum Super Capacitor

HOW TO ORDER

AVX PART NUMBER:

| | | | | | | | | | | | |
|------------|-----------|--|---|---|--|----------------------------|-----------------------------|---------------------------|--------------------------------|--|--------------------------------------|
| TWD | E | 503 | * | 006 | □ | B | 0 | Z | 0 | ^ | 00 |
| Type | Case Size | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Capacitance Tolerance K = ±10% M = ±20% | Voltage Code 002 = 2.5Vdc 006 = 6.3Vdc 010 = 10Vdc | Insulation Sleeve C = Without Sleeve S = With Sleeve | Packaging B = Tray Pack | Inspection Level 0 = N/A | Reliability Z = Non-ER | Qualification Level 0 = N/A | Termination Finish 0 = Sn/Pb 60/40 7 = Matte tin | Custom Test Options 00 = Standard |

RATINGS & PART NUMBER REFERENCE


| AVX Part Number | Cap (µF) 25°C | DC Rated Voltage (V) at 85°C | ESR Max (ohms) at 1kHz | DC Leakage max (µA) | | Maximum Capacitance Change (%) | | Case Size | |
|---------------------|------------------|---------------------------------|---------------------------|---------------------|-------|--------------------------------|-------|-----------|------|
| | | | | +25°C | +85°C | -55°C | +85°C | AVX | DSCC |
| | | | | 2.5 VDC at 85°C | | | | | |
| TWDE154*002_B0Z0^00 | 150 | 2.5 | 400 | 60 | 180 | -15 | +20 | E | T4 |
| 6.3 VDC at 85°C | | | | | | | | | |
| TWDE503*006_B0Z0^00 | 50 | 6.3 | 400 | 20 | 60 | -15 | +20 | E | T4 |
| 10 VDC at 85°C | | | | | | | | | |
| TWDE253*010_B0Z0^00 | 25 | 10 | 400 | 10 | 30 | -15 | +20 | E | T4 |



AVX modular packaged
93026 style capacitors.

Capacitance Range: 200uF to 6600uF
Voltage Range: 25 to 125V
Temperature Range: -55°C to 125 °C
Tolerance Range: 10%, 20%

DIMENSIONS: millimeters (inches)

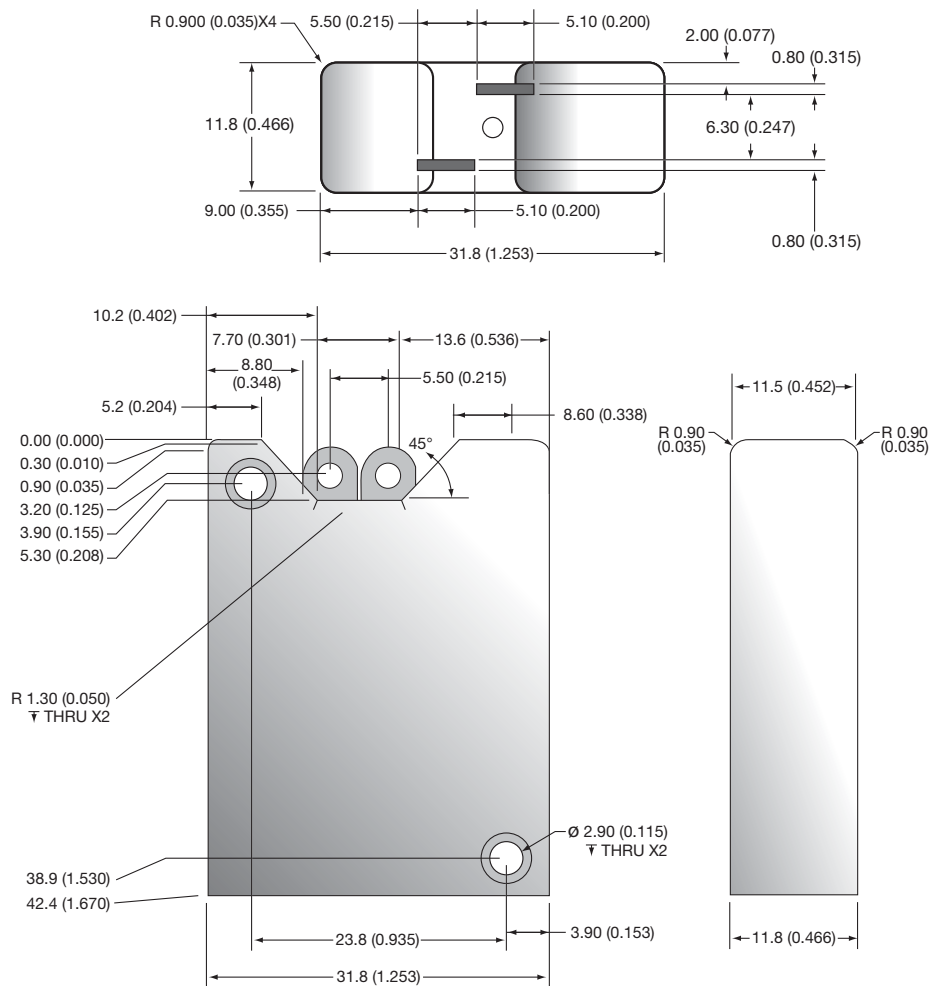


VOLTAGE RATINGS (Operating Temperature -55°C to 125°C)

| Voltage (DC) | | 25 | 30 | 50 | 60 | 75 | 100 | 125 |
|-----------------------|-------|------|------|------|----|------|-----|-----|
| Rated Voltage: (Ur) | 85°C | 25 | 30 | 50 | 60 | 75 | 100 | 125 |
| Derated Voltage: (Uc) | 125°C | 15 | 20 | 30 | 40 | 50 | 65 | 85 |
| Surge Voltage: (Us) | 85°C | 28.8 | 34.5 | 57.5 | 69 | 86.3 | 115 | 144 |

HOW TO ORDER

AVX PART NUMBER:

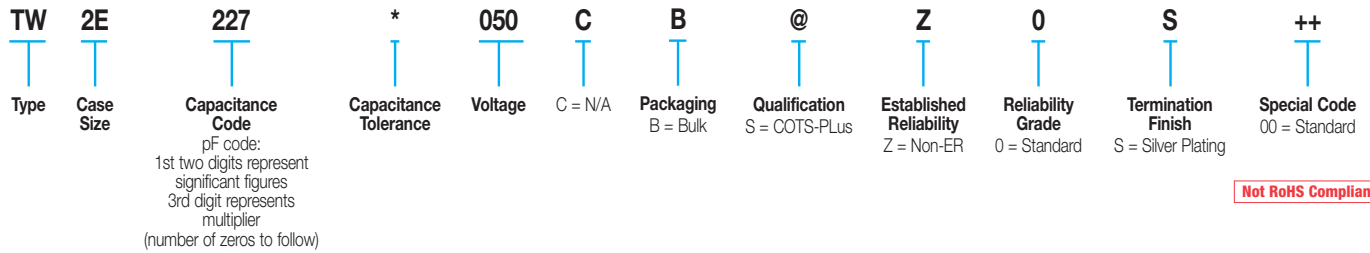

Not RoHS Compliant

SnPb termination option is not RoHS compliant.

RIPPLE CURRENT MULTIPLIERS vs. Frequency, temperature and applied voltage^{1/2/}

| Frequency of Applied Ripple Current | 120Hz | | | | 800Hz | | | | 1kHz | | | | |
|-------------------------------------|---------|------|------|------|-------|------|------|------|------|------|------|------|------|
| | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 | |
| % of 85°C Rated Peak Voltage | 100% | 0.60 | 0.39 | - | - | 0.71 | 0.43 | - | - | 0.72 | 0.45 | - | - |
| | 90% | 0.60 | 0.46 | - | - | 0.71 | 0.55 | - | - | 0.72 | 0.55 | - | - |
| | 80% | 0.60 | 0.52 | 0.35 | - | 0.71 | 0.62 | 0.42 | - | 0.72 | 0.62 | 0.42 | - |
| | 70% | 0.60 | 0.58 | 0.44 | - | 0.71 | 0.69 | 0.52 | - | 0.72 | 0.70 | 0.52 | - |
| | 66-2/3% | 0.60 | 0.60 | 0.46 | 0.27 | 0.71 | 0.71 | 0.55 | 0.32 | 0.72 | 0.72 | 0.55 | 0.32 |

| Frequency of Applied Ripple Current | 10kHz | | | | 40kHz | | | | 100kHz | | | | |
|-------------------------------------|---------|------|------|------|-------|------|------|------|--------|------|------|------|------|
| | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 | ≤55 | 85 | 105 | 125 | |
| % of 85°C Rated Peak Voltage | 100% | 0.88 | 0.55 | - | - | 1.00 | 0.63 | - | - | 1.10 | 0.69 | - | - |
| | 90% | 0.88 | 0.67 | - | - | 1.00 | 0.77 | - | - | 1.10 | 0.85 | - | - |
| | 80% | 0.88 | 0.76 | 0.52 | - | 1.00 | 0.87 | 0.59 | - | 1.10 | 0.96 | 0.65 | - |
| | 70% | 0.88 | 0.85 | 0.64 | - | 1.00 | 0.97 | 0.73 | - | 1.10 | 1.07 | 0.80 | - |
| | 66-2/3% | 0.88 | 0.88 | 0.68 | 0.40 | 1.00 | 1.00 | 0.77 | 0.45 | 1.10 | 1.10 | 0.85 | 0.50 |

1/ At 125°C the rated voltage of the capacitors decreases to 66 2/3 of the 85°C rated voltage.

2/ The peak of the applied ac ripple voltage plus the applied dc voltage must not exceed the dc voltage rating of the capacitors.

RATINGS & PART NUMBER REFERENCE

| AVX Part Number | Cap (uF) | DC Rated Voltage (V) | ESR Max (ohms) | DC Leakage Max (uA) | | Max Impedance (Ohms) | Maximum Capacitance Change* (%) | | | Max AC Ripple* (mA rms) |
|---------------------|---------------|----------------------|----------------|---------------------|---------------|----------------------|---------------------------------|-------|-------|-------------------------|
| | 25°C at 120Hz | 85°C | 120Hz | +25°C | +85 and 125°C | -55°C at 120 Hz | -55°C | +85°C | 125°C | 85°C at 40kHz |
| TW2D248*025CB@Z0S++ | 2400 | 25 | 0.33 | 10 | 40 | 3.50 | -70 | 12 | 18 | 5200 |
| TW3D368*025CB@Z0S++ | 3600 | 25 | 0.22 | 15 | 60 | 2.33 | -70 | 12 | 18 | 7800 |
| TW2E368*025CB@Z0S++ | 3600 | 25 | 0.25 | 12 | 50 | 3.50 | -75 | 12 | 20 | 6200 |
| TW2E448*025CB@Z0S++ | 4400 | 25 | 0.25 | 20 | 160 | 5.00 | -90 | 30 | 50 | 6400 |
| TW3E548*025CB@Z0S++ | 5400 | 25 | 0.17 | 18 | 75 | 2.33 | -75 | 12 | 20 | 9300 |
| TW3E668*025CB@Z0S++ | 6600 | 25 | 0.17 | 30 | 240 | 3.33 | -90 | 30 | 50 | 9600 |
| TW2D208*030CB@Z0S++ | 2000 | 30 | 0.35 | 14 | 50 | 3.50 | -70 | 10 | 18 | 5000 |
| TW3D308*030CB@Z0S++ | 3000 | 30 | 0.23 | 21 | 75 | 2.33 | -70 | 10 | 18 | 7500 |
| TW2E308*030CB@Z0S++ | 3000 | 30 | 0.30 | 24 | 70 | 3.00 | -72 | 10 | 20 | 6000 |
| TW3E458*030CB@Z0S++ | 4500 | 30 | 0.20 | 36 | 105 | 2.00 | -72 | 10 | 20 | 9000 |
| TW2D947*050CB@Z0S++ | 940 | 50 | 0.38 | 6 | 50 | 5.00 | -50 | 8 | 15 | 4200 |
| TW2E148*050CB@Z0S++ | 1360 | 50 | 0.35 | 10 | 80 | 4.00 | -58 | 10 | 20 | 5500 |
| TW3D148*050CB@Z0S++ | 1410 | 50 | 0.25 | 9 | 75 | 3.33 | -50 | 8 | 15 | 6300 |
| TW3E208*050CB@Z0S++ | 2040 | 50 | 0.23 | 15 | 120 | 2.67 | -58 | 10 | 20 | 8250 |
| TW2E308*050CB@Z0S++ | 3000 | 50 | 0.50 | 38 | 200 | 7.50 | -90 | 25 | 35 | 6000 |
| TW3E458*050CB@Z0S++ | 4500 | 50 | 0.33 | 57 | 300 | 5.00 | -90 | 25 | 35 | 9000 |
| TW2D787*060CB@Z0S++ | 780 | 60 | 0.45 | 6 | 50 | 7.50 | -60 | 8 | 15 | 4200 |
| TW2E118*060CB@Z0S++ | 1120 | 60 | 0.40 | 10 | 80 | 5.00 | -58 | 8 | 15 | 5500 |
| TW3D128*060CB@Z0S++ | 1170 | 60 | 0.30 | 9 | 75 | 5.00 | -60 | 8 | 15 | 6300 |
| TW3E178*060CB@Z0S++ | 1680 | 60 | 0.27 | 15 | 120 | 3.33 | -58 | 8 | 15 | 8250 |
| TW2E208*060CB@Z0S++ | 2000 | 60 | 0.50 | 24 | 180 | 10.00 | -90 | 30 | 50 | 6400 |
| TW3E308*060CB@Z0S++ | 3000 | 60 | 0.33 | 36 | 270 | 6.67 | -90 | 30 | 50 | 9600 |
| TW2D667*075CB@Z0S++ | 660 | 75 | 0.50 | 6 | 60 | 6.00 | -45 | 6 | 10 | 4200 |
| TW2E947*075CB@Z0S++ | 940 | 75 | 0.45 | 10 | 100 | 6.00 | -55 | 6 | 10 | 5500 |
| TW3D997*075CB@Z0S++ | 990 | 75 | 0.33 | 9 | 90 | 4.00 | -45 | 6 | 10 | 6300 |
| TW3E148*075CB@Z0S++ | 1410 | 75 | 0.30 | 15 | 150 | 4.00 | -55 | 6 | 10 | 8250 |
| TW2D307*100CB@Z0S++ | 300 | 100 | 0.80 | 6 | 50 | 11.00 | -35 | 6 | 12 | 4200 |
| TW2E447*100CB@Z0S++ | 440 | 100 | 0.60 | 10 | 100 | 7.50 | -40 | 6 | 12 | 5500 |
| TW3D457*100CB@Z0S++ | 450 | 100 | 0.53 | 9 | 75 | 7.33 | -35 | 6 | 12 | 6300 |
| TW3E667*100CB@Z0S++ | 660 | 100 | 0.40 | 15 | 150 | 5.00 | -40 | 6 | 12 | 8250 |
| TW2D207*125CB@Z0S++ | 200 | 125 | 0.90 | 6 | 50 | 17.50 | -35 | 5 | 12 | 4200 |
| TW3D307*125CB@Z0S++ | 300 | 125 | 0.60 | 9 | 75 | 11.67 | -35 | 5 | 12 | 6300 |
| TW2E307*125CB@Z0S++ | 300 | 125 | 0.80 | 10 | 100 | 10.00 | -35 | 6 | 12 | 5500 |
| TW3E457*125CB@Z0S++ | 450 | 125 | 0.53 | 15 | 150 | 6.67 | -35 | 6 | 12 | 8250 |

*For reference only, contact factory for more details

TAJ ESCC Tantalum Capacitors



SMD Solid Tantalum Chip Capacitors




Capacitors, Fixed, Leadless Surface Mount, Chip, Solid electrolyte Tantalum for use in ESCC space programs, according to ESCC Generic Specification 3012 and associated Detail Specification 3012/001 as recommended by the Space Components Coordination Group (ranges in table below).



CASE DIMENSIONS: millimeters (inches)

| Code | EIA Code | Variant | L±0.20 (0.008) | W+0.20 (0.008) -0.10 (0.004) | H+0.20 (0.008) -0.10 (0.004) | W _t ±0.20 (0.008) | A+0.30 (0.012) -0.20 (0.008) | S Min. |
|------|----------|---------|----------------|---------------------------------|---------------------------------|------------------------------|---------------------------------|--------------|
| A | 3216-18 | 01 | 3.20 (0.126) | 1.60 (0.063) | 1.60 (0.063) | 1.20 (0.047) | 0.80 (0.031) | 1.10 (0.043) |
| B | 3528-21 | 02 | 3.50 (0.138) | 2.80 (0.110) | 1.90 (0.075) | 2.20 (0.087) | 0.80 (0.031) | 1.40 (0.055) |
| C | 6032-28 | 13 | 6.00 (0.236) | 3.20 (0.126) | 2.60 (0.102) | 2.20 (0.087) | 1.30 (0.051) | 2.90 (0.114) |
| D | 7343-31 | 14 | 7.30 (0.287) | 4.30 (0.169) | 2.90 (0.114) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |
| E | 7343-43 | 17 | 7.30 (0.287) | 4.30 (0.169) | 4.10 (0.162) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |

W_t dimension applies to the termination width for A dimensional area only.

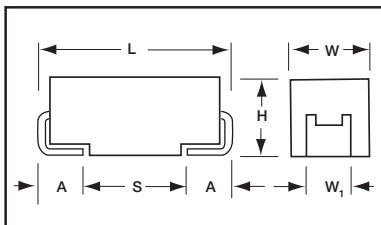

HOW TO ORDER

AVX PART NUMBER:

| | | | | | | | |
|------------|------------------------------|--|-----------------------------------|--|-------------|---|---------------------------|
| TAJ | A | 475 | K | 010 | ESA | * | Not RoHS Compliant |
| Type | Case Size See table above | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Tolerance K = ±10% M = ±20% | Rated DC Voltage 004 = 4Vdc 006 = 6.3Vdc 010 = 10Vdc 016 = 16Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc | ESCC Suffix | Please contact manufacturer for details on LAT, and other requirements. | |

ESCC PART NUMBER – MANDATORY FOR ORDERING:

| | | | | | | | |
|----------------------|--|--|--|---|-----------------------|----------|---------------------------|
| 3012 | 001 | 01 | C | 226 | V | K | Not RoHS Compliant |
| Detail Specification | Variant Basic Specification ESCC 23500 | Testing Level B = Level B (Xray) C = Level C | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Voltage G = 4V J = 6.3V A = 10V C = 16V D = 20V E = 25V V = 35V T = 50V | Tolerance K = ±10% | | |



TAJ ESCC Tantalum Capacitors



SMD Solid Tantalum Chip Capacitors

CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

| Capacitance | | Rated Voltage DC (V_R) at 85°C | | | | | | | |
|---------------|------|------------------------------------|----------|---------|---------|---------|---------|---------|---------|
| μF | Code | 4V (G) | 6.3V (J) | 10V (A) | 16V (C) | 20V (D) | 25V (E) | 35V (V) | 50V (T) |
| 0.10 | 104 | | | | | | | A | A |
| 0.15 | 154 | | | | | | | A | B |
| 0.22 | 224 | | | | | | | A | B |
| 0.33 | 334 | | | | | | | A | B |
| 0.47 | 474 | | | | | | A | A/B | C |
| 0.68 | 684 | | | | | A | A | A/B | C |
| 1.0 | 105 | | | | A | A | A | B | C |
| 1.5 | 155 | | | A | A | A | B | B/C | D |
| 2.2 | 225 | | A | A | A/B | B | B | B/C | D |
| 3.3 | 335 | A | A | A | A/B | B | B/C | C | D |
| 4.7 | 475 | A | A | A/B | B | B/C | C | C/D | D |
| 6.8 | 685 | A | A/B | B | B/C | C | C/D | D | D* |
| 10 | 106 | A/B | B | B/C | C | C | C/D | D | E* |
| 15 | 156 | B | B/C | C | C | C/D | D | D | |
| 22 | 226 | B/C | C | C | C/D | D | D | E | |
| 33 | 336 | C | C | C/D | D | D | E | | |
| 47 | 476 | C/D | C/D | D | D | E | | | |
| 68 | 686 | C/D | D | D | D | E | | | |
| 100 | 107 | D | D | D | E | | | | |
| 150 | 157 | D | D | E | | | | | |
| 220 | 227 | E | E | E | | | | | |

*Codes under development - subject to change.

LAT TESTING

AVX can perform the following Lot Acceptance Test according to ESCC

- LAT 3 Qty. 10 pcs. - 4 pieces of which are “destructive samples”, the remaining 6 pieces may be for part of the Order Qty. OR be additional to the order Qty.
- LAT 2 Qty. 26 pcs. - including the 10 pieces of LAT3. The additional 16 pieces are “destructive samples”.
- LAT 1 Qty. 34 pcs. - including the 26 pieces of LAT2. The additional 8 pieces are all “destructive samples”.

OPTION

Packaging: Tape and reel available on request – Contact marketing.




TES Low ESR – QPL ESCC



Low ESR Tantalum Chip Capacitor



- QPL ESCC approved series
- Manufactured in EU, ESA qualified plant, according to ESCC 3012
- Detailed specification 3012/004
- Low ESR designed parts, multianode D and E case included
- Robust against higher thermo-mechanical stresses during assembly process
- CV range 1.0 - 470uF/6.3 - 50V
- Improved reliability design

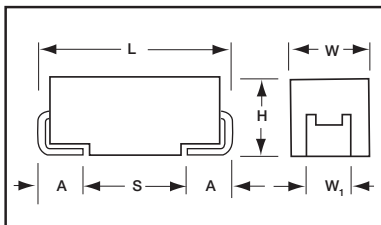

CASE DIMENSIONS: millimeters (inches)

| Code | EIA Code | Variant | L±0.20 (0.008) | W+0.20 (0.008) -0.10 (0.004) | H+0.20 (0.008) -0.10 (0.004) | W ₁ ±0.20 (0.008) | A+0.30 (0.012) -0.20 (0.008) | S Min. |
|------|----------|---------|----------------|------------------------------|------------------------------|------------------------------|------------------------------|--------------|
| A | 3216-18 | 01 | 3.20 (0.126) | 1.60 (0.063) | 1.60 (0.063) | 1.20 (0.047) | 0.80 (0.031) | 1.10 (0.043) |
| B | 3528-21 | 02 | 3.50 (0.138) | 2.80 (0.110) | 1.90 (0.075) | 2.20 (0.087) | 0.80 (0.031) | 1.40 (0.055) |
| C | 6032-28 | 03 | 6.00 (0.236) | 3.20 (0.126) | 2.60 (0.102) | 2.20 (0.087) | 1.30 (0.051) | 2.90 (0.114) |
| D | 7343-31 | 04 | 7.30 (0.287) | 4.30 (0.169) | 2.90 (0.114) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |
| E | 7343-43 | 05 | 7.30 (0.287) | 4.30 (0.169) | 4.10 (0.162) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |

W₁ dimension applies to the termination width for A dimensional area only.

HOW TO ORDER

AVX PART NUMBER:

| | | | | | | | | | | |
|------------|------------------------------|--|-----------------------------------|---|--|--|--|---|----------------------------|---------------------------|
| TES | E | 477 | K | 006 | □ | U | 0 | @ | ^ | Not RoHS Compliant |
| Type | Case Size See table above | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Tolerance K = ±10% M = ±20% | Voltage Code 006 = 6.3Vdc 010 = 10Vdc 012 = 12Vdc 016 = 16Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc | Packaging SnPb Termination X = 4" E = Bulk H = 7" | ESR Level C = Standard L = Mirror Multianode U = Multianode | LAT 0 = N/A 1 = LAT1 2 = LAT2 3 = LAT3 | Screening Level B = Level B (Xray) C = Level C Z = non-ER (not for flight parts) | FCSI 0 = N/A 1 = YES | |

ESCC PART NUMBER – MANDATORY FOR ORDERING:

| | | | | | | | | |
|----------------------|---------------------------------------|--|--|-----------------------------------|--|-----------|-------------|---------------------------|
| 3012 | 004 | 01 | B | 477 | K | E | 0030 | Not RoHS Compliant |
| Detail Specification | Variant 01 02 03 04 05 | Testing Level B = Level B (Xray) C = Level C | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Tolerance K = ±10% M = ±20% | Voltage J = 6.3V A = 10V B = 12V C = 16V D = 20V E = 25V V = 35V T = 50V | ESR in mΩ | | |



TES Low ESR – QPL ESCC



Low ESR Tantalum Chip Capacitor

CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

| Capacitance | | Rated Voltage DC (V_R) at 85°C | | | | | | | |
|---------------|------|------------------------------------|---------|---------|----------------|---------|----------------|-------------------|-------------------|
| μF | Code | 6.3V (J) | 10V (A) | 12V (B) | 16V (C) | 20V (D) | 25V (E) | 35V (V) | 50V (T) |
| 1.0 | 105 | | | | | | A(3000) | | B(2000) |
| 1.5 | 155 | | | | | | | | |
| 2.2 | 225 | | | | | | | | |
| 3.3 | 335 | | | | | A(2500) | B(1000) | B(1000) C(600) | C(1000) D(200) |
| 4.7 | 475 | | | | A(2000) | | | | |
| 6.8 | 685 | | | | | | | | |
| 10 | 106 | | A(1800) | | | B(1000) | C(600) | D(120) | E(150)* |
| 15 | 156 | | | | | | | | |
| 22 | 226 | A(900) | | | B(600) | C(400) | | D(100) | |
| 33 | 336 | | B(650) | | | C(300) | D(65) E(65) | E(65) | |
| 47 | 476 | B(500) | | | | C(350) | | | |
| 68 | 686 | | | | | | | | |
| 100 | 107 | | C(200) | | | E(45) | | | |
| 150 | 157 | C(300) | D(45) | | D(55) E(40) | | | | |
| 220 | 227 | | D(35) | E(35) | | | | | |
| 330 | 337 | D(35) | E(35) | | | | | | |
| 470 | 477 | E(30) | | | | | | | |
| 680 | 687 | | | | | | | | |

Available Ratings: ESR limits quoted in brackets (mOhms)

Engineering samples - please contact manufacturer

*Codes under development - subject to change.

LAT TESTING

AVX can perform the following Lot Acceptance Test according to ESCC

- LAT 3 Qty. 10 pcs. - 4 pieces of which are “destructive samples”, the remaining 6 pieces may be for part of the Order Qty. OR be additional to the order Qty.
- LAT 2 Qty. 26 pcs. - including the 10 pieces of LAT3. The additional 16 pieces are “destructive samples”.
- LAT 1 Qty. 34 pcs. - including the 26 pieces of LAT2. The additional 8 pieces are all “destructive samples”.

OPTION

Packaging: Tape and reel available on request – Contact marketing.

TES Low ESR – QPL ESCC



Low ESR Tantalum Chip Capacitor

RATINGS & PART NUMBER REFERENCE

| ESCC Part Number | AVX Part Number | Case Size | Cap (µF) | Rated Voltage (V) | DCL (µA) Max. | DF % Max. | ESR Max. (mΩ) @100kHz | 100kHz Ripple Current Rating (A) | | | 100kHz Ripple Voltage Ratings (V) | | |
|---|---------------------------|-----------|----------|-------------------|---------------|-----------|-----------------------|----------------------------------|------|-------|-----------------------------------|------|-------|
| | | | | | | | | 25°C | 85°C | 125°C | 25°C | 85°C | 125°C |
| 6.3 Volt @ 85°C (4 Volt @ 125°C) | | | | | | | | | | | | | |
| 301200401#226*J0900 | TES A 226 * 006 □ C 0 @ ^ | A | 22 | 6.3 | 1.32 | 6 | 900 | 289 | 260 | 115 | 260 | 234 | 104 |
| 301200402#476*J0500 | TES B 476 * 006 □ C 0 @ ^ | B | 47 | 6.3 | 2.82 | 6 | 500 | 412 | 371 | 165 | 206 | 186 | 82 |
| 301200403#157*J0300 | TES C 157 * 006 □ C 0 @ ^ | C | 150 | 6.3 | 9 | 6 | 300 | 606 | 545 | 242 | 182 | 163 | 73 |
| 301200404#337*J0035 | TES D 337 * 006 □ L 0 @ ^ | D | 330 | 6.3 | 19.8 | 8 | 35 | 2699 | 2429 | 1080 | 94 | 85 | 38 |
| 301200405#477*J0030 | TES E 477 * 006 □ U 0 @ ^ | E | 470 | 6.3 | 28.2 | 6 | 30 | 3000 | 2700 | 1200 | 90 | 81 | 36 |
| 10 Volt @ 85°C (7 Volt @ 125°C) | | | | | | | | | | | | | |
| 301200401#106*A1800 | TES A 106 * 010 □ C 0 @ ^ | A | 10 | 10 | 1 | 6 | 1800 | 204 | 184 | 82 | 367 | 331 | 147 |
| 301200402#336*A0650 | TES B 336 * 010 □ C 0 @ ^ | B | 33 | 10 | 3.3 | 6 | 650 | 362 | 325 | 145 | 235 | 212 | 94 |
| 301200403#107*A0200 | TES C 107 * 010 □ C 0 @ ^ | C | 100 | 10 | 10 | 6 | 200 | 742 | 667 | 297 | 148 | 133 | 59 |
| 301200404#157*A0045 | TES D 157 * 010 □ L 0 @ ^ | D | 150 | 10 | 15 | 6 | 45 | 2380 | 2142 | 952 | 107 | 96 | 43 |
| 301200404#107*A0035 | TES D 227 * 010 □ L 0 @ ^ | D | 220 | 10 | 22 | 6 | 35 | 2699 | 2429 | 1080 | 94 | 85 | 38 |
| 301200405#337*A0035 | TES E 337 * 010 □ U 0 @ ^ | E | 330 | 10 | 33 | 6 | 35 | 2777 | 2500 | 1111 | 97 | 87 | 39 |
| 12 Volt @ 85°C (8 Volt @ 125°C) | | | | | | | | | | | | | |
| 301200405#227*B0035 | TES E 227 * 012 □ U 0 @ ^ | E | 220 | 12 | 26.4 | 6 | 35 | 2777 | 2500 | 1111 | 97 | 87 | 39 |
| 16 Volt @ 85°C (10 Volt @ 125°C) | | | | | | | | | | | | | |
| 301200401#475*C2000 | TES A 475 * 016 □ C 0 @ ^ | A | 4.7 | 16 | 0.75 | 6 | 2000 | 194 | 174 | 77 | 387 | 349 | 155 |
| 301200402#226*C0600 | TES B 226 * 016 □ C 0 @ ^ | B | 22 | 16 | 3.52 | 6 | 600 | 376 | 339 | 151 | 226 | 203 | 90 |
| 301200403#476*C0350 | TES C 476 * 016 □ C 0 @ ^ | C | 47 | 16 | 7.52 | 6 | 350 | 561 | 505 | 224 | 196 | 177 | 78 |
| 301200404#107*C0055 | TES D 107 * 016 □ L 0 @ ^ | D | 100 | 16 | 16 | 6 | 55 | 2153 | 1938 | 861 | 118 | 107 | 47 |
| 301200405#157*C0040 | TES E 157 * 016 □ U 0 @ ^ | E | 150 | 16 | 24 | 6 | 40 | 2598 | 2338 | 1039 | 104 | 94 | 42 |
| 20 Volt @ 85°C (13 Volt @ 125°C) | | | | | | | | | | | | | |
| 301200401#335*D2500 | TES A 335 * 020 □ C 0 @ ^ | A | 3.3 | 20 | 0.66 | 6 | 2500 | 173 | 156 | 69 | 433 | 390 | 173 |
| 301200402#106*D1000 | TES B 106 * 020 □ C 0 @ ^ | B | 10 | 20 | 2 | 6 | 1000 | 292 | 262 | 117 | 292 | 262 | 117 |
| 301200403#226*D0400 | TES C 226 * 020 □ C 0 @ ^ | C | 22 | 20 | 4.4 | 6 | 400 | 524 | 472 | 210 | 210 | 189 | 84 |
| 301200403#336*D0300 | TES C 336 * 020 □ C 0 @ ^ | C | 33 | 20 | 6.6 | 6 | 300 | 606 | 545 | 242 | 182 | 163 | 73 |
| 301200404#476*D0055 | TES D 476 * 020 □ L 0 @ ^ | D | 47 | 20 | 9.4 | 6 | 55 | 2153 | 1938 | 861 | 118 | 107 | 47 |
| 301200405#107*D0045 | TES E 107 * 020 □ U 0 @ ^ | E | 100 | 20 | 20 | 6 | 45 | 2449 | 2205 | 980 | 110 | 99 | 44 |
| 25 Volt @ 85°C (17 Volt @ 125°C) | | | | | | | | | | | | | |
| 301200401#105*E3000 | TES A 105 * 025 □ C 0 @ ^ | A | 1.0 | 25 | 0.25 | 6 | 3000 | 158 | 142 | 63 | 474 | 427 | 190 |
| 301200402#475*E1000 | TES B 475 * 025 □ C 0 @ ^ | B | 4.7 | 25 | 1.18 | 6 | 1000 | 292 | 262 | 117 | 292 | 262 | 117 |
| 301200403#106*E0600 | TES C 106 * 025 □ C 0 @ ^ | C | 10 | 25 | 2.5 | 6 | 600 | 428 | 385 | 171 | 257 | 231 | 103 |
| 301200404#336*E0065 | TES D 336 * 025 □ L 0 @ ^ | D | 33 | 25 | 8.25 | 6 | 65 | 1981 | 1783 | 792 | 129 | 116 | 51 |
| 301200405#476*E0065 | TES E 476 * 025 □ U 0 @ ^ | E | 47 | 25 | 11.8 | 6 | 65 | 2038 | 1834 | 815 | 132 | 119 | 53 |
| 35 Volt @ 85°C (23 Volt @ 125°C) | | | | | | | | | | | | | |
| 301200402#335*V1000 | TES B 335 * 035 □ C 0 @ ^ | B | 3.3 | 35 | 1.16 | 6 | 1000 | 292 | 262 | 117 | 292 | 262 | 117 |
| 301200403#475*V0600 | TES C 475 * 035 □ C 0 @ ^ | C | 4.7 | 35 | 1.65 | 6 | 600 | 428 | 385 | 171 | 257 | 231 | 103 |
| 301200404#106*V0120 | TES D 106 * 035 □ L 0 @ ^ | D | 10 | 35 | 3.5 | 6 | 120 | 1458 | 1312 | 583 | 175 | 157 | 70 |
| 301200404#226*V0100 | TES D 226 * 035 □ L 0 @ ^ | D | 22 | 35 | 7.7 | 6 | 100 | 1597 | 1437 | 639 | 160 | 144 | 64 |
| 301200405#336*V0065 | TES E 336 * 035 □ U 0 @ ^ | E | 33 | 35 | 11.6 | 6 | 65 | 2038 | 1834 | 815 | 132 | 119 | 53 |
| 50 Volt @ 85°C (33 Volt @ 125°C) | | | | | | | | | | | | | |
| 301200402#105*T2000 | TES B 105 * 050 □ C 0 @ ^ | B | 1.0 | 50 | 0.5 | 6 | 2000 | 206 | 186 | 82 | 412 | 271 | 165 |
| 301200403#335*T1000 | TES C 335 * 050 □ C 0 @ ^ | C | 3.3 | 50 | 1.65 | 6 | 1000 | 332 | 298 | 133 | 332 | 298 | 133 |
| 301200404#475*T0200 | TES D 475 * 050 □ L 0 @ ^ | D | 4.7 | 50 | 2.35 | 6 | 200 | 1129 | 1016 | 452 | 226 | 203 | 90 |
| 301200405#106*T0150 | TES E 106 * 050 □ U 0 @ ^ | E | 10 | 50 | 5 | 6 | 150 | 1342 | 1207 | 537 | 201 | 181 | 80 |

The parts are supplied in dry pack with Moisture Sensitivity Level (MSL) level 3 - defined according to J-STD-020.

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.


NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.




TAJ CECC Tantalum Capacitors



SMD Solid Tantalum Chip Capacitors

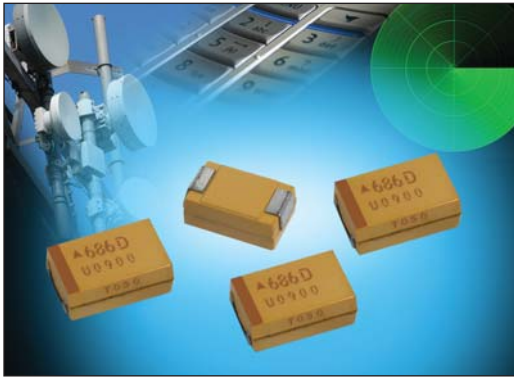

Capacitors, Fixed, Leadless Surface Mount, Chip, Solid electrolyte Tantalum for use in avionics and industrial applications, tested to CECC Specification 30801-005 and 30801-011 (CTC4).

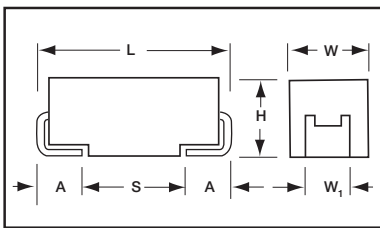

CASE DIMENSIONS: millimeters (inches)

| Code | EIA Code | Variant | L±0.20 (0.008) | W+0.20 (0.008) -0.10 (0.004) | H+0.20 (0.008) -0.10 (0.004) | W ₁ ±0.20 (0.008) | A+0.30 (0.012) -0.20 (0.008) | S Min. |
|------|----------|---------|----------------|---------------------------------|---------------------------------|------------------------------|---------------------------------|--------------|
| A | 3216-18 | 01&11 | 3.20 (0.126) | 1.60 (0.063) | 1.60 (0.063) | 1.20 (0.047) | 0.80 (0.031) | 1.10 (0.043) |
| B | 3528-21 | 02&12 | 3.50 (0.138) | 2.80 (0.110) | 1.90 (0.075) | 2.20 (0.087) | 0.80 (0.031) | 1.40 (0.055) |
| C | 6032-28 | 03&13 | 6.00 (0.236) | 3.20 (0.126) | 2.60 (0.102) | 2.20 (0.087) | 1.30 (0.051) | 2.90 (0.114) |
| D | 7343-31 | 04&14 | 7.30 (0.287) | 4.30 (0.169) | 2.90 (0.114) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |

W₁ dimension applies to the termination width for A dimensional area only.

HOW TO ORDER

TAJ
Type

A
Case Size

See table above

475
Capacitance Code

pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow)

K
Tolerance

K = ±10%
M = ±20%

010
Rated DC Voltage

006 = 6.3Vdc
010 = 10Vdc
016 = 16Vdc
020 = 20Vdc
025 = 25Vdc
035 = 35Vdc
050 = 50Vdc

R
Termination Finish

R = 7" T/R 100% Tin
S = 13" T/R 100% Tin
A = Gold Plating 7" Reel
B = Gold Plating 13" Reel
H = Tin Lead 7" Reel
K = Tin Lead 13" Reel

FJ
Suffix

FJ = CECC 30801-011(CTC4)
Y = CECC 30801-005

Not RoHS Compliant



TECHNICAL SPECIFICATIONS

Technical Data:

All technical data relate to an ambient temperature of +25°C

Capacitance Range: 0.1 µF to 100 µF

Capacitance Tolerance: ±10%; ±20%

| Rated Voltage DC (V _R) | ≤+85°C: | 6.3 | 10 | 16 | 20 | 25 | 35 | 50 |
|------------------------------------|----------|-----|----|----|----|----|----|----|
| Category Voltage (V _C) | ≤+125°C: | 4 | 7 | 10 | 13 | 17 | 23 | 33 |
| Surge Voltage (V _S) | ≤+85°C: | 8 | 13 | 20 | 26 | 32 | 46 | 65 |
| Surge Voltage (V _S) | ≤+125°C: | 5 | 8 | 13 | 16 | 20 | 28 | 40 |

Temperature Range: -55°C to +125°C

Reliability: 1% per 1000 hours at 85°C, V_R with 0.1Ω/V series Impedance, 60% confidence level



TAJ CECC Tantalum Capacitors



SMD Solid Tantalum Chip Capacitors

CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

BS CECC30801-005

| Capacitance | | Rated Voltage DC (V_R) at 85°C | | | | | | |
|---------------|------|------------------------------------|---------|---------|---------|---------|---------|---------|
| μF | Code | 6.3V (J) | 10V (A) | 16V (C) | 20V (D) | 25V (E) | 35V (V) | 50V (T) |
| 0.10 | 104 | | | | | | A | A |
| 0.15 | 154 | | | | | | A | A/B |
| 0.22 | 224 | | | | | | A | A/B |
| 0.33 | 334 | | | | | | A | B |
| 0.47 | 474 | | | | | A | A/B | C |
| 0.68 | 684 | | | | A | A | A/B | C |
| 1.0 | 105 | | | A | A | A | B | C |
| 1.5 | 155 | | A | A | A | A/B | B/C | D |
| 2.2 | 225 | A | A | A/B | B | B | B/C | D |
| 3.3 | 335 | A | A | A/B | B | B/C | C/D | D |
| 4.7 | 475 | A | A/B | B/C | B/C | C | C/D | D |
| 6.8 | 685 | A/B | B | B/C | C/D | C/D | D | D |
| 10 | 106 | A/B | B/C | B/C/D | C | C/D | D | |
| 15 | 156 | B/C | B/C/D | C | C/D | D | D | |
| 22 | 226 | B/C/D | C | C/D | D | D | | |
| 33 | 336 | C | C/D | D | D | | | |
| 47 | 476 | C/D | D | D | | | | |
| 68 | 686 | C/D | D | D | | | | |
| 100 | 107 | D | D | | | | | |
| 150 | 157 | | | | | | | |
| 220 | 227 | | | | | | | |

BS CECC30801-011 (CTC4)


| Capacitance | | Rated Voltage DC (V_R) at 85°C | | | | | | |
|---------------|------|------------------------------------|---------|---------|---------|---------|---------|---------|
| μF | Code | 6.3V (J) | 10V (A) | 16V (C) | 20V (D) | 25V (E) | 35V (V) | 50V (T) |
| 0.10 | 104 | | | | | | A | A |
| 0.15 | 154 | | | | | | A | B |
| 0.22 | 224 | | | | | | A | B |
| 0.33 | 334 | | | | | | A | B |
| 0.47 | 474 | | | | | A | B | C |
| 0.68 | 684 | | | | A | | B | C |
| 1.0 | 105 | | | A | | | B | C |
| 1.5 | 155 | | A | | | B | C | D |
| 2.2 | 225 | A | | | B | | C | D |
| 3.3 | 335 | | | B | | | C | D |
| 4.7 | 475 | | B | | | C | D | D |
| 6.8 | 685 | B | | | C | | D | |
| 10 | 106 | | | C | | D | D | |
| 15 | 156 | | C | | D | D | | |
| 22 | 226 | C | | D | D | | | |
| 33 | 336 | | D | D | | | | |
| 47 | 476 | D | D | | | | | |
| 68 | 686 | D | | | | | | |
| 100 | 107 | | | | | | | |
| 150 | 157 | | | | | | | |
| 220 | 227 | | | | | | | |

NOTE: Voltage ratings are minimum values. AVX reserves the rights to supply higher voltage rating in the same case size, to the same reliability standards.

TCH Low ESR Hermetic Series



SMD Low ESR Tantalum Capacitors with Conductive Polymer Electrode in Hermetic Package

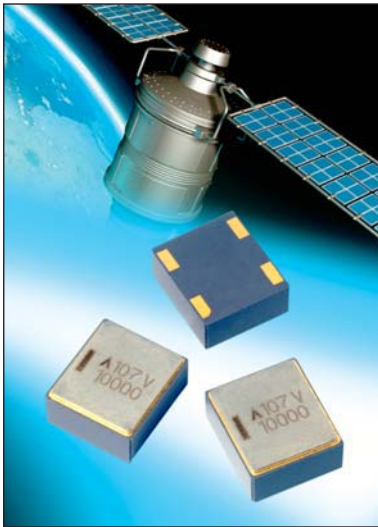

FEATURES

- Aerospace & Hi-Rel applications
- Low ESR conductive polymer electrode
- Ceramic case hermetic packaging
- Stability under humidity and ambient atmosphere exposure
- Large case sizes including CTC-21D provide high capacitance values
- Developed with ESA to suit aerospace applications
- Ongoing ESA qualification
- Manufacturing and screening utilizing AVX patented Q-Process to effectively remove components that may experience excessive parametric shifts or instability in operation life




APPLICATIONS

- Aerospace
- Defence
- Power supplies
- Pulse power

MARKING

9 CASE




CASE DIMENSIONS: millimeters (inches)

| Code | Type | L | W | H | W ₁ | A | S |
|-------------|----------|--------------|--------------|--------------|----------------|--------------|--------------|
| 9 (CTC-21D) | J-lead | 11.5 (0.453) | 12.5 (0.492) | 5.60 (0.220) | 12.5 (0.492) | 2.00 (0.079) | 7.50 (0.295) |
| 9 (CTC-21D) | Undertab | 11.0 (0.433) | 12.5 (0.492) | 5.45 (0.215) | 10.5 (0.413) | 1.50 (0.059) | 8.00 (0.315) |


Available ratings

Engineering samples - please contact manufacturer

'J' Lead Termination

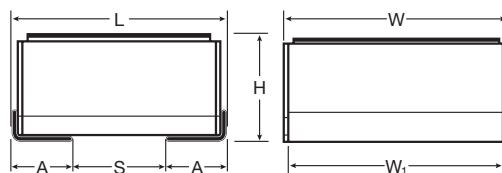

Undertab Termination

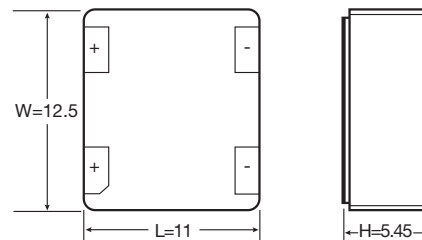

TECHNICAL SPECIFICATIONS

| | | | | | | | | | | |
|------------------------------------|--|----|----|------|----|------|----|----|----|-----|
| Technical Data: | All technical data relate to an ambient temperature of +25°C | | | | | | | | | |
| Capacitance Range: | 15 µF to 680 µF | | | | | | | | | |
| Capacitance Tolerance: | ±20% | | | | | | | | | |
| Leakage Current DCL: | 0.1CV | | | | | | | | | |
| Rated Voltage (V _R) | ≤ +85°C | 10 | 16 | 20 | 25 | 35 | 50 | 63 | 75 | 100 |
| Category Voltage (V _C) | ≤ +125°C | 7 | 11 | 13.5 | 17 | 23.5 | 33 | 42 | 50 | 66 |
| Temperature Range: | -55°C to +125°C | | | | | | | | | |
| Termination Finish: | Gold Plating (Undertab), Gold Plating (J-lead) | | | | | | | | | |



TCH Low ESR Hermetic Series



SMD Low ESR Tantalum Capacitors with Conductive Polymer Electrode in Hermetic Package

HOW TO ORDER

AVX PART NUMBER

| | | | | | | | |
|-------------------------|---|---|--|---|--|-------------------------------|--|
| TCH Type | 9 Case Size See table above | 687 Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | M Tolerance M = ±20% | 016 Rated DC Voltage 010 = 10Vdc 050 = 50Vdc 016 = 16Vdc 063 = 63Vdc 020 = 20Vdc 075 = 75Vdc 025 = 25Vdc 100 = 100Vdc 035 = 35Vdc | W Packaging W = Waffle B = Bulk | 0040 ESR in mΩ | U Termination J = 'J' lead U = Undertab |
|-------------------------|---|---|--|---|--|-------------------------------|--|



CAPACITANCE AND VOLTAGE RANGE (CASE CODE BEFORE THE BRACKETS)

| Capacitance | | Rated Voltage DC (V _R) at 85°C | | | | | | | | |
|-------------|------|--|--------|--------|--------|--------|--------|---------|---------|---------|
| μF | Code | 10V | 16V | 20V | 25V | 35V | 50V | 63V | 75V | 100V |
| 15 | 156 | | | | | | | | | 9(150)* |
| 22 | 226 | | | | | | | | 9(120)* | 9(150) |
| 33 | 336 | | | | | | | 9(100)* | 9(120)* | |
| 47 | 476 | | | | | | 9(70) | 9(100)* | | |
| 68 | 686 | | | | | | 9(70)* | | | |
| 100 | 107 | | | | 9(50)* | 9(55) | | | | |
| 150 | 157 | | | 9(45)* | 9(50) | 9(55)* | | | | |
| 220 | 227 | 9(40)* | 9(40) | 9(45)* | 9(50)* | | | | | |
| 330 | 337 | 9(40) | 9(40)* | 9(45)* | | | | | | |
| 470 | 477 | 9(40)* | 9(40)* | | | | | | | |
| 680 | 687 | 9(40)* | 9(40) | | | | | | | |

Available Ratings: (ESR ratings in mOhms in brackets)
 Engineering samples - please contact manufacturer
 *Codes under development - subject to change

TCH Low ESR Hermetic Series



SMD Low ESR Tantalum Capacitors with Conductive Polymer Electrode in Hermetic Package

RATINGS & PART NUMBER REFERENCE

| AVX Part No. | Case Size | Capacitance (µF) | Rated Voltage (V) | Rated Temperature (°C) | Category Voltage (V) | Category Temperature (°C) | DCL (µA) Max. | DF % Max. | ESR Max. (mΩ) @ 100kHz | MSL | 100kHz RMS Current (A) | | |
|------------------------|-----------|------------------|-------------------|------------------------|----------------------|---------------------------|---------------|-----------|------------------------|-----|------------------------|------|-------|
| | | | | | | | | | | | 25°C | 85°C | 125°C |
| 10 Volt @ 85°C | | | | | | | | | | | | | |
| TCH9227M010W0040# | 9 | 220 | 10 | 85 | 7 | 125 | 220 | 8 | 40 | 1 | 3.16 | 2.84 | 1.26 |
| TCH9337M010W0040# | 9 | 330 | 10 | 85 | 7 | 125 | 330 | 8 | 40 | 1 | 3.16 | 2.84 | 1.26 |
| TCH9477M010W0040# | 9 | 470 | 10 | 85 | 7 | 125 | 470 | 8 | 40 | 1 | 3.16 | 2.84 | 1.26 |
| TCH9687M010W0040# | 9 | 680 | 10 | 85 | 7 | 125 | 680 | 8 | 40 | 1 | 3.16 | 2.84 | 1.26 |
| 16 Volt @ 85°C | | | | | | | | | | | | | |
| TCH9227M016W0040# | 9 | 220 | 16 | 85 | 10 | 125 | 352 | 8 | 40 | 1 | 3.16 | 2.84 | 1.26 |
| TCH9337M016W0040# | 9 | 330 | 16 | 85 | 10 | 125 | 528 | 8 | 40 | 1 | 3.16 | 2.84 | 1.26 |
| TCH9477M016W0040# | 9 | 470 | 16 | 85 | 10 | 125 | 752 | 8 | 40 | 1 | 3.16 | 2.84 | 1.26 |
| TCH9687M016W0040# | 9 | 680 | 16 | 85 | 10 | 125 | 108 | 8 | 40 | 1 | 3.16 | 2.84 | 1.26 |
| 20 Volt @ 85°C | | | | | | | | | | | | | |
| TCH9157M020W0045# | 9 | 150 | 20 | 85 | 13 | 125 | 300 | 8 | 45 | 1 | 2.98 | 2.68 | 1.19 |
| TCH9227M020W0045# | 9 | 220 | 20 | 85 | 13 | 125 | 440 | 8 | 45 | 1 | 2.98 | 2.68 | 1.19 |
| TCH9337M020W0045# | 9 | 330 | 20 | 85 | 13 | 125 | 660 | 8 | 45 | 1 | 2.98 | 2.68 | 1.19 |
| 25 Volt @ 85°C | | | | | | | | | | | | | |
| TCH9107M025W0050# | 9 | 100 | 25 | 85 | 17 | 125 | 250 | 8 | 50 | 1 | 2.83 | 2.55 | 1.13 |
| TCH9157M025W0050# | 9 | 150 | 25 | 85 | 17 | 125 | 357 | 8 | 50 | 1 | 2.83 | 2.55 | 1.13 |
| TCH9227M025W0050# | 9 | 220 | 25 | 85 | 17 | 125 | 550 | 8 | 50 | 1 | 2.83 | 2.55 | 1.13 |
| 35 Volt @ 85°C | | | | | | | | | | | | | |
| TCH9107M035W0055# | 9 | 100 | 35 | 85 | 23 | 125 | 350 | 8 | 55 | 1 | 2.69 | 2.42 | 1.08 |
| TCH9157M035W0055# | 9 | 150 | 35 | 85 | 23 | 125 | 525 | 8 | 55 | 1 | 2.69 | 2.42 | 1.08 |
| 50 Volt @ 85°C | | | | | | | | | | | | | |
| TCH9476M050W0070# | 9 | 47 | 50 | 85 | 33 | 125 | 235 | 8 | 70 | 1 | 2.39 | 2.15 | 0.96 |
| TCH9686M050W0070# | 9 | 68 | 50 | 85 | 33 | 125 | 340 | 8 | 70 | 1 | 2.39 | 2.15 | 0.96 |
| 63 Volt @ 85°C | | | | | | | | | | | | | |
| TCH9336M063W0100# | 9 | 33 | 63 | 85 | 33 | 125 | 215 | 8 | 100 | 1 | 2.00 | 1.80 | 0.80 |
| TCH9476M063W0100# | 9 | 47 | 63 | 85 | 33 | 125 | 296 | 8 | 100 | 1 | 2.00 | 1.80 | 0.80 |
| 75 Volt @ 85°C | | | | | | | | | | | | | |
| TCH9226M075W0120# | 9 | 22 | 75 | 85 | 33 | 125 | 165 | 8 | 120 | 1 | 1.82 | 1.64 | 0.73 |
| TCH9336M075W0120# | 9 | 33 | 75 | 85 | 33 | 125 | 248 | 8 | 120 | 1 | 1.82 | 1.64 | 0.73 |
| 100 Volt @ 85°C | | | | | | | | | | | | | |
| TCH9156M100W0150# | 9 | 15 | 100 | 85 | 33 | 125 | 150 | 8 | 150 | 1 | 1.63 | 1.47 | 0.65 |
| TCH9226M100W0150# | 9 | 22 | 100 | 85 | 33 | 125 | 220 | 8 | 150 | 1 | 1.63 | 1.47 | 0.65 |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with a maximum DC bias of 2.2V. DCL is measured at rated voltage after 5 minutes.

Moisture Sensitivity Level (MSL) is defined according to J-STD-020.



TCH Low ESR Hermetic Series



SMD Low ESR Tantalum Capacitors with Conductive Polymer Electrode in Hermetic Package

QUALIFICATION TABLE

| TEST | TCH low ESR hermetic series (Temperature range -55°C to +125°C) | | | | | | | | | | |
|------------------------------|--|---------------|----------------|--------------------|------------------------------|------------|------------|------------|------------|------------|------------|
| | Condition | | | Characteristics | | | | | | | |
| Endurance | Determine after application of rated voltage for 2000 +48/0 hours at 85±2°C and then leaving min. 2 hours at room temperature. Also determine of 125°C temperature, category voltage for 2000 +48/-0 hours and then leaving min. 2 hours at room temperature. Power supply impedance to be < 3Ω. | | | Visual examination | no visible damage | | | | | | |
| | | | | DCL | 1.25 x initial limit | | | | | | |
| | | | | ΔC/C | within ±20% of initial value | | | | | | |
| | | | | DF | 1.5 x initial limit | | | | | | |
| | | | | ESR | 2 x initial limit | | | | | | |
| Storage Life | 125°C, 0V, 2000h | | | Visual examination | no visible damage | | | | | | |
| | | | | DCL | 2 x initial limit | | | | | | |
| | | | | ΔC/C | within ±20% of initial value | | | | | | |
| | | | | DF | 1.5 x initial limit | | | | | | |
| | | | | ESR | 2 x initial limit | | | | | | |
| Humidity | Determine after storage without applied voltage at 40±2°C and 90±2% relative humidity for 56 days and then recovery min. 2 hours at room temperature. | | | Visual examination | no visible damage | | | | | | |
| | | | | DCL | 1.25 x initial limit | | | | | | |
| | | | | ΔC/C | within ±10% of initial value | | | | | | |
| | | | | DF | initial limit | | | | | | |
| | | | | ESR | 1.25 x initial limit | | | | | | |
| Temperature Stability | Step | Temperature°C | Duration (min) | | +20°C | -55°C | +20°C | +85°C | +125°C | +20°C | |
| | 1 | +22 | 15 | DCL | IL* | n/a | IL* | 10 x IL* | 12.5 x IL* | IL* | |
| | 2 | -55 | 15 | | ΔC/C | n/a | +0/-20% | ±5% | +20/-0% | +30/-0% | ±5% |
| | 3 | +22 | 15 | DF | | IL* | 1.5 x IL* | IL* | 1.5 x IL* | 2 x IL* | IL* |
| | 4 | +85 | 15 | | ESR | 1.25 x IL* | 1.25 x IL* | 1.25 x IL* | 1.25 x IL* | 1.25 x IL* | 1.25 x IL* |
| | 5 | +125 | 15 | | | | | | | | |
| | 6 | +22 | 15 | | | | | | | | |
| Surge Voltage | Test temperature: 85°C±3/0°C Surge voltage: 1.3 x rated voltage Series protection resistance: 33Ω Discharge resistance: 33Ω Number of cycles: 1000x Cycle duration: 6 min; 30 sec charge, 5 min 30 sec discharge | | | Visual examination | no visible damage | | | | | | |
| | | | | DCL | initial limit | | | | | | |
| | | | | ΔC/C | within ±20% of initial value | | | | | | |
| | | | | DF | 1.25 x initial limit | | | | | | |

*Initial Limit

THH 230°C Hermetic Series



SMD 230°C High Temperature Tantalum Capacitor in Hermetic Package



FEATURES

- High temperature applications
- Rated temperature up to 230°C @ 0.5Vr / 1000hrs
- Ceramic case hermetic packaging
- Stability under humidity and ambient atmosphere exposure
- Large case sizes including CTC-21D provide high capacitance values
- Manufacturing and screening utilizing AVX patented Q-Process to effectively remove components that may experience excessive parametric shifts or instability in operation life




APPLICATIONS

- Oil drilling
- Extreme temperature applications

MARKING

9, I CASE



CASE DIMENSIONS: millimeters (inches)


| Code | Type | L | W | H | W ₁ | A | S |
|-------------|------------------|---------------|---------------|--------------|----------------|--------------|--------------|
| 9 (CTC-21D) | J-lead (L shape) | 11.50 (0.453) | 12.50 (0.492) | 5.60 (0.220) | 12.50 (0.492) | 2.00 (0.079) | 7.50 (0.295) |
| 9 (CTC-21D) | J-lead (flex) | 12.00 (0.472) | 12.50 (0.492) | 5.90 (0.232) | 12.00 (0.472) | 1.90 (0.075) | 8.20 (0.323) |
| 9 (CTC-21D) | Undertab | 11.00 (0.433) | 12.50 (0.492) | 5.50 (0.217) | 10.50 (0.413) | 1.50 (0.059) | 8.00 (0.315) |
| I | J-lead (L shape) | 11.50 (0.453) | 6.00 (0.236) | 2.50 (0.098) | 6.00 (0.236) | 3.60 (0.142) | 4.30 (0.169) |
| I | J-lead (flex) | 11.80 (0.465) | 6.00 (0.236) | 2.60 (0.102) | 5.50 (0.217) | 3.50 (0.138) | 4.80 (0.189) |
| I | Undertab | 11.00 (0.433) | 6.00 (0.236) | 2.40 (0.094) | 4.00 (0.157) | 3.00 (0.118) | 4.60 (0.181) |

Available ratings


*Codes under development – subject to change

Engineering samples - please contact manufacturer





'J' Lead Termination (J-Flex)

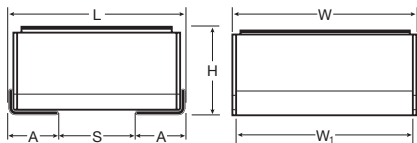

'J' Lead Termination (L-Shape)

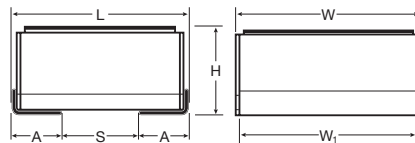

Undertab Termination



TECHNICAL SPECIFICATIONS

| | | | | | | | | |
|------------------------------------|---|----|----|----|----|----|----|--|
| Technical Data: | All technical data relate to an ambient temperature of +25°C | | | | | | | |
| Capacitance Range: | 3.3 µF to 470 µF | | | | | | | |
| Capacitance Tolerance: | ±20% | | | | | | | |
| Leakage Current DCL: | 0.01CV | | | | | | | |
| Rated Voltage (V _R) | ≤ +85°C | 16 | 20 | 25 | 35 | 50 | 63 | |
| Category Voltage (V _C) | ≤ +215°C | 10 | 13 | 16 | 23 | 33 | 41 | |
| Category Voltage (V _C) | ≤ +230°C | 8 | 10 | 12 | 17 | 25 | 31 | |
| Temperature Range: | -55°C to +230°C for case size "9", -55°C to +215°C for case size "I" | | | | | | | |
| Reliability: | 1% per 1000 hours at 85°C, Vr with 0.1Ω/V series impedance, 60% confidence level | | | | | | | |
| Termination Finish: | Gold plating (Undertab), Gold Plating (J-lead L shape), Nickel Plated (J-lead flex) | | | | | | | |



THH 230°C Hermetic Series



SMD 230°C High Temperature Tantalum Capacitor in Hermetic Package

HOW TO ORDER

AVX PART NUMBER

| | | | | | | | |
|-------------------------|---|--|--|---|--|-------------------------------|---|
| THH Type | 9 Case Size See table above | 107 Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | M Tolerance M = ±20% | 035 Rated DC Voltage 016 = 16Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc 063 = 63Vdc | W Packaging W = Waffle B = Bulk | 0250 ESR in mΩ | J Termination J = 'J' lead L shape U = Undertab W = 'J' lead flex |
|-------------------------|---|--|--|---|--|-------------------------------|---|



CAPACITANCE AND VOLTAGE RANGE (CODE DENOTES THE CASE SIZE)

| Capacitance | | Rated Voltage DC (V _r) at 85°C | | | | | |
|-------------|------|--|---------|---------|---------|---------|---------|
| μF | Code | 16V (C) | 20V (D) | 25V (E) | 35V (V) | 50V (T) | 63V (J) |
| 3.3 | 335 | | | | | I* | I* |
| 4.7 | 475 | | | | | I* | I* |
| 6.8 | 685 | | | | I | I* | |
| 10 | 106 | | | | I* | | |
| 15 | 156 | | I* | I* | I* | | |
| 22 | 226 | I | I* | I* | I* | | |
| 33 | 336 | I* | I* | I* | | | 9* |
| 47 | 476 | I* | I* | | | 9* | 9 |
| 68 | 686 | | | | | 9* | |
| 100 | 107 | | | 9* | 9 | | |
| 150 | 157 | | 9* | 9* | 9* | | |
| 220 | 227 | 9* | 9* | 9* | | | |
| 330 | 337 | 9* | 9* | | | | |
| 470 | 477 | 9* | | | | | |

Available ratings

*Codes under development - subject to change

Engineering samples - please contact manufacturer

RATINGS & PART NUMBER REFERENCE

| AVX Part No. | Case Size | Capacitance (μF) | Rated Voltage (V) | Rated Temperature (°C) | Category Voltage (V) | Category Temperature (°C) | DCL (μA) Max. | DF % Max. | ESR Max. (mΩ) @ 100kHz | MSL | 100kHz RMS Current (A) | | | Product Category |
|-----------------------|-----------|------------------|-------------------|------------------------|----------------------|---------------------------|---------------|-----------|------------------------|-----|------------------------|------|-------|------------------|
| | | | | | | | | | | | 25°C | 85°C | 230°C | |
| 16 Volt @ 85°C | | | | | | | | | | | | | | |
| THH1226M016W0500# | I | 22 | 16 | 85 | 10 | 215 | 3.6 | 8 | 500 | 1 | 0.81 | 0.73 | 0.73 | 215 |
| 35 Volt @ 85°C | | | | | | | | | | | | | | |
| THH1685M035W0500# | I | 6.8 | 35 | 85 | 23 | 215 | 2.4 | 8 | 500 | 1 | 0.81 | 0.73 | 0.73 | 215 |
| THH9107M035W0250# | 9 | 100 | 35 | 85 | 17 | 230 | 35 | 8 | 250 | 1 | 1.26 | 1.13 | 1.13 | 230 |
| 63 Volt @ 85°C | | | | | | | | | | | | | | |
| THH9476M063W0250# | 9 | 47 | 63 | 85 | 31 | 230 | 29.6 | 8 | 250 | 1 | 1.26 | 1.13 | 1.13 | 230 |

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts.


DCL is measured at rated voltage after 5 minutes.

ESR change post 1000hrs allowed up to 3 times catalog limit.

Parts are aged at 230°C.

Moisture Sensitivity Level (MSL) is defined according to J-STD-020.

THH 230°C Voltage vs Temperature Rating

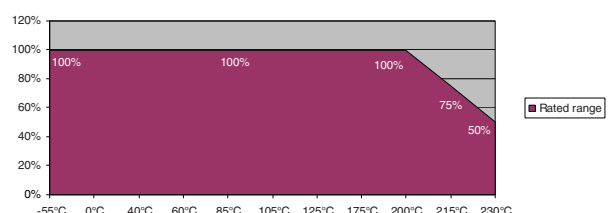

THH 230°C Hermetic Series



SMD 230°C High Temperature Tantalum Capacitor in Hermetic Package

QUALIFICATION TABLE

| TEST | THH 230°C hermetic series (Temperature range -55°C to +230°C) | | | | | | | | | | | | | | |
|-----------------------|--|---------------|----------------|--------------------|------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|--|--|
| | Condition | | | Characteristics | | | | | | | | | | | |
| Endurance | Determine after application of rated voltage for 2000+48/0 hours at 175±2°C and then leaving min. 2 hours at room temperature. Also determine of 200°C temperature, category voltage for 2000+48/-0 hours and then leaving min. 2 hours at room temperature. Also determine after application of 230°C temperature, category voltage for 1000+48/-0 hours and then leaving min. 2 hours at room temperature. Power supply impedance to be <3Ω. | | | Visual examination | no visible damage | | | | | | | | | | |
| | | | | DCL | 1.25 x initial limit | | | | | | | | | | |
| | | | | ΔC/C | within ±20% of initial value | | | | | | | | | | |
| | | | | DF | 1.5 x initial limit | | | | | | | | | | |
| | | | | ESR | 3 x initial limit | | | | | | | | | | |
| Storage Life | 230°C, 0V, 2000h | | | Visual examination | no visible damage | | | | | | | | | | |
| | | | | DCL | initial limit | | | | | | | | | | |
| | | | | ΔC/C | within ±5% of initial value | | | | | | | | | | |
| | | | | DF | initial limit | | | | | | | | | | |
| | | | | ESR | 1.25 x initial limit | | | | | | | | | | |
| Biased Humidity | Determine after leaving for 1000 hours at 85±2°C, 85% relative humidity and rated voltage and then recovery min. 2 hours at room temperature. | | | Visual examination | no visible damage | | | | | | | | | | |
| | | | | DCL | initial limit | | | | | | | | | | |
| | | | | ΔC/C | within ±10% of initial value | | | | | | | | | | |
| | | | | DF | initial limit | | | | | | | | | | |
| | | | | ESR | 1.25 x initial limit | | | | | | | | | | |
| Temperature Stability | Step | Temperature°C | Duration (min) | | +22°C | -55°C | +22°C | +85°C | +125°C | +175°C | +200°C | +230°C | +22°C | | |
| | 1 | +22 | 15 | | | | | | | | | | | | |
| | 2 | -55 | 15 | DCL | IL* | n/a | IL* | 10 x IL* | 12.5 x IL* | n/a | n/a | n/a | IL* | | |
| | 3 | +22 | 15 | | | | | | | | | | | | |
| | 4 | +85 | 15 | ΔC/C | n/a | +0/-20% | ±5% | +20/-0% | +30/-0% | +30/-0% | +30/-0% | +30/-0% | ±5% | | |
| | 5 | +125 | 15 | | | | | | | | | | | | |
| | 6 | +175 | 15 | DF | IL* | 1.5 x IL* | IL* | 1.5 x IL* | 2 x IL* | 2 x IL* | 2 x IL* | 2 x IL* | IL* | | |
| | 7 | +200 | 15 | | | | | | | | | | | | |
| | 8 | +230 | 15 | | | | | | | | | | | | |
| | 9 | +22 | 15 | ESR | 1.25 x IL* | 1.25 x IL* | 1.25 x IL* | 1.25 x IL* | 1.25 x IL* | 1.25 x IL* | 1.25 x IL* | 1.25 x IL* | 1.25 x IL* | | |
| Surge Voltage | Test temperature: 85°C+3/0°C Surge voltage: 1.3 x rated voltage Series protection resistance: 33Ω Discharge resistance: 33Ω Number of cycles: 1000x Cycle duration: 6 min; 30 sec charge, 5 min 30 sec discharge | | | Visual examination | no visible damage | | | | | | | | | | |
| | | | | DCL | initial limit | | | | | | | | | | |
| | | | | ΔC/C | within ±5% of initial value | | | | | | | | | | |
| | | | | DF | initial limit | | | | | | | | | | |
| | | | | ESR | 1.25 x initial limit | | | | | | | | | | |

*Initial Limit

High Reliability Tantalum MSL



Storage, Bake out, and Handling Recommendations


AVX Biddeford ships all COTS+, military, space level, and *medical grade surface mount tantalum capacitors in moisture resistant bags as a part of best practice. This includes CWR, TAZ, TBJ, TBC, TBM, and TCP product. This has improved our service to customers by alleviating the potential for long term exposure to high humidity conditions during shipping and storage.

Biddeford product that is considered to be MSL 3 includes TBMs, TCPs, TBJ V, U and E case, and TAZ V and X case sizes. The remainder of our tantalum capacitors are rated MSL 1 for moisture (per J STD 020D). AVX MSL 1 Tantalum capacitors are unaffected by storage for 2 years at the following conditions: a temperature between -10°C and +35°C, maximum of 85% RH, and atmospheric pressure between 860 mbar and 1060mbar. Exposure to humidity in excess of the above conditions can occur during shipping or storage; this

may affect the leakage current of resin protected capacitors and possibly result in damaging the capacitors during reflow.

If high exposure occurs, MSL 1 product can be dried by baking at temperatures between 85°C for 16 hours to 125°C for 4 hours. Product packaged in tape and reel requires special handling as the tape and reels cannot withstand these temperatures. Extended bake out at 55°C with less than 10% humidity for 48-hours can be performed for product in tape and reel packaging. MSL 3 product should be baked out for 168 hours at 40°C.

The reflow profile below is recommended to ensure parametric integrity of the capacitors is maintained. An improper combination of temperature and time can lead to damage in the dielectric of the component and this profile minimizes that risk.

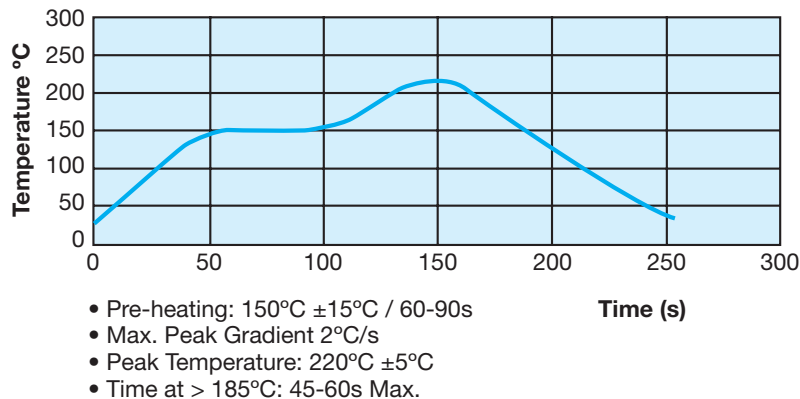

*For implantable medical applications please contact the factory for further recommendations.

TAJ ESCC, TAJ CECC, TBJ CWR11, TBJ COTS+, TBM, NBM, NBS, TES, TBC CWR15, TBC COTS+, TBC HRC5000 and TBC HRC6000 Series



Tape & Reel Packaging

Tape and reel packaging for automatic component placement. Please enter required Suffix on order. Bulk packaging is not available.

TAPE SPECIFICATION

Tape dimensions comply to EIA 481-1 Dimensions A_0 and B_0 of the pocket and the tape thickness, K , are dependent on the component size. Tape materials do not affect component solderability during storage. Carrier Tape Thickness $< 0.4\text{mm}$.

TAPING TABLE TAJ ESCC, TAJ CECC, TBJ CWR11, TBJ COTS+, TBM, NBM, NBS AND TES SERIES

| Case Size | Tape width mm | P mm | 180mm (7") reel Qty. | 330mm (13") reel Qty. |
|-----------|---------------|------|----------------------|-----------------------|
| A | 8 | 4 | 2,000 | 8,000 |
| B | 8 | 4 | 2,000 | 8,000 |
| C | 12 | 8 | 500 | 3,000 |
| D | 12 | 8 | 500 | 2,500 |
| E | 12 | 8 | 400 | 1,500 |
| V | 12 | 8 | 400 | 1,500 |

TAPING SUFFIX TABLE TBC CWR15, COTS+, TBC HRC5000 AND TBC HRC6000 SERIES

| Case Size | Tape width mm | P mm | 100mm (4") reel | | 180mm (7") reel | |
|-----------|---------------|------|-----------------|------|-----------------|--------|
| | | | Designator | Qty. | Designator | Qty. |
| A | 12 | 4 | | | R | 2,000 |
| B | 12 | 8 | | | R | 1,000 |
| L | 8 | 4 | X | 500 | R | 3,500 |
| R | 8 | 4 | X | 500 | R | 2,500 |
| S | 12 | 4 | | | R | 2,000 |
| K | 8 | 2 | | | R | 10,000 |


PLASTIC TAPE DIMENSIONS TAJ ESCC, TAJ CECC, TBJ CWR11, TBJ COTS+, TBM, NBM, NBS AND TES SERIES

| Case | $A_0 \pm 0.10$ | $B_0 \pm 0.10$ | $K \pm 0.10$ | $W \pm 0.30$ | $E \pm 0.10$ | $F \pm 0.05$ | G min. | $P \pm 0.10$ | $P_2 \pm 0.05$ | $P_0 \pm 0.10$ | $D^{+0.20}_{-0.00}$ | $D_1^{+0.25}_{-0.00}$ |
|------|----------------|----------------|--------------|--------------|--------------|--------------|--------|--------------|----------------|----------------|---------------------|-----------------------|
| A | 1.83 | 3.57 | 1.87 | 8.00 | 1.75 | 3.50 | 0.75 | 4.00 | 2.00 | 4.00 | 1.50 | 1.00 |
| B | 3.15 | 3.77 | 2.22 | 8.00 | 1.75 | 3.50 | 0.75 | 4.00 | 2.00 | 4.00 | 1.50 | 1.00 |
| C | 3.45 | 6.40 | 2.92 | 12.00 | 1.75 | 5.50 | 0.75 | 8.00 | 2.00 | 4.00 | 1.50 | 1.50 |
| D | 4.48 | 7.62 | 3.22 | 12.00 | 1.75 | 5.50 | 0.75 | 8.00 | 2.00 | 4.00 | 1.50 | 1.50 |
| E | 4.50 | 7.50 | 4.50 | 12.00 | 1.75 | 5.50 | 0.75 | 8.00 | 2.00 | 4.00 | 1.50 | 1.50 |
| V | 6.43 | 7.44 | 3.84 | 12.00 | 1.75 | 5.50 | 0.75 | 8.00 | 2.00 | 4.00 | 1.50 | 1.50 |


PLASTIC TAPE DIMENSIONS TBC CWR15, COTS+, TBC HRC5000 AND TBC HRC6000 SERIES

| Case | $A_0 \pm 0.10$ | $B_0 \pm 0.10$ | $K \pm 0.10$ | $W \pm 0.30$ | $E \pm 0.10$ | $F \pm 0.05$ | G min. | $P \pm 0.10$ | $P_2 \pm 0.05$ | $P_0 \pm 0.10$ | $D \pm 0.05$ |
|------|----------------|----------------|--------------|--------------|--------------|--------------|--------|--------------|----------------|----------------|--------------|
| A | 1.91 | 3.53 | 1.93 | 12.00 | 1.75 | 5.50 | 0.75 | 4.00 | 2.00 | 4.00 | 1.55 |
| B | 3.30 | 4.17 | 2.03 | 12.00 | 1.75 | 5.50 | 0.75 | 8.00 | 2.00 | 4.00 | 1.55 |
| L | 1.05 | 1.90 | 1.17 | 8.00 | 1.75 | 3.50 | 0.75 | 4.00 | 2.00 | 4.00 | 1.55 |
| S | 1.91 | 3.53 | 1.93 | 12.00 | 1.75 | 5.50 | 0.75 | 4.00 | 2.00 | 4.00 | 1.55 |
| R | 1.65 | 2.45 | 1.68 | 8.00 | 1.75 | 3.50 | 0.75 | 4.00 | 2.00 | 4.00 | 1.55 |
| K | 0.75 | 1.26 | 0.67 | 8.00 | 1.75 | 3.50 | 0.75 | 2.00 | 2.00 | 4.00 | 1.55 |

REEL DIMENSIONS

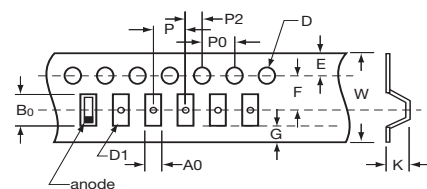

| Reel Size | Tape | A | B | C | W | t |
|---------------|------|----------|--------|-----------|-------------|-----------|
| 180mm (7") | 12mm | 178±2.00 | 50 min | 13.0±0.50 | 12.4+1.5/-0 | 1.50±0.50 |
| 180mm (7") | 8mm | 178±2.00 | 50 min | 13.0±0.50 | 8.4+1.5/-0 | 1.50±0.50 |
| 330mm (13") | 12mm | 328±2.00 | 50 min | 13.0±0.50 | 12.4+1.5/-0 | 1.50±0.50 |
| 330mm (13") | 8mm | 328±2.00 | 50 min | 13.0±0.50 | 8.4+1.5/-0 | 1.50±0.50 |
| 108mm (4.25") | 8mm | 108±2.00 | | 13.0±0.50 | 8.4+1.5/-0 | 1.50±0.50 |



COVER TAPE NOMINAL DIMENSIONS

Thickness: 75µm
Width of tape: 5.5mm (8mm tape)
9.5mm (12mm tape)



AMERICAS

AVX Greenville, SC
Tel: 864-967-2150

AVX Northwest, WA
Tel: 360-699-8746

AVX Midwest, IN
Tel: 317-861-9184

AVX Mid/Pacific, CA
Tel: 408-988-4900

AVX Northeast, MA
Tel: 617-479-0345

AVX Southwest, CA
Tel: 949-859-9509

AVX Canada
Tel: 905-238-3151

AVX South America
Tel: +55-11-4688-1960

EUROPE

AVX Limited, England
Tel: +44-1252-770000

AVX S.A.S., France
Tel: +33-1-69-18-46-00

AVX GmbH, Germany
Tel: +49-0811-95949-0

AVX SRL, Italy
Tel: +39-02-614-571

AVX Czech Republic
Tel: +420-57-57-57-521

AVX/ELCO UK
Tel: +44-1638-675000

ELCO Europe GmbH
Tel: +49-2741-299-0

AVX S.A., Spain
Tel: +34-91-63-97-197

AVX Benelux
Tel: +31-187-489-337

ASIA-PACIFIC

**AVX/Kyocera (S) Pte Ltd.,
Singapore**
Tel: +65-6286-7555

**AVX/Kyocera, Asia, Ltd.,
Hong Kong**
Tel: +852-2363-3303

**AVX/Kyocera Yuhan Hoesa,
South Korea**
Tel: +82-2785-6504

**AVX/Kyocera HK Ltd.,
Taiwan**
Tel: +886-2-2656-0258

**AVX/Kyocera (M) Sdn Bhd,
Malaysia**
Tel: +60-4228-1190

**AVX/Kyocera International
Trading Co. Ltd.,
Shanghai**
Tel: +86-21-3255 1933

**AVX/Kyocera Asia Ltd.,
Shenzen**
Tel: +86-755-3336-0615

**AVX/Kyocera International
Trading Co. Ltd.,
Beijing**
Tel: +86-10-6588-3528

**AVX/Kyocera India
Liaison Office**
Tel: +91-80-6450-0715

ASIA-KED

(KYOCERA Electronic Devices)

KED Hong Kong Ltd.
Tel: +852-2305-1080/1223

**KED Hong Kong Ltd.
Shenzen**
Tel: +86-755-3398-9600

**KED Company Ltd.
Shanghai**
Tel: +86-21-3255-1833

**KED Hong Kong Ltd.
Beijing**
Tel: +86-10-5869-4655

KED Taiwan Ltd.
Tel: +886-2-2950-0268

**KED Korea Yuhan Hoesa,
South Korea**
Tel: +82-2-783-3604/6126

**KED (S) Pte Ltd.
Singapore**
Tel: +65-6509-0328

**Kyocera Corporation
Japan**
Tel: +81-75-604-3449

Contact:

