Реле, Минск т.80447584780

www.fotorele.net www.tiristor.by радиодетали, электронные компоненты email minsk17@tut.by tel.+375 29 758 47 80 мтс

Реле, аналог, замена, каталог, описание, технические, характеристики, datasheet, параметры, маркировка,габариты, фото, даташит,




ab, adlake, agastat, airpax, alco, aleph, allen bradley, allied, allied control, alma, amer. zettler, american relays, american zettler, amperex, amperite, amph, aromat, artisan, astralux, at&t, auto electric, axicom, babcock, bailey controls, bosch, bourns, c-m-heald, cccd, cd, cde, celduc, ciclare, clare, codex, computer components, comus, cosar corp, coto, coto/wabash, cp clare, crydom, d/r, dare electronics, deutsch, doranic, douglas randall, e i & s, eac, ei & s, ei&s, elec. inst., elecpro, electro-national, electrol, electrol/triridge, electronic appl., electronic applications, electroswitch, elefin, elfa, equalto p&b, erg, ernernes, es, fifth dimension, flight systems, fujitsu, ge, general elect, genetech, genicom, gentech, gordos, grayhill, grigsby-barton, grisby-barton, gte - auto elec, guardian, gunther, gv, hamlin, harold beck, hartman & braun, hathaway, heald, hermetic, hi-g, hig, ibm, idec, inresco, itc, itt, jennings, kemreed, kilovac, kurman elect., leach, line, lucent, lucent dwg. #, lucent spec. #, magnecraft, magnecraft/struthers-dunn, master dist., mec, meder, meko, midland, midtex, midtex/cimilitary, military, msd, nais, nec, oeg, okolympic cont., olympic cont., omron, orbit instrument, osmor, p & b, p&b, p&b/siemens, reyrolle protection, rs components, s/d, schaffner, schrack, set, sgma, siemens, siemens electronics, sigma, sigma/cisigma/cisky, sky, sperry flight systems, src, standex, struthers, struthers/magnacraft, t-bar, taiko, taka, teledyne, teltone, thermosen, toward, triridge, tsg, tyco, unidynamics, unimation, universal, universal relay, us pioneer, us relays, varley, wabash, west'g, western electric, wheelock, zestron, zettler

COMUS

Switch Voltage, Switching Current and

Power Rating

The listed Values for switching voltage, switching current, and power rating are absolute limits. If any of these values is exceeded, a reduction of life expectancy will result (see following power diagram).

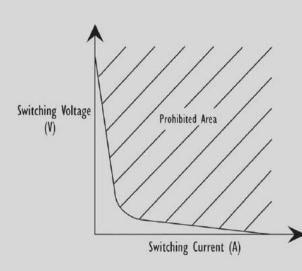


Operating Temperature


The operating temperature is the internal temperature of the relay (ambient temperature plus self heating). If relays are operating at higher ambient temperatures than +20°C, the pull-in voltage and the maximum coil voltage must be

Pull-in voltage = Pull-in voltage at 20°C x kl. Maximum coil voltage = Max. coil voltage 20°C x k2.


When mounting relays side by side, a gap of approximately half the relay width is recommended to avoid magnetic interference from one relay to another.

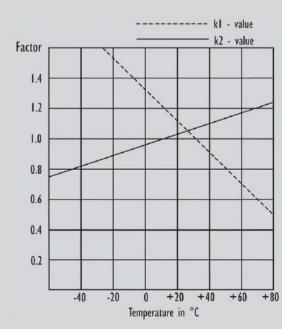

This is defined as, the pull-in time including the bounce time at nominal voltage and 20 Hz: 0.4 - 1.5ms.

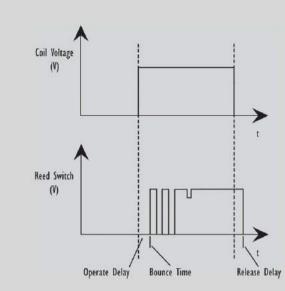

HOW TO ORDER HIGH VOLTAGE RELAYS

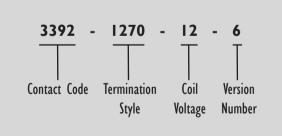

Note: All parts of the order code must be completed

Switching Time

and 20 Hz: 1.5 - 3.5ms, and the release time (without diode) at nominal voltage

COMUS

Comus International SARL Immeuble 'Les Juilliottes 31 Cours des Juilliottes F-94700 Maisons-Alfort

Tel: +33 (0)1 43 96 86 10 Fax: +33 (0)1 43 96 86 11 email: info@comus.fr internet: http://www.comus.fr

brochure.

The Comus Group of Companies

The Comus International group of companies consists of:



Comus International 454 Allwood Road Clifton New Jersey 07012 U.S.A

Tel: (1)973 - 777 - 6900 Fax:(1)973 - 777 - 8405 email: info@comus-intl.com internet: http://www.comus-intl.com



Assemtech Europe Limited Unit 7, Rice Bridge Industrial Estate Thorpe - Le - Soken England CO16 OHL Tel: +44 (0)1255 862236 Fax: +44 (0)1255 862014 email: sales@assemtech.co.uk internet: http://www.assemtech.co.uk **©** 2





Switching Technologies Gunther B-9, B-10, & C-1 Special Economic Zone (MEPZ) Tambaram Chennai 600 045 Tel: +91 44 22628093 Fax: +91 44 22628271 email: stgltd@eth.net



Comus Belgium BVBA Overhaamlaan 40 B-3700 Tongeren Belgium

COMUS

Tel: +32 (0)12 390400 Fax: +32 (0)12 235754 email: info@comus.be internet: http://www.comus.be



Comus Electronics India No 74A Anbu Street Gandhi Nagar Ekkattuthangal Chennai 600 097 TamilNadu India Tel: +91 44 22628198 Fax: +91 44 22628271 email: chitra@comus-intl.com internet: http://www.comusindia.com

High Voltage Reed Relays





COMUS 8 3391 1274 246 3











During Soldering make sure no mechanical stress is applied to the terminals because damage

Insulation Resistance

The insulation resistance is measured with a Tera Ohmmeter at 500VDC. The ambient climate is 20°C ±3°C and 50% relative humidity.

Dielectric Strength

DESCRIPTION

Reed Relays consist of a reed switch and a coil fitted into a housing, which could be plastic, metal, or moulded. Compared with electromechanical relays, reed relays generally have a faster response time, lower coil consumption, and are smaller in size. Furthermore, the switch is sealed in a dry, inert atmosphere, preventing the ingress of contaminants.

OPERATION

High Voltage Relays have outstanding perfomance in insulation and stand-off voltage. Energizing the coil operates a reed switch causing the contacts to open or close. It is important that the switch is not overloaded by applying loads in excess of the switch ratings. For details on switch loads refer to the reed relay specifications, and the reed switch catalogue, available from our sales offices.

General Parameters

All characteristics for pull-in voltage, drop-out voltage, and coil resistance are at 20°C ±3°C ambient temperature. For other temperatures see diagram 'Operating Temperature.'

Contact Resistance

Initial value at nominal voltage is measured by Kelvin test method at 20V / 100mA.

to the internal reed switch may occur.

Tested in a radiation (eg. light, x-ray) free environment by applying a DC voltage across the open contacts, between adjacent contacts and between the coil and contact. The test current is 50 µA. The unused contacts should not be connected during the test.

Shock and Vibration

During shock and vibration tests the relays must be energized with nominal voltage. The contact should not open or close longer than 10 µS. Vibration stability: 20g/50 - 500Hz. Shock stability: 35g/11ms half sine wave.

Life Expectancy:

The life expectancy of a reed relay is dependent upon the load being switched. At maximum rated loads life expectancy is approximately 106 switching cycles. Lower load ratings can increase the life expectancy up to 5x108 operations. The mechanical life expectancy can reach at least 109 operations. Through the switching of inductive, capacitive, and lamp loads, the life expectancy is considerably reduced due to exceeding the specified maximum current.


Contact Capacitance (Typical Values)


Across open contacts	0.8 - 1.2 pF
Between open contact and coil	1.4 - 2.2 pF
Between closed contacts and coil	2.3 - 3.5 pF
Between closed contacts and coil	2.3 - 3.5 pF

All dimensions are nominal in millimetres unless otherwise stated. If further information is required individual datasheets are available on our websites, and on CD. As part of the groups policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on our products.

We also have a large network of worldwide agents. These can be seen on any of our websites, or on our company profile

Com/4/Oct05/Iss.I



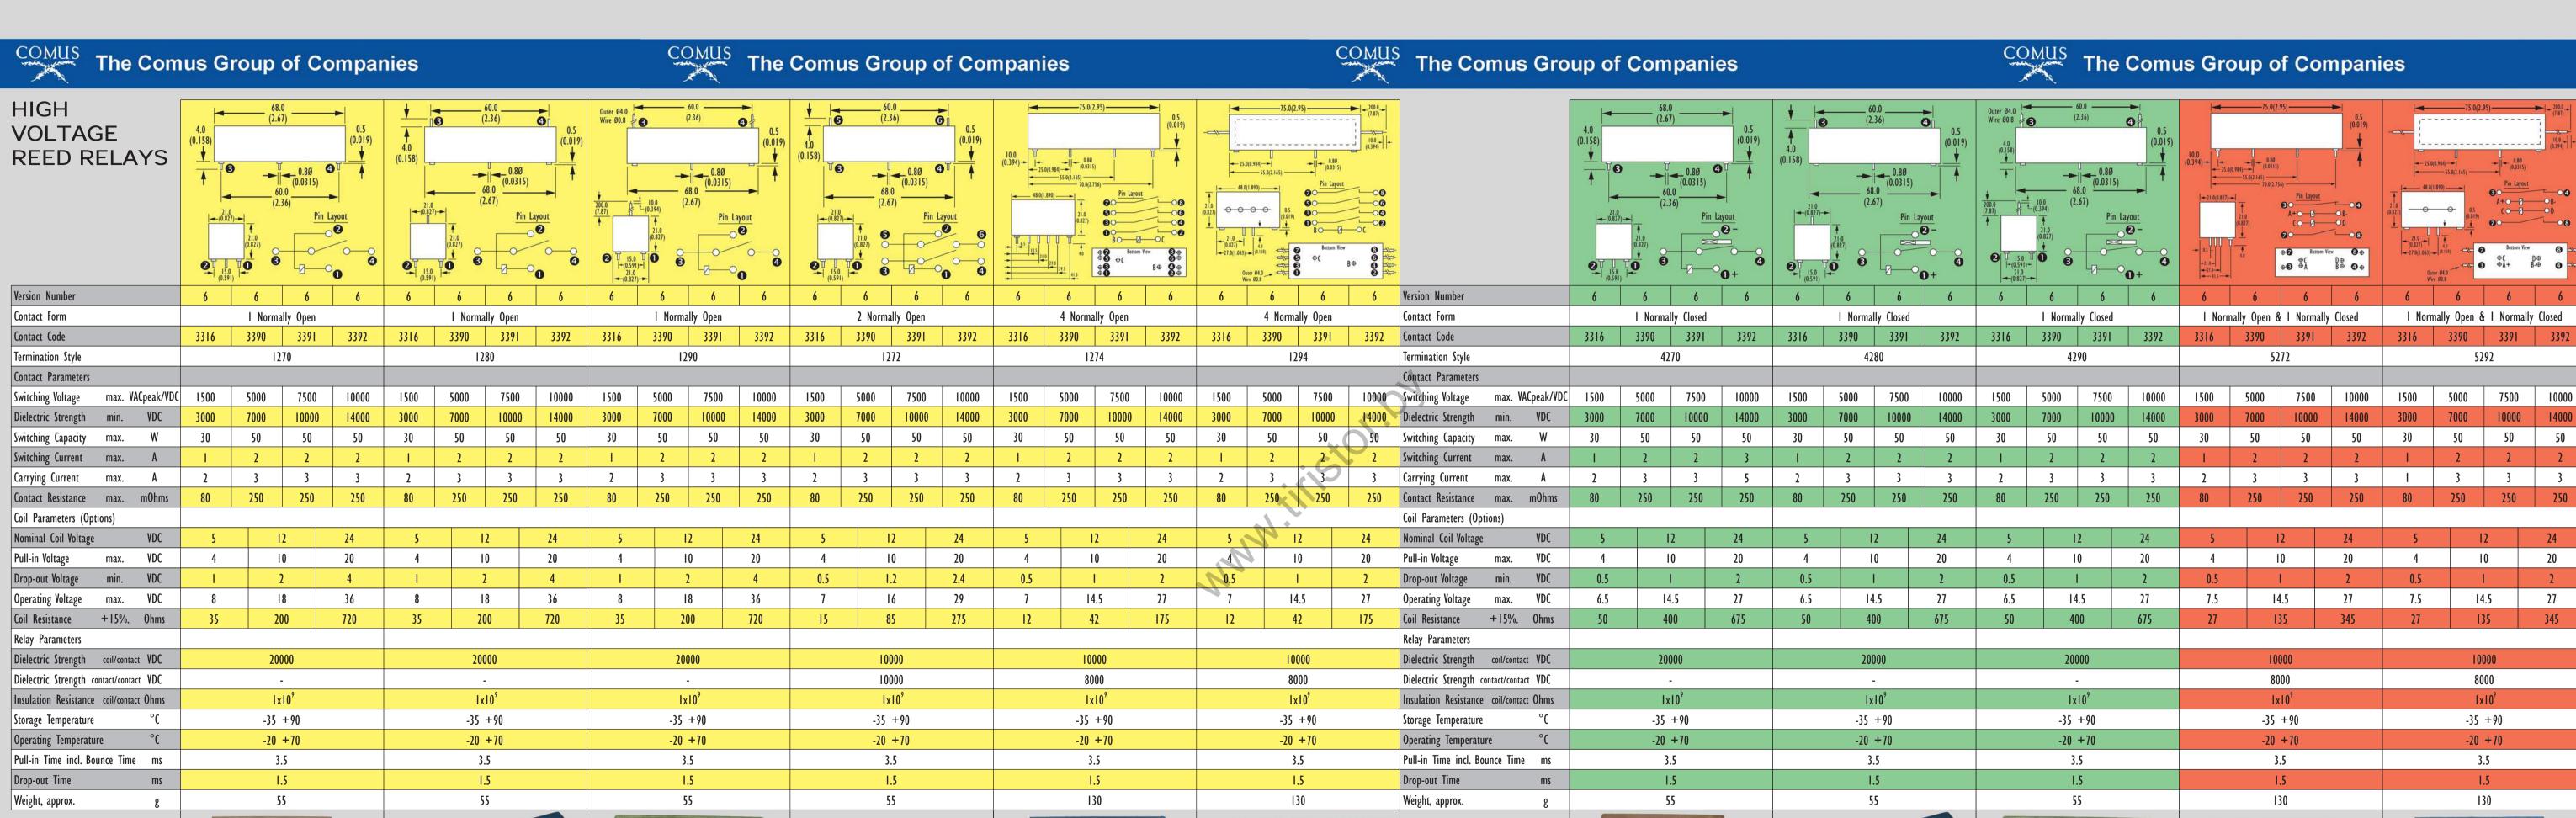























Реле, твёрдотельное, Минск т.80447584780

www.fotorele.net www.tiristor.by радиодетали, электронные компоненты email minsk17@tut.by tel.+375 29 758 47 80 мтс

Реле, твердотельное каталог, описание, технические, характеристики, datasheet, параметры, маркировка,габариты, фото, даташит,



Реле, твёрдотельное купить, продажа, в наличии, Минск, Беларусь





PROUD TO SERVE YOU

Dear customers,

New means of communication make paper-catalogues less useful but this short-form catalogue is an eagerly anticipated product selection guide.

Our strategy has always been to focus on research and innovation whilst remaining flexible enough to adapt products to our customers' applications and requirements. As a result we can offer products engineered to the highest quality for competitive prices. These core values have inspired us to develop several new products which can be found in this selection guide.


This selection guide catalogue is available in 6 languages, Chinese included. This demonstrates our worldwide presence and export dynamism: celduc® relais exports more than 60% of its production across the the main industrial countries, under our brand or through OEM contracts.

celduc® relais is a leader in its three strategic business units which are Solid State Relays (S), Magnetic proximity sensors (P) and reed relays & switches (R). Discover our new celpac®2G (2nd generation of 22,5mm pitch SSR and contactors), okpac® and flatpac® range with which we have had great success worldwide across many different applications.

Our main focus is achieving the best possible service and most reliable products possible and we invest a lot of time in this process. celduc® team would be pleased to answer any questions you may have to help you find the ideal product for your requirements. Ask us and we will produce it for you.

Marc Combette General Manager

All our technical data-sheets are available in our website.



www.celduc-relais.com

celduc® relais products

pages 1 to 22

Solid state relays

(Commonly known as SSR) represent 60% of the turnover of celduc® relais.

These innovative and highly efficient components are used to control all types of loads used in many industries.

The three major application areas are industrial heating and temperature control, motor control and/or public lighting control. Every day new applications calling for reliability, no noise and long life expectancies make use of our highly innovative solid state relays that provide the small but vital «extra» when compared to our competitor's products.



pages 23 to 35

Magnetic proximity sensors

Used for monitoring or controlling levels, clearances, movement, position and as a tachometer to record speed of rotation, the sky is the limit for these versatile sensors. These sensors are used by both the general public and the major industrial organizations such as the automotive, aircraft and telecommunication industries. They are also used extensively in all automation applications of the manufacturing sector.



pages 36 to 37

«Reed» relays & switches

Our Reed switches are used in combination with magnetic proximity sensors & reed relays and have proved to be an out-and-out winner over the past 50 years. The range meets the demands of an increasing number of new applications thanks to their ease of operation, compact size and reliability.





Solid State Relays

SCOPE

Heating

Plastic injection molding

Power supply distribution systems

Air conditioning

Textile

Home heating Infrared heating

Drying

Thermoforming

Motor starting

Pumps

Compressors

Plastic injection molding

Conveyors

Fans

Etc.

Lighting

Public lighting Cinema

Theatre lamps

Airport runaway lamps

Road lighting

Ftc.

Control

PLC interface Heating element control Solenoid valves **Contactor Coils** Optocoupling of sensors

Miscellaneous

Transformer starting Power factor corrector Uninterrupted power supplies Energy source switching Capacitors control

Contents

PCI	B relays		o 4
	-SLA SLD		. 2
	-SP/ST		
	-SK		
	-XK		
	-SN8		
	-SHT		
Sin	igle phase Solid State Relays	5 to	11
-	-S07 / S08		
	-SO9		
	-SOL		
	-SOR		-
	-SA / SU		
	-SAL / SAM / SUL / SUM		. 8
	-ESUC		. 8
	-SILD / SOD		. 9
	-SVX		
	-SF / SCF / SCFL		
	-SP7 / SP8		
	-SC		
Tw	o phase Solid State Relays		12
	-SOB		12
	-SCB		
Thr	ree phase Solid State Relays 1	3 to	14
	-SCT		
	-SGT		
	-SVT		
	-SWT / SIT		
SSI	R for motor control	4 to	15
	-SG9		14
	-SV9		
	-SW9		
	-XKRD		
	-SGRD		
	-SMCV / SMCW		15
Sin	gle phase controllers 1	6 to	17
UIII	-SIL4 / SIM4		
	-S04		
	-SG4		16
	-SO3		17
	-SG5		17
	-SWG5		
	-00000		17
			17 17
_	-SWG8		17
Thr	-SWG8		17 18
Thr	-SWG8		17
Thr	-SWG8		17 18
	-SWG8 ree phase controllers -SVTA / SWTA		17 18 18 18
	-SWG8 ree phase controllers -SVTA / SWTASGTA ur-Leg Solid State Relays		17 18 18 18 18
	-SWG8 ree phase controllers -SVTA / SWTA		17 18 18 18
Fou	-SWG8 ree phase controllers -SVTA / SWTASGTA ur-Leg Solid State Relays -SCQ		17 18 18 18 18 18
Fou	-SWG8 ree phase controllers -SVTA / SWTASGTA. ur-Leg Solid State Relays -SCQ. Solid State Relays	 9 to	17 18 18 18 18 18 20
Fou	-SWG8 ree phase controllers -SVTA / SWTASGTA. ur-Leg Solid State Relays -SCQ. Solid State Relays -SPD / STD.		17 18 18 18 18 18 20 19
Fou	-SWG8 ree phase controllers -SVTA / SWTASGTA. ur-Leg Solid State Relays -SCQ. Solid State Relays -SPD / STDSKLD.	 9 to	17 18 18 18 18 18 19 19
Fou	-SWG8 ree phase controllers -SVTA / SWTASGTA. ur-Leg Solid State Relays -SCQ. Solid State Relays -SPD / STDSKLDSCM		17 18 18 18 18 18 19 19
Fou	-SWG8 ree phase controllers -SVTA / SWTASGTA. ur-Leg Solid State Relays -SCQ. Solid State Relays -SPD / STDSKLDSCMSOM.	 9 to	17 18 18 18 18 18 19 19 19
Fou	-SWG8 ree phase controllers -SVTA / SWTASGTA. ur-Leg Solid State Relays -SCQ. Solid State Relays -SPD / STDSKLDSCM	 9 to	17 18 18 18 18 18 19 19
Fou	-SWG8 ree phase controllers -SVTA / SWTASGTA. ur-Leg Solid State Relays -SCQ. Solid State Relays -SPD / STDSKLDSCMSOM.	9 to	17 18 18 18 18 18 19 19 19 19 19
Fou	-SWG8 ree phase controllers -SVTA / SWTASGTA. ur-Leg Solid State Relays -SCQ. Solid State Relays -SPD / STDSKLDSCM -SOM -SOM -ESOSKD.	9 to	17 18 18 18 18 18 19 19 19 19 19 20
Fou	-SWG8 ree phase controllers -SVTA / SWTASGTA. ur-Leg Solid State Relays -SCQ. Solid State Relays -SPD / STDSKLDSCMSOMESOSKDSKD.	9 to	17 18 18 18 18 18 19 19 19 19 20 20
Fou	-SWG8 ree phase controllers -SVTA / SWTASGTA. ur-Leg Solid State Relays -SCQ. Solid State Relays -SPD / STDSKLDSCMSOMSOMESOSKDXKDXKDSCC / SGC.	9 to	17 18 18 18 18 19 19 19 19 20 20
Fou	-SWG8 ree phase controllers -SVTA / SWTASGTA. ur-Leg Solid State Relays -SCQ. Solid State Relays -SPD / STDSKLDSCMSOMESOSKDXKDSCC / SGCSCI.	9 to	17 18 18 18 18 18 19 19 19 19 20 20 20 20
Fou	-SWG8 ree phase controllers -SVTA / SWTASGTA. ur-Leg Solid State Relays -SCQ. Solid State Relays -SPD / STDSKLDSCMSOMSOMESOSKDXKDXKDSCC / SGC.	9 to	17 18 18 18 18 19 19 19 19 20 20

STANDARDS

The solid-state relays and contactors made by celduc® are manufactured in compliance with major international standards:

- IEC 947-4-2 for motor control.
- IEC 947-4-3 for the other loads.
- American et Canadian (UL, CSA, cUL).
- IEC / EN 60950 IEC 62314 VDE0805 Our products also meet the major European directive regarding the CE
- Some of our products fulfil the requirements according to DIN EN60601-1 (VDE 0750) for medical applications and also the requirements for explosive atmospheres ATEX "EX".
- All of our relays okpac® SO (as well as SC relays), celpac® 2G SU/SA including the current sense module ESUC but also the 2-phase SOB and 3-phase SGT comply with the European standard EN61373 for railways: Shocks and vibration tests on relays. Regarding the standards about Fire behaviour and fumes: French standard NF F16-102 calling for the EN60 695-2-10/11/12 (Glow Wire tests), blue covers of SO relays and SU/SA relays are classified I2 or I3 for fire behaviour and F2 for fumes (toxicity and opacity). Encapsulating resin and black housings are being completed.
- The process of manufacturing of our relays complies with the ISO9001 requirements version 2008. We incorporate highly reliable components with a very high electromagnetic interference level.









Accessories





SLIM range (miniature)

The SLA / SLD solid state relays are 100 % compatible with 5 mm pitch electromechanical relays. They can be soldered direct to PCBs or plugged into all din rail mountable bases. Every type of loads can be switched and those relays can withstand high current peaks that can be produced by loads such as electro valves, engines, coils, indicator, etc. The switching power is 2A/230VAC for SLA and 2.5A/60VDC or 4A/24VDC for SLD relays.

100% compatible with electromechanical relays



ノ	Product reference	Switching current	Switching voltage	Control voltage	Input R
_	SLA01220	2A	12-280VAC	3-10VDC	320 Ω
A C	SLA02220	2A	12-280VAC	7-20VDC	1100 Ω
<u> </u>	SLA03220	2A	12-280VAC	18-32VDC	3 kΩ
	SLD01205	4A	0-32VDC	3-10VDC	320 Ω
	SLD01210	2,5A	0-60VDC	3-10VDC	320 Ω
D	SLD02205	4A	0-32VDC	7-20VDC	1070 Ω
С	SLD03205	4A	0-32VDC	18-32VDC	3 kΩ
	SLD03210	2,5A	0-60VDC	18-32VDC	3 kΩ
	SLD04210	2,5A	0-60VDC	38-58VDC	10,8 kΩ
	Other miniature s	solid state relay o	ptions are availab	le on request.	

RC	AC output	28x5x15
Transil	DC output	28x5x15

Specifications

Protec.

Dimensions

mm



Product reference	Specifications.	Fig n°
ESD01000	SP/ST base for PCB for one relay	1
ESD08100	8 SLIM module base	2

SP-ST range (standard)

AC and DC from 1 to 5A, protection by VDR or built in Transil, available in 15,7 mm (ST Series) and 25,4 mm (SP Series).

100% compatible with electromechanical relays



1	A		
包	þ		
		7	1
		1	





	Product reference	Switching current	Switching voltage	Control voltage	Input R	Protec.	Specifications	Dimensions mm	Fig n°	
Δ.	SPA07420	4A	12-275VAC	12-30VDC 15-30VAC	2100 Ω	VDR	AC output	29x12,7x25,4	1	
	STA07220	2A	12-275VAC	12-30VDC 15-30VAC	2100 Ω	VDR	AC output	29x12,7x15,7	2	
	SPD03505 STD03205	5A 2,5A	0-30VDC 0-30VDC	12-30VDC 12-30VDC	2100 Ω 2100 Ω	Transil Transil	DC output DC output	29x12,7x25,4 29x12,7x15,7	1 2	
C	STN07105	1A	0-30VAC/ DC	12-30VDC 15-30VAC	2100 Ω	Transil	AC/DC output	29x12,7x15,7	2	


Product reference	Specifications	Fig n°
ESD05000	SP/ST base for DIN rail for one relay	3
ESD08000	8 SP in line module base	4
ESD16000	16 SP in line module base	4

Our STD and SPD modules can be modified, on request, with an output voltage of 100VDC. Other control voltages are available on request.



NTERFACE



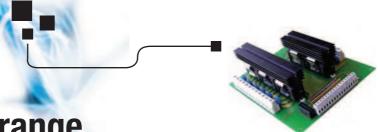

SK range

The SK range for PCB mounting is available in different models : SKA/SKB (AC output) or SKD/SKLD (DC output – see pages 19-20)

- \rightarrow SKA up to 6A 230 or 400VAC with built-in voltage protection, ideal for solenoid or motor control. \rightarrow SKB up to 4A 230 or 400VAC for resistive loads.



	Product reference	Current	Switching voltage	Control voltage	Input R	LED	l²t	Protec.	Specifications	Dimensions mm
	SK541101	2,5A	24-280VAC	3-30VDC	1 kΩ	no	50A2s	-	AC zero-cross output	
									/ Normaly closed	
	SKA10420	4A	12-275VAC	2,5-10VDC	330 Ω	no	50A2s	VDR		
1	SKA20420	4A	12-275VAC	4-30VDC	1 kΩ	no	50A2s	VDR		
	SKA10440	4A	12-460VAC	2,5-10VDC	330 Ω	no	50A2s	VDR	AC zero-cross	
	SKA11440	4A	12-460VAC	3-10VDC	220 Ω	yes	50A2s	VDR	output / most types	
	SKA20440	4A	12-460VAC	4-30VDC	1 kΩ	no	50A2s	VDR	of loads	
	SKA21440	4A	12-460VAC	7-30VDC	750 Ω	yes	50A2s	VDR		
	SKA20460	4A	24-600VAC	5-30VDC	1 kΩ	no	72A2s			
										43,2x10,2x25,4
	SKA20421	4A	12-275VAC	4-30VDC	1 kΩ	no	50A ² s	VDR	AC random	
	SKA20441	4A	12-460VAC	4-30VDC	1 kΩ	no	50A ² s	VDR	output / most types	
	SKA21441	4A	12-460VAC	7-30VDC	750 Ω	yes	50A2s	VDR_	of loads	
								<u> </u>		
	SKB10420	4A	12-280VAC	3-10VDC	330 Ω	no	50A2s		AC zero-cross	
	SKB10440	4A	24-600VAC	3,7-10VDC	270 Ω	no	72A ² s	-	output / resistive	
	SKB20420	4A	12-280VAC	8-30VDC	1200 Ω	no	50A ² s		loads	
	SKB20440	4A	24-600VAC	9-30VDC	1200 Ω	no	72A2s	- <u> </u>		

SKL for AC output with a ceramic substrate that can be mounted on a heatsink. The SKL is available with current ratings from 16A to 75A.

For the power element, our SKL use TMS² technology (see the power relay section introduction) reducing thermal stress and considerably improving life expectancy. Ideal for motor or lamps control (l²t up to 5000 A²s) with high inrush current as well as heating applications. Easy to protect against short circuit with micro circuit breakers.



SKL10120 16A 16A 12-280VAC 4-14VDC 440 Ω 128A²s SKL10220 21A 25A 12-280VAC 4-14VDC 440 Ω 312A²s SKL10240 22A 25A 24-600VAC 4-14VDC 440 Ω 450A²s SKL10540 27A 50A 24-600VAC 4-14VDC 440 Ω 1800A²s SKL10560 27A 50A 24-690VAC 4-14VDC 440 Ω 1800A²s SKL20120 16A 16A 16A 12-280VAC 8-32VDC 1640 Ω 128A²s AC zero-	Product reference	Max. cur- rent with WF032000	Thy- ristor rating	Switching voltage	Control voltage	Input R	l²t	Specifications	Dimensions mm	
SKL10240 22A 25A 24-600VAC 4-14VDC 440 Ω 450A²s SKL10540 27A 50A 24-600VAC 4-14VDC 440 Ω 1800A²s SKL10560 27A 50A 24-690VAC 4-14VDC 440 Ω 1800A²s AC zero-	SKL10120	16A	16A	12-280VAC	4-14VDC	440 Ω	128A ² s			
SKL10540 27A 50A 24-600VAC 4-14VDC 440 Ω 1800A²s SKL10560 27A 50A 24-690VAC 4-14VDC 440 Ω 1800A²s	SKL10220	21A	25A	12-280VAC	4-14VDC	440 Ω	312A ² s			
SKL10560 27A 50A 24-690VAC 4-14VDC 440 Ω 1800A ² s AC zero-	SKL10240	22A	25A	24-600VAC	4-14VDC	440 Ω	450A ² s			
AC 7ero-	SKL10540	27A	50A	24-600VAC	4-14VDC	440 Ω	1800A ² s			
SKI 20120 16A 16A 12-280VAC 8-32VDC 1640 O 128A2c AC ZEIO-	SKL10560	27A	50A	24-690VAC	4-14VDC	440 Ω	1800A ² s	AC 7000		
SKEZOTZO TOA TOA TZ-ZOOVAO 0-02VDO TO40 SZ TZOA S cross output	SKL20120	16A	16A	12-280VAC	8-32VDC	1640 Ω	128A ² s			
SKL20220 21A 25A 12-280VAC 8-32VDC 1640 Ω 312A ² s 43.4 x 6.3 x 24.5	SKL20220	21A	25A	12-280VAC	8-32VDC	1640 Ω	312A2s	Cross output	12 1 v 6 2 v 21 5	
SKL20240 22A 25A 24-600VAC 8-32VDC 1640 Ω 450A ² s 45,4 x 0,5 x 24,5	SKL20240	22A	25A	24-600VAC	8-32VDC	1640 Ω	450A ² s		45,4 x 0,5 x 24,5	
SKL20520 27A 50A 12-280VAC 8-32VDC 1640 Ω 1800A ² s	SKL20520	27A	50A	12-280VAC	8-32VDC	1640 Ω	1800A ² s			
SKL20540 27A 50A 24-600VAC 8-32VDC 1640 Ω 1800A ² s	SKL20540	27A	50A	24-600VAC	8-32VDC	1640 Ω	1800A ² s			
SKL20740 30A 75A 24-600VAC 8-32VDC 1640 Ω 5000A ² s	SKL20740	30A	75A	24-600VAC	8-32VDC	1640 Ω	5000A ² s			
SKL10421 27A 40A 12-280VAC 3-14VDC 660 Ω 1150A ² s AC random	SKL10421	27A	40A	12-280VAC	3-14VDC	660 Ω	1150A ² s	AC random		
SKL10521 27A 50A 12-280VAC 3-14VDC 660 Ω 2450A2s output	SKL10521	27A	50A	12-280VAC	3-14VDC	660 Ω	2450A ² s			
SKL20241 22A 25A 24-600VAC 8-32VDC 1640 Ω 450A ² s Output _	SKL20241	22A	25A	24-600VAC	8-32VDC	1640 Ω	450A ² s	- Output		

See DC output models - pages 19-20.



WF032000

Accessories for SKL Heatsinks for SKL L=150mm 2,6-3 K/W WF042000 Heatsinks for SKL L=100mm 3,6-3 K/W

Accessories for SKL

1L941000 Clip for SKL on WF03/04

Clip for SKL with screw for other heatsinks 1L942000



The SKH range is a "ready to use" range with integrated heatsink.

Product reference	Output current	Output current with ventilation	Switching voltage	Control voltage	Input R	l²t	Dimensions mm
SKH10120	10A @ 20°C	16A	12-280VAC	4-14VDC	440 Ω	128A ² s	
SKH10240	10A @ 25°C	25A	24-600VAC	4-14VDC	440 Ω	450A ² s	43.6 x 22 x 35.7
SKH20120	10A @ 20°C	16A	12-280VAC	8-32VDC	1640 Ω	128A ² s	40,0 x 22 x 33,1
SKH20240	10A @ 25°C	25A	24-600VAC	8-32VDC	1640 Q	450A2s	

Other references available - please contact us.

INTERFACE




www.celduc.com

XK range

Interface relays to control loads such as resistors, indicators, solenoids, transformers, motors, power contactor coils. These DIN-rail mounted products are available with AC and DC output options. They can also be supplied as dedicated motor control variants such as 2 and 3 phase switching and motor rotation reversal. All are fitted with LED indicators.

Suffix D: removable terminals.

Suffix R: removable spring terminals.

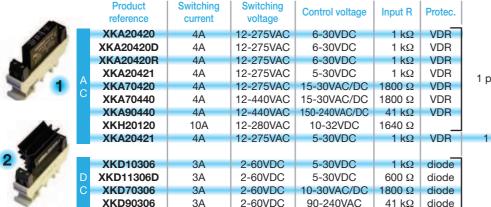

Spécifications	Dimensions mm	Fig n°
_		1
		1
		1
1 pole AC zero-cross output	12,2x76,4x53	1
		1
		1
		1
	25x76,4x65	2
1 pole AC random output	12,2x76,4x53	1
<u> </u>		
		1
1 pole DC output	12,2x76,4x53	1
1	, , , , , , , , , , , , , , , , , , ,	1
_		1

XKLD0020 has all protections included and is designed for inductive loads with high switching frequency

- -Diagnostic status output (potential free)
- -Control visualization by green LED
- -Output DC visualization by red LED
- -Built-in clamping voltage
- -Built-in free wheel diode
- -This product also includes a fuse on board to protect the installation.



Product reference	Switching current	Switching voltage	Control voltage	Input R	Protec.	Specifications	Dimensions mm
DC XKLD0020	4A	1-32VDC	18-32VDC	1 kΩ	VDR+diode	1 pole DC output	36x78x61

XKLD31006 is a DC SSR suitable for inductive loads and high current applications such as high switching frequency electro-valves.



Product reference	Switching current	Switching voltage	Control voltage	Input R	Protec.	Specifications	Dimensions mm	
DC XKLD31006	10A	12-36VDC	10-30VDC	1 kΩ	diode	Sortie DC - Technologie MOSFET	12,2x76,4x53	



XKM22440	4AC-51/2,5AC-53	24-460VAC	15-40VDC	2 kΩ	VDR	2 poles motor switching control	25,2x76,4x53	3
XKM23440	4AC-51/2,5AC-53	24-460VAC	12-35VDC	1 kΩ	VDR	3 poles motor switching control	47,5x76,4x53	4
XKR24440	4AC-51/2,5AC-53	24-460VAC	15-40VDC	2 kΩ	VDR	AC motor change-over control	58 2v76 /v53	4
XKRD30506	5A-DC	12-24VDC	7-30VDC	1 kΩ	diode	DC motor change-over control	30,2770,4733	4

The ready to use module XKRD30506 for Din-Rail mounting comprises 4 Solid State relays wired as a reverser to be used to change the direction of a DC motor (100W @ 24Vdc).



SN8 range

This relay is designed for PCB applications and when fitted with suitable heatsink, can control heavy loads in an ultra-miniature, physically compact package.



Product reference	Current	Switching voltage	Control voltage	Input R	l²t	Dimensions mm	
SN842500	25A	24-280VAC	15-32VDC	2200 Ω	260A ² s	35,05x12,70x28,32	

Other references available: please contact us.

SHT range

Three phase solid state relay in a single low profile package.

This relay is designed for PCR applications in order to provide or

This relay is designed for PCB applications in order to provide control of medium power in three phase environments.

Product reference	Current	Switching voltage	Control voltage	Input R	l²t	Dimensions mm	
SHT842300	3x25A	24-280VAC	10-30VDC	950 Ω	260A2s	81.28x8.26x27.69	

Other references available : please contact us.



SINGLE PHASE



ower Relays



kpac®

All our solid state relays fitted with back to back thyristors (power products: single phase, two phase, three phase) now use TMS2 technology with a very high life expectancy compared to the majority of products on the market (application note on request).

Innovation, Performance and Design!

Innovations

- → Screw connection up to 50mm²
- → Removable control terminals
- → Removable IP20
- → Versatile, easy and quick connections
- → Same screwdriver for outputs and inputs
- → Tightening on metal baseplate not on plastic
- → SSR, mains and load status
- → Less potting resin : environmentally friendly
- → 25 to 30% lighter than the SC range.

Performances:

- → Designed for all types of loads Current from 12 to 125A
- → TMS² technology 4th generation with very long life time expectancy
- → Output voltage from 24 to 690 VAC (600V-1200V-1600V peak)
- → Very low zero-crossing level
- → Large and regulated AC and DC input voltage
- → Control status LED
- → Very high immunity according IEC/EN61000-4-4 (bursts) and IEC/EN61000-4-5 (spikes): 4KV with no change of state
- → EMC compatible for industrial environment
- → UL/cUL, VDE (EN60950), IEC/EN60947-4-3, CE marking
- → Itsm up to 2000A and I2t>20 000A2s
- → Protection against circuit breaker.

S07 range

Typical applications: Motors (AC-53), inductive loads and phase angle control applications.

- Random or instant switching

Voltage protection on input (transil) and output (RC and VDR)



voltage pro	tection on mp	out (transii) and c	atput (110 an	a voli)			
Product	Switching	Switching	Peak	Control	Control	2 	Dimensions
reference	current	voltage	voltage <	voltage	current	11	mm
SO745090	50A	12-275VAC	600V	3-32VDC	lc<13mA	2500A ² s	
SO747090	75A	12-275VAC	600V	3-32VDC	lc<13mA	7200A ² s	
SO763090	35A	24-510VAC	1200V	3,5-32VDC	lc<13mA	1250A ² s	
SO765090	50A	24-510VAC	1200V	3,5-32VDC	lc<13mA	2500A ² s	45x58.5x30
SO767090	75A	24-510VAC	1200V	3,5-32VDC	lc<13mA	7200A ² s	+3730,3700
SO768090	95A	24-510VAC	1200V	3,5-32VDC	lc<13mA	14400A ² s	
SO769090	125A	24-510VAC	1200V	3,5-32VDC	lc<13mA	24000A2s	
SO789060	125A	24-690VAC	1600V	3,5-32VDC	lc<13mA	24000A2s_	

These products should be mounted on heatsinks in order to reach nominal current.

- Designed for most types of loads Zero cross with low zero-crossing level (<12V)
- Voltage protection on input (transil) with very high immunity according to IEC/EN61000-4-4
- IP20 protection
- Control current < 13mA for all the voltage range at any operating temperature
- Control status LED



Product	Switching	Switching	Peak	Control	Control	l ² t	Dimensions
reference	current	voltage	voltage	voltage	current	Ft	mm
SO842074	25A	12-275VAC	600V	3-32VDC	lc<13mA	600A ² s	
SO842974	25A	12-275VAC	600V	20-265VAC/DC	Ic<10mA	600A ² s	
SO843070	35A	12-275VAC	600V	3-32VDC	Ic<13mA	1250A ² s	
SO843970	35A	12-275VAC	600V	20-265VAC/DC	Ic<10mA	1250A ² s	
SO845070	50A	12-275VAC	600V	3-32VDC	Ic<13mA	2500A ² s	
SO847070	75A	12-275VAC	600V	3-32VDC	Ic<13mA	7200A ² s	
SO848070	95A	12-275VAC	600V	3-32VDC	Ic<13mA	14400A ² s	
SO849070	125A	12-275VAC	600V	3-32VDC	Ic<13mA	24000A ² s	
SO863070	35A	24-510VAC	1200V	3,5-32VDC	lc<13mA	1250A ² s	
SO863970	35A	24-510VAC	1200V	20-265VAC/DC	Ic<10mA	1250A ² s	
SO865070	50A	24-510VAC	1200V	3,5-32VDC	lc<13mA	2500A ² s	
SO865970	50A	24-510VAC	1200V	20-265VAC/DC	Ic<10mA	2500A ² s	
SO867070	75A	24-510VAC	1200V	3,5-32VDC	lc<13mA	7200A ² s	45x58,5x30
SO867970	75A	24-510VAC	1200V	20-265VAC/DC	Ic<10mA	7200A ² s	
SO868070	95A	24-510VAC	1200V	3,5-32VDC	lc<13mA	14400A ² s	
SO868970	95A	24-510VAC	1200V	20-265VAC/DC	Ic<10mA	14400A ² s	
SO869070	125A	24-510VAC	1200V	3,5-32VDC	lc<13mA	24000A ² s	
SO869970	125A	24-510VAC	1200V	20-265VAC/DC	lc<10mA	24000A ² s	
SO885060	50A	24-690VAC	1600V	3,5-32VDC	Ic<12mA	2500A2s	
SO885960	50A	24-690VAC	1600V	20-265VAC/DC	IC<12mA	2500A ² s	
SO887060	75A	24-690VAC	1600V	3,5-32VDC	lc<12mA	7200A ² s	
SO888060	95A	24-690VAC	1600V	3,5-32VDC	Ic<12mA	14400A ² s	
SO889060	125A	24-690VAC	1600V	3,5-32VDC	Ic<12mA	24000A ² s	

These products should be mounted on heatsinks in order to reach nominal current.



www.celduc.com

S09 range

Typical applications: Resistive loads (AC-51)

- Zero cross
- Control status LED
- IP20 protection


ii 25 protostori										
SO9 range with regulated control current										
Product	Switching	Switching	Peak	Control	Control	l²t	Dimensions			
reference	current	voltage	voltage	voltage	current	''	mm			
SO941460	12A	12-280VAC	600V	3-32VDC	Ic<13mA	128A ² s				
SO942460	25A	12-280VAC	600V	3-32VDC	lc<13mA	600A ² s				
SO943460	35A	12-280VAC	600V	3-32VDC	Ic<13mA	1250A ² s				
SO945460	50A	12-280VAC	600V	3-32VDC	lc<13mA	2500A2s	45x58,5x30			
SO963460	35A	24-600VAC	1200V	3,5-32VDC	lc<13mA	1250A ² s				
SO965460	50A	24-600VAC	1200V	3,5-32VDC	lc<13mA	2500A2s				
SO967460	75A	24-600VAC	1200V	3,5-32VDC	lc<13mA	7200A ² s				

SO9 range wit	h simplified inp	ut					
Product	Switching	Switching	Peak	Control voltage	Control	l ² t	Dimensions
reference	current	voltage	voltage	Control voltage	current	''	mm
SO942560	25A	12-280VAC	600V	7-30VDC	lc<30mA	600A ² s	
SO942860	25A	12-280VAC	600V	15-32VAC/10-30VDC	lc<33mA	600A ² s	
SO942960	25A	12-280VAC	600V	185-265VAC/DC	lc<10mA	600A ² s	45x58.5x30
SO963560	35A	24-600VAC	1200V	8-30VDC	lc<30mA	1250A ² s	40,00,0,00
SO965560	50A	24-600VAC	1200V	8-30VDC	Ic < 30mA	2500A2s	
SO967560	75A	24-600VAC	1200V	8-30VDC	Ic < 30mA	7200A ² s_	

These products should be mounted on heatsinks in order to reach nominal current.

SOL flatpac® range

low profile (16,3mm high)



Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Control current	l²t	Specifications	Dimensions mm
SOL745060	50A	12-280VAC	600V	3-32VDC	lc<13mA	1680A ² s	Random	
SOL942460	25A	12-280VAC	600V	3-32VDC	lc<13mA	600A ² s	Zero-cross	45x58.5x16.3
SOL942960	25A	12-280VAC	600V	185-265VAC/DC	lc<10mA	600A ² s	Zero-cross	4500,5010,3
SOL965460	50A	24-600VAC	1200V	3,5-32VDC	lc<13mA	1680A ² s	Zero-cross_	

These products should be mounted on heatsinks in order to reach nominal current.



SOR range

With removable input connector - Spring terminals :

- Designed for most types of loads.
- Zero cross with low zero-crossing level (<12V)
- Voltage protection on input (transil) and output (VDR) with very high immunity according to IEC/EN61000-4-4 and IEC/EN61000-4-5
- IP20 protection
- Control current <13mA for all the voltage range at any operating temperature
- Control status LED
- Double inputs

Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Control current	l²t	Dimensions mm
SOR842074	25A	12-275VAC	600V	3-32VDC	lc<13mA	600A ² s	
SOR863070	35A	24-510VAC	1200V	3,5-32VDC	Ic<13mA	1250A ² s	45x58.5x30
SOR865070	50A	24-510VAC	1200V	3,5-32VDC	lc<13mA	2500A ² s	4500,500
SOR867070	75A	24-510VAC	1200V	3,5-32VDC	Ic<13mA	7200A ² s	

These products should be mounted on heatsinks in order to reach nominal current.





- celpac[®]26

The 22,5mm pitch SSR solution!

Performances & reliability:

- → Fixing screws compatible with all hockey puck style relays (celduc SO and SC range),
- → Maximum voltage up to 1600V (690VRMS), 600VAC and 1200VAC as standard,
- Thyristor rating up to 75A,
- → Large input range : 3-32VDC with regulated current models
- → AC input control available,
- → Input status yellow LED,
- → Over-voltage protection on input,
- → New generation of TMS² technology for thyristors for a longer life expectancy,
- Quick and easy connections,
- → Designed according to European standards EN60947-4-3 (IEC947-4-3) and EN60950 (VDE0805 reinforced insulation) -IEC62314-UL-cUL,
- → IP20 protection with removable flaps (SU range) or cover (SA range),
- Other protection devices available as an option: RC snubber, VDR, self turn-on.

Price-effective and compact solution:

- → The 22,5 mm pitch of our Solid State contactors reduces space to the minimum.
- → Reduced assembling time, easy cabling,
- → Reduced maintenance thanks to a very long life expectancy,
- → One single screw driver for input and output.

SA8: designed for most types of loads. SA9: designed for resistive loads AC-51.

SU7: designed for motors AC-53 and inductive loads. Also use in phase



SU range:
with pluggable connector on



SA range

- Screw connection
- Transparent protective cover
- For mounting on your heatsink or panel mount.



Product reference SA842070	Output voltage	Thyristor rating 25A	V peak (V)	Control voltage 3-32VDC	Specifications	Visualization & protection LED, VDR
SA941460 SA942460 SA943460 SA945460 SA963460 SA965460	12-280VAC 12-280VAC 12-280VAC 12-280VAC 24-600VAC 24-600VAC	12A 25A 35A 50A 35A 50A	600V 600V 600V 600V 1200V 1200V	3-32VDC 3-32VDC 3-32VDC 3-32VDC 3,5-32VDC 3,5-32VDC	Zero-cross	LED

angle control systems. **SU8**: designed for most types of loads.

SU9: designed for resistive loads AC-51.

SU range

- With pluggable connector on inputs
- Removable flaps for protection
- For mounting on your heatsink or panel mount.



Référence produit SU765070	Tension de sortie 24-510VAC	Calibre thyristor 50A	V peak (V)	Tension de commande 3,5-32VDC	Specifications Random	Visualization & protection LED
SU842070 SU842770 SU842970 SU865070 SU865970 SU867070	12-275VAC 12-275VAC 12-275VAC 24-510VAC 24-510VAC 24-510VAC	25A 25A 25A 50A 50A 75A	600V 600V 600V 1200V 1200V 1200V	3-32VDC 17-30VAC/DC 180-240VAC 3,5-32VDC 180-240VAC 3,5-32VDC	Zero-cross _	LED, VDR
SU942460 SU963460 SU965460 SU967460	12-280VAC 24-600VAC 24-600VAC 24-600VAC	25A 35A 50A 75A	600V 1200V 1200V 1200V	3-32VDC 3,5-32VDC 3,5-32VDC 3,5-32VDC		LED

SINGLE PHASE





- celpac[®]26

SAL/SAM range

SAx9: designed for resistive loads AC-51.

SUx8: designed for most types of loads. **SUx9**: designed for resistive loads AC-51.



- Transparent protective cover
- « Ready to use » on 22,5 and 45mm heatsinks.

Product reference	Output voltage	Thyristor rating	Max. switching current at 25°C	V peak (V)	Control voltage	Specifications	Visualization & protection
SAL941460	12-280VAC	12A	12A	600V	3-32VDC		
SAL942460	12-280VAC	25A	23A	600V	3-32VDC		
SAL963460	12-280VAC	35A	30A	1200V	3,5-32VDC	Zero-cross	LED
SAL965460	24-600VAC	50A	32A	1200V	3,5-32VDC		
SAM943460	12-280VAC	35A	35A	600V	3-32VDC		

SUL/SUM range



- Removable flaps for protection

- « Ready to use » on 22,5 and 45mm heatsinks

Product reference	Output voltage	Thyristor rating	Max. switching current at 25°C	V peak (V)	Control voltage	Specifications	Visualization & protection
SUL842070	12-275VAC	25A	23A	600V	3-32VDC		
SUL842970	12-275VAC	25A	23A	600V	180-240VAC		
SUL865070	24-510VAC	50A	32A	1200V	3,5-32VDC		
SUL865770	24-510VAC	50A	32A	1200V	18-30VAC/DC		LED, VDR
SUL865970	24-510VAC	50A	32A	1200V	180-240VAC		
SUL867070	24-510VAC	75A	35A	1200V	3,5-32VDC	Synchrone	
SUM865070	24-510VAC	50A	45A	1200V	3,5-32VDC		
SUL942460	12-280VAC	25A	23A	600V	3-32VDC		
SUL963460	24-600VAC	35A	30A	1200V	3,5-32VDC		LED
SUL965460	24-600VAC	50A	32A	1200V	3,5-32VDC		
SUL967460	24-600VAC	75A	35A	1200V	3.5-32VDC		



ESUC for SU/SUL range

Current monitoring module

ESUC module is an option available for the celpac 2G range. Mounted on SU or SUL, this module provides users with diagnostic information for up to 5 heating elements in parallel.

- Permanent load current monitoring
- Current teaching function by push button or external logic input
- One alarm threshold : 16% of Iteach
- Partial load break detection
- Open mains detection
- Open load detection
- Detection of short-circuited SSR

Product reference	Current range	Control
ESUC0450	2-40A	8-30VDC













Power SSRs with diagnostics

Status of the SSR and the load (resistive load) without external power supply. This range is patented. Status output can be chained.

Fault condition alarms:

- Line or load open
- Short circuit output

Diagnostic description

Control	Control LED	Mains	Load	SSR	Status LED	Etat du contact
0	0	Yes	OK	OK	0	closed
1	•	Yes	OK	OK	<u> </u>	closed
0	0	No	OK	OK	0	open
1	•	No	OK	OK	0	open
0	0	Yes	-	OK	0	open
0	0	Yes	OK	short-circuit	0	open
1	•	Yes		OK	0	open
1	•	Yes	OK	short-circuit	0	open



1		Yes	open				
celpa	ac®	Nill	S				
Product	Switching	Switching	Peak	Control	Control	l ² t	Dimensions
reference	current	voltage	voltage	voltage	current	_	mm
SILD845160	32A	70-280VAC	600V	3-32VDC	lc<10mA	1500A2s	
SILD865170	32A	150-510VAC	1200V	3,5-32VDC	lc<10mA	1500A ² s	22,5x80x116
SILD867170	35A	150-510VAC	1200V	3,5-32VDC	lc<10mA	5000A2s	

okpac[®]



Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	l²t	Dimensions mm
SOD843180	35A	50-265VAC	600V	7-30VDC	1 kΩ	1250A ² s	
SOD845180	50A	50-265VAC	600V	7-30VDC	1 kΩ	2500A ² s	
SOD849180	125A	50-265VAC	600V	7-30VDC	1 kΩ	24000A2s	45x58,5x33,6
SOD865180	50A	150-510VAC	1200V	5-30VDC	1 kΩ	2500A ² s	
SOD867180	75A	150-510VAC	1200V	5-30VDC	1 kΩ	7200A2s	

The SOD products should be mounted on heatsinks in order to reach nominal current. The SOD range is now available with a thermal switch for over-temperature protection. Please consult us.





www.celduc.com



Softlife range Get rid of your heatsinks!

Relays combining the assets of dual technology: solid state and electromechanical. These relays are designed to switch current up to 30A without the need of heatsink. These relays have LED indicators, RC and VDR protection.

Product reference	Switching current	Switching voltage	Control voltage	l²t	Protec.	Specifications	Dimensions mm	
SVX963350	30A	12-420VAC	20-30VDC	265A ² s	RC-VDR	Mixed relay	44,5x61,3x45	



Miniature relays available with "FASTON" or PCB terminals.



Product reference	Switching current	Switching voltage	Control voltage	Input R	Specifications	Dimensions mm
SF541310	10A	12-280VAC	4-30VDC	1 kΩ	Zero-cross, "FASTON" terminals	
SF542310	10A	12-280VAC	4-30VDC	1 kΩ	Zero-cross, PCB terminals	21 x 35,5 x 15
SF546310	20A	12-280VAC	4-30VDC	1 kΩ	Zero-cross, "FASTON" terminals	

These products should be mounted on heatsinks in order to reach nominal current.

SCF range

To control resistive loads. "FASTON" terminals.



Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	LED	l²t	Protec.	Dimensions mm
SCF42160	25A	12-280VAC	600V	4-30VDC	600 Ω	yes	312A ² s	_	
SCF42324	25A	12-280VAC	600V	12-30VDC	1 kΩ	no	312A ² s	VDR	44,5x58x33
SCF62160	25A	24-600VAC	1200V	5-30VDC	600 Ω	yes	265A ² s		

Other references (corresponding to the SC9 range) are available: please contact us. These products should be mounted on heatsinks in order to reach nominal current. E option "large Entraxe" and L option "Faston" 4,8mm on request.

SCFL range EMC optimised

(low electromagnetic emission – low RFI)



household and electrical appliances, information technology and medical equipments. In compliance with EN 50081-1 Generic Emission Standards for Residential and meets CISPR 22 requirements.

Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	l²t	Dimensions mm	
SCFL42100	25A	12-280VAC	600V	4-30VDC	1 kΩ	312A ² s	44.5x58.2x32	l
SCFL62100	25A	24-440VAC	1200V	5-30VDC	1 kΩ	312A ² s	44,5856,2852	ı

These products should be mounted on heatsinks in order to reach nominal current.

SP7/SP8 range

This new range extends the products available with FASTON terminals.

In a full plastic case, these relays can nevertheless switch up to 12 A AC51.

These relays are appropriate for any type of loads (such as heating or single-phase random motor) thanks to high immunity components and an integrated overvoltage protection combined with 800 Upeak power components. This range is well adapted to the food industry.

Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	l²t	Specifications	Dimensions mm	
SP752120	12A	12-280VAC	800V	3-32VDC	1 kΩ	340A2s	Random	38x66.8x22	l
SP852120	12A	12-280VAC	8007	4-32VDC	1 kO	340A2s	Zero-cross	30000,0022	Н

These products should be mounted on heatsinks in order to reach nominal current.







See also our okpac® range (pages 5 & 6)

SC range

SC7 range with random or instant switching, integrating a snubber (RC) is especially designed for motor and transformer control.

SC8 range with zero-cross switching, integrating a snubber (RC), is recommended for all types of applications. **SC9** range with zero-cross switching is optimized for resistive load control (heating application).



Product	Switching	Switching	Peak	Control voltage	Input R	l ² t	Dimensions	okpac
reference	current	voltage	voltage				mm	equivalent
SC741110	12A	12-280VAC	600V	3-30VDC	1 kΩ	72A ² s		SO745090
SC744110	40A	12-280VAC	600V	3-30VDC	1 kΩ	612A ² s		SO745090
SC762110	25A	24-520VAC	1200V	4-30VDC	1 kΩ	265A ² s		SO763090
SC764110	50A	24-520VAC	1200V	4-30VDC	1 kΩ	1500A ² s		SO765090
SC764910	50A	24-520VAC	1200V	90-240VAC/DC	30 kΩ	1500A ² s		_
SC767110	75A	24-520VAC	1200V	4-30VDC	1 kΩ	5000A ² s		SO767090
SC768110	95A	24-520VAC	1200V	4-30VDC	1 kΩ	11000A ² s		SO768090
SC769110	125A	24-520VAC	1200V	4-30VDC	1 kΩ	20000A ² s		SO769090
SC841110	12A	12-280VAC	600V	4-30VDC	1 kΩ	72A ² s		SO842074
SC841910	12A	12-280VAC	600V	90-240VAC/DC	30 kΩ	72A ² s		SO842974
SC842110	25A	12-280VAC	600V	4-30VDC	1 kΩ	312A ² s		SO842074
SC844110	40A	12-280VAC	600V	4-30VDC	1 kΩ	612A ² s		SO845070
SC844910	40A	12-280VAC	600V	90-240VAC/DC	30 kΩ	612A ² s		SO865970
SC862110	25A	24-520VAC	1200V	5-30VDC	1 kΩ	265A ² s		SO863070
SC864110	50A	24-520VAC	1200V	5-30VDC	1 kΩ	1500A ² s		SO865070
SC864810	50A	24-520VAC	1200V	17-80VAC/DC	3 kΩ	1500A ² s		SO863970
SC864910	50A	24-520VAC	1200V	90-240VAC/DC	30 kΩ	1500A ² s	445 500 07	SO863970
SC867110	75A	24-520VAC	1200V	5-30VDC	1 kΩ	5000A2s	44,5x58,2x27	SO867070
SC867910	75A	24-520VAC	1200V	90-240VAC/DC	30 kΩ	5000A2s		SO867970
SC869110	125A	24-520VAC	1200V	5-30VDC	1 kΩ	20000A2s		SO869070
SC869910	125A	24-520VAC	1200V	90-240VAC/DC	30 kΩ	20000A2s		SO869970
SC941160	12A	12-280VAC	600V	4-30VDC	600 Ω	72A ² s		SO941460
SC942110	25A	12-280VAC	600V	4-30VDC	1 kΩ	312A ² s		SO942460
SC942160	25A	12-280VAC	600V	4-30VDC	600 Ω	312A ² s		SO942460
SC942900	25A	12-280VAC	600V	90-240VAC/DC	30 kΩ	312A ² s		SO942960
SC944110	40A	12-280VAC	600V	4-30VDC	1 kΩ	612A ² s		SO945460
SC945160	50A	12-280VAC	600V	4-30VDC	600 Ω	1500A ² s		SO945460
SC947160	75A	12-280VAC	600V	4-30VDC	600 Ω	5000A2s		SO967460
SC962114	25A	24-600VAC	1200V	5-30VDC	1 kΩ	265A2s		SO863070
SC962160	25A	24-600VAC	1200V	5-30VDC	600 Ω	265A ² s		SO963460
SC962960	25A	24-600VAC	1200V	90-240VAC/DC	30 kΩ	265A ² s		SO863970
SC965160	50A	24-600VAC	1200V	5-30VDC	600 Ω	1500A ² s		SO965460
SC967100	75A	24-600VAC	1200V	5-30VDC	1 kΩ	5000A ² s		SO967460
SC967160	75A	24-600VAC	1200V	5-30VDC	600 Ω	5000A ² s		SO967460

These products should be mounted on heatsinks in order to reach nominal current. Protective cover and heatsinks available: see accessories.





TWO PHASE





Two phase relays

Our two phase range provides two solid state relays in a compact standard 45 mm enclosure. They are perfectly adapted to three phase applications with breaking of two phases only.

SOB range - Dual okpac®

New 2 phase relays in okpac® IP20 housing. Removable connector for control allowing many wiring possibilities eg.

FASTONS, springs, screw and so on (please consult us).

SOB5: power and control connections by FASTON terminals

SOB6: double input with connector CE100F ITWPANCON type or similar

SOB7: random

SOB8: zero-cross – designed for most types of loads

SOB9: zero-cross - resistive loads AC-51.

Connectors to be ordered separately







Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Input B	l²t	Specifications	Dimensions mm	Fig n°	
										1
SOB542460	2x25A	12-280VAC	600V	3-32VDC	Ic < 13mA	600A ² s	zero-cross / 2 controls		1	
SOB665300	2x25A	24-600VAC	1200V	10-30VDC	1200 Ω	1680A ² s	zero-cross / 2 controls		3	ı
SOB763670	2x35A	24-510VAC	1200V	8-30VDC	1200 Ω	1250A ² s	random / 2 controls		2	ı
SOB765670	2x50A	24-510VAC	1200V	8-30VDC	$1200~\Omega$	2500A ² s	random / 2 controls		2	ı
SOB767670	2x75A	24-510VAC	1200V	8-30VDC	1200 Ω	7200A ² s	random / 2 controls		2	ı
SOB865660	2x50A	24-600VAC	1200V	8-30VDC	1200 Ω	2500A ² s	zero-cross / 2 controls	45x58,5x27	2	ı
SOB942360	2x25A	24-280VAC	600V	10-30VDC	1200 Ω	600A ² s	zero-cross / 1 control		2	ı
SOB942660	2x25A	24-280VAC	600V	10-30VDC	1200 Ω	600A ² s	zero-cross / 2 controls		2	ı
SOB963660	2x35A	24-600VAC	1200V	10-30VDC	1200 Ω	1250A ² s	zero-cross / 2 controls		2	ı
SOB965660	2x50A	24-600VAC	1200V	10-30VDC	1200 Ω	2500A ² s	zero-cross / 2 controls		2	ı
SOB967660	2x75A	24-600VAC	1200V	10-30VDC	1200 Ω	7200A ² s	zero-cross / 2 controls		2	

On request: 1600V peak version, 75A version, overvoltage protection option available. For SOB6 range: other rating on request, TVS (Transient Voltage Suppression) protection possible.

SCB range







Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	l²t	Specifications	Dimensions mm	Fig n°	
SCB564310	2x40A	24-510VAC	1200V	5-30VDC	1 kΩ	610A ² s	zero-cross / 2 controls		1	ı
SCB665300	2x50A	24-600VAC	1200V	8-35VDC	1800 Ω	1500A ² s	zero-cross / 1 control		2	ı
SCB865300	2x50A	24-600VAC	1200V	10-30VDC	1400 Ω	1500A ² s	zero-cross / 1 control		2	ı
SCB865600	2x50A	24-600VAC	1200V	10-30VDC	1800 Ω	1500A ² s	zero-cross / 2 controls	44,8x58,5x27	3	ı
SCB941300	2x12A	12-280VAC	600V	8-30VDC	1 kΩ	72A ² s	zero-cross / 1 control	44,0X00,0X21	2	ı
SCB942600	2x25A	12-280VAC	600V	8-30VDC	1 kΩ	288A ² s	zero-cross / 2 controls		3	ı
SCB962600	2x25A	24-600VAC	1200V	8-30VDC	1 kΩ	265A2s	zero-cross / 2 controls		3	ı
SCB965600	2x50A	24-600VAC	1200V	8-30VDC	1 kΩ	1500A ² s	zero-cross / 2 controls		3	l

Protection cover: see accessories (1K470000).

These products should be mounted on heatsinks in order to reach nominal current.

HREE PHASE







Three phase solid state relays in a single phase relay enclosure (width 45mm).

Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	l²t	Specifications	Dimensions mm
SCT32110	3x10A	12-440VAC	800V	4-30VDC	330 Ω	72A ² s	random	44.8x58x27
SCT62110	3x10A	12-440VAC	800V	4-30VDC	330 Ω	72A2s	zero-cross	44,0000027
		0001 11						

These products also come with PCB terminals.

These product should be mounted with heatsink in order to reach nominal current.

SGB range 2 legs Three Phase Solid State Relays

Our SGB range is designed for controlling three wire three phase loads connected in delta or, if balanced, connected in



Product reference	Switching current	Switching voltage			Input R	l²t	Specifications	Dimensions mm
SGB967360	3x75A	24-600VAC	1200V	10-30VDC	550 Ω	7250A ² s	synchrone	100x75,15x46

SGT range

These relays have LED indicators.



SGT range with 47,6mm housing and square terminals

SGT767470E	3x75A	24-520VAC	1200V	4-32VDC	ic<25mA	7250A ² s	Random /
SGT769360E	3x125A	24-520VAC	1200V	8,5-30VDC	21 kΩ	20000A2s	for most types of loads
SGT865470E	3x50A	24-520VAC	1200V	4-32VDC	ic<25mA	2500A ² s	Zero-cross / for most types of loads
SGT965360E	3x50A	24-600VAC	1200V	10-30VDC	550 Ω	2500A ² s	
SGT967360E	3x75A	24-600VAC	1200V	10-30VDC	550 Ω	7250A ² s	7
SGT967760E	3x75A	24-600VAC	1200V	10-24VAC	400 Ω	7250A ² s	Zero-cross / for resistive loads AC-51
SGT967960E	3x75A	24-600VAC	1200V	90-240VAC	21 kΩ	7250A ² s	for resistive loads AC-51
SGT968360E	3x95A	24-600VAC	1200V	10-30VDC	21 kΩ	7250A2s	

These products should be mounted with heatsink in order to reach nominal current.

SVT range

Three phase IP20 protection range to control resistive loads (AC-51) or for motor control (AC-53). These relays have LED. Please consult us for other loads.

100x75,15x46

No.	Product reference	Switching current AC-51	Switching current AC-53	Switching voltage	Thy- ristor rating	Control voltage	Input R	l²t	Protec.	Specifications	Dimensions mm
	SVT range wit	th 40mm hous	sing								
	SVT764394	3x50A	3x12A	24-520VAC	50A	8,5-30VDC	620 Ω	1500A ² s	RC-VDR	Random	
	SVT864374	3x50A	3x12A	24-520VAC	50A	10-32VDC	580 Ω	1500A2s	VDR		
	SVT867394	3x75A	3x24A	24-520VAC	75A	8,5-30VDC	620 Ω	5000A2s	RC-VDR	Zero-cross	
	SVT867994	3x75A	3x24A	24-520VAC	75A	90-240VAC	620 Ω	5000A ² s	RC-VDR	/ for most	
	SVT869394	3x125A	3x32A	24-520VAC	125A	8,5-30VDC	620 Ω	20000A2s	RC-VDR	types of loads	100x76x56,5
	SVT869994	3x125A	3x32A	24-520VAC	125A	90-240VAC	21 kΩ	20000A ² s	RC-VDR		100/11 0/100,0
	SVT965360	3x50A	_	24-600VAC	50A	8,5-30VDC	620 Ω	1500A ² s	_	Zero-cross /	
	SVT965760	3x50A	_	24-600VAC	50A	10-30VAC/DC	410 Ω	1500A ² s	-	for resistive	
	SVT967360	3x75A	_	24-600VAC	75A	8,5-30VDC	620 Ω	5000A ² s	-	loads AC-51	
	SVT967960	3x75A	_	24-600VAC		90-240VAC	21 kΩ	1500A ² s			
	SVT range wit	th 47,6mm ho	using								
		- 1							_		



· ·										
SVT864394E	3x50A	3x12A	24-520VAC	50A	8,5-30VDC	620Ω	1500A2s	RC-VDR	Zero-cross / for	
SVT868394E	3x95A	3x24A	24-520VAC	95A	8,5-30VDC	620Ω	11000A2s	RC-VDR	most types of loads	
SVT965460E	3x50A	_	24-600VAC	50A	4-32VDC	ic<25mA	1500A2s	_	Zero-cross /	100x76x56,5
SVT965960E	3x50A	_	24-600VAC	50A	90-240VAC	21 kΩ	1500A2s	-	for resistive	
SVT967360E	3x75A	_	24-600VAC		8,5-30VDC	21 kΩ	1500A ² s	_	loads AC-51	

These products should be mounted with heatsink in order to reach nominal current.

THREE PHASE MOTOR CONTROL



SWT / SIT range

solid state contactors

Three phase contactor with heatsink and DIN rail mounting. Fitted with a LED indicators, and RC and VDR network protection designed to control resistive loads (AC-51) or for motor control (AC-53).

Product reference	Switching current AC-51	Switching current AC-53	Switching voltage	Peak voltage	Control voltage	Input R	l²t	Specifications	Dimensions mm	Fig n°
SIT865390	3X22A	3x12A	24-510VAC	1200V	10-30VAC/DC	410 Ω	1500A ² s	_		1
SIT865570	3X22A	_	24-510VAC	1200V	10-30VDC	560Ω	1500A ² s	Zero-cross	90x98x122	1
SIT865990	3X22A	3x12A	24-510VAC	1200V	90-240VAC	21 kΩ	1500A ² s_			1
SWT860330	3x5A	3x5A	24-520VAC	1200V	10-30VAC/DC	410 Ω	265A2s		83x76x72	2
SWT861730	3x28A	3x16A	24-520VAC	1200V	10-30VAC/DC	410Ω	5000A2s			3
SWT861790	3x28A	3x16A	24-520VAC	1200V	90-240VAC	21 kΩ	5000A2s	Zero-cross	110x100x172	3
SWT862030	3x32A	3x24A	24-520VAC	1200V	10-30VAC/DC	410Ω	11000A ² s	2010 01033	11001000112	3
SWT862090	3x32A	3x24A	24-520VAC	1200V	90-240VAC	21 kΩ	11000A ² s			3
SWT865080	3x50A	_	24-520VAC	1200V	10-30VAC/DC	$410~\Omega$	5000A ² s_		110x145x172	3
Th	ara dafinad	with tomor	waters wises of	E000 and	nermanent onerati	/	tina avala	1000/ laf 0 haura	in acmaliance wit	th tha

These products are defined with temperature rises of 50°C and permanent operation (operating cycle = 100%)of 8 hours in compliance with the European standards.

AC Reversing switches - SG9, SV9 & SW9

This relay is used to reverse the rotational direction of a motor. The SW9 series is ready to use with heatsink and DIN rail mounting integrated. They all supplied with LED indicators and protection against simultaneous controls.

Product reference	Switching current AC-53	Switching voltage	Control voltage	l²t ♠	Protec.	Specifications	Dimensions mm	Fig n°	
SG969100	3x6,6A	24-520VAC	10-30VDC	612A2s		3 phase switching	100x73,5x39,5	1	
SG969300	3x8,5A	24-520VAC	12-30VDC	1500A ² s		2 phase switching	100x73,5x39,5	1	
SV969300	3x8,5A	24-520VAC	12-30VDC	1500A ² s	reversing +	2 phase switching IP20 enclosure	100x76x56,5	4	
SV969500	3x16A	24-550VAC	12-30VDC	5000A ² s	time delay	2 phase switching IP20 enclosure	100x76x56,5	4	
SW960330	3x4,5A	24-550VAC	12-30VDC	1500A ² s		2 phase switching	100x76x72	3	
SW961230	3x8,5A	24-520VAC	12-30VDC	1500A ² s		2 phase switching	83x90x155	2	

Standard housing 40mm. Available in 47,6mm (E suffix) : please contact us












Wiring examples — Three-phase applications

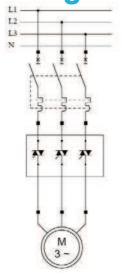


Three-phase SSR SVT8/SGT8 controlling a three-phase motor with a thermal - magnetic protection.




Motor reverser SV9 for three-phase asynchronous motor



Three-phase SSR SVT9/ SGT9 to control heaters connected in star with fuses



Three-phase SSR SVT9/SGT9 to control heaters connected in delta with circuit-breaker.

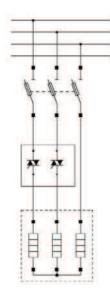

Two-phase SSR SOB9 to control heaters connected in star with fuses protection.

MOTOR CONTROL



SMCV & SMCW range

AC Softstarter

Motor control:

- Efficient reduction of torque and starting current.

Incandescent or infrared lamp starting:

- Reduction of in rush current
- Increase in life expectancy.

Transformer control (loaded):

- Elimination of saturation current
- Improved control and protection.

Whatever your application:

- -Diagnostic monitoring of line, load & supply as well as normal operational status
- Better balance of and less interference on starters (full control of the 3 phases!)
- Simple use easing implementation and adjustements
- As compact as an electronic contactor.











	Product Pmax motor 400VAC				motor VAC	Max. Cur	rent AC53a	Specifications	Dimensions mm	Fig n°	
TOTOTOTI		Υ*	D*	Υ*	D*	Max.	EN60947-4-2			"	l
SMCV6	080	7,5kW	13kW	4,3kW	7,5kW	16A	11,5A]	l
SMCV6	110	11kW	19kW	6,4kW	11kW	25A	15,5A	Heatsink not provided	100x76x58,5	1	l
SMCV6	150	15kW	26kW	8,6kW	15kW	30A	22,5A		_] '	l
						○ '					l
SMCW6	020	2,5kW	4,3kW	1,4kW	2,5kW	5,6A	4A		83x110x74	2	ı
SMCW6	080	7,5kW	13kW	4,3kW	7,5kW	16A	11,5A	Supplied with	83x110x155	3	l
SMCW6	110	11kW	19kW	6,4kW	11kW	25A	15,5A	built-in heatsink	110x110x180	4	Ĺ
SMCW6	150	15kW	26kW	8,6kW	15kW	30A	22,5A		110x141x180	5	l
SMCW6	151	15kW	26kW	8,6kW	15kW	30A (AC53b)	22,5A (AC53b)	Ext. Bypass required	83x110x74	2	i

Common characteristics

Values given at 40°C ambient

Range of voltage and
network frequency
200-480VAC
40-65Hz

Control 10-24VDC or contact

Diagnostic output 0-24V 1A AC/DC

Operating temperature 40°C +100°C

Insulation


Max. section of wires E=2,5mm²

S-10mm²

*The star assembly (Y) corresponds to in-line wired starter.

The delta assembly (D) corresponds to the starter wired in the triangle coupling of the motor.

Each channel is wired in series with a winding of the motor.





XKRD & SGRD range

Reversing switches for DC motor control



Control voltage ranges from 7 to 30VDC and this module can switch up to 5A/60VDC. A voltage clamp device is integrated and offers an input-output isolation of 2500VRMS.

Our SGRD reversing unit for DC motor control offers all the necessary built-in control protections including protection against wiring errors or short circuit on the input. This version includes the interlocking function to avoid control of the two directions at the same time.

Control voltage ranges from 8 to 36VDC and this SSR can switch up to 10A/36VDC.

Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Control current	Protec.	Dimensions mm	Fig n°	
XKRD30506	5A	7-36VDC	60V	7-30VDC	12-58mA	VDR	58,2x76,4x53	1	
SGRD01006	10A	8-36VDC	60V	8-36VDC	20mA	Voltage and current	100x73,5x50,9	2	

DC speed variation possible - please consult us

PHASE ANGLE SINGLE PHASE





New generation of proportional controllers

This range comes in celpac® housing (ready to use) and okpac® housing (to be mounted on a heatsink). This range is designed for resistive loads.

SO465620 is a



SO4 housino	with	different	control	connections.

Other functions possible: phase angle control, full wave pulse control, fast burst control Soft-Starter, timers and flashing relay, ... - please consult us.

a SSR based ph	ase angle co	ontroller with P	WM control inpu	t (linear power la	aw response).		
Product reference	Switching current	Switching voltage	Control voltage	Dimensions mm	External power supply required ?	Fig n°	
SIL465000	22A	160-450VAC	0-10V	22,5x80x11	no	1	
SIM465000	32A	160-450VAC	0-10V	45 x 80 x 116	no	2	
SO445020	50A	100-280VAC	0-10V		yes		ı
SO465020	50A	200-480VAC	0-10V		yes		ı
SO468020	95A	200-480VAC	0-10V		yes		ı
SO469020	125A	200-480VAC	0-10V		yes		
SO445120	50A	100-280VAC	0-5V		yes		
SO468120	95A	200-480VAC	0-5V		yes		ı
SO469120	125A	200-480VAC	0-5V		yes		ı
		100 150 110	. =>.				ı
SO467501	75A	160-450VAC	1-5V	45x58,2x27	no	3	
SO445320	50A	100-280VAC	Potentiometer		yes		ı
SO465320	50A	200-480VAC	Potentiometer		yes		
SO445420	50A	90-265VAC	4-20mA		no		ı
SO465420	50A	200-480VAC	4-20mA		no		ı
SO467420	75A	200-480VAC	4-20mA		no		ı
SO468420	95A	200-480VAC	4-20mA		no		
SO469420	125A	200-480VAC	4-20mA		no		ı
00405005	504	000 1001110	D) A / A				ı
SO465620	50A	200-480VAC	PWM		yes _		ı

S04 range - Single phase softstarters

This relay is designed to proportionally vary the switching point on a sinusoidal mains supply via an isolated analogue control signal thereby varying the RMS voltage at the terminals of the load. Applications: light dimmer, heating regulation, single phase variable speed control (vibrating feeders, etc).

Model with LED and RC and VDR network.



Product reference	Switching voltage	Switching current	Control voltage	Dimensions mm	Fig n°	
SO400200 SO400300	200-260VAC 200-260VAC	35A 40A*	Soft-starter	45x58,2x27	1 2	

^{*}Value given at 25°C ambient

For the softstart of other loads (transformers, single-phase motors, ...) please consult us.

SG4 range - Phase angle controller

This relay is designed to proportionally vary the switching point on a sinusoidal mains supply via an isolated analogue control signal thereby varying the RMS voltage at the terminals of the load. Applications: light dimmer, heating regulation, single phase variable speed control (vibrating feeders, etc). Model with LED and RC and VDR network.



Product reference	Switching current	Switching voltage	Control voltage	Input R	I²t	Dimensions mm
SG441020	10A	115-265VAC	0-10VDC	400 kΩ	72A ² s	
SG444020	40A	115-265VAC	0-10VDC	400 kΩ	1500A ² s	
SG464020	40A	200-460VAC	0-10VDC	400 kΩ	1500A2s	
SG468020	70A	200-460VAC	0-10VDC	400 kΩ	5000A2s	
SG469020	110A	200-460VAC	0-10VDC	400 kΩ	20000A ² s	
SG444120 SG464120 SG469120 SG444420	40A 40A 110A 40A	115-265VAC 200-460VAC 200-460VAC 115-265VAC	Potentiometer Potentiometer Potentiometer 4-20mA	200 kΩ 200 kΩ 200 kΩ 250 Ω	1500A ² s 1500A ² s 20000A ² s	100x73,5x39,5
SG464420	40A	200-460VAC	4-20mA	250 Ω	1500A ² s	
SG468420	70A	200-460VAC	4-20mA	250 Ω	5000A ² s	
SG469420	110A	200-460VAC	4-20mA	250 Ω	20000A2s_	

These products should be mounted on heatsink in order to reach nominal current.



PHASE ANGLE CONTROLLERS





SO3 range Burst control mode (µP based unit)

This control mode is particularly suitable for resistive loads having a low thermal inertia like short wave Infra Red sources (IR lamps). It allows a very fine control of power according to the analogue input signal while reducing noise emission level (EMC conducted emissions).

This control mode consists in switching streams of full sine waves equally distributed along a fixed modulation period (TM) function of the analogue input signal. The μP constantly computes the number of full sine waves to be switched along the TM period.

Product reference	Switching current	Switching voltage	Control voltage	Dimensions mm
SO367001	75A	400VAC	0-10VDC	45x58,2x27

Other power rating and / or control on request.

SG5 range Full wave pulse controllers

This relay has an analog input isolated from the mains to proportionally vary the cyclic operating ratio of a load (t/T). Control and mains are synchronous and output only has full periods. Models supplied with LED indicators together with RC & VDR network protection.

Heating control

Application:

Application:

Application: three-phase heaters

single phase heaters

Product reference	Switching current	Switching voltage	Control voltage	Input R	l²t	Dimensions mm
SG541020	10A	230VAC	0-10VDC	250 Ω	72A ² s	
SG544020	40A	230VAC	0-10VDC	350 Ω	610A ² s	
SG564020	40A	400VAC	0-10VDC	250 kΩ	610A ² s	
		*	6			
SG541120	10A	230VAC	Potentiometer	1 MΩ	72A ² s	100x73,5x39,5
SG564120	40A	400VAC	Potentiometer	1 ΜΩ	610A ² s	
SG541420	10A	230VAC	4-20mA	350 Ω	72A2s	
SG564420	40A	400VAC	4-20mA	350 Ω	610A ² s	

For higher power ratings and three phase applications, ask for our application notes. These products should be mounted on heatsink in order to reach nominal current.

SWG5 range Single phase power controllers


This range is based on the SG5 controllers. The SWG5 are fitted with heatsinks and DIN rail adapters

Product reference	Switching power	Switching voltage	Control voltage	Input R	Dimensions mm	
SWG50210	2kW	230VAC	0-10VDC	250 kΩ	100x74x56	
SWG50810	8kW	230VAC	0-10VDC	250 kΩ	100x110x96	

Control voltage 0-5V or potentiometer on requets.

SWG8 range Three phase power controllers

The SWG8 controllers consist of a control unit (0 to 10 VDC input) and a power unit adapted to three phase load. The control unit has got an analogue input, isolated from the mains, that can proportionally alter the power to the load.



3x400Vac	Product reference	Switching power	Switching voltage	Control voltage	Input R	Control unit dimensions mm	Power unit dimensions mm
	SWG81510	20kW					45x80x120
4	SWG82710	27kW					2x(83x110x130)
44	SWG83610	36kW					2x(110x110x154)
sirca	SWG84210	42kW	400VAC	0-10VDC	250 kΩ	100 x 74 x 56	2x(110x110x154)
	SWG84810	48kW					2x(110x110x154)
LOAD / CHARGE	SWG86010	60kW					2x(110x110x154)
IIIII DOD CHANG	SWG88010	80kW					2x(110x145x154)


HREE PHASE PROPORTIONAL CONTROLLERS





Three phase universal digital proportional controllers

- → Allows control of any type of loads (except capacitive) 3 or 4 wires (neutral), delta or star wiring
 - Resistive loads for temperature control (infrared lamps, kilns, resistors, ...)
 - Resistive loads for light control (bulbs, halogen, UV, scenes, ...)
 - Loads including a transformer, a coil or a rectifier for voltage control (power supplies, high voltage generators, ...)
 - Motors for voltage speed control (Possibility to reduce the speed depending on the type of motor and machine, motor fans, ...)
- → Six thyristor proportional phase angle controller (Three phase positive and negative cycle control): Balanced currents, less harmonics....
- → Softstart and softstop ramps (Increases the lifetime expectancy of the
- \rightarrow Diagnostic functions.
- → Compact housing

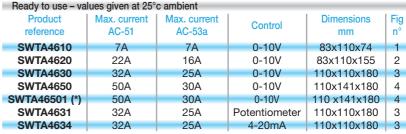

* Fan 24 VDC

Products to be mounted on a heatsink											
Product	Max. current	Max. current Max. current		Dimensions	Fig						
reference	AC-51	AC-53a	Control	mm	n°						
SVTA4650	50A	16A	0-10V	_	1						
SVTA4690	125A (**)	30A	0-10V								
SVTA4651	50A	16A	Potentiometer	100x76x58.5	5						
SVTA4691	125A (**)	30A	Potentiometer	1000/10000,0	ľ						
SVTA4684	95A (**)	25A	4-20mA								
SVTA4694	125A (**)	30A	4-20mA	_							

* * Max. wire size = 10mm²: double wires or use special adaptors for current > 50A. Please refer to the mounting instructions.



No external power supply required

SGTA range



- Price-effective range
- Adapted to three phase star connected resistive loads (or delta connected loads on request)
- Small housing Wide mains frequency variation (40-65Hz)
- Built-in overvoltage protection
- High I2t power elements
- Fully optoisolated full cycle three phase phase angle controller (balanced currents, less harmonics, ...)
- The minimum voltage applied on the load is the lowest in the market (3% RMS on the nominal voltage against 40% RMS offered by our competitors!)
- Lots of possible options on request
- Manufactured in compliance with major international standards EMC, LVD, UL, VDE.

Typical applications:

- -Resistive loads for temperature control (infrared lamps, kilns, resistors, ...)
- -Resistive loads for light control (bulbs, halogen, scenes, ...)

Product reference	Max. current AC-51	Switching voltage	Control	Dimensions mm
SGTA4650	50A	300-510VAC	0-10V	
SGTA4651	50A	300-510VAC	Potentiometer	75,15x100x46
SGTA4654	50A	300-510VAC	4-20mA	

These products should be mounted on heatsink in order to reach nominal current. Other rating on request - consult us.

8-32V external power

supply required

SCQ range

Four-Leg Solid State Relays

4 single phase SSRs in a SC case - save place in control panels (width 45 mm).

Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	l²t	Dimensions mm	Led	
SCQ842000	4x25A	12-280VAC	600V	3-32VDC	I<10mA	288A2s	44,5x58,2x274	no	ı
SCQ842060	4x25A	12-280VAC	600V	3-32VDC	I<10mA	288A2s		ves	L

These products should be mounted on heatsink in order to reach nominal current.



DC Solid State Relays

160

These relays are designed to switch DC loads e.g solenoid valves, brakes, indicators, motors (possibly on AC mains under specific conditions). All possible technologies can be available:

MOSFET

for applications where overcurrent capability and low dissipated power are needed.

BIPOLAR


for applications where low control current is needed.

IGBT


for high voltage applications (> 600 VDC).

For each application the corresponding technology - up to 1200VDC, 150A.

In development: DC SSR for high current (400A) - for others, please contact us.

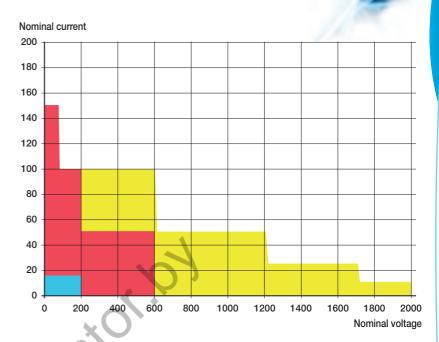

MOSFET Technology

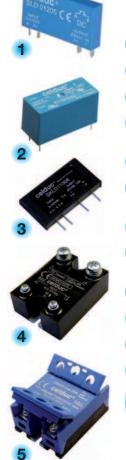

Product reference Switching current voltage Voltage				+					
SLD01210	Product	Switching	Switching	Peak	Control	Control ourset	Intograted protection	Dimensions	Fig
SLD03210 2,5A 0-60VDC 18-32VDC 5,5-10,2mA Transil 28 x 5 x 15 1 SLD01205 4A 0-32VDC 60V 3-10VDC 5,5-27mA Transil 28 x 5 x 15 1 SLD03205 4A 0-32VDC 60V 12-30VDC 5,5-10,2mA Transil 29x12,7x15,7 2 STD03505 2,5A 0-30VDC 60V 12-30VDC 4,1-12mA Transil 29x12,7x15,7 2 SKLD10510 8A 7-60VDC 100V 3-10VDC 6-30mA Transil 43,6x6,3x24,5 3 SKLD30510 8A 7-60VDC 100V 7-30VDC 6-30mA Transil 43,6x6,3x24,5 3 SCM030200 30A 0-200VDC 60V 7-30VDC 25-42mA - 44,5x58,2x27 4 SCM0100200 20A 5-40VDC 60V 100V 25-42mA - 44,5x58,2x27 4 SOM020100 20A 5-60VDC 100V 100V 100V	reference	current	voltage	voltage	voltage	Control current	integrated protection	mm	n°
SLD01205 4A 0-32VDC 60V 3-10VDC 5,5-27mA Transil 28 x 5 x 15 1 SLD02205 4A 0-32VDC 60V 3-10VDC 5,5-18mA 7-20VDC 5,5-18mA 5,5-10,2mA Transil 28 x 5 x 15 1 STD03505 2,5A 0-30VDC 60V 12-30VDC 4,1-12mA Transil 29x12,7x15,7 29x12,7x25,4 2 SKLD10510 8A 7-60VDC 100V 3-10VDC 6-30mA Transil 43,6x6,3x24,5 3 SKLD11006 12A 7-36VDC 60V 3-10VDC 6-30mA Transil 43,6x6,3x24,5 3 SCM030200 30A 0-200VDC 200V 7-30VDC 25-42mA - 44,5x58,2x27 4 SCM0150100 150A 0-100VDC 60V 3-60VDC 100V 25-42mA - 44,5x58,2x27 4	SLD01210	2,5A	0-60VDC		3-10VDC	5,5-27mA	_	7 -	1
SLD02205 SLD03205 4A 4A 0-32VDC 0-32VDC 7-20VDC 18-32VDC 5,5-18mA 5,5-10,2mA 29x12,7x15,7 29x12,7x25,7 2 29x12,7x15,7 29x12,7x25,4 2 2 2 2 STD03505 SPD03505 2,5A 5A 0-30VDC 0-30VDC 12-30VDC 12-30VDC 12-30VDC 4,1-12mA 4,1-12mA Transil 29x12,7x15,7 29x12,7x25,4 2 2 29x12,7x25,4 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	SLD03210	2,5A	0-60VDC		18-32VDC	5,5-10,2mA			
SLD03205 4A 0-32VDC 18-32VDC 5,5-10,2mA	SLD01205	4A	0-32VDC	60V	3-10VDC	5,5-27mA	Transil	28 x 5 x 15	1
STD03505 SPD03505 2,5A 5A 0-30VDC 60V 12-30VDC 12-30VDC 4,1-12mA 4,1-12mA Transil 29x12,7x15,7 29x12,7x25,4 2 SKLD10510 SKLD30510 8A 8A 7-60VDC 7-60VDC 100V 100V 7-30VDC 3-10VDC 7-30VDC 6-30mA Transil 43,6x6,3x24,5 3 SKLD11006 SKLD31006 12A 12A 7-36VDC 60V 60V 60V 7-30VDC 3-10VDC 60V 7-30VDC 6-30mA Transil 43,6x6,3x24,5 3 SCM030200 SCM040600 SCM0100200 SCM0150100 30A 40A 150A 150A 0-200VDC 200V 0-100VDC 200V 100V 100V 4,5-32VDC 25-42mA - 44,5x58,2x27 4 SOM02060 SOM020100 20A 20A 5-40VDC 5-60VDC 60V 100V 100V - - - -	SLD02205	4A	0-32VDC		7-20VDC	5,5-18mA			
SPD03505 5A 0-30VDC 60V 12-30VDC 4,1-12mA Iransil	SLD03205	4A	0-32VDC		18-32VDC	5,5-10,2mA_	_	_	_
SPD03505 5A 0-30VDC 60V 12-30VDC 4,1-12mA Iransil							_		_
SPD03505 5A 0-30VDC 12-30VDC 4,1-12mA 29x12,7x25,4 SKLD10510 8A 7-60VDC 100V 3-10VDC 6-30mA Transil 43,6x6,3x24,5 3 SKLD11006 12A 7-36VDC 60V 3-10VDC 6-30mA Transil 43,6x6,3x24,5 3 SCM030200 30A 0-200VDC 200V 7-30VDC 4,5-32VDC 25-42mA - 44,5x58,2x27 4 SCM0100200 100A 0-200VDC 200V 4,5-32VDC 25-42mA - 44,5x58,2x27 4 SOM02060 20A 5-40VDC 60V 100V 100V 100V 100V 100V		, -		60V		,	Transil		2
SKLD30510 8A 7-60VDC 100V 7-30VDC 6-30mA Transil 43,6x6,3x24,5 3 SKLD11006 12A 7-36VDC 60V 3-10VDC 6-30mA Transil 43,6x6,3x24,5 3 SCM030200 30A 0-200VDC 200V 600V 7-30VDC 25-42mA - 44,5x58,2x27 4 SCM0100200 100A 0-200VDC 200V 4,5-32VDC 25-42mA - 44,5x58,2x27 4 SOM02060 20A 5-40VDC 60V 100V	SPD03505	5A	0-30VDC		12-30VDC	4,1-12mA	_	_ 29x12,7x25,4 _	_
SKLD30510 8A 7-60VDC 100V 7-30VDC 6-30mA Transil 43,6x6,3x24,5 3 SKLD11006 12A 7-36VDC 60V 3-10VDC 6-30mA Transil 43,6x6,3x24,5 3 SCM030200 30A 0-200VDC 200V 600V 7-30VDC 25-42mA - 44,5x58,2x27 4 SCM0100200 100A 0-200VDC 200V 4,5-32VDC 25-42mA - 44,5x58,2x27 4 SOM02060 20A 5-40VDC 60V 100V 100V 100V 100V 100V 100V						. –			-
SKLD11006 SKLD31006 12A 12A 7-36VDC 7-36VDC 60V 60V 3-10VDC 7-30VDC 6-30MA Iransii 43,6x6,3x24,5 3 SCM030200 SCM040600 SCM0100200 SCM0150100 30A 40A 10A 10A 150A 0-200VDC 0-200VDC 200V 0-100VDC 200V 100V 100V 4,5-32VDC 25-42mA - 44,5x58,2x27 4 SOM02060 SOM020100 20A 20A 5-40VDC 5-60VDC 60V 100V - <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>1</th>									1
SKLD31006 12A 7-36VDC 60V 7-30VDC						6-30mA	Transil	43,6x6,3x24,5	3
SCM030200 SCM040600 SCM0100200 SCM0150100 30A 40A 100A 150A 0-200VDC 600V 200V 0-200VDC 100V 4,5-32VDC 25-42mA 25-42mA - 44,5x58,2x27 4 SCM0150100 20A SCM02060 SOM020100 20A 20A 20A 20A 20A 20A 20A 20A 20A 20A									1
SCM040600 40A 0-600VDC 600V 4,5-32VDC 25-42mA - 44,5x58,2x27 4 SCM0100200 100A 0-200VDC 200V 100V 25-42mA - 44,5x58,2x27 4 SOM02060 20A 5-40VDC 60V 60V 0-100V 0-	SKLD31006	12A	7-36VDC	60V	7-30VDC	_	_		J
SCM040600 40A 0-600VDC 600V 4,5-32VDC 25-42mA - 44,5x58,2x27 4 SCM0100200 100A 0-200VDC 200V 100V 25-42mA - 44,5x58,2x27 4 SOM02060 20A 5-40VDC 60V 60V 0-100V 0-	COM000000	004	0.000\/D0	0001/	. –	_	-		1
SCM0100200 SCM0150100 100A 150A 0-200VDC 0-100VDC 200V 100V 4,5-32VDC 25-42MA - 44,5x58,2x27 4 SOM02060 SOM020100 20A 20A 5-40VDC 5-60VDC 60V 100V -<									
SCM0150100 150A 0-100VDC 100V					4,5-32VDC	25-42mA	_	44,5x58,2x27	4
SOM02060 20A 5-40VDC 60V SOM020100 20A 5-60VDC 100V									
SOM020100 20A 5-60VDC 100V	3CIVIO 130 100	130A	0-100VDC	1007_	_	_	' -	_	_
SOM020100 20A 5-60VDC 100V	SOM02060	204	5-40VDC	601/	_	1 -	_	7 -	1
SOM04060 40A 5-40VDC 50V 3,5-32VDC 30-35mA Transil 45x58,5x30 5	SOM04060	40A	5-40VDC	50V	3,5-32VDC	30-35mA	Transil	45x58,5x30	5
SOM040100 40A 5-60VDC 100V	SOM040100	40A	5-60VDC	100V					
SOM040200 40A 5-110VDC 200V	SOM040200	40A	5-110VDC	200V					
SOM06075 60A 5-40VDC 75V	SOM06075	60A	5-40VDC	75V		_	_	_	
ESO01000 0-80A 0-130VDC 200V Protection against line Diode + 45x58,5x30 5	FS001000	0-804	0-130VDC	2001/		•		45x58 5x30	5
inductance (C1, D2): option for SOM range capacitor	20001000	0 00A	0 100000	200 V	inductance (C1, D2):	option for SOM range	capacitor	45756,5756	J

DC RELAYS



BIPOLAR Technology







reference	current	Voltage	mm	rig n°					
SKD10306	3A	2-60VDC	60V	3-30VDC	1-30mA	Diode	43,2x10,2x25,4	7	
					_			,	
XKD10120	1A	2-220VDC	220V	5-30VDC	1-30mA				
XKD10306	3A	2-60VDC	60V	5-30VDC	1-30mA				
XKD11306D	3A	2-60VDC	60V	3-30VDC	5-30mA	Diode	12,2x76,4x53	8	
XKD70306	3A	2-60VDC	60V	10-30VAC/DC	2-14mA				
XKD90306	3A	2-60VDC	60V	90-240VAC/DC	2-5,7mA		<u> </u>		
						. <u> </u>	_	.	
SCC10506	5A	2-60VDC		3-16VDC					
SCC20506	5A	2-60VDC	60V	10-32VDC		Diode			
SCC11506	15A	2-60VDC		3-16VDC	1-30mA	Diode	44,5x58,2x27	9	
SCC21506	15A	2-60VDC		10-32VDC	_				
SCC21520	15A	2-200VDC	300V	10-32VDC		Transil]	
								.	
SGC20420	20A	2-200VDC	300V	3-30VDC	1-30mA	Transil	67 x 38 x 37,5	10	





4			- 4-					
Product reference	Switching current	Switching voltage	Peak voltage	Control voltage	Control current	Integrated protection	Dimensions mm	
SCI0251700	25A	0-1700VDC	1700V	4,5-32VDC	25-42mA	Reverse diode		
SCI0501200	50A	0-1200VDC	1200V	4,5-32VDC	25-42mA	Reverse diode	44,5x58,2x27	
SCI0100600	100A	0-600VDC	600V	4,5-32VDC	25-42mA	Reverse diode		

Products without integrated over-voltage protection (transil or VDR) or having only a Freewheel diode, must be fitted with an external overvoltage protection. The maximum operating voltage is then often reduced to the half of the specified maximum operating voltage.

Applications

DC power supplies (converters like choppers, inverters, ...)

Signal switching (testing equipment, ...)

Electro-magnets (induction motor braking, ...)

Heaters (air conditioning in trains, tramways, ...)

Batteries (ships, solar systems, ...)

DC Motors (travelling cranes, cranes, vehicles, ...)















On request: « ready to use » products i.e. products including integrated voltage protection, proportional controllers, DC motor reversers ...

Please consult us!

SPECIAL RELAYS




Special Relays



Shunting relays: SAS Relays

Airport beacon relay.

If a lamp fails, the relais short circuit this lamp. Different configurations available.



Dry contact relays: SG241010 relay

230VAC mains.

12A output voltage.

Control by PLA type insulated contact Typical applications: heating breaking, etc



Flashing relays : ST relays

ST645000: flashing 1/2Hz 230VAC 15A. ST647000: flashing 1/2Hz 230VAC 25A.

Special customer products



In addition to the very large range of solid state relays, celduc® design specific products according to the customers specifications or adapt products to the customers needs if prices and volumes can justify such developments. Please do not hesitate to consult us.



4 SKL SSRs on PCB



This device using SSRs controls AC motors in hazardous area.

Control by pushbutton with embedded magnet actuating Reed switches.



PCB for single-phase motor softstart



Special development composed of SU SSRs and **ESUC modules** to control 9

heating elements with partial load break detection. This system includes all protections.



Solid state contactor for 3 phase motor.

Dry contact control Spring terminals.



Motor reverser with 2 electronic cards included 5 SSRs.

Applications notes

Application notes on request: a certain number of application notes are available to celduc® customers:

- → Principle of solid state relays.
- → Life expectancy of solid state relays: TMS² technology.
- → Short circuit protection of solid state relays : fuses and circuit breakers.
- → Solid state relays on resistive loads (heating application).
- → Three phase motor.
- → Transformer control.
- → Incandescent lamp control.
- → Discharge lamp control / Application of three phase diagnostic. → Our products in equipment for the train industry.
- → Our products in equipment for the food industry.
- → Our products in equipment for the packing industry.
- Our products in equipment for the textile industry.

- → Solid state relays in emergency power supplies (UPS).
- → Solid state relays on capacitive loads : power factor corrector (PFC) application.
- Application of SKL et SKH relays.
- → Softstart and reversing relays.
- → Softstart relays in transformer control.
- → Softstart relays in incandescent and infrared lamp control.
- → Our products in equipment for the electronic industry.
- → Our products in equipment for the renewable energy.

HEATSINKS & ACCESSORIES



Heatsinks









Thermal
characteristics
0,3K/W
0,55K/W
0,75K/W
0,9K/W
1,1K/W
1,2K/W
2,1K/W
2,2K/W
3K/W

Specifications	Dimensions
•	mm
ventiled for DIN rail or screw	110x120x145
DIN rail adaptor as option	110x100x200
DIN rail adaptor as option	110x100x100
for DIN rail or screw	110x100x90
for DIN rail or screw	89,8x81x98,02
for DIN rail or screw	100x40x100
DIN rail adaptor as option	96x41x55
for DIN rail or screw	45x73x80
for DIN rail or screw	22,5x73x80

Relay type	Fig n°
SO, SC, SG, SGT, SVT	1
SO, SC, SG, SGT, SVT	2
SO, SC, SG, SGT, SVT	3
SO, SC, SG, SGT, SVT	4
SO, SC	5
SO, SC, SG, SGT, SVT	6
SO, SC	7
SO, SC, SA, SU	8
SA. SU	9

The Rth values are given for a temperature of 50°C in calm air. Other dimensions available on request.

Accessories





PROTECTION COVERS / FLAPS

1K199000 protection cover for SGT/SG9 1K460000 protection cover for SC range (except SCB and 125A rating SC) protection cover for all SC/SCB range 1K470000 1K522000 protection cover for SA-SAL 1K523000

protection flaps for SU-SUL



1MZ09000 marking labels to be mounted on protection flaps or covers for SA SU



DIN RAIL ADAPTORS

1LD00400 DIN rail adaptator for WF21/07/05 1LD00500 DIN rail adaptator for SG/SVT/SV969300 1LD12020 DIN rail adaptator for SC/SV8/SO montage vertical

MOUNTING KITS

1LK00100 mounting SC-SO-SF on heatsink or SC-SO on 1LD12020 1LK00200 mounting SG-SVT-SV9 on heatsink or 1LD00500 1LK00300 mounting heatsinks on 1LD00400 or SC-SO on 1LD00000 special kit for high current (okpac range)

MOUNTING + HEATSINK + DIN ADAPTOR OPTION

1LWD1202 mounting of SC/SV/SO sur 1LD12020 + 1LD12020

THERMAL SEALS RELAY/HEATSINK

thermal grease for 30 relays SG/SVT ou 60 relays SC/SO 5TH21000 thermal precut film for SC/SO 5TH23000 thermal pads

MOUNTING OPTION (screw kit included) **ONLY IF QUANTITY > 10**

1LW00000 mounting of relays on heatsink **1LWD0000** mounting of heatsink on DIN rail adaptator



Magnetic Proximity Sensors

MAGNETIC PROXIMITY SENSORS

We are the experts!!!!

If you are looking for position, presence, level or speed detection, then we will be able to offer a solution from our range of magnetic sensors.

We can even design a specific product for your applications!

At celduc® relais, we are eager to offer the best products for your application, thanks to our 30-year experience in the key technologies that we use in our products:


- Reed switch, a dry contact in a sealed glass bulb providing insulation at the same time: a simple, reliable and low cost solution.
- Electronic cell, based on either magneto-resistance or Hall effect, necessary for higher performance, particularly in high frequency operation.


Contents

24 to 30
24-25
26-27
28-29
30
30
31 to 33
31
32
33
34
35


REMINDER: Reed switches and magnetic sensors using reed switches can switch AC or DC current. In our technical data-sheets the values given for current and voltage are the maximum values. It means that in DC applications it corresponds to the max. switching current and voltage. In AC applications these values are the peak values, to obtain the nominal value you should divide by 1,414.

SCOPE











Industry

Counting
Cylinder positions
Machine safety
Advertising panel
Actuator position
Liquide level
Speed control.

Home

Burglar alarm
Camera shutter control window
position (blinds)
Lifts
Alarms
Big and small household goods
Swimming-pools.

Aircraft, space and army

Fuel/oil level
Camera shutter control
Sensors and actuators for Airbus.

Specific applications

ATEX (explosive atmospheres)

CONTACT TYPE

- NO / A Form → Normaly Open
- NC / B Form → Normaly Closed
- BISTABLE NO / L Form
- CHANGE-OVER / C Form

Other lengths of cable or wire possible for signifiant quantities.



All our technical data-sheets are available in our website www.celduc-relais.com

REED MAGNETIC SENSORS







celduc® relais offers a large range of standard or specific level and flow sensors using Reed switches. Our sensors are available in plastic, brass or stainless steel housing, making it possible to use them with various chemical substances and/or operating temperatures.

With some sensors, it is possible to invert function by reversing the float or using the sensor upside down. Please see the data sheets for more details.

For specific applications (e.g. potentiometric scale, special level sensors) do not hesitate to contact us: products can be developed on request.

				5		Ŧ	<u>*</u>
						Ť	
Product reference		PTF01060	PTFA1015	PTFA1103 ⁽¹⁾	PTFA1104 ⁽¹⁾	PTFA1210	PTFA2115 ⁽¹⁾⁽²⁾
Mounti	ing	Vertically	Vertically High and low level	Vertically High level	Vertically Low level	Vertically High and low level	Vertically High and low level
Contact s (float do		1NO	1NO	1NC	1NO	1NO+NC	1NO
Connectio	n type	2 wires 600mm	2 wires 1,5m	2 wires 300mm	2 wires 300mm	Cable (3 wires) 300mm	2 wires 1,5m
Material Housing		Polyamide 6/6 resin with glass fiber content	Polyamide 6/6 resin with glass fiber content	Polypropylene	Polypropylene	Polyamide	Stainless steel
Float		Polypropylene	Polypropylene	+ 6		Polyurethane	
Liquid comp	oatibility	Water	Water	1	1	2	3
Float tra	avel	10mm	17mm	9mm	9mm	48,5mm	8mm
Max. swit powe		10VA	10VA	10VA	10VA	Top : 10VA Bottom : 3VA	50VA
Max. switching voltage		100Vdc	100Vdc	100Vdc	100Vdc	Top : 200Vdc Bottom : 100Vdc	300Vac/dc
Max. switching current		0,5A	0,5A	0,5A	0,5A	Top : 0,5A Bottom : 0,25A	0,5A
Density mini		0,8	0,75	0,7	0,7	0,6	0,75
Workir tempera		0 / 70°C	0 / 70°C	-10 / 80°C	-10 / 80°C	-10 / 85°C	0 / 100°C
Thread		M8 x 1,25	3/8" threading UNC 1,588mm (16 per inch)	1/8" GAS (28 per inch)	1/8" GAS (28 per inch)	3/8" threading UNC 1,588mm (16 per inch)	M10 x 1

⁽¹⁾ Possible to invert the functions by reversing the float

Liquids compatibility

- 1 -> Compatible with acid: acetic, citric, formic, lactic, nitric diluted, phosphoric, sulphuric diluted; soda; alcohols: ethanol, methanol, propanol; glycol; mineral oil; water.
 - → Not compatible with the following solvents : chloroforme, methylene chloride, trichloroethylene, toluene ; hard acids.
- $\mathbf{2} \rightarrow$ Compatible with fuels, engine oil, kerosene, lubricaring oil, mineral oil, vegetable oil
 - → Not compatible with almost all acids, methylene chloride
 - → Acceptable resistance to water
- 3 → Compatible with almost all the liquids except hard acids.



⁽²⁾ Available in ATEX version (see page 31).



EED MAGNETIC **SENSORS**

Working principle

A float fitted with one or more magnets moves with the liquid and actuates, due to its magnetic field, a hermetically sealed reed contact located in the body of the float.

Advantages

- -One moving part
- -The Reed contact is actuated by a magnetic field only: no contact so no wear
- -The Reed contact is completely isolated from the liquid so perfectly waterproof

The above advantages allow a safety use, repetitiveness, precision and minimum maintenance.

	√	Letter 1		_		
					-	
Product reference	PTFA0100	PTFA0115	PTFA3115	PTFA3315 ⁽²⁾	PTFA3415	PTFA3002
Mounting	Horizontally External mounting	Horizontally External mounting	Horizontally	Horizontally	Horizontally External mounting	Horizontally External mounting
Contact status	1NO	1NO	1NO	1NO	1NO	1NO
Connection type	2 wires 175mm + Molex connector	2 wires 1,5m	2 wires 1,5m	2 wires 1,5m	Cable 1,5m	Cable 20m R in serie
Material	Polyamide 30% glass fiber	Polyamide 30% glass fiber	Polyamide 30% glass fiber	Polypropylene	Polypropylene	Polypropylene
Liquid compatibility	2	2	2	1	1	1
Float travel	50°	50°	50°	50°	50°	50°
Max. switching power	10VA	10VA	50VA	50VA	50VA	50VA
Max. switching voltage	200Vdc	200Vdc	300Vac/dc	300Vac/dc	300Vac/dc	300Vac/dc
Max. switching current	0,5A	0,5A	0,5A	0,5A	0,5A	0,1A
Density mini	0,6	0,6	0,6	0,6	0,6	0,6
Working temperature	0 / 85°C	0 / 85°C	0 / 85°C	-10 / 100°C (wires/85°C)	-10 / 100°C (wires/85°C)	-10 / 100°C (wires/85°C)
Thread	Specific	Specific	Specific	M16 x 2	M16 x 2	M16 x 2
(2) Available in ATEX vers	sion (see page 31).					

⁽²⁾ Available in ATEX version (see page 31).

For Stainless steel version please consult us

Applications

Heating (air-conditioning, heaters, humidifiers)

→ To detect the water level in the tank.

Domestic equipment (electronic flush, solar systems)

→ To detect the water level.

Food industry (coffee machines, vending machines)

→ Check the level of water left in the tank.

Medical equipment (sterilising equipment for medical instruments)

→ Check level of water for steam or liquid detergent level.

Water treatment (water purifying, desalinating)

→ The sensors enable the reserve water level to be established.

Swimming pools (water treatment, water heating)

Water level and flow.

Automobile (radiator liquids level, windscreen washer, engine oil level, brake oil level)

Detection of liquids levels.

Various industries (photo lab equipment, scrubber machines, fuel dispensing systems...)



REED MAGNETIC SENSORS



Screw position sensors

General use screw sensors for industry and household use :

- -Rabbet sensors
- -Doors opening
- -Protection cover presence
- -House hold applicances

									- Raiduc
		P. P.	alduc 1120e S			PO	THE SECTION OF THE SE		
Product reference	PAA10060	PAA11202	PAB10020	PAC10010	PLA10100	PLA10160	PLA11208	PLA12430	PLA10290 PLA10292
Contact status	NO	NO	NC	Change-over	NO	NO	NO	NO	NO
Connection type	2 wires / FASTON	2 wires	2 wires + HE14 connector	3 wires + HE14 connector	2 wires	2 wires	cable	cable	2 wires
Cable length	680mm	275mm	160mm	70mm	10m	360mm	800mm	3m	220mm
Max. switching power	12VA	12VA	3VA	NC : 3VA NO : 8VA	12VA	12VA	12VA	12VA	12VA
Max. switching voltage		100\	/DC		100VDC	100VDC	250VDC	250VDC	200VDC
Max. switching current	0,4A 0,25A				0,5A	0,4A	0,4A	0,4A	0,5A
Activation distance	16mm with P6250000	15mm with P6250000	18mm with P6250000	12mm with U4200000	10mm with P6250000	19mm with P6250000	16mm with P6250000	12mm with P6250000	15mm with P4060200
Working temperature	-40 to +85°C	-	-40 to +100°C		-40 to +85°C	-40 to +100°C	-40 to +100°C	-40 to +100°C	-40 to +85°C
Dimensions (mm)		23x1	4x6	N		32x1	5x6,8		28,57x19x6,34
Fixing screws distance		14n	nm	1		17,	5mm		15,88mm

					O PAGE	1082						
Product reference	PLA13701	PLA13715	PLA13725	PLA13750	PLA13780	PLB10060	PLB16701	PLC10040	PLC13701	PLC13780		
Contact status	NO	NO	NO	NO	NO	N	С		Change-over			
Connection type	cable	cable	cable	cable	cable	cable	cable	cable	3 wires	cable		
Cable length	100mm	1,5m	2,5m	5m	8m	3m	100mm	1,5m	100mm	8m		
Max. switching power	12VA NC : 3VA NO : 8VA						VA					
Max. switching voltage		250VDC						100VDC				
Max. switching current				0,4A					0,25A			
Activation distance	10mm with P6250000	10mm with P6250000	10mm with P6250000	10mm with P6250000	10mm with P6250000	4 <d<12mm (magnet provided)</d<12mm 	4mm (magnet provided)	14mm with P6250000	10mm with P6250000	10mm with P6250000		
Working temperature		-40 to +100°C										
Dimensions (mm)					32	2x15x6,8						
Fixing screws distance					1	7,5mm						



REED MAGNETIC SENSORS











			D			FBA13780		
Product reference	PB158S00	PB195T00	PB285T00	PB367G00	PB390G00	PBA13725	PBA13740	PBA13780
Contact status	N	10	N	С	NO		NO	
Connection type	2 wires	cable	cable	cable				
Cable length	80mm	80mm	80mm	80mm	80mm	2,5m	4m	8m
Max. switching power	100VA	50VA	50VA	16VA	16VA	12VA	12VA	12VA
Max. switching voltage	250VAC	250VAC	250VAC	250VAC	250VAC	250VAC	250VAC	250VAC
Max. switching current	3A	1A	1A	0,5A	0,5A	0,4A	0,4A	0,4A
Activation distance	4mm with P4160000	7mm with P4160000	6mm with P4160000	6mm with P4159000	13mm with P4160000	13mm with P4160000	13mm with P4160000	13mm with P4160000
Working tempe- rature	-40 to +100°C		-40 to +100°C		-40 to +100°C	-40 to +100°C	-40 to +100°C	-40 to +100°C
Dimensions (mm)	86x8,5x12,5	86x8,5x12,5	86x8,5x12,5	51x8,5x11,5	51x8,5x11,5	51x8,5x11,5	51x8,5x11,5	51x8,5x11,5
Fixing screws distance		75mm		*		40mm		

Sensor with metal housing

Product reference	PLMA0220
Contact status	NO
Connection type	1 shielded cable
Cable length	2m
Max. switching power	100VA
Max. switching voltage	300VAC
Max. switching current	1A
Activation distance	25mm (provided magnet)
Working temperature	-40 to +85°C
Dimensions (mm)	88x38x12
Fixing screws distance	69mm

Screw sensors with safety loop (Alarms)

	Celduc :	Stans
Product reference	PBA10010	PMG12482
Contact status	NO	NO
Connection type	cable + loop	cable + loop
Cable length	8m	8m
Max. switching power	12VA	12VA
Max. switching voltage	250VDC	250VDC
Max. switching current	0,4A	0,5A
Activation distance	16mm with P4160000	14mm with P6250000
Working temperature	-40 to +100°C	-25 to +85°C
Dimensions (mm)	51x8,5x11,5	33x15x6,8
Fixing screws distance	40mm	17,5mm

High power switching sensors These sensors allow controlling loads up to 3A.

	Partie rock	Celduc esagono
Product reference	PSA60010	PSA60015
Contact status	NO	NO
Max. switching power	500VA	500VA
Max. switching voltage	24-440VAC	24-440VAC
Max. switching current	3A	3A
Cable length	2 wires 350mm	Cable 1,5m
Activation distance	12mm with P6250000	13mm with P6250000
Working temperature	-40 to +85°C	-40 to +85°C
Dimensions (mm)	51x ⁻	16x7
Fixing screws distance	16r	nm

Safety sensors manufactured in compliance with the European Directive 2006/42/CE: PLc according to ISO13849-1

SIL1 according to IEC62061

Category 1 High MTTFd

For other safety applications see page 33.

REED MAGNETIC SENSORS



General use tubular sensors for industry and household use:

- -Rabbet sensors
- -Doors opening
- -Protection cover presence
- -Household appliances







Tubular position sensors



			_				
				-	-		
Product reference	PTA10490	PMG90010	PMG92291	PTPA0030	PTPA0100	PTPA0230	PTPB0010
Contact status	NO	1NO	1NO	1NO	1NO	1NO	1NC
Max. switching power	10VA	10VA	12VA	12VA	12VA	12VA	12VA
Max. switching voltage	100VDC						
Max. switching current	0,4A	0,4A	0,4A	0,5A	0,5A	0,5A	0,5A
Connection type	2 wires 800mm	Cable 10m	2 wires 200mm	2 wires 3m	Connectors	2 wires 3m	2 wires 80mm + FASTON
Activation distance	16mm with P6250000	12mm with PMG92280	8mm with P6250000	12mm (magnet provided)	12mm (magnet provided)	30mm (magnet provided)	10mm (magnet provided)
Working temperature	-40 to +120°C	-40 to +85°C	-40 to +100°C	-40 to +85°C	-40 to +85°C	-40 to +85°C	-40 to +85°C
Dimensions (mm)	Ø6x41	Ø12x32	Ø18,5x32,5	Ø11x28	Ø11x28	Ø23x27	Ø23x28



REED MAGNETIC SENSORS



Typical applications:

- -Speed sensors,
- -Presence, position, clearance sensors.

PTI range – M8 plastic and stainless-steel housing

Product reference	PTI40003	PTI40003	PTI50003	PTI50020	PTI60003	PTI60020	PTI70003
Contact status	1NO / A form	1NO / A form	1NC / B form	1NC / B form	1NO / A form	1NO / A form	1NC / B form
Max. switching power	12VA	12VA	5W	5W	12VA	12VA	5W
Max. switching voltage	200VDC	200VDC	175VDC	175VDC	200VDC	200VDC	175VDC
Max. switching current	0,5A	0,5A	0,25A	0,25A	0,5A	0,5A	0,25A
Connection type	Cable 30cm	Cable 2m	Cable 30cm	Cable 2m	Cable 30cm	Cable 2m	Cable 30cm
Activation distance	12mm with magnet PT505000	12mm with magnet PT505000	7mm with magnet PT505000	7mm with magnet PT505000	12mm with magnet PT505100	12mm with magnet PT505100	7mm with magnet PT505100
Working temperature	-40 to +85°C	-40 to +85°C	-40 to +85°C	-40 to +85°C	-40 to +85°C	-40 to +85°C	-40 to +85°C
Dimensions (mm)	M8x1 - Lg 31 Plastic	M8x1 - Lg 31 Plastic	M8x1 - Lg 31 Plastic	M8x1 - Lg 31 Plastic	M8x1 - Lg 40 Stainless Steel	M8x1 - Lg 40 Stainless Steel	M8x1 - Lg 40 Stainless Steel

PTA range – M10 housing

	1	Man Printer	
Product reference	PTA80020	PTA90050	PTA90160
Contact status	1NO / A form	1NO	1NO
Max. switching power	12VA	12VA	5W
Max. switching voltage	200VDC	100VDC	100VDC
Max. switching current	0,5A	0,4A	0,4A
Connection type	Cable 2m	Cable 5m	Cable 1,5m
Activation distance	25mm with magnet PT810000	10mm with magnet P6250000	12mm with magnet P6250000
Working temperature	-25 to +70°C	-40 to +125°C	-40 to +125°C
Dimensions (mm)	M10x1 - Lg 44,5 Stainless Steel	M10x1 - Lg 40 Raw brass	M10x1 - Lg 40 Raw brass



REED MAGNETIC / HALL EFFECT **SENSORS**



Sensors for layout on PCB

Reed switch proximity sensors in plastic housing, for PCB mounting with no risk of dammage.





	Celd PHA01	ug /	4			
Product reference	PHA01200	PHA11200	PHC10010	PHC13700		
Contact status	NO Change-over					
Max. switching power	12VA NC : 3VA / NO : 8V			NO : 8VA		
Max. switching voltage		100\	VDC			
Max. switching current	0,4A			0,4A		
Activation distance with U6250000	18mm	17mm	17mm	11mm		
Working temperature	-40 to +100°C					
Dimensions (mm)		23x4,	2x3,6			

Hall effect sensors

celduc® relais offers two ranges of electronical sensors:

- Hall effect sensors
- Gear tooth sensors.









	Catalog Co	III.S MALLON		Topic Control of the						
Product reference	PLE13220	PLE14320	PTE11320	PTE11321	PTE21320	PTE21321	PTE31320	PTE31321	PTE41320	PTE41321
Contact status	Hall effect NPN	Hall effect NPN	Hall effect PNP	Hall effect NPN	Gear tooth PNP	Gear tooth NPN	Hall effect PNP	Hall effect NPN	Gear tooth PNP	Gear tooth NPN
Longueur de câble		cable 2m								
Distance max. d'utilisation	top 8mm	side 8mm	19mm	19mm	1,5mm	1,5mm	17mm	17mm	1,5mm	1,5mm
Tension max. commutable	5-24VAC		6-48VAC							
Courant max. commutable	25mA					0,4A				
Température de fonctionnement		-25°C to +70°C								
Dimensions (mm)		housing 5x6,8		Plastic hous	sing M12x33		St	ainless stell h	ousing M12x	33
Aimant associé	P6250000	P6250000	PT810000	PT810000			PT810000	PT810000		

Applications


- → Industry
- → Lift
- Speed sensors
- Household electronical appliances
- Tractors ...



Direct detection



Detection through non-magnetic material



Detection of ferro-magnetic (counting,...)



Gear tooth sensor



SENSORS FOR SPECIFIC APPLICATIONS

ATEX sensors

celduc® relais is notified as manufacturer of ATEX products : INERIS 04ATEXQ406 and offers a wide range of ATEX sensors.

Groupe II: Open-air industry (other than mines) with possible inflammable dust.

CE0080 (Ex)

II 2GD Ex mb II T6

Ex tD A21 IP67 T85°C

II 1GD Ex ia IIB T6

Ex iaD 20 T85°C

Types of devices:

1 for zone 0 (continuous risk)

2 for zone 1 (intermittent risk)

Gas: G or Dust: D

Protection "m" for zone 1 and "i" for zone 0

Temperature class: T6 (85°C) T4 (135°C) or T3 (200°C).



Coded magnet P3000100 to be ordered separately

			Common Participation	- B		_
			- 1 max mar (V)	00100 September Collective (reserve		
Product reference	PFA2125Ex	PFA3125Ex	PSS5905Ex	PSS7905Ex	PTA6125Ex	PTA9125Ex
Contact status	1NO	1NO	1NO + 1NC	2NO	1NO	1NO
Temperature group	Т6	Т6	T4	T4	T4/T6 or T3/T6*	T4/T6 or T3/T6*
Max. switching power	10W 12VA	10W 12VA	3VA	3VA	10W 12VA	10W 12VA
Max. switching voltage	60VDC					
Max. switching current	0,4A	0,4A	0,1A	0,1A	0,4A	0,4A
Cable length	cable 5m	cable 5m	cable 5m	cable 5m	cable 5m	cable 5m
Working temperature	-40 to	+80°C	-25 to	+85°C	-40 to +200°C	-20 to +200°C
Housing material	Stainless steel	Polypropylene	Pla	stic	Bra	ass
Dimensions (mm)	Ø28x60	Ø28x90	51:	k16	Ø6x41	M10

SENSORS FOR SPECIFIC APPLICATIONS



Sensors for lifts

(and other industrial applications)

Sensors for: - Detection of the lift position

- Doors opening control

celduc® relais offers a wide range of magnetic sensors for elevators with reed switches or "Electronic" magnetic sensors using an Hall effect cell or magneto resistance.

The magnetic field created by the permanent magnet, activates the sensitive part (the reed switch or the Hall effect cell or the magneto resistance). It is important to combine the magnet and sensor with consideration to the correct operating conditions (switching distance, presence of ferro-magnetic parts or non ferro-magnetic parts...).

celduc® relais is at your disposal to help you define the right products.

Advantages: - insensitive to the ambient working conditions (heat or cold air, humidity, dust...)

- high reliability

- large detection distance

- good reliability to shocks and vibrations

- IP67

			merital (2005) Questions		Transit To
Product reference	PMG12802	PMG12921	PMG12930	PMG13051	PMG13110
Contact status	NO bistable	NO	NO bistable	NC	NO
Max. switching power	60VA	100VA	60VA	30VA	30VA
Max. switching voltage	230VDC	230VDC	230VDC	230VDC	230VDC
Max. switching current	0,3A	ЗА	1A	0,5A	1A
Cable length	2m	₹m	7,3m	6,5m	7m
Activation distance	7 <d<25mm with<br="">UF252060</d<25mm>	17 <d<27mm td="" up302010<="" with=""><td>7<d<40mm td="" up302010<="" with=""><td>17<d<27mm td="" up302010<="" with=""><td>9,5mm with UF221105</td></d<27mm></td></d<40mm></td></d<27mm>	7 <d<40mm td="" up302010<="" with=""><td>17<d<27mm td="" up302010<="" with=""><td>9,5mm with UF221105</td></d<27mm></td></d<40mm>	17 <d<27mm td="" up302010<="" with=""><td>9,5mm with UF221105</td></d<27mm>	9,5mm with UF221105
Working temperature	N.	\	-25 to +85°C		
Dimensions (mm)	65x15x16	M14x75	80x30x30	M14x75	80x20x15

PC range - M12 housing

Typical applications

- Lifts: sensors with 2 or 3 normally open contacts are used to detect the position of the cabin as well as automatic level reset according to the weight.

- Position / clearance sensors.

Product reference	PCA22330	PCA36720	PCC12320	PCLA3020	PCLA3030	PC2A2330	PC3A2330
Contact status	1xNO / A form	1xNO / A form	Change-over / C form	Bistable / L form	Bistable / L form	2xNO / A form	3xNO / A form
Max. switching power	70VA	100VA	3VA	100VA	100VA	70VA	70VA
Max. switching voltage	300VAC	250VAC	100VAC	250VAC	250VAC	300VAC	300VAC
Max. switching current	0,5A	3A	0,25A	3A	3A	0,5A	0,5A
Cable length	Cable 3m	Cable 2m	Cable 2m	Cable 2m	Cable 3m	Cable 3m	Cable 3m
Activation distance	20mm with UR144061	20mm with UR144061	25mm with UR144061	30mm with UP082006	30mm with UP082006	20mm with UR144061	20mm with UR144061
Working temperature	-25 to +75°C	-25 to +75°C	-25 to +75°C	-25 to +75°C	-25 to +75°C	-40 to +75°C	-40 to +75°C
Dimensions (mm)	M12x1 L 80 Plastic housing						



SENSORS FOR SPECIFIC APPLICATIONS











Safety sensors

The PXS or PSS type products are designed to control the opening of protective devices, machine casings and access doors.

These products, in their basic design and construction, are conform to the applicable European Directive for machinery safety 2006/42/CEE.

Correctly installed with their associated coded magnets and connected to adapted safety modules, they can reach the following safety level: PLd and PLe according to EN 13849-1

SIL3 according to EN 62061

		Celduc		4		Ce	Mary Town		PU PU PROVAC 2A	Celduc PSA60010	
Product reference	PXS79150	PXS59150	PXS10350	PXS70150	PSS79050	PSS79150	PSS59050	PSS59150	PSA60010	PSA60020	
Contact status	20	O+C	20 + 1C	20 + 1C	20	20	O+C	O+C	10 solid state	10 solid state	
Current limiting resistor	10Ω	10Ω	-	10Ω .	10Ω	10Ω	10Ω	10Ω	-	-	
Max. switching power	3VA	3VA	3VA	3VA	3VA	3VA	3VA	3VA	500VA	500VA	
Max. switching voltage	100VDC	100VDC	100VDC	100VDC	100VDC	100VDC	100VDC	100VDC	24- 440VAC	6-440VAC	
Max. switching current	100mA	100mA	100mA	100mA	100mA	100mA	100mA	100mA	ЗА	ЗА	
Cable length	Cable 5m	Cable 5m	Cable 5m	Cable 5m	Cable 5m	Cable 5m	Cable 5m	Cable 5m	2 wires 350mm	2 wires 3m	
Activation distance		8n	nm			5n	nm		121	mm	
Associated coded magnet		P200	0100			P300	0100		P6250000		
LED option	yes	yes	no	yes	no	yes	no	yes	no	no	
Working temperature		-25 to +85°C -40 to +85°C				+85°C					

Associated coded magnets







P2000100

P3000100

P6250000







Terminals version on request M8 or M12 depends on the model : see data sheet

CONTROL MAGNETS



Control magnets

Range of standard permanent magnets used as actuators for our magnetic sensors.

Our range of magnetic sensors with reed switches or "Electronic" magnetic sensors using a Hall effect cell should be actuated with the correct magnet.

celduc ® relais offers 3 families of magnets to be chosen according to the application (working temperature, geometry, resistance to corrosion).

ı	Material	Max. operating temperature	Derating according to temperature (recoverable)	Resistance to corrosion	
	Alnico	500°C	very low (-0,025% per °C)	Good resistance	generally supplied in bars which should have a length of minimum x4 the diameter
	Ferrite	Ferrite 250°C high (-0,20% per °C)		Very good resistance	generally supplied in parallelepiped block, disc or ring
	Samarium Cobalt (SmCo)	250°C	low (-0,04% per °C)	Very good resistance	generally supplied in blocks or granulates
Rare earth	Neodymium Iron Bore (NdFeBo)	160°C	low (-0.10% per °C)	Bad resistance (must have tin or nickel coating)	generally supplied in blocks or granulates

celduc® relais is at your disposal to help you define the correct magnet/sensor arrangement according to your needs / operating conditions.

Coated magnets

	•			
Product reference	For sensors	Bare magnet dimensions (mm)	Dimensions (mm)	Fig n°
PA320000	PA	Ø 3x20	23x15x6	1
FA320000	10	Ø 3A20	20/10/0	
P3150000	PA, PH, PL, PT	Ø 3x15	32x15x6,8	2
D. 4000000	DA BUI BU BT	~ 4 00	00 15 0 0	
P4200000	PA, PH, PL, PT	Ø 4x20	32x15x6,8	2
P6250000	PA, PH, PL, PT	Ø 6x25	32x15x6,8	2
	, , ,		N	
P4060200	PLA10290x	Ø 4.7 x 25.4	28,57x19x6,34	3
		N		
P4159000	PB or PLA	Ø 3x15	51,8x8,5x11,5	4
P4160000	PB or PLA	Ø 5x25	51,8x8,5x11,5	4
PMG92280	PMG92291	Ø 6x25	Ø 18,5x28	5
			,	
PT505000	PTI5 plastic	D5x5	M8x1 Lg 31	6
PT508000	· '	D5x8	ı	6
P1000000	PTI5 plastic	рэхв	M8x1 Lg 31,2	ן ס
PT505100	PTI6 stainless steel	D5x5	M8x1 Lq 40	7



Bare magnets

reference	Material	Dimensions (mm)	Fig n°
		C 0 45	
U315P003	Alnico5	Ø 3x15	1
U4200000	Alnico5	Ø 4x20	1
U6250000	Alnico5	Ø 6x25	1
U8300000	Alnico5	Ø 8x30	1
U8350000	Alnico5	Ø 8x35	1
UB104000	Alnico5	Ø 10x40	1
UF181538	Ferrite	18x15x3,8	2
UF127738	Ferrite	12x7,7x3,8	2
UF777760	Ferrite	7,7x7,7x6	2
UF207760	Ferrite	20,5x7,7x6	2
UF221105	Ferrite	Ø 22x11x5	3
UF341605	Ferrite	Ø 34x16x5	3
UP051508	Plastoferrite	50x15x8	4
UP301508	Plastoferrite	300x15x8	4
UR102540	NdFeBo	Ø 10x4x2,5	5
UR124540	NdFeBo	Ø 12x4x4,5	5
UR144361	NdFeBo	Ø 14x6x4,3	5
UR304000	NdFeBo	Ø 3x4	6
UR502000	NdFeBo	Ø 5x2	6
UR508000	NdFeBo	Ø 5x8	6
UR604010	NdFeBo	Ø 6x4	6
UR801000	NdFeBo	Ø 8x10	6





SPECIAL CUSTOMERS PRODUCTS

celduc® relais: the expert in specific sensors

There are numerous special customer applications in all sectors of activity. Please consult us to have our expertise.



In the automotive industry there are numerous applications for our magnetic proximity sensors: detection of liquid levels (radiator liquid, windscreen washer, engine oil level, brake oil level, ...) but also closing/locking detection of the fuel tank knob, detection of water in the oil filter, potentiometric scales to be used in lorry tank for level measurement, ...

Aircraft industry



Serving this industry is a proof of reliability. celduc ® relais has developed special sensors to detect the opening/closing of the doors as for example push-buttons used to detect open/closed doors in Airbus A380; sensors to detect tank refueling in Mirage Rafale and Saab Jas 39 fighters; level sensors for AIRBUS humidifiers, ...





In the medical field magnetic proximity sensors can be used in automatic analysis systems to control liquids level, presence of a tank, right-working of the arms, open /closed doors of sterilizers ...






Swimming pools / Water treatment


Flow sensors are used to supervise

How sensors are used to supervise the flow rate and the function of the dosing pump and to indicate a failure or loss of capacity of the dosing pump.

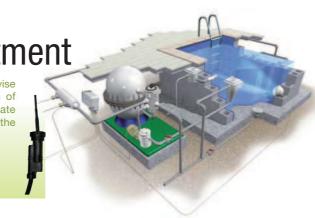

SWITCHES AND REED RELAYS





Reed Switches and Mercury Tilt Switches

Detecting a clearance, a position, a level in extrem environnements without mechanical link between the moving parts and without maintenance, such is the daily challenge of the Reed contact submitted to a magnetic field in industrial sectors as various as money, space, control, telecom...




Sensitiviy to be specified in the order

Product reference	Contact status	Max. switching voltage	Max. switching current	Max. switching power	Standard sensivity range	Glass length
AB21		350VDC	1A	100VA	20-35ATf	21mm
AC01		30VDC	0,01A	0,25VA	5-20ATf	6mm
AC03		100VDC	0,5A	12VA	10-35ATf	10mm
AC05		100VDC	0,5A	12VA	10-35ATf	14mm
AJ21		100VDC	0,4A	10VA	10-35ATf	14mm
AV10	1NO	7500VDC	0,2A	50VA	80-130ATf	53,4mm
AD22	INO	250VDC	1,3A	AV08	40-105ATf	52mm
AD27/28		250VDC	3A	120W	70-100ATf	50mm
Al02		200VDC	0,5A	10W	15-30ATf	10mm
Al43		200VDC	0,5A	10W	15-30ATf	15mm
Al44		200VDC	0,75A	30W	15-35ATf	20,5mm
CD29	Change	250VAC	1A	25W	50-90ATf	34,3mm
CD30	Change-	500VAC	3A	100VA	60-100ATf	34,3mm
CG21	over switch	100VDC	0,25A	NC 3W / NO 8W	15-35ATf	14,5mm
CG21V	SWILCH	100VDC	0,25A	NC 3W / NO 8W	15-35ATf	14,5mm «bent»

Reed Relays in DIP enclosure

The most popular and the most industrial of the range. It offers all contact combinations. It is designed to switch inputs of telephony levels or PLC, signals from sensors or safety components.

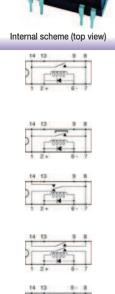

		Char	Characteristi	cs of the coil				
Product reference	Contact status	Max. switching voltage	Max. swit- ching current	Max. switching power	Nominal voltage	R. coil at 20°C	Specifications	Dimensions in mm
D31A3100		100VDC	0,5A	10VA	5VDC	500 Ω	-	
D31A3110		100VDC	0,5A	10VA	5VDC	500 Ω	diode	
D31A5100		100VDC	0,5A	10VA	12VDC	1 kΩ	-	
D31A5110	1NO	100VDC	0,5A	10VA	12VDC	1 kΩ	diode	19,1x6,6x6,4
D31A6110		100VDC	0,5A	10VA	15VDC	2150 Ω	diode	
D31A7100		100VDC	0,5A	10VA	24VDC	2150 Ω	_	
D31A7110		100VDC	0,5A	10VA	24VDC	2150 Ω	diode	
D31B3110	1NC	100VDC	0,5A	10VA	5VDC	500 Ω	diode	19,1x6,6x6,4
D31B5110	TING	100VDC	0,5A	10VA	12VDC	1 kΩ	diode	
D31C2100		100VDC	0,25A	3VA	5VDC	200 Ω		
D31C2110		100VDC	0,25A	3VA	5VDC	200 Ω	diode	
D31C5100	Change-	100VDC	0,25A	3VA	12VDC	500 Ω	_	19,1x6,6x6,4
D31C5110	over	100VDC	0,25A	3VA	12VDC	500 Ω	diode	19,100,000,4
D31C7100		100VDC	0,25A	3VA	24VDC	2150 Ω	_	
D31C7110		100VDC	0,25A	3VA	24VDC	2150 Ω	diode	
D32A3100		100VDC	0,5A	10VA	5VDC	200 Ω	_	
D32A3110	2NO	100VDC	0,5A	10VA	5VDC	200 Ω	diode	19,1x6,6x6,4
D32A5100		100VDC	0,5A	10VA	12VDC	500 Ω		
D71A2100		100VDC	0,5A	10VA	5VDC	380 Ω	-	
D71A2110	1NO	100VDC	0,5A	10VA	5VDC	380 Ω	diode	19,1x6,6x5,5
D71A5100		100VDC	0,5A	10VA	12VDC	530 Ω		

Reed Relays in SIP enclosure

Relays for high density component circuits: alarms, testers, industrial control.



Product	
reference	
D41A3100L	
D41A3110L	

	Contac
	status
-	1NO

Contact
status
1NO

Char	acteristics of the
Max. switching voltage	Max. swit- ching current
100VDC	0,5A
1001/DC	0.54

Max. switching
power
10VA
10VA

Nominal voltage	R. coil at 20°C
5VDC	500 Ω
5VDC	500 Ω

Characteristics of the coil

Specifications	Dimensions in mm
- diode	19x(5 or 6)x7,5



SWITCHES AND REED RELAYS

High voltage relay

Dielectric strenght between contacts > 10KVDC and 14VDC between coil and contact.



Reed D and R Relay Range

Relays with ferro-magnetic shield in for telecom type applications

			Char	acteristics of the s	witch	Characteristi	cs of the coil		
Internal scheme (top view)	Product reference	Contact status	Max. switching voltage	Max. swit- ching current	Max. switching power	Nominal voltage	R. coil at 20°C	Specifications	Dimensions in mm
->	F51A2100 F51A5100 F51A7100	1NO	250VDC 250VDC 250VDC	0,4A 0,4A 0,4A	14VA 14VA 14VA	5VDC 12VDC 24VDC	345 Ω 2145 Ω 7845 Ω	comes in coated version réf. F81Ax100	30x9,5x10
	F81A2500 F81A5500 F81A7500	1NO mercury	500VDC 500VDC 500VDC	1A 1A 1A	50VA 50VA 50VA	5VDC 12VDC 24VDC	140 Ω 1000 kΩ 2300 Ω	Position vertically	30x9,5x10
	F61A2100 F61A5100 F61A7100	1NO	250VDC 250VDC 250VDC	0,4A 0,4A 0,4A	14VA 14VA 14VA	5VDC 12VDC 24VDC	345 Ω 2145 Ω 7845 Ω	Coil/contact insulation 4KV	30x9,5x11
100 (C	F72C2500 F72C5500 F72C7500	2 mercury wetted chan- ge-over switch	500VDC 500VDC 500VDC	1A 1A 1A	50VA 50VA 50VA	5VDC 12VDC 24VDC	75 Ω 350 Ω 1350 Ω	Position vertically	30x16,5x11
	10 10 10 10 10 10 10 10 10 10 10 10 10 1		M	*					

The state of the s			Char	acteristics of the s	ics of the coil					
	Durdad								I Binantina	
Internal scheme	Product	Contact	Max. switching	Max. swit-	Max. switching	Nominal	R. coil at 20°C	Specifications	Dimensions in	ı
(top view)	reference	status	voltage	ching current	power	voltage		_	l mm	ı
	R0292B00		100VDC	0,4A	12VA	4VDC	250 Ω			ı
-	R0293B08	1NO	100VDC	0,4A	12VA	5VDC	450 Ω	_	23x7,5x6,7	ı
	R0294B08		100VDC	0,4A	12VA	12VDC	1600 Ω		20/11/0/10/1	ı
	R0295B08_	ļ	100VDC	0,4A	12VA	24VDC	2800 Ω_	_		ı
14 8	R0550B08		100VDC	0,4A	12VA	4VDC	500 Ω			ı
) Commo	R0551B08	1NO	100VDC	0,4A	12VA	5VDC	500 Ω	. DIL	20,2x10,1x7,2	ı
10000-11	R0552B08		100VDC	0,4A	12VA	12VDC	1000 kΩ	layout		ı
6	R0553B08_		100VDC	0,4A	12VA	24VDC	2150 Ω_	_		ı
	R0250W00	l .	100VDC	0,25A	3VA	4VDC	75 Ω			ı
100	R0251W00	change-	100VDC	0,25A	3VA	6VDC	150 Ω	_	23x7,5x6,7	ı
- 00000C	R0252W00	over	100VDC	0,25A	3VA	12VDC	500 Ω		, ,	.
	R0253W00		100VDC	0,25A	3VA	24VDC	1800 Ω_	_		
	R0115S06	4110	250Veff	3A	100VA	6VDC	250 Ω		05 45 5 40	ı
70000	R0116S06	1NO	250Veff	3A	100VA	12VDC	1000 kΩ	step 5,08	65x15,5x16	ı
	R0117S06_		250Veff	3A	100VA	24VDC	4 kΩ _	_		ı
14 8	R0542B08		100VDC	0,4A	12VA	4VDC	200 Ω	5		ı
	R0543B08	1NC	100VDC	0,4A	12VA	5VDC	200 Ω	DIL	20,2x10,1x7,2	ı
1 1 0000 -1 1	R0544B00		100VDC	0,4A	12VA	12VDC	500 Ω	layout		ı
14 +0 8	R0546B00_	-	100VDC	0,4A	12VA	24VDC	2150 Ω_	_		ı
1000	R0585B01	1NO bistable	100VDC	0,2A	5VA	5VDC	2x500 Ω	DIL layout /	20 2010 1010	ı
000	R0582B01	2 coils	100VDC	0,2A	5VA	12VDC	2x1500 Ω	diode	20,2x10,1x10	ı
1+F 7	R0861P12		500VDC	2A	100VA	5VDC	335 Ω	_		ı
5 4 8	R0760P00	mercury wetted change-over	500VDC	2A	100VA	12VDC	680 Ω	position	40,8x14,2x10,4	ı
¥, 8	R0761P00	switch	500VDC	2A 2A	100VA 100VA	24VDC	2650 Ω	vertically	40,6x14,∠x10,4	
Page 2	R0866P00	{	500VDC	2A 2A	100VA	5VDC	125 Ω	position —		l
\$	R0720P00	2 mercury wetted change-	500VDC	2A	100VA	12VDC	355 Ω	vertically	40,8x19,8x10,4	l
± -:0° €:	R0721P00	over switch	500VDC	2A	100VA	24VDC	800 Ω	possible C.O.T	40,0010,0010,4	
			00000	<u>-</u> /\	1007/	, , DO	00000	P000.2.0 0.0.1		1

Celduc[®] relais' worldwide presence in more than 60 countries

Algeria
Argentina
Australia
Austria
Belgium
Brazil
Bulgaria
Chile
China
Colombia
Czech Rep.
Denmark

Egypt
Estonia
Finland
France
Germany
Greece
Hong Kong
Hungary
India
Indonesia

Irelande

Israël
Italy
Japan
Latvia
Lithuania
Malaysia
Mexico
Morocco
Netherlands
New Zealand
Norway
Paraguay

Philippines
Poland
Portugal
Romania
Russia
Singapore
Slovakia
Slovenia
South Africa
South Korea
Spain
Sweden

Switzerland
Syria
Taiwan
Thailand
Turkey
United Kingdom
United States
Ukraine
Venezuela
Vietnam

NORTH AMERICA EUROPE

Sorbiers

្វ

ASIA

SOUTH AMERICA

AFRICA



PACIFIC

Sales department France: Tel. +33 (0)4 77 53 90 20
Sales department for Asia: Tel. +33 (0)4 77 53 90 19
Sales department for Europe: Tel. +33 (0)4 77 53 90 21
Sales department for America: Tel. +33 (0)4 77 53 90 19
Purchasing department: Tel. +33 (0)4 77 53 90 18
Administrative and financial department: Tel. +33 (0)4 77 53 90 05

5 rue Ampère - BP 30004 - 42290 Sorbiers - France Fax: +33 (0)4 77 53 85 51 • celduc-relais@celduc.com www.celduc-relais.com

Your distributor celduc ® / Your agent



www.celduc.com

Selection Guide
























Word of Introduction

Dear Customers, dear Readers,

Here is the new issue of our "Selection guide" catalogue that we believe will be clearer, easier and more complete. This is also the opportunity to confirm again our goals, our will and our passion:

Keep our customers satisfied !!

This "selection guide" catalogue is a picture of the products that are available to date. As a matter of fact, we are convinced that innovation only will help us to remain your favourite supplier, and this is why more than 10 new products complete each month our 3 product lines: Solid State Relays, magnetic sensors and Reed products.

Therefore it may happen that some products can not be found in this catalogue. In this case we invite you to visit our website at www.celduc.com updated every month.

If you haven't been successful, feel free to contact **celduc**® relais, our team will try to fully answers your question.

Marc Combette
Managing Director



Solid State Relays

P.1 -> P.18


- Scope
- Selection Criteria
- Product Range



2 Proximity Sensors

P.19 -> P.24

- Scope
- Product Range



3 Reed Relays and Switches

P.25 -> P.26

- Scope
- Product Range



All our technical data-sheets are available in our website : www.celduc.com



Solid state relays

Scope

Heating

Plasturgy Furnaces

Power supply distribution systems

Air conditioning

Textile

Home heating

Infrared heating

Drying Thermoforming

Etc...

Motor starting

Pumps Compressors Plasturgy (see above) Conveyors Fans Etc...

Lighting


Public Lighting Cinema theatre lamps Airport runaway lamps Road lighting Etc...

Control

PLC interface Heating element control Solenoid valves Contactor Coils Optocoupling of sensors

Miscellaneous

Transformer starting Power factor corrector Uninterrupted power supplies Energy source switching



IEC 947-4-3 for the other loads

American et Canadian (UL, CSA, cUL)

■ European : EN 60950/VDE0805 pr EN 61810xx

Our products also meet the major European directive regarding the CE marking.

- Some of our products fulfil the requirements according to DIN EN60601-1 (VDE 0750) for medical applications and also the requirements for explosive atmospheres ATEX "EX".
- Our extensive range of relays ranging from 1 to 125A complies with the ISO9001 requirements and quality requirements and incorporates highly reliable components with a very high electromagnetic interference level.














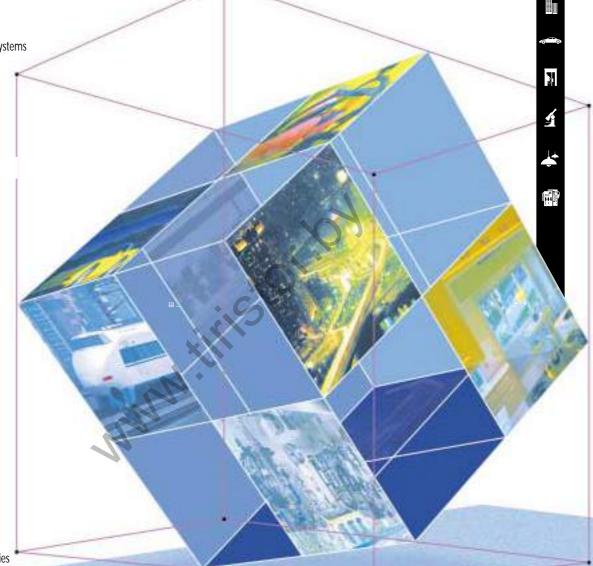



Selection

by

Applications

Function		ON/OFF RELAY								
Number de poles		1 Pole Single phse		1 Pole EN		oles ohase	3 Poles three phase			
ype of mounting	РСВ	Rail DIN	Screw	Rail DIN	Screw	Rail DIN	Screw	РСВ	Rail DIN	Scre
HEATING ELEM	MENTS									
AC-51	SKA/SKB SN8	XKA/XKH SIL/SIM	SC8/SC9 SIC/SIR	SOL	SVX	SWB	SCB	SCT	SWT	SCT/S
	SKL/SKH	SWM	SV8	хкх	SCFL	XKM		SHT		SV
NCANDESCEN	IT LAMPS A	ND INFRARE	ED LAMPS SC8/SC9	501	SVX	SWB	SCB		SWT	SG
C-55b	SN8	SIL/SIM	SIC/SIR	SOL			SCB		SWI	
DISCHARGE LA	SKL/SKH AMPS	SWM	SV8	XKX	SCFL	SIB	:		<u>:</u>	SV
AC-55a	SKA/SKL	XKA/XKH	SC8			SIB	SCB		:	
	SN8 SKH	SIL/SIM SWM	SV8		_					
MOTORS			- A							
AC-53	SKA/SKL SN8	SWM SIL/SIM	SC7	SOL	svx	SIB	SCB	SCT	SWT	SCT/
SOL ENOIDS	SKH	: XKH :		ХКХ	SCFL		: :	SHT	<u>:</u>	SV
SOLENOIDS AC-14 / AC-15	STN/STA/SPA	: STN/STA/SPA :	SC7/SC8				: :		<u> </u>	:
AC-14 / AC-13	SN8/SLA SKA/SKB/SSA	XKA/XKH/SSA	SF	.()`						
DC-13	STN/STD/SPD	STN/STD/SPD	SCC							
	SLD SLD/SKD/SSC	XKD/SSC	SGC							
NDICATORS										
AC-55b	STN/STA/SPA SN8/SLA	STN/STA/SPA	SC7/SC8							
DC-6	SKA/SKB/SSA STN/STD/SPD	XKA/XKH/SSA STN/STD/SPD	SF SCC/SGC							
DC-0	SLD SLD/SKD/SSC	XKD/SSC	1							
CONTACTORS	<u> </u>	, AND/GOO.								<u>. </u>
AC-14<72VA	STN/STA/SPA SN8/SLA	STN/STA/SPA	SC7/SC8						:	
	SKA/SKB/SSA	XKA/XKH/SSA	SF							
AC-15>72VA	STA/SPA/SKA/SKB SN8/SLA	STA/SPA	SC7/SC8							
DC-13	SSA/SKL/SKH STN/STD/SPD	XKA/XKH/SSA STN/STD/SPD	SF SCC/SGC							
JC-13	SLD/SKD/SSC	XKD/SSC	SGD							
DC-14	STN/STD/SPD	STN/STD/SPD	SCC/SGC							
	SLD SLD/SKD/SSC	XKD/SSC	SGD							
PLC INPUTS/O	UTPUTS									
AC input	SEA	SEA								
DC input AC output	SEC STN/STA/SPA	SEC STN/STA/SPA	SF			VICE			VICE	
-C output	SLA SKA/SKB/SSA	XKA/XKH/SSA				XKM			XKM	
DC output	STN/STD/SPD	STN/STD/SPD								
	SLD SLD/SKD/SSC	XKD/SSC								
TRANSFORME										
AC-56a	SKA/SKL		SC7			SIB7	SCB			SV
DADA CITORS	SKH		SCP						:	:
CAPACITORS AC-56b	SKL	SIL-SIM	SC8			SIB	SCB		:	SV
10-30b	SKH	SWM	SV8			5.5	JUB			31
OTHERS										
·>UPS			SC7			SIB7	SCB			S\
->AIRPORTS			SAS							
->Alarms			SG2							
->Signaling lights		FLASHING	ST3 ST6							

3

criteria





	DIAGN	OSTIC	CON	ITROL	LER	REV	ERSIN	IG SWI	тсн	SOFT	START
4 Poles	1 Po single	ole phase	1 Pole	1 Pole 3 Poles three phase		2 Poles two phase			3 Poles three phase	3 Po	oles phase
Screw	Rail DIN	Screw	Screw		Screw	РСВ	Rail DIN	Screw			Screw
SCQ	SILD	SCD	SG4	SWTA	SVTA						
		<u>i</u>	SG5		•			j —	\sim		<u>:</u>
SCQ	SILD	SCD	SG4	SWTA	SVTA	-		2000		SMCW	SMCV
					<u>:</u>				2		<u> </u>
SCQ	SILD	SCD									
								-	:		
SCQ	SILD	SCD	SG4	SWTA	SVTA	SG9	XKR	SG9	SG9	SMCW	SMCV
							SW9	SV9			
	:	:	l	Á				<u>:</u>	:		:
									X	\bigcirc	
								٠,	6	•	
								+ 1			:
							6				
							110				
		:			:			:	:		<u> </u>
				1700	245						
				0000							
				FLANE	194						
				7.00							
		:			:				:		
			T Street		- q						
				100	ar'		XKR				
				The state of							
		<u>:</u>	SG4	SWTA	SVTA			tipli	:	SMCW	SMCV
				J.7.1A	UIA					5017	
						1		7.37	E		
							6	Pow.			
							E		1		
							元主题	AL OF			
									:		

Contents

EBS Page 5
EBS raye S
ESC Page 4
ESD Page 4
SC7 Page 8
SC9 Page 9
SCB Page 12
SCC Page 17
0
SCF Page 7
SCFL Page 7
SCP Page 10
SCQ Page 17
SCT Page 13
SE Page 5
SF Page 7
SG4 Page 15
SG5 Page 15
SGC Page 17
SGD Page 17
SGT Page 13
SHT Page 6
- 3
SIC Page 9
SIL Page 11
SILD Page 10
SIM Page 11
SIR Page 9
- 0
SK Page 6
SLA Page 4
SLD Page 4
SMCV Page 14
SMCW Page 14
SOL Page 7
SP Page 4
SS Page 5
ST Page 4
. age .e
SVT Page 13
SVTA Page 16
SVX Page 7
SVX Page 7 SW9 Page 14 SWM Page 10
SWM Dage 10
CMT Part 40
SWT Page 13
SWTA Page 16
SWTA Page 16 WF Page 18
XK Page 5
XKX Page 7
Application nates Decade
Application notes Page 18 Accessories Page 18
Accessories Page 18





Modules



- -> PCB or socket mount
- -> Pin to pin compatible with electromechanical relays
- -> No maintenance
- -> AC and DC output
- -> Withstand high inrush current
- -> Integrated VDR
- -> Can drive all type of loads
- -> High insulation between input to output
- -> Low input current
- -> Low leakage current





SLIM RANGE (miniature)





	PRODUCT REFERENCE	Switching Current	Switching Voltage	Control Voltage	Input R	Protec.	Specifications	Dimensions
	SLA01220	2A	12-280VAC	3-10VDC	320 Ω	RC	AC output module	28x5x15
ည	SLA02220	2A	12-280VAC	7-20VDC	1100 Ω	RC	AC output module	28x5x15
1	SLA03220	2A	12-280VAC	18-32VDC	3 kΩ	RC	AC output module	28x5x15
	SLD01205	4A	0-32VDC	3-10VDC	320 Ω	Transil	DC output module	28x5x15
	SLD01210	2,5A	0-60VDC	3-10VDC	320 Ω	Transil	DC output module	28x5x15
	SLD02205	4A	0-32VDC	7-20VDC	1070 Ω	Transil	DC output module	28x5x15
ပ	SLD02210	2,5A	0-60VDC	7-20VDC	1070 Ω	Transil	DC output module	28x5x15
Ω	SLD03205	4A	0-32VDC	18-32VDC	3 kΩ	Transil	DC output module	28x5x15
	SLD03210	2,5A	0-60VDC	18-32VDC	3 kΩ	Transil	DC output module	28x5x15
	SLD04205	4A	0-32VDC	38-58VDC	10800 Ω	Transil	DC output module	28x5x15
	SLD04210	2,5A	0-60VDC	38-58VDC	10800 Ω	Transil	DC output module	28x5x15

Other miniature solid state relays can be procured (SKM, SKN): please contact us

SP-ST-SL RANGE (standard)

AC and DC from 1 to 5A, protection by VDR or built-in transil, come in 15,7 mm (ST Series) and 25,4 mm (SP Series).



	PRODUCT REFERENCE	Switching Current	Switching Voltage	Control Voltage	Input R	Protec.	Specifications	Dimensions
J.	SPA07420	4A	12-275VAC	12-30VDC 15-30VAC	2100 Ω	VDR	AC output module	29x12,7x25,4
	STA07220	2A	12-275VAC	12-30VDC 15-30VAC	2100 Ω	VDR	AC output module	29x12,7x15,7
	SPD03505	5A	0-30VDC	12-30VDC	2100 Ω	transil	DC output module	29x12,7x25,4
DC	STD03205	2,5A	0-30VDC	12-30VDC	2100 Ω	transil	DC output module	29x12,7x15,7
	STD03505	5A	0-30VDC	12-30VDC	2100 Ω	transil	DC output module	29x12,7x15,7
AC/DC	STN07105	1A	0-30VAC/DC	12-30VDC 15-30VAC	2100 Ω	transil	AC/DC output module	29x12,7x15,7









7	-40
Interface cardboard	
MANA.	^_
	Allegania
AWS N	75 A F
	Jan Salar
	-

ESD08000	8 SP in line module base	ESC05000	SP/ST base for PCB for one relay
ESD16000	16 SP in line module base		SP/ST base for DIN rail for one relay
ESD16100	16 SP compact module base		

Our STD03 and SPD03 modules are also available with AC input (12-30VAC/DC): STD07 and SPD07. Our STD and SPD modules can be developped, on request, with an output voltage of 100VDC. Other control voltage on request.



SE-SS RANGE - Input/output modules

Optocoupled input and output modules for control interface. Plug-in relay solution.





	PRODUCT REFERENCE	Input voltage	Input R	Logic voltage	Output	Specifications	Dimensions mm
	SEA05004	36-60VAC/DC	5 kΩ	5VDC (3-8V)	NPN 25mA	AC/DC Input	
	SEA05010	90-140VAC/DC	20 kΩ	5VDC (3-8V)	NPN 25mA	AC/DC Input	МО
	SEA05020	180-280VAC/DC	54 kΩ	5VDC (3-8V)	NPN 25mA	AC/DC Input	YELLOW
Щ	SEA24010	90-140VAC/DC	20 kΩ	24VDC (15-30V)	NPN 25mA	AC/DC Input	% `
員	SEA24020	180-280VAC/DC	54 kΩ	24VDC (15-30V)	NPN 25mA	AC/DC Input	0103 44 v 15 v 33
MODU	SEC05003	10-32VDC	1 kΩ	5VDC (3-8V)	NPN 25mA	DC/ time delay input	44 x 15 x 33
ž	SEC05101	3-10VDC	200 Ω	5VDC (3-8V)	NPN 25mA	DC quick input	ITE TE T
15	SEC05103	10-32VDC	1 kΩ	5VDC (3-8V)	NPN 25mA	DC quick input	
INPUT	SEC15003	10-32VDC	1 kΩ	15VDC (8-20V)	NPN 25mA	DC/ time delay input	WHITE
É	SEC15103	10-32VDC	1 kΩ	15VDC (8-20V)	NPN 25mA	DC quick input	8
	SEC24001	3-10VDC	200 Ω	24VDC (15-30V)	NPN 25mA	DC/ time delay input	
	SEC24003	10-32VDC	1 kΩ	24VDC (15-30V)	NPN 25mA	DC/ time delay input	





	PRODUCT REFERENCE	Switching current	Switching voltage	Control voltage	Input R	Specifications	Dimensions mm
	SSA05320	3A	12-280VAC	5VDC (3-8V)	220 Ω	AC output	_
≝	SSA15320	3A	12-280VAC	15VDC (8-20V)	1 kΩ	AC output	OR -ACK
MODUL	SSA24320	3A	24-280VAC	24VDC (15-30V)	2200 Ω	AC output	18 100
۶	SSC05120	1A	12-200VDC	5VDC (3-8V)	220 Ω	DC output	44 x 15 x 33
TPUT	SSC05306	3A	3-60VDC	5VDC (3-8V)	220 Ω	DC output	44 X 15 X 33
Ē	SSC15306	3A	3-60VDC	15VDC (8-20V)	1 kΩ	DC output	RED
9	SSC24306	3A	3-60VDC	24VDC (15-30V)	2200 Ω	DC output	***
	EBS01000	DIN RAIL BASI	E for input/outp	ut Module	4		
R	EBS08000	I/O board for	8 input/output N	Module			
SUPPORT	EBS16000	I/O board for	16 input/output	Module			
တ	EBS24000	I/O board for	24 input/output	Module			

Only the most common references are given in these tables. Other products with different voltages are available: please contact us.

XK RANGE

Interface relays to control loads such as resistors, indicators, solenoids, transformers, motors, power contactor coils. These Din-rail mounted products come in AC, DC outputs and three phase motor control: 2 and 3 phase switching and rotation reverser. Fitted with LED.



PRODUCT REFERENCE	Switching current	Switching voltage	Control voltage	Input R	Protec.	Specifications	Dimensions mm
XKA20420	4A	12-275VAC	6-30VDC	1 kΩ	VDR	1 pole AC synchronous output	12,2x76,4x53
XKA70420	4A	12-275VAC	15-30VAC/DC	1800 Ω	VDR	1 pole AC synchronous output	17,2x76,4x53
XKA70440	4A	12-440VAC	15-30VAC/DC	1800 Ω	VDR	1 pole AC synchronous output	17,2x76,4x53
XKA90440	4A	12-440VAC	150-240VAC/DC	41 kΩ	VDR	1 pole AC synchronous output	17,2x76,4x53
XKD10120	1A	2-220VDC	5-30VDC	1 kΩ	diode	1 pole DC output	12,2x76,4x53
XKD10306	3A	2-60VDC	5-30VDC	1 kΩ	diode	1 pole DC output	12,2x76,4x53
XKD11306	3A	2-60VDC	3-30VDC	600 Ω	diode	1 pole DC output	12,2x76,4x53
XKD70306	3A	2-60VDC	10-30VAC/DC	1800 Ω	diode	1 pole DC output	12,2x76,4x53
XKD90306	3A	2-60VDC	90-240VAC	41 kΩ	diode	1 pole DC output	17,2x76,4x53
XKH20120	10A	12-280VAC	10-32VDC	1640 Ω		1 pole AC synchronous output	25x76,4x65
XKM22440	4AC-51/2.5AC-53	24-460VAC	15-40VDC	2 kΩ	VDR	2 pole motor switching control	25,2x76,4x53
XKM23440	4AC-51/2.5AC-53	24-460VAC	12-35VDC	1 kΩ	VDR	3 pole motor switching control	47,5x76,4x53
XKR24440	4AC-51/2.5AC-53	24-460VAC	15-40VDC	2 kΩ	VDR	Motor change-over control	58,2x76,4x53
XKX21640	16AC-51/4AC-53	12-460VAC	20-30VDC	1140 Ω	RC-VDR	AC output + bypass	22,5x76,4x45

Other references available : please consult us.

 $\label{lem:connectors} \textit{Our XKA \& XKD ranges with pluggable connectors are also available on request.}$

5



SK RANGE

The SK range for PCB mount is available in 2 cases:

- SKA / SKB (AC output) or SKD (DC output).

 SKA up to 6A 230 or 400VAC with built-in voltage protection, ideal for solenoid or motor control
- SKB up to 4A 230 or 400VAC for resistive loads
- SKD rated 3A / 60VDC or 1A / 200VDC


SKL for AC output with a ceramic substrate that can be mounted on a heatsink (see picture). The SKL range is ranging from 16A to 75A.

For the power element, our SKL use TMS² technology (see the Power relay section introduction) reducing thermal stress and considerably improving life expectancy. Ideal for motor control (I't up to 5000 A²s) with high inrush current as well as heating application. Easy to protect against short circuit with micro circuit breakers.



PRODUCT REFERENCE	Current	Switching voltage	Control voltage	Input R	LED	l²t	Protec	Specifications	Dimensions mm
SK541100	2,5A	12-280VAC	3-30VDC	1 kΩ	no	50A ² s	RC	AC zero-cross output	
SK541101	2,5A	24-280VAC	3-30VDC	1 kΩ	no	50A ² s	-	AC zero-cross output NC	
SKA10420	4A	12-275VAC	2.5-10VDC	330 Ω	no	50A2s	VDR	AC zero-cross output	
SKA10440	4A	12-460VAC	2,5-10VDC	330 Ω	no	50A ² s	VDR	AC zero-cross output	
SKA10620	6A	12-280VAC	4-14VDC	440 Ω	no	1800A ² s	-	TMS ² ,DCB Technology	
SKA10640	6A	24-600VAC	4-14VDC	440 Ω	no	1800A ² s	-	TMS ² ,DCB Technology	
SKA11440	4A	12-460VAC	3-10VDC	220 Ω	yes	50A ² s	VDR	AC zero-cross output	
SKA20420	4A	12-275VAC	4-30VDC	1 kΩ	no	50A ² s	VDR	AC zero-cross output	
SKA20421	4A	12-275VAC	4-30VDC	1 kΩ	no	50A ² s	VDR	AC random output	
SKA20440	4A	12-460VAC	4-30VDC	1 kΩ	no	50A ² s	VDR	AC zero-cross output	
SKA20441	4A	12-460VAC	4-30VDC	1 kΩ	no	50A ² s	VDR	AC random output	
SKA20460	4A	24-600VAC	5-30VDC	1 kΩ	no	72A ² s	-	AC zero-cross output	43,2 x 10,2 x 25,4
SKA20620	6A	12-280VAC	8-32VDC	1640 Ω	no	1800A ² s	-	TMS ² ,DCB Technology	43,2 x 10,2 x 23,4
SKA20640	6A	24-600VAC	8-32VDC	1640 Ω	no	1800A ² s	-	TMS ² ,DCB Technology	
SKA21420	4A	12-275VAC	7-30VDC	750 Ω	yes	50A ² s	VDR	AC zero-cross output	
SKA21421	4A	12-275VAC	7-30VDC	750 Ω	yes	50A2\$	VDR	AC random output	
SKA21440	4A	12-460VAC	7-30VDC	750 Ω	yes	50A ² s	VDR	AC zero-cross output	
SKA21441	4A	12-460VAC	7-30VDC	750 Ω	yes	50A ² s	VDR	AC random output	
SKB10420	4A	12-280VAC	3-10VDC	330 Ω	no	50A ² s		AC zero-cross output	
SKB10440	4A 4A	24-600VAC	3-10VDC 3.7-10VDC	270 Ω	no	72A ₂ s		AC zero-cross output	
SKB20420	4A 4A	12-280VAC	8-30VDC	1200 Ω	no	50A ² s	-	AC zero-cross output	
SKB20440	4A 4A	24-600VAC	9-30VDC	1200 Ω	no	72A2s		AC zero-cross output	
	44			1200 32	110	, ZA-3	쁘	Ao Zoro-cross output	
SKD10306	3A	2-60VDC	3-30VDC	1 kΩ	no	-	diode	DC output	
SKD10120	1A	2-220VDC	3-30VDC	1 kΩ	no	_	diode	DC output	



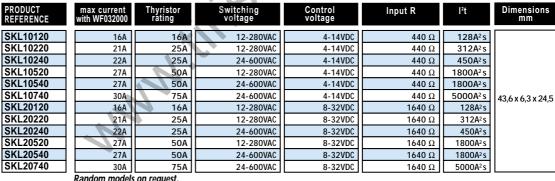



		nanaom moadi	on roquost.					
PRODUCT REFERENC	E	Output current	Output current with ventilation	Switching voltage	Control voltage	Input R	l²t	Dimensions mm
SKH1012	0	10A@20°C	16A	12-280VAC	4-14VDC	440 Ω	128A ² s	
SKH1024	0	10A@25°C	25A	24-600VAC	4-14VDC	440 Ω	450A ² s	43,6 x 22 x 35,7
SKH2012	0	10A@20°C	16A	12-280VAC	8-32VDC	1640 Ω	128A ² s	45,0 x 22 x 35,1
SKH2024	0	10A@25°C	25A	24-600VAC	8-32VDC	1640 Ω	450A ² s	
		<u> </u>						

Other reference available : please contact us

WF032000 WF042000 Heatsink for SKL L=150mm 2,6-3 K/W Heatsink for SKL L=100mm 3,6-4 K/W

1L941000	Clips for SKL on WF03/04 (clips Max 23 Aavid Thermalloy)
1L942000	Clips for SKL with screw for other heatsinks

SN8 RANGE

Ultra miniature package for achieving optimum size / performance goal

-> This relay is designed for PCB board and heatsink to control heavy loads in an ultra-miniature, physically compact package.

PRODUCT REFERENCE	Current	Switching voltage	Control voltage	Input R	l²t	Dimensions mm
SN842500	25A	24-280VAC	15-32VDC	2200 Ω	260A ² s	35,05x12,70x28,3 2

Other reference available : please contact us.

SHT RANGE

Three phase solid state relay in a single low profile package.

This relay is designed for PCB board to provide control of medium power in three phase applications.



)	PRODUCT REFERENCE	Current	Switching voltage	Control voltage	Input R	I²t	Dimensions mm
ŀ	SHT842100	3x25A	24-280VAC	3,5-10VDC	250 Ω	260A ² s	81,28x8,26x27,6 9
_	SHT842300	3x25A	24-280VAC	10-30VDC	950 Ω	260A ² s	81,28x8,26x27,6 9
		044		4			·

Other reference available : please contact us.

Power Relays



All our solid state relays fitted with back to back thyristors (power products: single phase, two phase, three phase) now use TMS² technology with a very high life expectancy compared to the majority of products on the market (application note on request)



TMS² Technology

SOFTLIFE RANGE - "Get rid of your heatsinks!"



Relays combining the assets of dual technology: solid state and electromechanical. These relays are designed to switch current up to 30A without heatsink and in a very compact sizes. Relays with LED and RC and VDR protection.

PRODUCT REFERENCE	Switching current	Switching voltage	Control voltage	I²t	Protec.	Specifications	Fig n°	Dimensions mm
SOL42950	25A	24-275VAC	195-253VAC	312A ² s	RC-VDR	domestic	1	35x58x90
SVX963350	30A	12-420VAC	20-30VDC	265A2s	RC-VDR	mixed relays	2	44,5x61,3x45
XKX21640	16AC1/4AC3	12-460VAC	20-30VAC	72A ² s	RC-VDR	mixed, DIN rail mounted relay	3	22,5x77x45

SF RANGE

Miniature relays with "FASTON" terminals or PCB terminals.



PRODUCT REFERENCE	Switching current	Switching voltage	Control voltage	Input R	Specifications	Dimensions mm
SF441310	10A	12-280VAC	3-30VDC	1 kΩ	Random, "FASTON" terminals	
SF541310	10A	12-280VAC	4-30VDC	1 kΩ	zero-crossed, "FASTON" terminals	21 x 35.5 x 15
SF542310	10A	12-280VAC	4-30VDC	1 kΩ	zero-crossed, PCB terminals	21 x 33,3 x 13
SF546310	20A	12-280VAC	4-30VDC	1 kΩ	zero-crossed, "FASTON" terminals	

These products should be mounted on heatsinks in order to reach nominal value.

SCF RANGE



To control resistive loads. "FASTON" terminals

PRODUCT REFERENCE	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	LED	l²t	Protec.	Dimensions mm
SCF42160	25A	12-280VAC	600V	4-30VDC	600 Ω	yes	312A2s	-	
SCF42324	25A	12-280VAC	600V	12-30VDC	1 kΩ	no	312A2s	VDR	44,5 x 58,2 x 27
SCF62160	25A	24-600VAC	1200V	5-30VDC	600 Ω	yes	265A2s	-	

Other references (corresponding to the SC9 range) are available: please contact us. These products should be mounted on heatsinks in order to reach nominal value.

SCFL RANGE EMC optimised (low electromagnetic emission - low RFI)



This relay is designed for use in applications where low electromagnetic emission is essential: household and electrical appliances, information technology and medical equipments. In compliance with EN 50081-1 Generic Emission Standards for Residential and meets CISPR 22 requirements.

PRODUCT REFERENCE	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	l²t	Dimensions mm
SCFL42100	25A	12-280VAC	600V	4-30VDC	1 k.	312A ² s	44,5x58,2x32

These products should be mounted on heatsinks in order to reach nominal value.

7



SC7 RANGE

The SC7 range with random or instant switching, integrating a snubber (RC) is especially designed for motor and transformer control. This range is also suitable (with closing times < 50 microseconds) for quick switching for uninterrupted power supplies (UPS, etc).




PRODUCT REFERENCE	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	l²t	Dimensions mm
SC741110	12A	12-280VAC	600V	3-30VDC	1 kΩ	72A ² s	
SC742110	25A	12-280VAC	600V	3-30VDC	1 kΩ	312A ² s	
SC744110	40A	12-280VAC	600V	3-30VDC	1 kΩ	612A ² s	
SC745100	50A	12-280VAC	600V	3-30VDC	1 kΩ	1500A ² s	
SC747100	75A	12-280VAC	600V	3-30VDC	1 kΩ	5000A ² s	44,5 x 58,2 x 27
SC762110	25A	24-520VAC	1200V	4-30VDC	1 kΩ	265A2s	
SC764110	50A	24-520VAC	1200V	4-30VDC	1 kΩ	1500A ² s	
SC764910	50A	24-520VAC	1200V	90-240VAC/DC	30 k Ω	1500A ² s	
SC767110	75A	24-520VAC	1200V	4-30VDC	1 kΩ	5000A ² s	
SC768110	95A	24-520VAC	1200V	4-30VDC	1 kΩ	11000A ² s	
SC769110	125A	24-520VAC	1200V	4-30VDC	1 kΩ	20000A ² s	

Other reference (AC control...) are available. All our products can be made with 1600V peak: please contact us. These products should be mounted on heatsink in order to reach nominal value.

SC8 RANGE

The SC8 range with zero-cross switching, integrating a snubber (RC), is recommended for all types of applications. The sc8xxxx products with 1600V peak are especially designed for capacity control: power factor corrector.

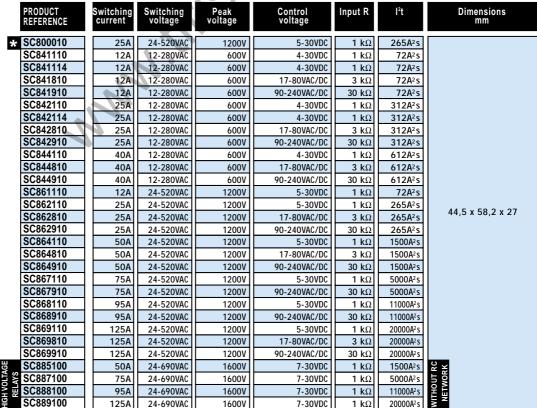



Protective cover and heatsinks : see accessories

* For PCB mounting.

other references (built-in VDR, LED...) can be made to minimum quantity.

These products should be mounted on heatsink in order to reach nominal value.

Some of our references fulfil the requirements according to DIN EN60601-1 (VDE 0750) for medical applications.

SC9 RANGE

The SC9 series with zero-cross switching is optimized for resistive load control (heating application)



Protective cover and heatsinks : see accessories

PRODUCT REFERENCE	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	LED	l²t	Protec.	Dimensions mm
SC941110	12A	12-280VAC	600V	4-30VDC	1 kΩ	no	72A2s		
SC941160	12A	12-280VAC	600V	4-30VDC	600 Ω	yes	72A2s		
SC942110	25A	12-280VAC	600V	4-30VDC	1 kΩ	no	312A2s		
SC942120	25A	12-275VAC	600V	4-30VDC	1 kΩ	no	312A2s	VDR	
SC942160	25A	12-280VAC	600V	4-30VDC	600 Ω	yes	312A ² s		
SC942900	25A	12-280VAC	600V	90-240VAC/DC	30 kΩ	no	312A ² s		
SC942920	25A	12-275VAC	600V	90-240VAC/DC	30 kΩ	no	312A ² s	VDR	
SC944110	40A	12-280VAC	600V	4-30VDC	1 kΩ	no	612A ² s		
SC944160	40A	12-280VAC	600V	4-30VDC	600 Ω	yes	612A ² s		
SC945060	50A	12-280VAC	600V	3-32VDC	600 Ω	Led	1500A ² s		
SC945100	50A	12-280VAC	600V	4-30VDC	1 kΩ	no	1500A ² s		
SC945160	50A	12-280VAC	600V	4-30VDC	600 Ω	yes	1500A ² s		
SC945900	50A	12-280VAC	600V	90-240VAC/DC	30 k Ω	no	1500A ² s		44,5 x 58,2 x 27
SC947100	75A	12-280VAC	600V	4-30VDC	1 kΩ	no	5000A ² s		
SC947160	75A	12-280VAC	600V	4-30VDC	600 Ω	yes	5000A ² s		
SC947900	75A	12-280VAC	600V	90-240VAC/DC	30 kΩ	no	5000A ² s		
SC948100	95A	12-280VAC	600V	4-30VDC	1 kΩ	no	11000A ² s		
SC949100	125A	12-280VAC	600V	4-30VDC	1 kΩ	no	20000A2s		
SC961110	12A	24-600VAC	1200V	5-30VDC	1 kΩ	no	72A ² s		
SC961160	12A	24-600VAC	1200V	5-30VDC	600 Ω	yes	72A ² s		
SC962110	25A	24-600VAC	1200V	5-30VDC	1 kΩ	no	265A ² s		
SC962114	25A	24-600VAC	1200V	5-30VAC	1 kΩ	no	265A ² s		
SC962160	25A	24-600VAC	1200V	5-30VDC	600 Ω	yes	265A ² s		
SC962800	25A	24-600VAC	1200V	17-80VAC/DC	3 kΩ	no	265A ² s		
SC962960	25A	24-600VAC	1200V	90-240VAC/DC	30 k Ω	yes	265A2s		
SC965100	50A	24-600VAC	1200V	5-30VDC	1 kΩ	no	1500A ² s		
SC965160	50A	24-600VAC	1200V	5-30VDC	600 Ω	yes	1500A ² s		
SC967100	75A	24-600VAC	1200V	5-30VDC	1 kΩ	no	5000A ² s		
SC967160	75A	24-600VAC	1200V	5-30VDC	600 Ω	yes	5000A ² s		

All the products come in 800V peak (SC95xxxx).

This SC9 range can be made with a self-protection device in the event of high energy overvoltage: please contact us.

These products should be mounted on heatsink in order to reach nominal value.

SIC/SIR RANGE



New Solid State Relay compact size pitch 22,5mm. SIR model with spring terminals.

-> These relays are designed for power application where we want to save space and time with modern terminals.

PRODUCT REFERENCE	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	LED	l²t	Protec.	Dimensions mm
SIC841500	12A	12-280VAC	600V	7-30VDC	1 kΩ	no	72A ² s		22,5x80x31
SIC864520	32A	24-600VAC	1200V	7-30VDC	1 kΩ	no	610A ² s	VDR	22,5x80x37
SIC865560	32A	24-600VAC	1200V	7-30VDC	1 kΩ	yes	1500A ² s		22,5x80x37
SIR841500	12A	12-280VAC	600V	7-30VDC	1 kΩ	no	72A ² s		22,5x80x33
SIR842500	(16A)25A	12-280VAC	600V	7-30VDC	1 kΩ	no	312A ² s		22,5x80x33



Spring terminals : easy to connect !

Other references available : please contact us.

These products should be mounted on heatsink in order to reach nominal value.



POWER SSRs with diagnostic

Status of the SSR and the load without external power supply. This range is patented. Status output can be chained.

- Line or load openShort circuit output



RORJ Hinda	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	l²t	Dimensions mm
SCD845110	50A	70-280VAC	600V	7-32VDC	1 kΩ	1500A ² s	45,5x58,2x35
SCD847110	75A	70-280VAC	600V	7-32VDC	1 kΩ	5000A2s	45,5x58,2x35
SCD865110	50A	150-510VAC	1200V	8-32VDC	1 kΩ	1500A ² s	45,5x58,2x35
SCD867110	75A	150-510VAC	1200V	8-32VDC	1 kΩ	5000A ² s	45,5x58,2x35
SILD845160	25A	70-280VAC	600V	3-32VDC	Ic<10mA	1500A ² s	22,5x80x116
SILD865170	25A	150-510VAC	1200V	3,5-32VDC	Ic<10mA	1500A ² s	22,5x80x116
SILD867170	35A	150-510VAC	1200V	3,5-32VDC	Ic<10mA	5000A ^{2s}	22,5x80x116

The SCD products should be mounted on heatsink in order to reach nominal value.

SCP RANGE - Transformer starting



The SCP relays are designed for the start-up of transformer primary circuits and all satured inductance coil loads preventing magnetising current peaks (application note on request)

PRODUCT REFERENCE	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	l²t	Sp cifications	Dimensions mm
SCP49110 SCP69110	40A* 40A*	180-280VAC 300-480VAC	600V 1200V	4-30VDC 4-30VDC	1 kΩ 1 kΩ	610A ² s	peak starting	44,5x58,2x27

*See application note on data sheet.
These products can be procured with high rating current on request.
For the start-up of three phase transformers, use our new range of SOFTSTARTERS SMCW or our SVTA / SWTA range : please consult us.

These products should be mounted on heatsink in order to reach nominal value.

SV8 RANGE

Synchronous single phase relays, all options: LED, IP20, RC, VDR terminal protection, identification tag, cage terminals.



PRODUCT REFERENCE	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	LED	l ² t	Protec.	Dimensions mm
SV841394	12A	12-275VAC	600V	10-32VDC	1250 Ω	yes	72A2s	RC-VDR	
SV841994	12A	12-275VAC	600V	150-240VAC	21 kΩ	yes	72A2s	RC-VDR	
SV842170	25A	12-275VAC	600V	4-30VDC	600 Ω	yes	288A2s	VDR	
SV844394	45A	12-275VAC	600V	10-32VDC	1250 Ω	yes	1500A ² s	RC-VDR	
SV844994	45A	12-275VAC	600V	150-240VAC	21 kΩ	yes	1500A ² s	RC-VDR	
SV845170	50A	12-275VAC	600V	4-30VDC	600 Ω	yes	1500A ² s	VDR	
SV861394	12A	24-500VAC	1200V	10-32VDC	1250 Ω	yes	72A ² s	RC-VDR	44,5 x 61,3 x 45
SV861994	12A	24-500VAC	1200V	150-240VAC	21 kΩ	yes	72A2s	RC-VDR	
SV865160	50A	24-600VAC	1200V	5-30VAC	600 Ω	yes	1500A ² s	no	
SV865394	50A	24-500VAC	1200V	10-32VDC	1250 Ω	yes	1500A ² s	RC-VDR	
SV865994	50A	24-500VAC	1200V	150-240VAC	21 kΩ	yes	1500A ² s	RC-VDR	
SV867130	75A	24-500VAC	1200V	5-30VDC	1 kΩ	no	5000A ² s	Transil	
SV867170	50A	24-500VAC	1200V	5-30VDC	600 Ω	yes	5000A ² s	VDR	
SV867160	75A	24-600VAC	1200V	5-30VDC	600 Ω	yes	5000A ² s	Led	
SV867470	75A	24-510VAC	1200V	3,5-32VDC		no	5000A ² s	Led + VDR	

The whole SC range can be made in SV size (other controls, currents, random, etc): please contact us. These products should be mounted on heatsink in order to reach nominal voltage.

SWM RANGE - Solid state contactor



Single phase ready-to-use contactor integrating heatsink, DIN-rail mounting, IP20 terminal protection, LED, VDR, cage terminals... these products are defined with temperature rises of 50°C and permanent 8-hour operation (operating cycles = 100%) in compliance with the European standards

PRODUCT REFERENCE	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	l²t	Dimensions mm	Fig n°
SWM841080	9A	12-280VAC	600V	17-60VAC/DC	170 0 .	610A ² s	45x65x60	1
SWM841830 SWM862080	30A 30A	12-280VAC 24-510VAC	600V 1200V	10-30VDC 17-60VAC/DC	1250 Ω 1700 Ω	1500A ² s 1500A ² s	48x72x120 48x72x120	2
SWM864530 SWM865080	50A 50A	24-500VAC 24-510VAC	1200V 1200V	10-30VDC 17-60VAC/DC	1250 Ω 1700 Ω	11000A ² s 5000A ² s	83x90x143 83x90x143	3



celpac® RANGE



- -> 22,5 and 45mm Pitch.
- -> Large control range : 3-32VDC with an input current <10mA whatever the rating voltage and temperature range. AC control models available.
- -> Green LED visualization on the input.
- -> Very high immunity: Voltage protection on output and input: 4kV according to IEC61000-4-4 & 5.
- -> Models SILD845, SIL855 and SIM855 switch ON in case of overvoltage: autoprotection on AC-51 loads only.
- -> TMS² Technology with very long lifetime.
- -> I² t value between 312 and 5000A² s hence protection against short-circuit on the load possible by Miniature Circuit Breakers (MCB).
 Low leakage current (<1mA) and low zero cross voltage (<10V) for zero cross SSR. Turn on time for random models.</p>
- -> IP20 housing.
- -> Use screw clamp terminals.
- -> No tools needed for mounting and dismounting on DIN rail or direct mounting on panel.
- Designed in conformity with EN60947-4-3 (IEC947-4-3) and EN60950 -UL-cU.
 CE mark: made in France with high quality level.



Single Phase SIL 22,5 mm

				4				
PRODUCT REFERENCE	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	l²t	Protec.	Dimensions mm
SIL765170	35A (22A)	24-510VAC	1200V	3,5-32VDC	Ic<10mA	1500A ² s	Random	22,5x80x116
SIL841170	12A (12A)	12-275VAC	600V	3-32VDC	Ic<10mA	72A ² s	Zero-cross	22,5x80x116
SIL842170	25A (20A)	12-275VAC	600V	3-32VDC	Ic<10mA	312A ² s	Zero-cross	22,5x80x116
SIL842770	25A (20A)	12-275VAC	600V	17-60VAC/DC	Ic<10mA	312A ² s	Zero-cross	22,5x80x116
SIL842970	25A (20A)	12-275VAC	600V	150-240VAC/DC	Ic<10mA	312A ² s	Zero-cross	22,5x80x116
SIL855160	35A (22A)	12-480VAC	1200V	3-32VDC	Ic<10mA	1500A ² s	Zero-cross	22,5x80x116
SIL865170	35A (22A)	24-510VAC	1200V	3,5-32VDC	Ic<10mA	1500A ² s	Zero-cross	22,5x80x116
SIL865770	35A (22A)	24-510VAC	1200V	17-60VAC/DC	Ic<10mA	1500A ² s	Zero-cross	22,5x80x116
SIL865970	35A (22A)	24-510VAC	1200V	150-240VAC/DC	Ic<10mA	1500A ² s	Zero-cross	22,5x80x116
SIL867170	35A (28A)	24-510VAC	1200V	3,5-32VDC	Ic<10mA	5000A ² s	Zero-cross	22,5x80x116

^{* ()} UL and AC-51



Single Phase SIM 45 mm

SIM765170	V	40A (32A)	24-510VAC	1200V	3,5-32VDC	Ic<10mA	1500A ² s	Random	45X80X116
SIM855160)	40A (32A)	24-510VAC	1200V	3,5-32VDC	Ic<10mA	1500A ² s	Zero-cross	45X80X116
SIM865170		40A (32A)	24-510VAC	1200V	3,5-32VDC	Ic<10mA	1500A ² s	Zero-cross	45X80X116
SIM865770		40A (32A)	24-510VAC	1200V	17-60VAC/DC	Ic<10mA	1500A ² s	Zero-cross	45X80X116
SIM865970		40A (32A)	24-510VAC	1200V	150-240VAC/DC	Ic<10mA	1500A ² s	Zero-cross	45X80X116
SIM867170		45A (35A)	24-510VAC	1200V	3,5-32VDC	Ic<10mA	5000A ² s	Zero-cross	45X80X116

Products also available in this range :

- •SILD model with diagnostic (see page 10): status of the SSR and the load.
 Without external power supply. Normally closed status output. Status visualization by LED. Status output can be chained.
 This range is patented.
- •SIB two phase relays (see page 12): can be used in three phase applications by switching two phases only.

11



Two phase relays

SCB RANGE

This two phase range provides two solid state relays in a compact standard 45 mm enclosure. They are perfectly adapted to three phase applications with breaking of two phases only.



All our SCB products are now available with LED

PRODUCT REFERENCE	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	l²t	Specifications	Dimensions mm	Fig ni
SCB345100	2X50A	12-280VAC	600V	4-30VDC	1 kΩ	1500A ² s	random / 2 controls		1
SCB445100	2X50A	12-280VAC	600V	4-30VDC	1 kΩ	1500A ² s	random / 2 controls		2
SCB564310	2X40A	24-510VAC	1200V	5-30VDC	1 kΩ	610A2s	zero-cross / 2 controls		3
SCB865300	2X50A	24-600VAC	1200V	10-30VDC	1400 Ω	1500A2s	zero-cross /1 control		4
SCB865600	2X50A	24-600VAC	1200V	10-30VDC	1800 Ω	1500A2s	zero-cross /2 controls		5
SCB665300	2X50A	24-600VAC	1200V	8-35VDC	1800 Ω	1500A2s	zero-cross /2 controls		2
SCB745300	2X50A	12-280VAC	600V	10-30VDC	1400 Ω	1500A ² s	random /1 control		4
SCB765200	2X50A	24-600VAC	1200V	5-30VDC	1 kΩ	1500A ² s	random / 2 controls	44.8 x 58 x 27	5
SCB867300	2X75A	24-600VAC	1200V	10-30VDC	1400 Ω	1500A ² s	zero-cross /1 control	,	4
SCB867600	2X75A	24-600VAC	1200V	10-30VDC	1800 Ω	5000A ² s	zero-cross /2 controls		5
SCB941300	2X12A	12-280VAC	600V	8-30VDC	1000 Ω	72A2s	zero-cross /1 control		4
SCB941600	2X12A	12-280VAC	600V	8-30VDC	1 Κ Ω	72A2s	zero-cross /2 controls		5
SCB942300	2X25A	12-280VAC	600V	8-30VDC	1000 Ω	288A2s	zero-cross /1 control		4
SCB942600	2X25A	12-280VAC	600V	8-30VDC	1 Κ Ω	288A2s	zero-cross /2 controls		5
SCB944300	2X40A	12-280VAC	600V	8-30VDC	1000 Ω	612A ² s	zero-cross /1 control		4
SCB944600	2X40A	12-280VAC	600V	8-30VDC	1 Κ Ω	612A ² s	zero-cross /2 controls		5
SCB945600	2X50A	12-280VAC	600V	8-30VDC	1 Κ Ω	1500A ² s	zero-cross /2 controls		5
SCB962600	2X25A	24-600VAC	1200V	8-30VDC	1 Κ.Ω	265A ² s	zero-cross /2 controls		5
SCB965600	2X50A	24-600VAC	1200V	8-30VDC	1 K Ω	1500A2s	zero-cross /2 controls		5

Protection Cover: see accessories (1K470000).

These products should be mounted on heatsink in order to reach nominal value.











celpac® RANGE

They are perfectly adapted to three phase applications with breaking of two phases only.



Two	phase	SIB	45	mn

PRODUCT REFERENCE	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	l²t	Specifications	Dimensions mm
SIB765170	2x25A	24-510VAC	1200V	3,5-32VDC	Ic<10mA	1500A ² s	random	45 00 444
SIB865170	2x25A	24-510VAC	1200V	3,5-32VDC	Ic<10mA	1500A ² s	zero-cross	45 x 80 x 116
SIB865970	2x25A	24-510VAC	1200V	150-240VAC/DC	Ic<10mA	1500A ² s	zero-cross	
SIB867170	2x25A	24-510VAC	1200V	3,5-32VDC	Ic<10mA	5000A ² s	zero-cross	



Three phase relays

SCT RANGE

Three phase solid state relays in a single phase relay enclosure.



PRODUCT REFERENCE	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	l²t	Specifications	Dimensions mm
SCT32110	3X10A	12-440VAC	800V	4-30VDC	330 Ω	72A ² s	random	44.8 x 58 x 27
SCT62110	3X10A	12-440VAC	V008	4-30VDC	330 Ω	72A ² s	zero-cross	11,0 X 30 X 27

These products also come with PCB terminals.

These product should be mounted with heatsink in order to reach nominal value.

SGT RANGE

Standard three phase range to control resistive loads (AC-51) or for motor control (AC-53). These relays have LED



PRODUCT REFERENCE	Switching current AC-51	Current AC-53	Switching voltage	Peak voltage	Control voltage	Input R	l²t	Specifications	Dimensions mm
SGT369350A	3X40A	3X7,5A	24-520VAC	1200V	5-30VDC	270 Ω	610A ² s		
SGT669350A	3X40A	3X7,5A	24-520VAC	1200V	5-30VDC	270 Ω	612A ² s	random	
SGT765370	3X50A	3X12A	24-520VAC	1200V	8.5-30VDC	620 Ω	1500A ² s	S	
SGT767370	3X75A	3X16A	24-520VAC	1200V	8.5-30VDC	620 Ω	5000A ² s		
SGT865350	3X50A	3X12A	24-520VAC	1200V	8.5-30VDC	620 Ω	1500A ² s	zero-cross	
SGT867350	3X75A	3X16A	24-520VAC	1200V	8.5-30VDC	620 Ω	5000A ² s	2010-01033	100 x 73,5 x 39,5
SGT961360	3X12A	-	24-600VAC	1200V	8.5-30VDC	620 Ω	72A2s		
SGT962360	3X25A	-	24-600VAC	1200V	8.5-30VDC	620 Ω	265A ² s	zero-cross optimised	
SGT965360	3X50A	-	24-600VAC	1200V	8.5-30VDC	620 Ω	1500A ² s	for resistive loads	
SGT965960	3X50A	-	24-600VAC	1200V	90-240VAC	21 kΩ	1500A ² s	ioi resistive iodas	
SGT967360	3X75A	-	24-600VAC	1200V	8.5-30VDC	620 Ω	5000A ² s		

These product should be mounted with heatsink in order to reach nominal value.

SVT RANGE

Three phase IP20 protection range to control resistive loads (AC-51) or for motor control (AC-53). Please consult us for other loads. These relays have LED.



PRODUCT REFERENCE	Switching current AC-51	Current AC-53	Switching voltage	Calibre Thyristor	Control voltage	Input R	l²t	Protec.	Specifications	Dimensions mm
SVT764394	3X50A	3X12A	24-520VAC	50A	8.5-30VDC	620 Ω	1500A ² S	RC-VDR	random	
SVT861394	3X12A	3X2,5A	24-520VAC	12A	8.5-30VDC	620 Ω	72A2S	RC-VDR		
SVT861994	3X12A	3X2,5A	24-520VAC	12A	90-240VAC	21 kΩ	72A2S	RC-VDR		
SVT864374	3X50A	3X12A	24-520VAC	50A	10-32VDC	580 Ω	1500A2S	VDR		
SVT864394	3X50A	3X12A	24-520VAC	50A	8.5-30VDC	620 Ω	1500A2S	RC-VDR		
SVT864994	3X50A	3X12A	24-520VAC	50A	90-240VAC	21 kΩ	1500A2S	RC-VDR		
SVT867394	3X50A	3X16A	24-520VAC	75A(90A)	8.5-30VDC	620 Ω	5000A2S	RC-VDR	zero-cross	100 x
SVT867994	3X50A	3X16A	24-520VAC	75A(90A)	90-240VAC	21 kΩ	5000A2S	RC-VDR		76 x 56,5
SVT868394	3X50A	3X24A	24-520VAC	95A	8.5-30VDC	620 Ω	11000A ² S	RC-VDR		
SVT868994	3X50A	3X24A	24-520VAC	95A	90-240VAC	21 kΩ	11000A ² S	RC-VDR		
SVT869394	3X50A	3X32A	24-520VAC	125A	8.5-30VDC	620 Ω	20000A ² S	RC-VDR		
SVT869994	3X50A	3X32A	24-520VAC	125A	90-240VAC	21 kΩ	20000A2S	RC-VDR		
SVT961360	3X12A	-	24-600VAC	12A	8.5-30VDC	620 Ω	72A2S	-		
SVT965360	3X50A	-	24-600VAC	50A	8.5-30VDC	620 Ω	1500A2S	-	zero-cross	
SVT965760	3X50A	-	24-600VAC	50A	10-30VAC/DC	410 Ω	1500A2S	-	optimised	
SVT965960	3X50A	-	24-600VAC	50A	90-240VAC	21 kΩ	1500A ² S	-	for resistive loads	
SVT967360	3X75A	-	24-600VAC	75A	8.5-30VDC	620 Ω	5000A ² S	-	Tot Tosistive Todas	

These product should be mounted with heatsink in order to reach nominal value.

SWT RANGE - Solid state contactors

Three phase contactor with heatsink and DIN rail mounting. Fitted with a LED and RC and VDR network protection designed to control resistive loads (AC-51) or for motor control (AC-53).



D	PRODUCT REFERENCE	Switching current AC-51	Current AC-53	Switching voltage	Peak voltage	Control voltage	Input R	l²t	Specifications	Dimensions mm	Fig n°	
	SWT860330	3X5A	3X5A	24-520VAC	1200V	10-30VAC/DC	410 Ω	265A2S		83x76x72	1	
	SWT860390	3X5A	3X5A	24-520VAC	1200V	90-240VAC	21 kΩ	265A2S		83x76x72	1	İ
	SWT861230	3X22A	3X12A	24-520VAC	1200V	10-30VAC/DC	410 Ω	1500A2S		83x90x155	2	
	SWT861290	3X22A	3X12A	24-520VAC	1200V	90-240VAC	21 kΩ	1500A2S		83x90x155	2	ĺ
	SWT861730	3X28A	3X16A	24-520VAC	1200V	10-30VAC/DC	410 Ω	5000A2S	zero-cross	110x90x172	3	ĺ
2)	SWT861790	3X28A	3X16A	24-520VAC	1200V	90-240VAC	21 kΩ	5000A2S		110x90x172	3	ĺ
	SWT862030	3X32A	3X24A	24-520VAC	1200V	10-30VAC/DC	410 Ω	11000A2S		110x90x172	3	ĺ
	SWT862090	3X32A	3X24A	24-520VAC	1200V	90-240VAC	21 kΩ	11000A ² S		110x145x172	3	ĺ
	SWT865080	3X50A	-	24-520VAC	1200V	10-30VAC/DC	410 Ω	5000A ² S		83x90x155	4	
		Those produ	ate are del	inad with tam	noroturo	ricas of EOOC as	d normana	nt anaratio	n (anarating aval	- 1000/\ of	O hours in	

These products are defined with temperature rises of 50°C and permanent operation (operating cycle = 100%) of 8 hours in compliance with the European standards.

13



Motor control

SG9 - SW9 - Reversing switches




This relay is used to reverse the rotational direction of a motor. The SW9 series is ready to use with heatsink and DIN rail mounting integrated. They all come with LED and protection against simultaneous controls.

Alaski li	
	1000
OR SERVICE OF THE PERSON OF TH	The second
	550
3	use 4 - 90
ready to	use 🔼 - so

PRODUCT REFERENCE	Switching current AC-53	Switching voltage	Control voltage	l²t	Protec.	Specifications	Dimensions mm
SG969100	3X6,6A	24-520VAC	10-30VDC	612A ² s		3 phase switching	100x73,5x39,5
SG969300	3X8,5A	24-520VAC	12-30VDC	1500A ² s	reversing	2 phase switching	100x73,5x39,5
SV969300	3X8,5A	24-520VAC	12-30VDC	1500A ² s	+	2 phase switching IP20 enclosure	100x76x56,5
SV969500	3X16A	24-550VAC	12-30VDC	5000A2s	time delay	2 phase switching IP20 enclosure	100x76x56,5
SW960330	3X4,5A	24-520VAC	12-30VDC	1500A ² s		2 phase switching	100x76x72
SW961230	3X8,5A	24-520VAC	12-30VDC	1500A ² s		2 phase switching	83x90x155

4)= SG969300 in SV IP20 enclosure

SOFT STARTER SMCV - SMCW

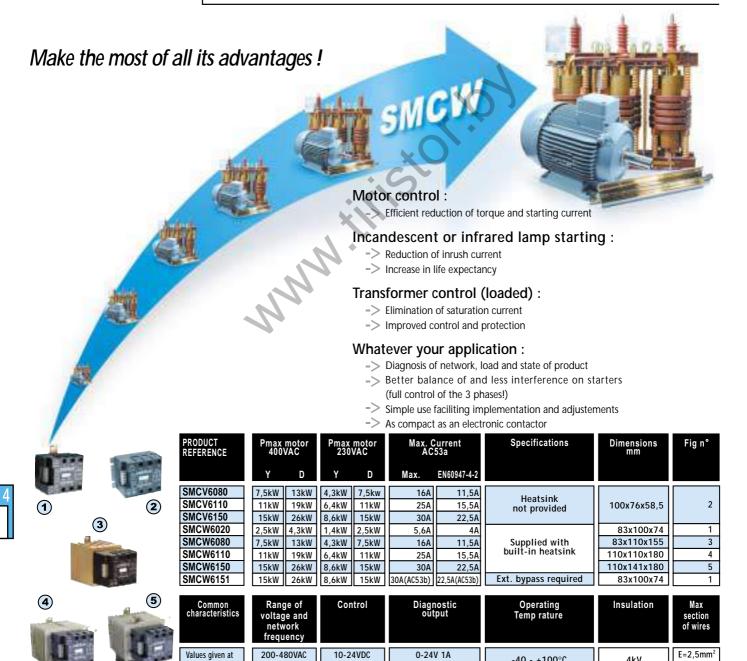

The star assembly (Y) corresponds to in-line wired starter. The delta assembly (D) corresponds to the starter wired in the triangle coupling of the motor. Each channel is wired in series with a winding of the motor.

ou contact

40°C ambient

40-65Hz

-40 - +100°C

 $S=10mm^2$



SG4 RANGE - Phase angle controller

This relay is designed to proportionally vary the switching moment on a sinusoidal mains at an analog output thereby varying the RMS voltage at the terminals of the load. Applications: light dimmer, heating regulation single phase variable speed control (vibrating feeders,etc). Model with LED and RC and VDR network



	REFERENCE	current	voltage	voltage	Input K	lft	Dimensions mm
	SG441020	10A	115-265VAC	0-10VDC	400 kΩ	72A ² s	
	SG444020	40A	115-265VAC	0-10VDC	400 kΩ	1500A ² s	
	SG444120	40A	115-265VAC	Potentiometer	200 kΩ	1500A ² s	
	SG444420	40A	115-265VAC	4-20mA	250 Ω	1500A ² s	
	SG464020	40A	200-460VAC	0-10VDC	400 kΩ	1500A ² s	
	SG464120	40A	200-460VAC	Potentiometer	200 kΩ	1500A ² s	100 x 73,5 x 39,5
	SG464420	40A	200-460VAC	4-20mA	250 Ω	1500A ² s	100 x /3,5 x 39,5
	SG468020	70A	200-460VAC	0-10VDC	400 kΩ	5000A ² s	
	SG468120	70A	200-460VAC	Potentiometer	200 kΩ	5000A2s	
	SG468420	70A	200-460VAC	4-20mA	250 Ω	5000A2s	
-	SG469020	110A	200-460VAC	0-10VDC	400 kΩ	20000A ² s	
	SG469120	110A	200-460VAC	Potentiometer	200 kΩ	20000A ² s	
	SG469420	110A	200-460VAC	4-20mA	250 Ω	20000A ² s	

These products should be mounted on heatsink in order to reach nominal value.

SG5 RANGE - Full wave pulse controller



This relay has an analog input isolated from the mains to proportionnally vary the cyclic operating ratio of a load (t/T). Control and mains are synchronous and output only has full periods. Models with LED and RC and VDR network protection.

These series of relays is suitable for many characteristics:

- Main voltage: 230VAC or 400VAC (50 ou 60Hz)
- Load current 10A, 40A
- Analog input 0 à 10V, 4 à 20mA, 0 à 5V or potentiometric (3rd terminal available).

\uparrow	$\wedge \wedge \wedge \wedge \wedge$

PRODUCT REFERENCE	Switching current	Switching voltage	Control voltage	Input R	l²t	Dimensions mm
SG541020	10A	230VAC	0-10VDC	250 kΩ	72A2s	
SG541120	10A	230VAC	Potentiometer	1 MΩ	72A ² s	
SG541420	10A	230VAC	4-20mA	350 Ω	72A ² s	
SG544020	40A	230VAC	0-10VDC	350 Ω	610A ² s	100 x 73,5 x 39,5
SG544120	40A	230VAC	Potentiometer	1 ΜΩ	610A ² s	
SG564020	40A	400VAC	0-10V	250 kΩ	610A ² s	
SG564120	40A	400VAC	Potentiometer	1 MΩ	610A2s	
SG564420	40A	400VAC	4-20mA	350 Ω	610A2s	

For higher power ratings and three phases, ask for our application notes.

These products should be mounted on heatsink in order to reach nominal value.

THREE PHASE UNIVERSAL DIGITAL PROPORTIONAL CONTROLLER










- -> Allows controlling any kind of loads (except capacitive) 3 or 4 wires (neutral), delta or star connection:
 - -Resistive loads for temperature control (infrared lamps, kilns, resistors, ...)
 - -Resistive loads for lighting control (bulbs, halogen, UV, scenes, ...)
 - -Loads including a transformer, a coil or a rectifier for voltage control (power supplies, high voltage generators, ...)
 - -Motors for voltage speed control (Possibility to reduce the speed depending on the type of motor and machine, motor fans, ...)
- -> Six thyristor proportional phase angle controller (Three phase positive and negative cycle control) : Balanced currents, less harmonics, ...
- Softstart and softstop ramps (Increases the lifetime expectancy of the assembly)
- Diagnostic functions
- Compact housing

SVTA - SWTA RANGE
















PRODUCT REFERENCE	Max. current AC51	Max. current AC53a	Control	Dimensions mm	Fig n;
SWTA4610	7A	7A	0-10V	83x110x74	1
SWTA4620	22A	16A	0-10V	83x110x155	2
SWTA4630	224	254	0-10V	110::110::100	
SWTA4631 SWTA4634	32A	25A	Potentiometer 4-20mA	110x110x180	3
SWTA4650 SWTA46501 (*)	50A	30A	0-10V	110x141x180	4

* Fan 24 VDC.

PRODUCTS TO BE MOUNTED ON A HEATSINK




PRODUCT REFERENCE	Max. current AC511	Max. current AC53a	Control	Dimensions mm
SVTA4650 SVTA4651	50A	16A	0-10V Potentiometer	100x76x58,5
SVTA4684	95A(**)	25A	4-20mA	100x76x58,5
SVTA4690 SVTA4694	125A(**)	30A	0-10V 4-20mA	100x76x58,5

^{**} Max. wire size = 10mm²: double wires or use special adaptors for current > 50A. Please refer to the mounting instructions.

SCC, SGC, SGD RANGE... DC Relays

This range of relays is designed to switch loads on DC networks such as solenoids, brakes, indicators... under voltages from 2 to 200 VDC with currents from 6 to 60A. 2 types of connections: screw on "FASTON" terminals.

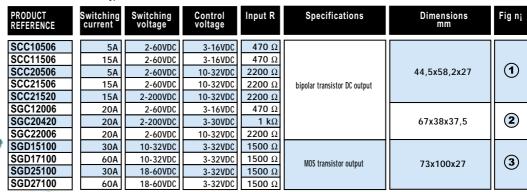



Other DC relays under development: with MOSFET and IGBT's technologies:

Output: 50 VDC -> 150 A 100 VDC -> 100 A 200 VDC -> 100 A 600 VDC -> 20 A

Please contact us

FOUR-LEG SOLID STATE RELAYS

4 single phase SSRs in a SC case - save place in control panels (width 45 mm).



PRODUCT REFERENCE	Switching current	Switching voltage	Peak voltage	Control voltage	Input R	l²t	Dimensions mm	Led
SCQ842000	4x25A	12-280VAC	600V	3-32VDC	I≤10mA	288A2s	44,5x58,2x27	no
SCQ842060	4x25A	12-280VAC	600V	3-32VDC	I≤10mA	288A ² s	44,5x58,2x27	yes

These products should be mounted on heatsink in order to reach nominal value.

SPECIAL RELAYS



Airport beacon relay. If a lamp fails, the relais short circuit this lamp. Different configurations available.



230VAC mains. 12A output voltage. Control by PLA type insulated contact Typical applications : heating breaking, etc



ST645000: flashing 1/2Hz 230VAC 10A. ST647000: flashing 1/2Hz 230VAC 25A. ST323000: flashing 1/2Hz 30-60VDC 10A.



Current detection module 0,5A to 16A, 50-60Hz. Alarm output 30VDC 10ma.

celducⁿ **relais** is the specialist of typical customers applications.



4 SKLS 5000 A² S on DIN Rail adaptators.



4 SKL on compact card



This device using SSRs controls AC motors in hazardous area. Control by push-buttoms with embedded magnet actuating Reed swicthes.



HEATSINKS

- * The Rth value are given for a temperature of 50°C in calm air
- ** Other dimensions available on request

PRODUCT REFERENCE	Thermal characteristics	Specifications	Dimensions mm	Relay type	Fig n;
WF031100 *	0,3K/W	ventiled for DIN rail or screw	110x120x145	SC,SV, SG, SGT, SVT	1
WF050000	0,55K/W	DIN rail adaptator as option	110x100x200	SC,SV, SG, SGT, SVT	2
WF070000	0,75K/W	DIN rail adaptator as option	110x100x100	SC,SV, SG, SGT, SVT	3
WF092000	0,9K/W	to be screwed	120x75x120	SC,SV, SG, SGT, SVT	4
WF115100	0,9K/W	For DIN rail or screw	110x100x90	SC,SV, SG, SGT, SVT	5
WF131100	1,1K/W	For DIN rail or screw	83x90x90	SC, SV	6
WF120100	1,2K/W	For DIN rail or screw	112x60x80	SC,SV, SG, SGT, SVT	7
WF121000	1,2K/W	For DIN rail or screw	100x40x100	SC,SV, SG, SGT, SVT	8
WF129100	1,3K/W	For DIN rail or screw	74x91x77	SC, SV	9
WF141100	1,5K/W	For DIN rail or screw	45x84x65	SC, SV	10
WF191100	1,95K/W	For DIN rail or screw	48x65x80	SC, SV	11
WF152100	2,4K/W	For DIN rail or screw	45x73x70	SC, SV	12
WF210000**	2,1K/W	DIN rail adaptator as option	96x41x55	SC, SV	13
WF262100	2,2K/W	For DIN rail or screw	48x60x72	SC, SV	14
WF151200	2,2K/W	For DIN rail or screw	45x73x80	SC, SV	15































Accessories



> PROTECTION COVERS

1K199000	(199000 ON SGT/SG9/SMC relays						
1K460000 on SC relays (except SCB et SC 125A)							
1K470000	assembling on all SC/SCB relays						



1LK00100	mounting on SC-SF-SV8/heatsink or SC-SV8/1LD12020
1LK00200	mounting on SG-SVT-SV9/heatsink or 1LD00500
1LK00300	mounting on heatsink/1LD00400 or SC-SV8/1LD00000



		Thermal grease for 30 relays SG/SVT ou 60 relays SC/SV8					
	5TH21000	Thormal procut film for SC/SV					



SYMMETRICAL DIN RAIL ADAPTATORS

1LD00000	DIN rail adaptator for SC/SV8 horizontal mounting
1LD00400	DIN rail adaptator for WF21/16/13/07/05
1LD00500	DIN rail adaptator for SG/SVT/SV969300
1LD12020	DIN rail adaptator for SC/SV8 montage vertical

MOUNTING + HEATSINK + DIN ADAPTATOR OPTION

1LW23100	SC/SV mounting on WF23 + WF23100 + 1LD12020
1LW27100	SC/SV mounting on WF27 + WF27100 + 1LD12020
1LWD1202	SC/SV mounting on 1LD12020



MOUNTING OPTION ONLY IF QUANTITY>10 (SCREW KIT INCLUDED)

1LW00000	mounting of relay on heatsink					
1LWD0000	mounting of heatsink on DIN rail adaptator					

APPLICATION NOTES

- -> Application notes on request : a certain number of application notes are available to celduc" customers
 - · Principle of solid state relays.

 - Principle of solid state relays: TMS² technology.
 Short circuit protection of solid state relays: fuses and circuit breakers.
 Application of solid state relays.
 Solid state relays on resistive loads (heating application).

 - Three phase motor.
 - Transformer control
 - Incandescent lamp control.
 - Discharge lamp control. Refrigerated unit control.
- Solid state relays in emergency power supplies (UPS).
 Solid state relays on capacitive loads: power factor corrector (PFC) application.
 SCB relays in injection presses.
 Application of SKL et SKH relays.
 - · Softstart and reversing relays.
 - Softstart relays in transformer control.

· Categories of use of solid state relays.

- Softstart relays in incandescent and infrared lamp control.
- Etc...



Magnetic proximity sensors




We are the experts!!!!


If you look for a sensor for position, passage, presence, level or speed, we must have it in our range of magnetic sensors.


We can even design the ideal product for your applications!


At celduc® relais, we are eager to offer the best products for your application, thanks to our 30year experience in the key technologies that we use in our products:


- Reed switch, a dry contact in a sealed glass bulb providing insulation at the same time. A simple, reliable and low cost solution.
- Electronic cell, based on either magneto-resistance or Hall effect, necessary for higher performance, particularly in frequency.

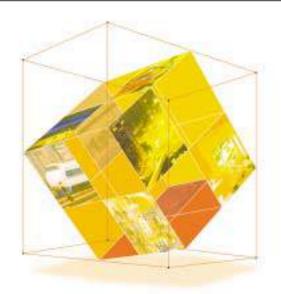









Contents

Level sensors - PTF range

Sensors for layout on PCB _____

Sensors with high level of switching _____

Contol magnets _____

Door sensors for lifts _____

Special customer products

Electronical sensors

Screw sensors

PMG range _

Tubular sensors _

Safety sensors _



PAGES

20

21

21

21

22

22

22

22

23

24 24

Industry

Counting Cylinder positions Machine safety Advertising panel

Home

Burglar alarm Camera shutter control window position (blinds) Lifts **Alarms** Big and small household goods

Aircraft, space and army

Specific applications

ATEX (explosive atmospheres)

Fuel/oil level. camera shutter control

Contact type:

NO -> Normaly Open -> Normaly Closed

Other lengths of cable or wire possible for significant quantities



All our technical data-sheets are available in our website: www.celduc.com




ELECTRONICAL SENSORS



celduc" relais offers two ranges of electronical sensors :


- -> HALL effect sensors.
- -> Gear Tooth Sensor.




PTE (for front detection)


Technical characteristics :

- 5-24VDC or 6-48VDC power supply with internal voltage clamping and reverse voltage protection.
- Low side or High side output.
- 25mA or 0.4A output current with overload short-circuit protection and thermal shutdown.
- Adjustable Internal delay (option on request).
- High Speed Operation > 10khz.
- Insensible to shocks and vibrations.
- Designed in conformity with IEC/EN60947-5-2



PLE (for side detection)

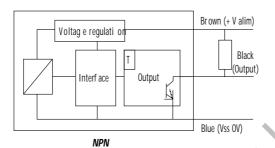


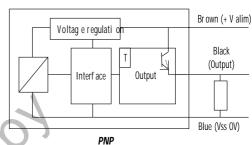


PRODUCT REFERENCE	Contact type	Connection type	Cable lenght	Closing distance	Max switching voltage	Max switching current	Dimensions L x l x h	Associated coded magnet
PLE13320* PLE14320**	Hall effect NPN Hall effect NPN	Cable Cable	2 m	8 mm 8 mm	5-24VDC 5-24VDC	25mA 25mA	32x15x6,8 32x15x6,8	P6250000
PTE11320 PTE11321	Hall effect PNP	Cable Cable	2 m	19 mm	6-48VDC 6-48VDC	0,4A 0,4A	M12x33 M12x33	PT810000
PTE21320 PTE21321	Gear tooth PNP	Cable Cable	2 m	1,5 mm	6-48VDC 6-48VDC	0,4A 0,4A	M12x33 M12x33	

^{*} Front detection


^{**} Side detection



Direct detection



Detection through non-magnetic material




Detection of ferro-magnetic (counting,...)

Applications:

- Industry
- Lift
- Speed sensors
- Household electronical appliances
- Tractors

..



Gear tooth sensor

20



LEVEL SENSORS - PTF RANGE

Closed : float at the top - Open : float at the bottom Closed: float at the bottom - Open: float at the top



PRODUCT REFERENCE	Contact type	Connection type	Cable lengh	Material Housing Float		Max. switching power	Max. switching voltage	Max. switching current	Dimensions mm	Fig n°
PTF01070	1NO	2 wires	70 mm	PA66 Plastic	Polypro	10VA	100VDC	0,5A	ø25 x 42	1
PTFA2015	1NO	2 wires	1,5 m		tainless st	eel 10VA	200VDC	0,4A	ø28 x 60	2
PTFA3015	1NO	2 wires	1,5 m	PE Plastic	PE Plastic	10VA	200VDC	0,4A	ø28 x 90	3

SCREW SENSORS

PΑ

PRODUCT REFERENCE	Contact type	Connection type	Cable lengh	Closing distance*	Max. switching power	Max. switching voltage	Max.switching current	Dimensions mm
PAA10060**	1NO	2 wires	680 mm	16 mm	12VA	100VDC	0,4A	
PAA11202	1NO	2 wires	275 mm	16 mm	12VA	100VDC	0,4A	
PAA11205	1NO	2 wires	500 mm	16 mm	12VA	100VDC	0,4A	23x14x6
PAC10010	reversing switch	3 wires + HE14 connector	70 mm	12 mm ***	NF 3VA NO 8VA	100VDC	0.25A	

With P6250000 magnet.


** Faston terminals.



PL	
11	
7	







with 04200000 magnet.										
PRODUCT REFERENCE	Contact type	Connection type	Cable lengh	Closing distance**	Max. switching power	Max. switching voltage	Max.switching current	Dimensions mm		
PLA10130	1NO	cable	13 mm	12 mm	12VA	250VDC	0,25A			
PLA11208	1NO	cable	800 mm	16 mm	12VA	250VDC	0,4A			
PLA12430	1NO	cable	3 m	12 mm	12VA	250VDC	0,4A			
PLA13701	1NO	cable	100 mm	10 mm	12VA	250VDC	0,4A	32x15x6,8		
PLA13715	1NO	cable	1,5 m	10 mm	12VA	250VDC	0,4A	32X13X0,0		
PLA13725	1NO	cable	2,5 m	10 mm	12VA	250VDC	0,4A			
PLA13750	1NO	cable	5 m	10 mm	12VA	250VDC	0,4A			
PLA13780	1NO	cable	8 m	10 mm	12VA	250VDC	0,4A			
PLB10060	1NC	cable	3 m	12 mm	12VA	250VDC	0,4A			
PLB13730	1NC	cable	3 m	10 mm	12VA	250VDC	0,4A	32x15x6,8		
PLB16701	1NC	cable	100 mm	10 mm	12VA	250VDC	0,4A			
PLC10030	reversing	cable	3 m	12 mm	NC 3VA/NO 8VA	100VDC	0,25A			
PLC10040	reversing	cable	1,5 m	14 mm	NC 3VA/NO 8VA	100VDC	0,25A	32x15x6,8		
PLC13701	reversing	3 cables	100 mm	10 mm	NC 3VA/NO 8VA	100VDC	0,25A			
								Aluminium		
PLMA0130**	1NO	1 shielded cable	3 m	50 mm	50W	250VAC	0,5A	88x38x12		
	* 14001 0405			**						

* With P6250000 magnet.

** sensor + magnet .

"PRODUCT REFERENCE	Contact type	Connection type	Cable lengh	Closing distance**	Max. switching power	Max. switching voltage	Max.switching current	Dimensions mm
PB158S00	1N0	2 wires	80 mm	4 mm	100VA	250VAC	3A	
PB195T00	1NO	2 wires	80 mm	7 mm	50VA	250VAC	1A	86x8,5x12,5
PB285T00	1NC	2 wires	80 mm	6 mm	50VA	250VAC	1A	
PB367G00	1NC	2 wires	180 mm	6 mm	16VA	250VDC	0,5A	
PB390G00	1NO	2 wires	80 mm	13 mm	16VA	250VDC	0,5A	
PBA10010	1NO+loop	cable	8 m	13 mm	12VA	250VDC	0,4A	51x8,5x11,5
PBA13725	1NO	cable	2,5 m	13 mm	12VA	250VDC	0,4A	3186,3811,3
PBA13740	1NO	cable	4 m	13 mm	12VA	250VDC	0,4A	
PBA13780	1NO	cable	8 m	13 mm	12VA	250VDC	0,4A	

* With associated magnet: P4160000 except for PB367G00 sensor P4159000 magnet.

SENSORS for layout on PCB



PRODUCT REFERENCE	Contact type	Closing distance**	Max. switching power	Max. switching voltage	Max.switching current	Dimensions mm
PHA01200	1NO	18 mm	12VA	100VDC	0,4A	
PHA11200	1NO	17 mm	12VA	100VDC	0,4A	23x4.2x3.6
PHC10010	reversing switch	17 mm	NC 3VA/NO 8VA	100VDC	0,25A	23,4,2,3,0
PHC13700	reversing switch	11 mm	NC 3VA/NO 8VA	100VDC	0,25A	

* With P6250000 magnet.



PMG RANGE



PRODUCT REFERENCE	Contact type	Connection type	Cable lengh	Closing distance	Max. switching power	Max. switching voltage	Max. switching current	Specifications	Dimensions mm
PMG90010	1NO	cable	10m	(1)10 mm	10VA	250VDC	0,4A	plastic tube	Ø 12x32
PMG92291	1N0	2 wires	200 mm	(2)12 mm	12VA	100Vcc	0,4A	plastic tube	Ø 18,5x32,5
		cable +							
PMG92334	2N0	RJ11	4,5 mm	11 mm	10VA	250VDC	0,4A	clips	33x21x9,5
PMG12830	2N0	cable	3 m	(3)16 mm	12VA	100Vcc	0,4A	PSA enclosure	51x16x7

(1) With UR102540 magnet. (2) With PMG92280 magnet. (3) With P6250000 magnet.

Sensors with high level of switching



PRODUCT REFERENCE	Contact type	Connection type	Cable lengh	Closing distance*	Max. switching power	Max. switching voltage	Max.switching current	Dimensions mm
PSA60010	1NO	2 wires	300 mm	12 mm	800W	24-440VAC	3A	
PSA60015	1N0	cable	1,5 m	12 mm	800W	24-440VAC	3A	51x16x7
PSA60020	1NO	2 wires	3 m	12 mm	800W	6-440VAC	3A	

^{*} With P6250000 magnet.

Tubular SENSOR




PRODUCT REFERENCE	Contact type	Connection type	Cable lengh	Closing distance	Max. switching power	Max. switching voltage	Max. switching current	Dimensions mm
PTA10440	1NO	2 wires + cosses	500 mm		12VA	100VDC	0,4A	
PTA11235	1NO	cable	3,5 m	15 mm	12VA	100VDC	0,4A	
PTA12401	1NO	2 wires	100 mm	14 mm	12VA	100VDC	0,4A	
PTA13701	1NO	2 wires	100 mm	10 mm	12VA	100VDC	0,4A	
PTA13715	1NO	2 wires	1,5 m	10 mm	12VA	100VDC	0,4A	plastic tube
PTA13730	1NO	cable	3 m	10 mm	12VA	100VDC	0,4A	Ø 6x30
PTB13702	1NC	2 wires	200 mm	10 mm	3VA	100VDC	0,25A	
PTC12301	reversing switch	3 wires	100 mm	14 mm	NC 3VA/NO 8VA	100VDC	0,25A	
PTC13730	reversing switch	cable	3 m	10 mm	NC 3VA/NO 8VA	100VDC	0,25A	
PTA50010	1NO	2 wires	100 mm	14 mm	10VA	100VDC	0,4 A	plastic tube Ø 6x25,4
PTI11220	1NO	cable	2 m	8 mm	10VA	100VDC	0,4A	threaded plastic tube
		*						M8 X 31
PTI21220	1 NO + Led	Cable	2 m	17 mm	10VA	100VDC	0,3A	threaded plastic tube M12 X 33
PTPA0100*	1N0	connector	_	12 mm	10VA	200VDC	0,5A	plastic tube
1								Ø 11 X 28
PTPA0230*	1NO	2 wires	3 m	30 mm	10VA	200VDC	-	plastic tube
								Ø 23 X 27
PTA90010	1NO	cable	10 m	16 mm	12VA	100VDC	0,4A	Threaded brass tube
PTA90020	1NO+LED	cable	10m	15 mm	0,3VA	24VDC	0,01A	M10
PTA90130	1NO	cable	3 m	16 mm	12VA	100VDC	0,4A	
	* Sensor + mag	net.						

All the closing distances are given with the magnet associated and in non-magnetic environment.

CONTROL MAGNETS



-> Coated magnets.



· ·				
PRODUCT REFERENCE	Adapted to sensor	Bare magnet dimension	Dimensions mm	
P3150000		Ø 3x15mm	32x15x6,8	
P6250000	PA,PH,PL,PT	Ø 6x25mm	32x15x6,8	
P4200000		Ø 4x20mm	32x15x6,8	
P4159000	PB	Ø 3x15mm	51x8,5x11,5	
P4160000	ГВ	Ø 5x25mm	51x8,5x11,5	
PA320000	PA	Ø 3x20mm	23x14x6	
PMG92290	PMG92291	Ø 6x25mm	Ø 18,5x28	

b

are magnets		
PRODUCT REFERENCE	Mati re	Dimensions mm
U2710000		Ø 2,7x10
U3150000		
		Ø 3x15
U4200000	Alnico	Ø 4x20
U6250000		Ø 6x25
U8300000		Ø 8x30
U8350000		Ø 8x35
UF181538		18x15x3,8
UF127738	Ferrite	12x7,7x3,8
UF777760	Territe	7,7x7,7x6
UF207760		20,5x7,7x6
UR102540		Ø 10x4
UR304000	NdFeBo	Ø 3x4
UR502000	NareBo	Ø 5x2
UR508000		Ø 5x8
UR604010	rare earth	Ø 6x4
UR801000	NdFeBo	Ø 8x10

OUC" relais

SAFETY SENSORS









-> The PXS or PSS type products are sensors designed to control the opening of protective devices, machine casings and access doors. Associated with their respective coded magnet and a controller module, they are capable of monitoring 1 or more "O" contacts (break, closed with a magnet) and/or 1 or more "C" contacts (make, closed with a magnet). They meet the "CE" directives and European regulations relating to machine conformity as per the standards EN60204 - EN1088 - En 954 and be covered by the categories 1 to 4 of these standards according to the associated module (CETIM certificate).

Safety functions performed thanks to:

- Tamper-proof: the sensor, associated with its coded magnet, reduces the possibility of tampering; a standard magnet cannot actuate the sensor.
- Redundancy: the components are redundant. If part of the sensor fails, the redundant circuit continues to operate.
- Unbalance: associated with a controller module which checks the unbalance of the signals from the sensor, the first fault is signaled if the switches are not actuated in the right order

Magnetic safety sensors represent an alternative to mechanical position switches in the following cases:

- Mechanical clearance required to overcome alignment or vibration problems,
- Compulsory complete sealing: industrial, food and mechanical environments,
- · Longer lifetime and reliability.
- -> Different switch combinations (with or without display) mean that all the recommendations of the EN 954-1 standard can be achieved. All our switches include fusible resistor type protection and the use of flame retardant materials in the event of short-circuit.

Please, contact us for all specific cases. We can advise users and examine the most suitable solution.





Reference	Contacts	Led option	Cable lenght (m)	Current limiting resistor	Switching power
PXS10350	0.0.40		-		01/4 4001/00 400 4
	2 O + 1 C	no	5	-	3VA - 100VDC - 100mA
PXS59010	0 + C	no	10	10 Ω	3VA - 100VDC - 100mA
PXS59150	O + C	yes	5	10 Ω	3VA - 100VDC - 100mA
PXS70150	2 O + 1 C	yes	5	10 Ω	3VA - 100VDC - 100mA
PXS79010*	20	no	10	10 Ω	3VA - 100VDC - 100mA
PXS79020*	2 0	no	2	10 Ω	3VA - 100VDC - 100mA
PXS79110*	2 0	yes	10	10 Ω	3VA - 100VDC - 100mA
PXS79120*	2 0	yes	2	10 Ω	3VA - 100VDC - 100mA
PXS79150*	2 0	yes	5	10 Ω	3VA - 100VDC - 100mA
PSS59050	0 + C	no	5	10 Ω	3VA - 100VDC - 100mA
PSS59150	0 + C	yes	5	10 Ω	3VA - 100VDC - 100mA
PSS79050	2 0	no	5	10 Ω	3VA - 100VDC - 100mA
PSS79150	2 0	yes	5	10 Ω	3VA - 100VDC - 100mA
PSA60010	1 0 solid state	no	0,35	-	500 VA - 24 to 440VAC - 0,01 à 3A
PSA60020	1 0 solid state	no	3	-	500 VA - 6 to 440VAC - 0,01 à 3A
Magnet reference	Contact type				

* In the PXS range, the 2C + O sensors are also available.

Magnet for PXS

Magnet for PSS Magnet for PSA

Contact type

P2000100

P3000100

- O -> Normally open and closed with magnet
- C -> Normally closed and open with magnet



DOOR SENSORS FOR LIFTS





PRODUCT REFERENCE	Contact type	Connection type	Cable lengh	Closing distance	Max. switching power	Max. switching voltage	Max. switching current	Dimensions mm
PMG12802	Bistable	Cable	2 m	7 <d<25*< th=""><th>60VA</th><th>230VDC</th><th>0,3A</th><th>80x20x20</th></d<25*<>	60VA	230VDC	0,3A	80x20x20
PMG12921	1N0	Cable	7 m	27mm**	100VA	230VDC	3A	M14x75
PMG12930	Bistable	Cable	7,3 m	7 <d<40**< th=""><th>60VA</th><th>230VDC</th><th>0,3A</th><th>80x30x30</th></d<40**<>	60VA	230VDC	0,3A	80x30x30
PMG13051	1 NC	Cable	6,5 m	27mm**	30VA	230VDC	0,5A	M14x75
PMG13110	1 NO	Cable	7 m	9,5mm***	30VA	230VDC	1A	80x20x15

- * With UF252060 magnet ** With UP302010 magnet ***With Ø 22x11 magnet

SPECIAL CUSTOMER PRODUCTS

There are numerous special customer applications in all sectors of activity. Consult us.


Expertise in specific sensors



- · Potentiometric scale (levels)
- Postal sorting (filling racks)



Speed sensor integrated into ball bearing: speed counter, kilometers, etc.



Position sensors with dry or impedent sheet contacts: washing machine, iron...

Opening and closing sensor for doors and windows (alarm, energy saving, lighting...)



- Reed Technology
- 2 and 3-wire magnetoresistance
 Short-circuit self protection
- Electronic sensors
- Hall effect sensors • Temperature

- White products



- Level sensors water, brake fluid for ABS system, presence of water in diesel
- Position sensors : control, closing of doors, sun roof...
- Safety sensors : burglars, Airbag For various engines.







Reed relays and switches



SCOPE

Detection


Clearance, position, level, presence

Switching

Telecom, tester, measurement

Reed SWITCHES and MERCURY TILT SWITCHES

Detecting a clearance, a position, a level in extrem environnements without mechanical link between the moving parts and without maintenance, such is the daily challenge of the Reed contact submitted to a magnetic field in industrial sectors as varied as money, space, control, telecom...



PRODUCT REFERENCE	Contact type	Max. switching voltage	Max. switching current	Max. switching power	standard sensitivity range	Glass length
AC01		30VDC	0,01A	0,25VA	5-20ATf	6mm
AC03		100VDC	0,5A	12VA	10-35ATf	10mm
AC05		100VDC	0,5A	12VA	10-35ATf	14mm
AC11		24VDC	0,1A	1VA	15-30ATf	10mm
AD22		250VDC	1,3A	AV08	40-105ATf	52mm
AI01	1NO	200VDC	0,5A	10VA	15-35ATf	14mm
AJ21		100VDC	0,5A	10VA	10-35ATf	14mm
IA21		100VDC	0,4A	12VA	10-30ATf	15mm
IA23		250VDC	0,5A	20VA	15-35ATf	21mm
IA83		250VDC	1A	50VA	35-72ATf	53,4mm
IA85		250Veff	3A	100VA	72-110ATf	53,4mm
CD16		500VDC	1,5A	50VA	50-80ATf	39,7mm
CD20	Change-over	220VDC	1A	60VA	70-90ATf	52mm
CG21	switch	100VDC	0,25A	NF 3W/NO 8W	10-30ATf	14,5mm
CG21V		100VDC	0,25A	NF 3W/NO 8W	10-30ATf	14,5mm,"with bending"
IB600099	Tilt switch	240VDC	0,4A	60VA	_	mercury switch

Reed RELAYS in DIP enclosure



Sensitivity to be specified at the order

The most popular and the most industrial of the range. It offers all contact combinations. It is designed to switch inputs of telephony levels or PLC, signals from sensors or safety components.

			Characteristics of the bulb			Characteristi	cs of the coil		
Internal scheme top view	PRODUCT REFERENCE	Contact type	Max. switching voltage	Max. switching current	Max. switching power	Voltage rating	R. coil at 20 _i C	Specifications	Dimensions mm
	D31A3100		100VDC	0,5A	10VA	5VDC	500 Ω	-	
34-30: 9:3	D31A3110	Ī	100VDC	0,5A	10VA	5VDC	500 Ω	diode	
	D31A5100		100VDC	0,5A	10VA	12VDC	1 kΩ	-	
) 10000	D31A5110	1NO	100VDC	0,5A	10VA	12VDC	1 kΩ	diode	19,1 x 6,6 x 6,4
2+ 8-7	D31A6110		100VDC	0,5A	10VA	15VDC	2150 Ω	diode	
4. 6.0	D31A7100		100VDC	0,5A	10VA	24VDC	2150 Ω	-	
	D31A7110		100VDC	0,5A	10VA	24VDC	2150 Ω	diode	
14 13: 9 8	20120110								
	D31B3110	1NC	100VDC	0,5A	10VA	5VDC	500 Ω	diode	19,1 x 6,6 x 6,4
1000	D31B5110		100VDC	0,5A	10VA	12VDC	1 kΩ	diode	
100	D31C2100		100VDC	0,25A	3VA	5VDC	200 Ω	_	
39:00 4:00	D31C2110		100VDC	0,25A	3VA	5VDC	200 Ω	diode	
	D31C5100		100VDC	0,25A	3VA	12VDC	500 Ω	alouc	
5	D31C5110	Change-over	100VDC	0,25A	3VA	12VDC	500 Ω	diode	19,1 x 6,6 x 6,4
1 2+ 5-7	D31C7100	switch	100VDC	0,25A	3VA	24VDC	2150 Ω	alouc	
(1)	D31C7110		100VDC	0,25A	3VA	24VDC	2150 Ω	diode	
14:10	20101110		100120	0,2011	Our	21100	210011	diode	
	D32A2100		100VDC	0,5A	10VA	5VDC	125 Ω	-	
(2000)	D32A2110	2N0	100VDC	0,5A	10VA	5VDC	125 Ω	diode	19,1 x 6,6 x 6,4
1 E+ 5 T	D32A5100		100VDC	0,5A	10VA	12VDC	500 Ω	-	
14 13 3+ B									
1	D71A2100		100VDC	0,5A	10VA	5VDC	380 Ω	-	
	D71A2110	1NO	100VDC	0,5A	10VA	5VDC	380 Ω	diode	19,1 x 6,6 x 5,5
1 2 4+7	D71A5100		100VDC	0,5A	10VA	12VDC	530 Ω	-	

Reed RELAYS in SIP enclosure



	Char	acteristics of th	e bulb	Characterist	ics of the coil				
Internal scheme top view	PRODUCT REFERENCE	Contact type	Max. switching voltage	Max. switching current	Max. switching power	Voltage rating	Coil Resistance	Specifications	Dimensions mm
(1027)	D41A3100L D41A3110L	1N0	100VDC 100VDC	0,5A 0,5A	10VA 10VA	5VDC 5VDC	500 Ω 500 Ω	- diode	19 x (5 or 6) x 7,5



Reed F and R RELAY RANGE

Relays with ferro-magnetic shielding for telecom type applications

- 48			ь.	
63	8.		801	n
-			=	v
	9		-	7
		-	•	

			Characteristics of the bulb			Characterist	ics of the coil		
Internal scheme top view	PRODUCT REFERENCE	Contact type	Max. switching voltage	Max. switching current	Max. switching power	Voltage rating	R. coil at 20¡C	Specifications	Dimensions mm
→	F51A2100 F51A5100 F51A7100	1NO	250VDC 250VDC 250VDC	0,4A 0,4A 0,4A	14VA 14VA 14VA	5VDC 12VDC 24VDC	345 Ω 2145 Ω 7845 Ω	comes in coated version réf. F81	30 x 9,5 x 10
	F81A2500 F81A5500 F81A7500	1NO mercury	500VDC 500VDC 500VDC	1A 1A 1A	50VA 50VA 50VA	5VDC 12VDC 24VDC	140 Ω 1000 kΩ 2300 Ω	Position vertically	30 x 9,5 x 10
	F61A2100 F61A5100 F61A7100	1NO	250VDC 250VDC 250VDC	0,4A 0,4A 0,4A	14VA 14VA 14VA	5VDC 12VDC 24VDC	345 Ω 2145 Ω 7845 Ω	Coil/contact insulation 4KV	31 x 9,5 x 11
à la	F72C2500 F72C5500 F72C7500	mercury wetted Change-over switch	500VDC 500VDC 500VDC	1A 1A 1A	50VA 50VA 50VA	5VDC 12VDC 24VDC	75 Ω 350 Ω 1350 Ω	Position vertically	30 x 16,5 x 11



Characteristics of the bulb Characteristics of the coil












etable.	- 6	-
	- 6	

PRODUCT REFERENCE	Contact type	Max. switching voltage	Max. switching current	Max. switching power	Voltage rating	R. coil at 20¦C	Specifications	Dimensions mm
R0292B00 R0293B08 R0294B08 R0295B08	1NO	100VDC 100VDC 100VDC 100VDC	0,4A 0,4A 0,4A 0,4A	12VA 12VA 12VA 12VA	4VDC 5VDC 12VDC 24VDC	250 Ω 450 Ω 1600 Ω 2800 Ω	-	23 x 7,5 x 6,7
R0550B08 R0551B08 R0552B08 R0553B08	1NO	100VDC 100VDC 100VDC 100VDC	0,4A 0,4A 0,4A 0,4A	12VA 12VA 12VA 12VA	4VDC 5VDC 12VDC 24VDC	500 Ω 500 Ω 1000 kΩ 2150 Ω	DIL layout	20,2 x 10,1 x 7,2
R0250W00 R0251W00 R0252W00 R0253W00	Change-over switch	100VDC 100VDC 100VDC 100VDC	0,25A 0,25A 0,25A 0,25A	3VA 3VA 3VA 3VA	4VDC 6VDC 12VDC 24VDC	75 Ω 150 Ω 500 Ω 1800 Ω	-	23 x 7,5 x 6,7
R0115S06 R0116S06 R0117S06	1NO	250Veff 250Veff 250Veff	3A 3A 3A	100VA 100VA 100VA	6VDC 12VDC 24VDC	250 Ω 1000 kΩ 4 kΩ	step 5,08	65 x 15,5 x 16
R0542B08 R0543B08 R0544B08 R0546B00	1NF	100VDC 100VDC 100VDC	0,4A 0,4A 0,4A 0,4A	12VA 12VA 12VA 12VA	4VDC 5VDC 12VDC 24VDC	200 Ω 200 Ω 500 Ω 2150 Ω	DIL layout	20,2 x 10,1 x 7,2
R0585B01 R0582B01	1NO bistable 2 coils	100VDC 100VDC	0,2A 0,2A	5VA 5VA	5VDC 12VDC	2x500 Ω 2x1500 Ω	diode	20,2 x 10,1 x 10
R0861P12 R0760P00 R0761P00	mercury wetted Change-over switch	500VDC 500VDC 500VDC	2A 2A 2A	100VA 100VA 100VA	5VDC 12VDC 24VDC	335 Ω 680 Ω 2650 Ω	position vertically	40,8 x 14,2 x 10,4
R0866P00 R0720P00 R0721P00	2 mercury wetted Change-over switch	500VDC 500VDC 500VDC	2A 2A 2A	100VA 100VA 100VA	5VDC 12VDC 24VDC	125 Ω 355 Ω 800Ω	position vertically possible C.O.T.	40,8 x 19,8 x 10,4

HIGH VOLTAGE RELAYS



R1380L00		7500VDC	0,2A	50VA	6VDC	75 Ω	High voltage	
R1329L00	1NO	7500VDC	0,2A	50VA	12VDC	300 Ω	relays	65 x 15,2 x 16,9
R1343L00		7500VDC	0,2A	50VA	24VDC	1200 Ω	Tolays	

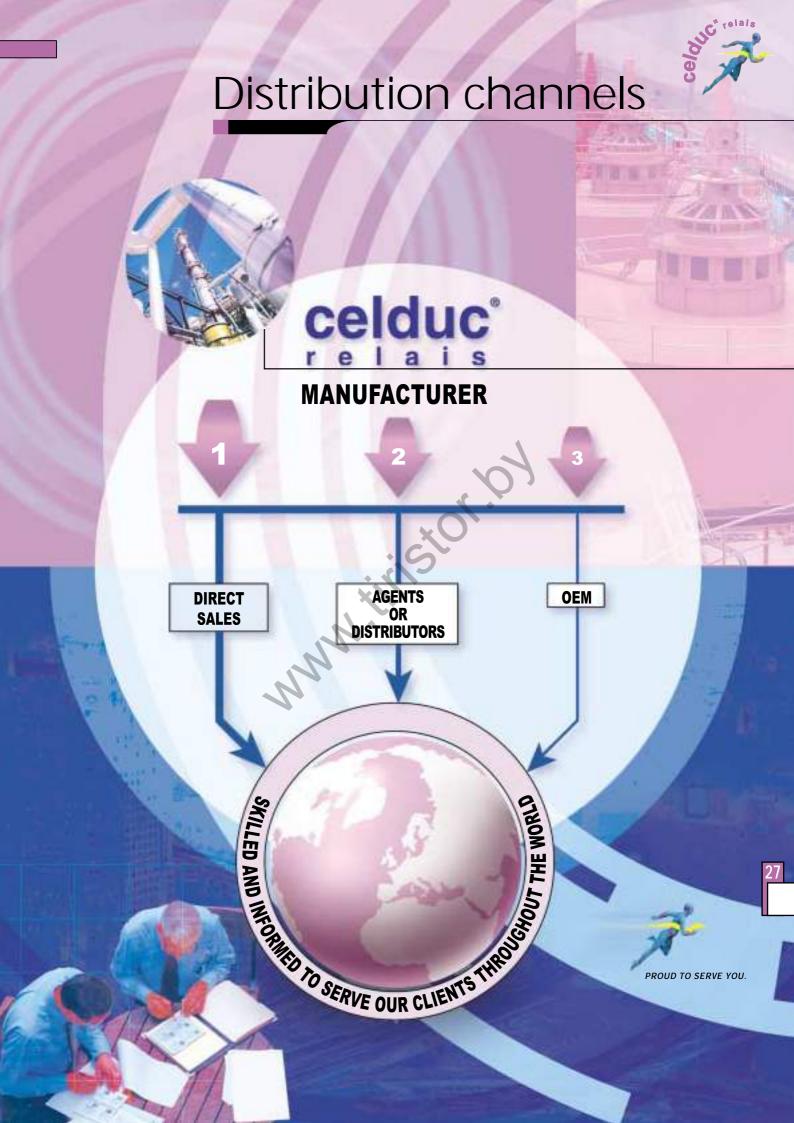



Groupe celduc*

40 years of innovation

celduc", a specialist in power techniques and electronics, can call upon many years of pratical experience and is fully focused on serving its market and customers the world over. **celduc*** dates back to 1960 when the company was founded by Michel GUICHARD. Today it is split into two separate trading companies, celduc" transfo & celduc" relais to channel and focus its expertise into two separate market sectors.



celduc" relais is now structured into three strategic business units each with its own dedicaced R&D and marketing teams. The three market sectors are solid state relays, magnetic proximity sensors and reed switches. By focusing on these separate areas, the company has pursued innovations that have enabled it to gain an unrivalled and long-standing reputation.

The Saint-Etienne-based **celduc**" group in a key factor in the prosperity of the Rhône-Alpes region and with over 50 % of its turn over exported, it is established as a truly international company Well established in Europe, the company has an increasing stature in the USA and in ASIA.

celduc* relais products



Solid state relays (commonly known as SSR) represent 50% of the turn over of **celduc**" relais. These innovative and highly efficient components are used to control all types of loads used in many industries. The three major application areas are industrial heating and temperature control, motor control and/or public lighting control. Every day new applications calling for reliability, no noise and long life expectancies make use of our highly innovative solid state relays that provide the small but vital "extra" when compared to our competitor's products.




Magnetic proximity sensors: Used for monitoring or controlling levels, clearances, movement, position and as a tachometer to record speed of rotation, the sky is the limit for these versatile sensors. These sensors are used by both the general public and the major industrial organisations such as the automative, aircraft and telecommunication industries. They are also used extensively in all automation applications of the manufacturing sector.



"Reed" switches: our Reed switches are used in combination with magnetic proximity sensors and reed relays and have proved to be an out-and-out winner over the past 50 years. The range meets the demands of an increasing number of new applications thanks to their ease of operation, price, compact size and reliability.

Know-How:

Being a specialist in this field, **celduc*** relais not only manufactures one of the most comprehensive ranges of solid state relays available from any manufacturer but the company has also developed the very latest in terms of production equipment ensuring efficient manufacture to the highest standards. These products and ressources keep the name of **celduc*** relais at the forefront as one of the biggest name in the industry. We have provided the solution to countless applications in homes, planes, satellites, plastic injection presses, motors, modems and many other applications.



Quality ISO9001:

ISO9002 ratified since 1993, celduc" relais also boasts the year 2002 version of ISO 9001 accreditation. It is by stringent application of and adherence to the rules of this standard that ensures total control of our production and research programmes. Being tuned to and building products that meet the specific requirements of our customers is the "raison d'être" of celduc"









Реле, твёрдотельное, Минск т.80447584780

www.fotorele.net www.tiristor.by радиодетали, электронные компоненты email minsk17@tut.by tel.+375 29 758 47 80 мтс

Реле, твердотельное каталог, описание, технические, характеристики, datasheet, параметры, маркировка,габариты, фото, даташит,



Реле, твёрдотельное купить, продажа, в наличии, Минск, Беларусь

Оптроны оптопары продажа в Минске

3од101а

3од101а

3од101а

аод101а

аод101а

аод101а

аод101а

аод101а

аод101а

аод101а

3од101б

3од1016

3од101б

аод101б

аод101б

аод101б

аод101б

3од101б

3од101в

3од101в

3од101г

3од101г

3од109а

3од109а

3од109а

аод109а

3од109б

аод109б аод109б

аод109б

3од109в 3од109в

аод109в

3од109г

аод109г

аод109г 3од109д

аод109д

аод109е

аод109и

аод111а

аод111а

аод120а1

3од120а1

3од129а

3од129а

3од129а аод129а

3од129а

3од129б

3од129б

3од129б

аод130а

аод130а

аод130а

аод133а

оэп-1

оэп-1

- оэп-2
- оэп-2
- оэп-2
- оэп-11 оэп-11
- оэп-12
- оэп-13
- оэп-13
- оэп-14
- оэп-14
- оэп-16
- оэп-16
- оэп-16
- оэп-16-2
- оэп-16-2
- 3op124a
- 3op124a
- aop124a
- аор124б-1
- аот101ас
- аот101ас
- аот101ас
- аот101бс
- аот101бс
- аот101бс
- аот101бс
- аот101бс
- аот101вс
- аот101вс аот101гс
- 3от102а
- аот102а
- аот102а
- 3от102б
- 3от102б 3от102б
- 3от102б
- аот1026
- аот102б
- аот102в
- аот102г
- аот102г
- аот102г
- 3от110а
- 3от110а
- аот110а
- аот110а
- аот110а
- аот110а
- 3от110б
- 3от110б
- 3от110б
- 3от110б аот110б
- аот110б
- аот110б
- аот110б
- 3от110в
- 3от110в
- 3от110в
- аот110в

minsk17@tut.by

аот110в

аот110в

аот110г

аот110г

аот110г

аот110г

аот110г

аот110г

аот110г

аот110д

3от122а

3от122а

3от122а

3от122а

3от122а

3от122а 3от122а

3от122а

3от122б

3от122г

3от122г

3от122г

3от122г

3от123а

3от123а

3от123а

аот123а

3от123б

3от1236

аот123б

аот123б

аот123б

аот123б

3от123в

3от123в

аот123в

аот123в

3от123г

3от123г

аот123г аот123г

аот123г

3от126а

3от126а

3от126а

аот126а

аот126а

аот126а аот126а

3от126б

3от126б

3от127а

3от127а

3от127а

3от127а

3от127а

3от127а

аот127а аот127а

3от1276

3от127б

г.Минск тел.8(017)2005646 3от127б 3от127б аот127б аот1276 аот127в аот127в аот127в аот128а аот128а аот128а аот128б аот128б аот128б аот128б аот128в аот128в аот128в аот128г аот128г аот128д аот128д 3от136а аот13761 аот137в1 аот137в1 3от146а аот147а аот1476 аот162а аот165а аот165а1 аот170 3oy103a aoy103a1 3oy1036 aoy103б1 aoy10361 aoy10361 3оу103в 3оу103в aoy103в1 aoy103в1 aoy103в1 аоу103в1 3оу103д aoy115a

> aoy115a aoy115a aoy1156 aoy1156 aoy115B aoy115B

> аоу115в аоу115г

aoy115r aoy115д aoy160a aoy160B aoy163a

aoy179a