



Output product catalogue

POWER CABLES
with hard grade ethylene
propylene rubber (HEPR)
insulation TOFLEX®



2017





Output product catalogue
**POWER CABLES with hard grade ethylene
propylene rubber (HEPR) insulation TOFLEX®**
Limited liability company TOMSKCABLE, 2016




FACTORY TODAY

LLC «Tomsk cable factory» is modern, dynamically developing company of cable industry, which has high-powered base of technological equipment for wide range production of the most popular cable and wire products. Within few working years LLC «Tomskcable» gained credibility of reliable and trustworthy partner for our customers.

We rely on high technology, as this is contemporary industrial and technological policy of the company. We are continuously increasing our production volumes due to the professional work of the whole team. We respect our partners, customers, rivals — you are the stimulus of growth and improvement for us.

CABLE PRODUCTION TECHNOLOGY

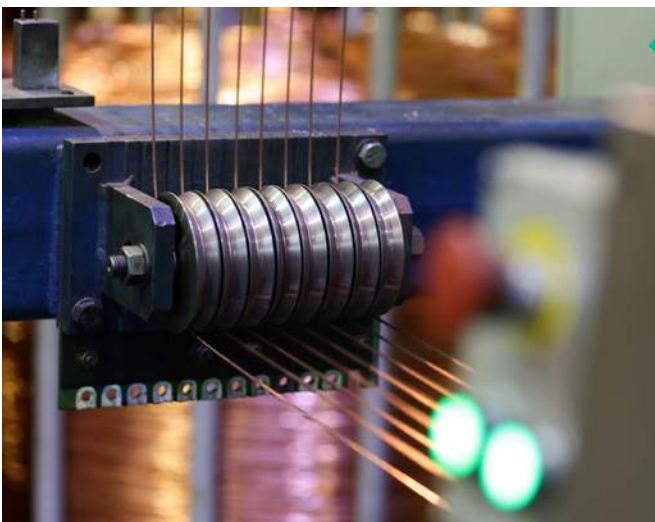

Wire drawing

The drawing divides in two stages: coarse drawing and mean drawing. Drawing is a process which uses tensile forces to stretch metal and reduce the cross-section of a wire. Drawing is carried out by pulling the metal through a draw bench machine. Raw material for the wire is copper or aluminum wire rod.

The drawing process includes the following steps:

- Using of the wire pointing machine for sharpening the ends of the metal raw material (aluminum or copper wire rod);
- The process of wire drawing;
- The annealing process.

Drawing is carried out on drawing machines of Mario Frigerio, Euro Alpha, Siktra.

Wire tinning

A process of galvanic tinning is applied in the production. Galvanic tinning is a process of passing the wire through a special tin bath. The raw material for the production of copper tinned wire is a copper wire get in the process of drawing. The main purpose of tinning is to give the product enhanced anticorrosion properties. After tinning process, re-drawing is also allowed. In this case the layer of the coated tin is retained on the wire surface.

The process of tinning includes the following steps:

- Wire degreasing;
- In the electrophoresis process, the work solution acidomedium and electrochemical process influence positive tin ions of soluble anodes. As a result, these ions are attracted to the wire;
- Washing with water and blowing with air.

Tinning is carried out on the equipment of Otomec.



Stranding

Stranding is a process of composing of a number of individual elements (wires, conductors, bunches) bundled or wrapped together around the central (one or several) elements.

The main purpose of stranding is to make the cable construction more stable and flexible.

Types of stranding, implemented in the production:

- Stranding in layers and stranding in bundles;
- Back-twist and no back-twist stranding;
- Simple and complex stranding;
- Correct and incorrect stranding.

Stranding is carried out on the stranding machines of Sampsystemi, Mario Frigerio, Cortinovis, Pourtier.

Applying of fire resistant barrier

Micatape is used in the process of applying the fire resistant barrier.

Micatape fire resistant barrier is applied with the usage of semi-tangential tapping machines.

The main purpose of the process is to improve fire resistant properties of the cables.

Tapping process is carried out on the equipment of WTM, Pioneer.



Cable insulating

The process of insulating a conductor is carried out on the extrusion lines, which include an extruder, pay-off, traction and take-up machines, as well as a quenching bath, control and startup equipment. From the pay-off machine the wire or stranded conductor enter the extruder head.

The materials for insulation are various PVC and polyolefins based compounds


The process of insulation:

- Melting of compound pellets in the extruder to a homogeneous mass;
- Pressing the molten plastic through the annular space between the forming tool: tip and the die;
- Placing the molten mass on the preform;
- Cooling the product in water;
- Blowing-off and drying the insulated conductor.

Types of insulation:

- PVC-compound;
- Polyethylene;
- Thermoplastic elastomer;
- Halogen free compounds;
- Hard grade ethylene-propylene rubber

The main purpose of the process is to provide electrical insulation among the conductors. Insulating process is applied on the equipment of Maillefer, Sket, and others.

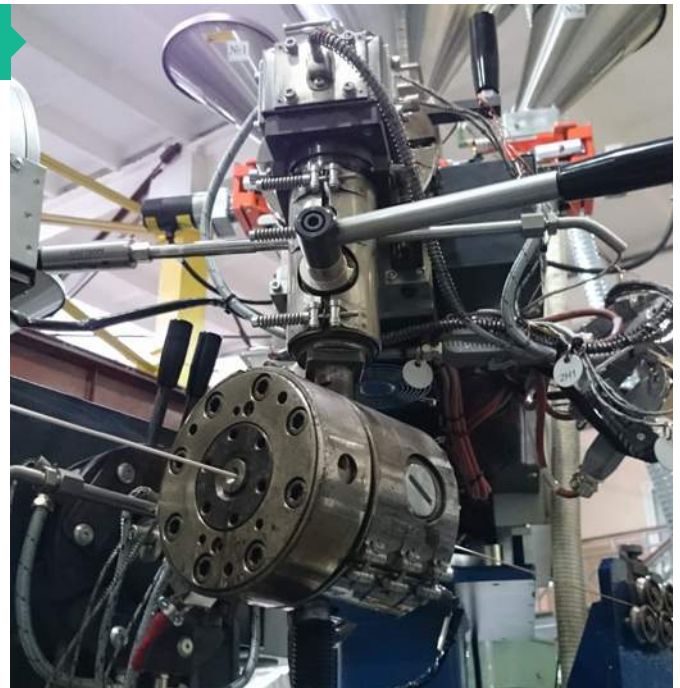

Polyethylene cross-linking

We use silane XLPE for cross linking. It consists of the material from the composition of low density copolymerized with vinylsilane polyethylene and a catalyst that participates in the cross-linking process. The usage of the material with a catalyst makes it possible to accelerate the cross-linking reaction. Cross-linking is carried out in a steam bath.

The main purpose of the process is to obtain high physical and mechanical characteristics of the insulation. Cross-linking is carried out in a cross-linking chamber.


Shielding

Shielding with copper or aluminopolymer tapes can be carried out on semi-tangential tapping machines. The wire shield is applied with the usage of braiding machines.

Types of shields:

- Copper wire;
- Copper foil;
- Aluminopolymer tape;
- Copper tinned wire.

The main purpose of the process is to protect the cable from the external electromagnetic influence and to provide the instantaneous trip during the short circuit of the conductor to the shield. **Shielding is carried out on the equipment of Spirka, Pioneer.**

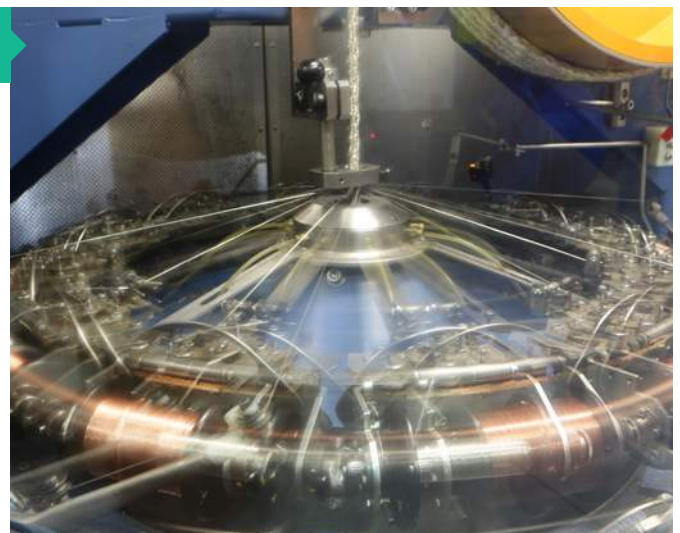

Applying of inner sheath


The process of applying cable inner sheath is carried out on extrusion lines, which is similar to the insulating process. The difference is in the using of more powerful extruders, pay-offs and other units because of large diameters of the preforms for sheaths.

Types of inner sheath:

- Polyvinyl chloride;
- Halogen-free polymer compounds;
- Thermoplastic elastomer.

The main purpose of the process is to provide a separation layer between the insulation of the current-conducting conductor and the shield or armor.

Applying of inner sheath is carried out on the equipment of Maillefer, Sket and others.

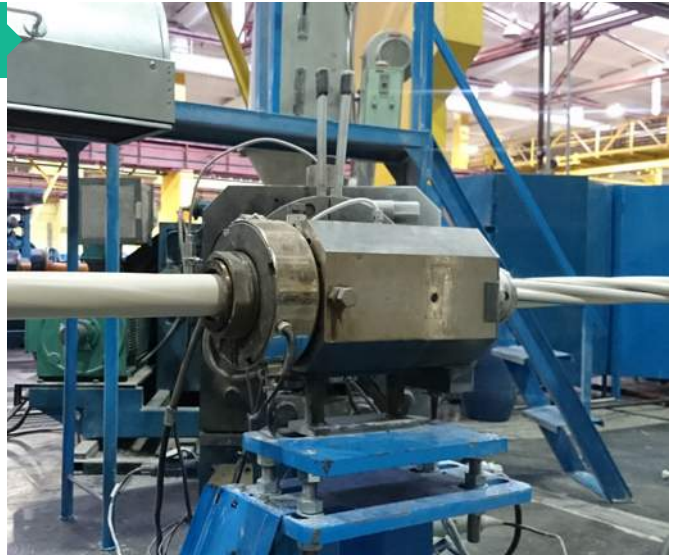

Armoring

Armoring is a process of strengthening the product by creating additional protection. Armoring is carried out with the usage of aluminum or steel galvanized tapes on semi-tangential tapping machines. Wire armor made from steel galvanized wires is applied on braiding or stranding machines.

Types of armor:

- Steel galvanized tapes
- Aluminium tapes
- Steel galvanized wires
- Aluminium wires

The main purpose of the process is to protect the cable from the mechanical damage.

Armoring is carried out on the equipment of Spirka, Pioneer, Pourtier and others.

Applying of outer sheath

The process of applying outer sheath is carried out on extrusion lines, which is similar to the insulating process. The difference is in the using of more powerful extruders, pay-offs and other units because of large diameters of the preforms for sheaths

Types of outer sheath:

- Polyvinyl chloride
- Polyethylene
- Halogen-free polymer compounds
- Thermoplastic elastomer
- Polyurethane

The main purpose of the process is to protect the cable from any mechanical and climatic effects.

The outer sheath is applied on the equipment of Maillefer, Sket, and others.



CONVENTIONAL SYMBOLS



Cables with index «CL» are designed for operation at a low ambient temperature



Cables resistant to salt spray



Cables shield protects the circuit from the electromagnetic interference



Cables «ng (A)» are flame-retardant at a group laying



Cables with index «LS» and «HF» have low smoke and gas emission



Tape armouring protects cable from mechanical damage when laying in the ground or in the air



Cables «UV» are resistant to UV radiation



Cables with index «HF» do not emit corrosive gases in condition of burning



Full lay-up from wires protects cable from tensile loads at a vertical cable run



Cables with high flexibility parameters



Cables are designed for operation at a high ambient temperature



Braiding from wires protects cable from mechanical damage retaining its high flexibility



Cables «T» designed for tropics are resistant to mold fungi



Cables resistant to oils, diesel fuel, sea water and drilling fluids



Cables withstand open-flame exposure for 180 minutes

CONTENTS

POWER CABLES WITH ETHYLENE PROPYLENE RUBBER (HEPR) INSULATION

| | |
|------------------------------------------------------------------------------------------|---------|
| 1. Unshielded unarmoured cables..... | 15 |
| 2. Shielded cables..... | 27 |
| 3. Armoured with steel galvanized tapes..... | 39 |
| 4. Armoured with full lay-up from steel galvanized wires..... | 51 |
| 5. Armoured with braiding from steel galvanized wires..... | 59 |
| 6. Shielded, armoured with steel galvanized tapes..... | 71 |
| 7. Shielded, armoured with full lay-up from steel galvanized wires..... | 83 |
| 8. Shielded, armoured with braiding from steel galvanized wires..... | 91 |
| 9. Fire-resistant, unshielded, unarmoured cables..... | 103 |
| 10. Fire-resistant shielded cables..... | 112 |
| 11. Fire-resistant armoured with steel galvanized tapes cables..... | 121 |
| 12. Fire-resistant, armoured with full lay-up from steel galvanized wires..... | 130 |
| 13. Fire-resistant, armoured with braiding from steel galvanized wires..... | 136 |
| 14. Fire-resistant, shielded, armoured with steel galvanized tapes..... | 145 |
| 15. Fire-resistant, shielded, armoured with full lay-up from steel galvanized wires..... | 154 |
| 16. Fire-resistant, shielded, armoured with braiding from steel galvanized wires | 160 |
| NORMATIVE REFERENCES..... | 169 |
| REFERENCE INFORMATION..... | 170 |

POWER CABLES with hard grade ethylene propylene rubber (HEPR) insulation

IEC 60502-1



APPLICATION

Power cables are designed for transmission and distribution of electric power in fixed facilities with nominal alternating voltage of 1kV and 3 kV and frequency of 50 Hz

Cables with copper conductors can be used at explosion hazard areas according to IEC 60079-10-1.

Cables sheathed with low fire hazard PVC-compound or halogen-free polymer compound as well as flame-retardant cables can be used in underground structures and nuclear power stations outside of containment areas in automated systems.

Cables TOFLEX R are designed for laying in dry and wet industrial facilities, open areas, special cable tray systems, blocks, pipes or fire risk facilities:

- Oil and gas production enterprises, transporting and processing enterprises.
- Mining industry enterprises.
- Metallurgical plants.
- Chemical factories.

- Nuclear power stations.
- Floating facilities (vessels, ships, platforms).
- Transport tunnels and underground structures.
- Other objects in hazardous zones (cables with copper conductors).

Cables TOFLEX R are flame-retardant at a group laying; halogen-free cables are low-smoke in condition of burning or smouldering and do not emit corrosive gases. Halogen-free cables TOFLEX R can be used in mass gathering objects: hotels, schools, hospitals, sports facilities, tunnels, multi-storey buildings, business centres, etc.

Cables TOFLEX R withstand high ambient temperature, which allows using them in metallurgical plants facilities. Hard grade ethylene propylene rubber (HEPR) insulation provides smooth operation at the operating conductor temperature at 90 °C and up to 130 °C and meets the high values of current carrying capacity with a good safety margin. EPR insulation provides resistance to short circuits at temperatures up to 250 °C.



TOFLEX R CABLES ADVANTAGES

| Characteristics | TOFLEX R | XLPE | PVC | Note |
|--------------------------------------------------------|----------|---------|---------|---------------------------------------------------------------------------------------------------------|
| Heat endurance | 90 | 90 | 70 | The higher current loads, the smaller fuel weight |
| Flexibility | Good | Average | Average | High flexibility reduces installation time |
| Overload conditions, °C | 130 | 130 | 80 | Higher temperatures provide cable line capacity additional margin (18-25%) |
| Short-circuit test, °C | 250 | 250 | 160 | Higher temperature increases the reliability of the cable line in case of short circuit |
| Insulation material fire load, kWh/kg | 6.4 | 12.2 | — | Need to take into consideration in the designing of the objects requiring the redundancy of fuel weight |
| Installation temperature, °C | -35 | -20 | -15 | Installation safety in winter conditions. No additional facilities for preheating |
| Operating temperature, °C | -65 | -50 | -50 | Possibility of operating in arctic climate |
| Possibility of using in hazardous zones of all classes | Yes | No | Yes | |
| The content of halogens | No | No | Yes | Halogen gases cause accelerated corrosion of metal structures and electrical equipment |
| Service life | 35 | 30 | 30 | |



SHEATH MATERIAL SELECTION

Material properties

| Material type | Cable grade designation | Operating temperature, °C | Minimal operating temperature without preheating, °C | Flame retardancy | Low smoke emission | Flexibility | Oil resistance | Resistance to diesel fuel | Hydrocarbon resistance | Fluids resistance | Moisture resistance | Mechanical impacts resistance |
|---------------------------------------------------|-------------------------------|---------------------------|------------------------------------------------------|------------------|--------------------|-------------|----------------|---------------------------|------------------------|-------------------|---------------------|-------------------------------|
| PVC | Vng(A) | -50÷50 | -15 | **** | ** | *** | ** | * | ** | ** | ** | *** |
| | Vng(A)-HL | -60÷50 | -30 | **** | ** | *** | ** | * | ** | ** | ** | *** |
| | Vng(A)-LSVng(A)-FRLS | -50÷50 | -15 | **** | **** | *** | ** | * | ** | ** | ** | *** |
| | Vng(A)-LS-HL Vng(A)-FRLS-HL | -60÷50 | -30 | **** | **** | *** | ** | * | ** | ** | ** | *** |
| Cross-linked highly elastic compound | Rng (A) | -50÷50 | -15 | **** | ** | **** | **** | **** | **** | **** | **** | **** |
| | Rng (A)-HL | -60÷50 | -30 | **** | ** | **** | **** | **** | **** | **** | **** | **** |
| Halogen-free cross-linked highly elastic compound | Rng (A)-HFRng (A)-FRHF | -50÷85 | -15 | ***** | ***** | **** | **** | **** | **** | **** | **** | **** |
| | Rng (A)-HF-HL Rng (A)-FRHF-HL | -65÷85 | -35 | ***** | ***** | **** | **** | **** | **** | **** | **** | **** |
| Halogen-free thermoplastic polymer compound | Png(A)-HFPng(A)-FRHF | -50÷85 | -15 | ***** | ***** | ** | ** | * | ** | ** | *** | *** |
| | Png(A)-HF-HL Png(A)-FRHF-HL | -65÷85 | -35 | ***** | ***** | ** | ** | * | ** | ** | **** | *** |
| Thermoplastic polyurethane elastomer | Tng(A) | -60÷90 | -30 | **** | ** | ***** | ***** | ***** | ***** | ***** | ***** | ***** |



FIRE SAFETY PERFORMANCE

- Cables are flame-retardant at a group laying.
- Fire resistance for cables with «FR» index.....not less than 180min
- Cables with index «LS» and «HF» are low-smoke in condition of burning and smouldering. Smoke emission does not decrease light permeability in test chamber:

| | |
|------------------|---------------|
| for cables «LS"» | more than 50% |
| for cables «HF"» | more than 40% |



TECHNICAL STANDARDS

- Ultraviolet category (U) and cold-resistant category (HL)

Operating temperature range:

Cables are designed for operating in stationary state at an ambient temperature:

| | |
|----------------------------------------------------------------------------------------------------------|----------------|
| for cables of any grade, except cables sheathed with thermoplastic elastomer and cold-resistant category | 50°C to +50°C |
| for cables sheathed with thermoplastic polyurethane elastomer | -60°C to +90°C |
| for cold-resistant category cables of any grade, except «ng(A)-HF-HL» | -60°C to +50°C |
| for cables «ng(A)-HF-HL» | -65°C to +85°C |
| for cables «ng(A)-HF» | -50°C to +85°C |

- Atmosphere relative humidity up to +35°C.....to 98%
- Conductor continuous heating temperature.....+90°C

Cables sheathed with cross-linked highly elastic compound (R) and thermoplastic polyurethane elastomer (T) are resistant to the periodic effect of oil and diesel fuel.

Minimum bending radius during laying and installation:

| | |
|-------------------------------------------------------------------------------------------------------------|------------------------------------------|
| for single conductor cable | min. 10D |
| for multi-conductor cables of any grade except for cables with flexible conductor | min. 7,5D |
| for cables with single flexible conductor unarmoured and armoured with braiding from galvanized steel wires | min. 5D where D is cable outer diameter. |

Cables can be laid and installed without preheating at a temperature not lower than:

- for cables «-HL» (except «ng(A)-HF-HL»).....-30 °C
- for cables «ng(A)-HF-HL».....-35 °C
- other grades.....-15 °C

Cables are resistant to UV radiation

Cables service life.....35 years

Warranty period.....5 years


Warranty period starts from the date of putting cables into operation, but not later than 6 months from the production date.

RECOMMENDATION ON CABLE LAYING

Material properties

| Material type | Cable grade designation | In dry soils (sand, sandy-clay and normal soil with humidity less than 14%) | In soil (humidity more than 14%) | In water-flooded and marshy soils | In open cable structures (overpasses, galleries), outdoor electric installations | In indoor electric installations, in buildings and closed cable structures | In indoor electric installations and structures of mass gathering |
|---------------------------------------------------|----------------------------------|-----------------------------------------------------------------------------|----------------------------------|-----------------------------------|----------------------------------------------------------------------------------|----------------------------------------------------------------------------|-------------------------------------------------------------------|
| PVC | Vng(A) | ✓ | - | - | ✓ | - | - |
| | Vng(A)-HL | ✓ | - | - | ✓ | - | - |
| | Vng(A)-LSVng(A)-FRLS | ✓ | - | - | ✓ | ✓ | - |
| | Vng(A)-LS-HL Vng(A)-FRLS-HL | ✓ | - | - | ✓ | ✓ | - |
| Cross-linked highly elastic compound | Rng (A) | ✓ | ✓ | ✓ | ✓ | - | - |
| | Rng (A)-HL | ✓ | ✓ | ✓ | ✓ | - | - |
| Halogen-free cross-linked highly elastic compound | Rng (A)-HFRng (A)-FRHF | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Rng (A)-HF-HL Rng (A)-FRHF-HL | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Halogen-free thermoplastic polymer compound | Png(A)-HFPng(A)-FRHF | ✓ | ✓ | - | ✓ | ✓ | ✓ |
| | Png(A)-HF-HL Png(A)-FRHF-HL | ✓ | ✓ | - | ✓ | ✓ | ✓ |
| Thermoplastic polyurethane elastomer | Tng(A) | ✓ | ✓ | ✓ | ✓ | - | - |


SHIELD TYPES

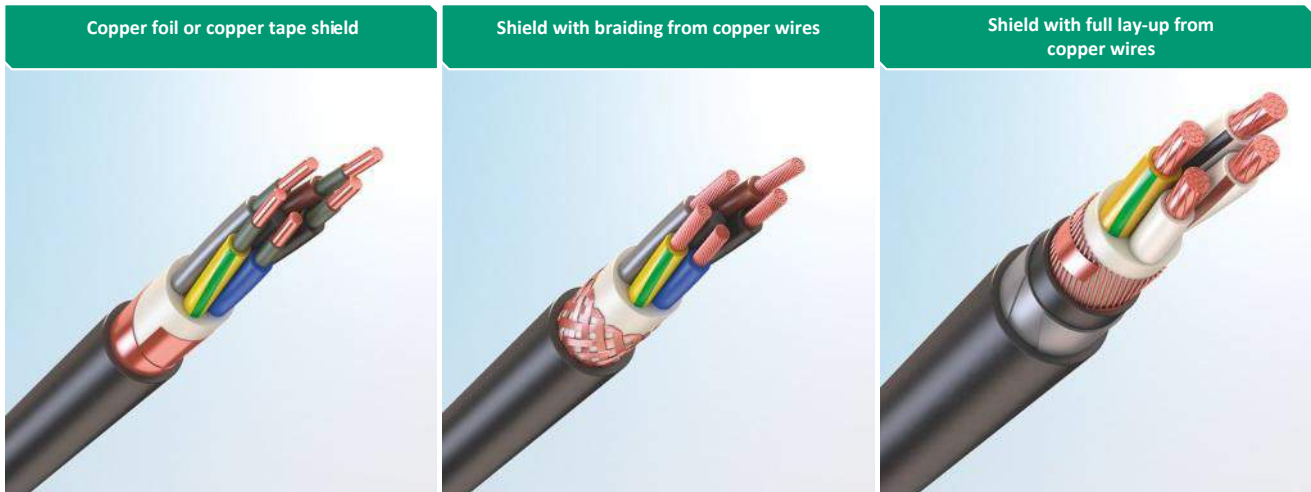

Default option

Is used in cables with a flexible conductor

The cross section of shield is indicated after the slash in cable grade

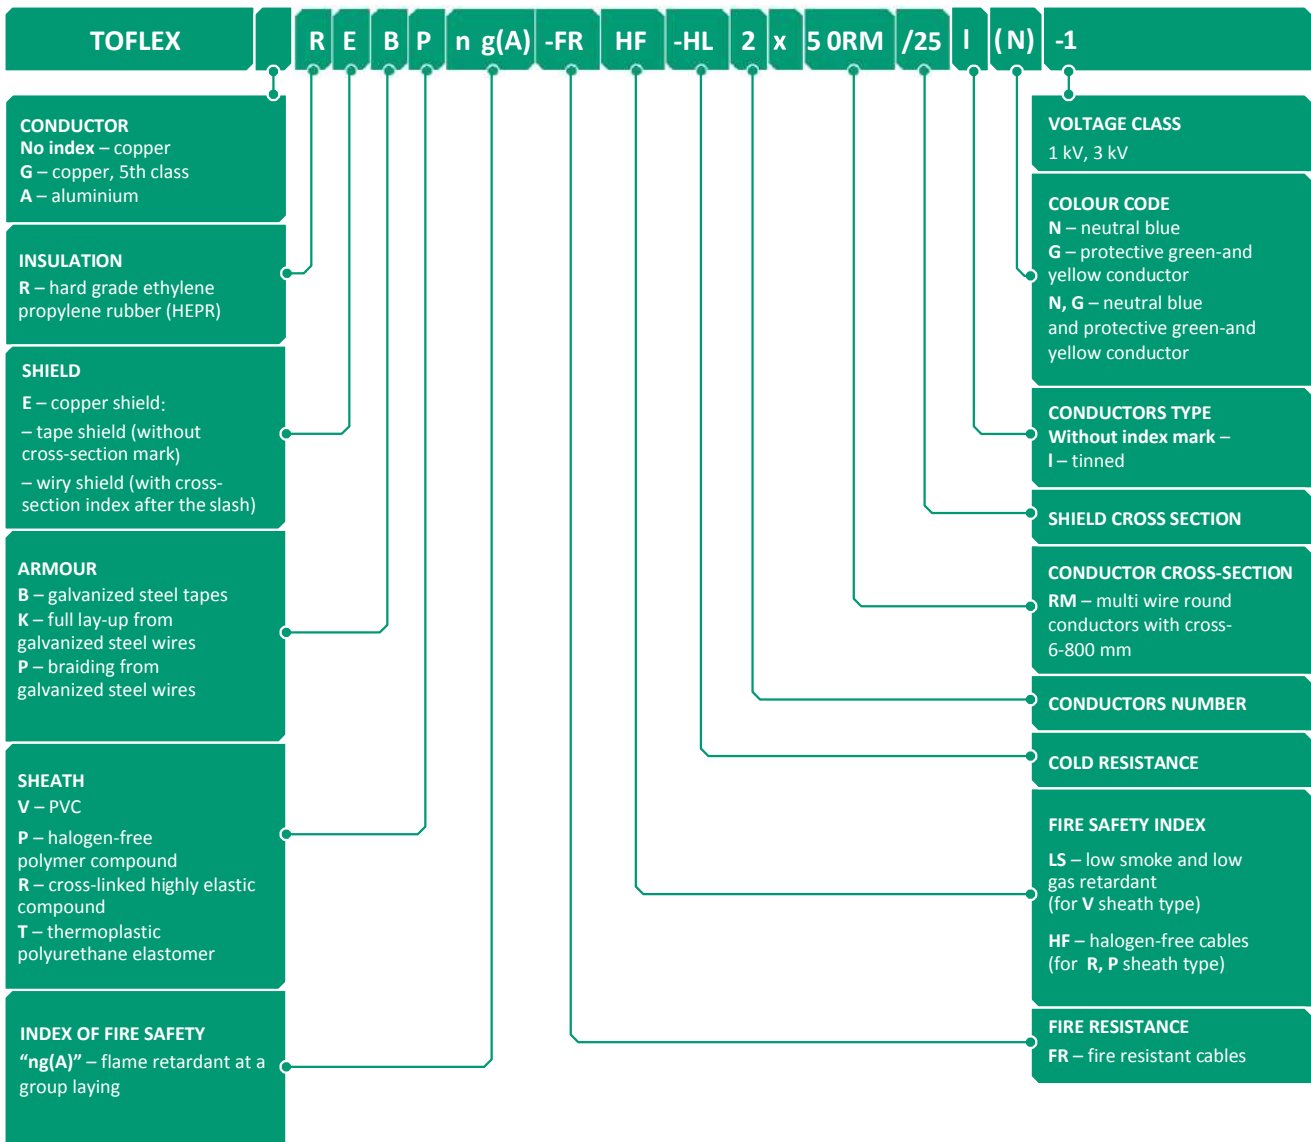

Designation examples when ordering and in other documentation:

| | |
|---------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Cable TOFLEX ARVng(A) 1×185RM-1 IEC 60502-1 | Power cable TOFLEX with single aluminium multi wire conductor with cross section 185 mm ² , insulated with hard grade ethylene propylene rubber, sheathed with flame retardant PVC-compound, for nominal voltage 1kV (Al/HEPR/PVC). |
| Cable TOFLEX GRRng(A)-HF 3×70RM - 1 IEC 60502-1 | Power cable TOFLEX with three copper multi wire conductors with cross section 70 mm ² , insulated with hard grade ethylene propylene rubber, sheathed with cross-linked highly elastic compound, for nominal voltage 1 kV (Cu/HEPR/XLHFFR). |
| Cable TOFLEX REPng(A)-FRHF 2×50RM/25(N)-1 IEC 60502-1 | Power cable TOFLEX with two copper multi wire conductors with cross section 50 mm ² , insulated with hard grade ethylene propylene rubber, shielded with copper wires with cross section 25mm ² , sheathed with halogen-free polymer compound, for nominal voltage 1 kV, flame retardant (Cu/MGT/HEPR/OSCR/HFFR). |
| Cable TOFLEX REBVng(A)-FRLS 3×95RM(N, G)-1 IEC 60502-1 | Power cable TOFLEX with three copper multi wire conductors with cross section 95 mm ² , insulated with hard grade ethylene propylene rubber, shielded with copper tapes or flexible materials based on copper foil, armoured with steel galvanized tapes, sheathed with flame retardant PVC-compound, for nominal voltage 1 kV (Cu/HEPR/OSCR/LSPVC/STA/LSPVC). |
| Cable TOFLEX REVng(A)-LS 1×150RM-3 IEC 60502-1 | Power cable TOFLEX with single copper multi wire conductor with cross section 150mm ² , insulated with hard grade ethylene propylene rubber, shielded with copper tapes or flexible materials based on copper foil, sheathed with flame retardant PVC-compound, for nominal voltage 3 kV (Cu/HEPR/OSCR/LSPVC). |


POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

1. UNSHIELDED UNARMoured

IEC 60502-1

1.1 Cables with PVC sheath

- TOFLEX R Vng(A)
- TOFLEX GRVng(A)
- TOFLEX ARVng(A)
- Cu/HEPR/PVC, Al/HEPR/PVC

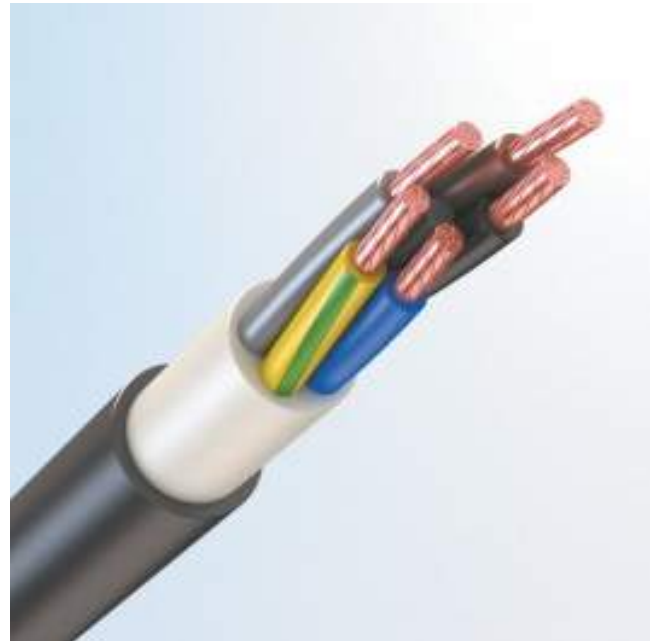

Possible options:

| | |
|---------------|---------------------------------|
| «ng(A)-HL» | |
| «ng(A)-LS» | (Cu/HEPR/LSPVC, Al/ HEPR/LSPVC) |
| «ng(A)-LS-HL» | (materials as above) |

DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; copper flexible (version GRV) of 5th class (according to IEC 60228).
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Outer sheath:**
 - «ng(A)» – made from PVC-compound with low fire hazard.
 - «ng(A)-HL» – made from cold-resistant PVC-compound with low fire hazard.
 - «ng(A)-LS» – made from PVC-compound with low fire hazard, low smoke and gas emission.
 - «ng(A)-LS-HL» – made from cold-resistant PVC-compound with low fire hazard, low smoke and gas emission.

► **Ordering example:**

«TOFLEX R Vng(A)-LS 3×95RM(N, G)-1 IEC 60502-1»

CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|-------------------|-------------------|----------------------|---------------------------------------|
| | | | | TOFLEX RVng(A) | TOFLEX RVng(A)-HL | TOFLEX RVng(A)-LS | TOFLEX RVng(A)-LS-HL | |
| 1x1,5 RE | 1 | 7.0 | 69.6 | 64 | 64 | 72 | 72 | 36.3 |
| 1x2,5 RE | 1 | 7.4 | 73.6 | 77 | 77 | 86 | 86 | 39.7 |
| 1x4 RE | 1 | 7.8 | 78.2 | 95 | 95 | 105 | 105 | 43.7 |
| 1x6 RE | 1 | 8.3 | 83.2 | 118 | 118 | 128 | 128 | 48.0 |
| 1x10 RE | 1 | 9.1 | 91.0 | 161 | 161 | 173 | 173 | 54.8 |
| 1x16 RE | 1 | 10.1 | 100.5 | 225 | 225 | 184 | 184 | 63.0 |
| 1x16 RM | 1 | 10.5 | 105.0 | 232 | 232 | 238 | 238 | 66.9 |
| 1x25 RE | 1 | 11.6 | 115.5 | 323 | 323 | 245 | 245 | 79.4 |
| 1x25 RM | 1 | 11.9 | 119.0 | 331 | 331 | 346 | 346 | 82.7 |
| 1x35 RM | 1 | 12.9 | 129.0 | 425 | 425 | 442 | 442 | 91.9 |
| 1x50 RM | 1 | 14.6 | 146.0 | 600 | 600 | 620 | 620 | 112.7 |
| 1x70 RM | 1 | 16.2 | 162.0 | 771 | 771 | 793 | 793 | 128.5 |
| 1x95 RM | 1 | 18.3 | 183.0 | 1026 | 1026 | 1052 | 1052 | 156.2 |
| 1x120 RM | 1 | 19.7 | 197.0 | 1270 | 1270 | 1298 | 1298 | 170.9 |
| 1x150 RM | 1 | 21.5 | 215.0 | 1548 | 1548 | 1578 | 1578 | 198.4 |
| 1x185 RM | 1 | 23.5 | 235.0 | 1906 | 1906 | 1939 | 1939 | 230.2 |
| 1x240 RM | 1 | 26.6 | 266.0 | 2440 | 2440 | 2482 | 2482 | 289.3 |
| 1x300 RM | 1 | 30.9 | 308.5 | 3081 | 3081 | 3130 | 3130 | 372.7 |
| 1x400 RM | 1 | 35.0 | 349.9 | 3964 | 3964 | 4030 | 4030 | 479.8 |
| 1x500 RM | 1 | 38.6 | 385.7 | 4958 | 4958 | 5031 | 5031 | 555.6 |
| 1x630 RM | 1 | 42.5 | 425.3 | 6321 | 6321 | 6402 | 6402 | 621.7 |
| 2x1,5 RE | 1 | 10.3 | 77.4 | 143 | 143 | 162 | 162 | 82.7 |
| 2x2,5 RE | 1 | 11.1 | 83.4 | 177 | 177 | 198 | 198 | 94.4 |
| 2x4 RE | 1 | 12.0 | 90.3 | 223 | 223 | 247 | 247 | 108.5 |
| 2x6 RE | 1 | 13.0 | 97.8 | 281 | 281 | 308 | 308 | 124.7 |
| 2x10 RE | 1 | 14.6 | 109.5 | 387 | 387 | 420 | 420 | 151.5 |
| 2x16 RE | 1 | 16.5 | 123.8 | 543 | 543 | 585 | 585 | 186.8 |
| 2x16 RM | 1 | 17.4 | 130.5 | 572 | 572 | 617 | 617 | 204.6 |
| 2x25 RE | 1 | 21.5 | 161.3 | 894 | 894 | 988 | 988 | 322.5 |
| 2x25 RM | 1 | 22.2 | 166.5 | 928 | 928 | 1028 | 1028 | 340.6 |
| 2x35 RM | 1 | 24.6 | 184.5 | 1194 | 1194 | 1316 | 1316 | 410.7 |
| 2x50 RM | 1 | 28.0 | 210.0 | 1651 | 1651 | 1806 | 1806 | 522.4 |
| 2x70 RM | 1 | 31.6 | 237.0 | 2138 | 2138 | 2334 | 2334 | 649.1 |
| 2x95 RM | 1 | 36.6 | 274.5 | 2893 | 2893 | 3153 | 3153 | 865.1 |
| 2x120 RM | 1 | 39.4 | 295.5 | 3515 | 3515 | 3813 | 3813 | 981.5 |
| 2x150 RM | 1 | 43.4 | 325.5 | 4298 | 4298 | 4661 | 4661 | 1186.3 |
| 2x185 RM | 1 | 48.2 | 361.5 | 5337 | 5337 | 5781 | 5781 | 1462.2 |
| 2x240 RM | 1 | 54.0 | 405.0 | 6759 | 6759 | 7314 | 7314 | 1812.4 |
| 3x1,5 RE | 1 | 10.8 | 81.2 | 162 | 162 | 180 | 180 | 88.8 |
| 3x2,5 RE | 1 | 11.7 | 87.6 | 205 | 205 | 226 | 226 | 101.0 |
| 3x4 RE | 1 | 12.7 | 95.0 | 264 | 264 | 287 | 287 | 115.7 |
| 3x6 RE | 1 | 13.7 | 103.1 | 339 | 339 | 365 | 365 | 132.2 |
| 3x10 RE | 1 | 15.4 | 115.7 | 478 | 478 | 510 | 510 | 159.2 |
| 3x16 RE | 1 | 17.5 | 131.0 | 686 | 686 | 725 | 725 | 194.2 |
| 3x16 RM | 1 | 18.4 | 138.3 | 715 | 715 | 757 | 757 | 211.6 |
| 3x25 RE | 1 | 22.7 | 170.2 | 1118 | 1118 | 1207 | 1207 | 335.4 |
| 3x25 RM | 1 | 23.4 | 175.8 | 1155 | 1155 | 1249 | 1249 | 353.3 |
| 3x35 RM | 1 | 26.0 | 195.0 | 1502 | 1502 | 1616 | 1616 | 423.0 |
| 3x50 RM | 1 | 29.7 | 222.4 | 2106 | 2106 | 2248 | 2248 | 536.2 |

| | | | | | | | | |
|----------|---|------|-------|-------|-------|-------|-------|--------|
| 3x70 RM | 1 | 33.5 | 251.2 | 2737 | 2737 | 2916 | 2916 | 659.8 |
| 3x95 RM | 1 | 38.8 | 291.0 | 3709 | 3709 | 3947 | 3947 | 877.6 |
| 3x120 RM | 1 | 41.8 | 313.6 | 4546 | 4546 | 4816 | 4816 | 987.9 |
| 3x150 RM | 1 | 46.9 | 351.6 | 5660 | 5660 | 6003 | 6003 | 1254.0 |
| 3x185 RM | 1 | 51.2 | 383.9 | 6922 | 6922 | 7322 | 7322 | 1470.5 |
| 3x240 RM | 1 | 58.0 | 434.9 | 8869 | 8869 | 9381 | 9381 | 1871.7 |
| 4x1,5 RE | 1 | 11.7 | 87.7 | 190 | 190 | 209 | 209 | 100.5 |
| 4x2,5 RE | 1 | 12.7 | 95.0 | 243 | 243 | 265 | 265 | 114.5 |
| 4x4 RE | 1 | 13.8 | 103.3 | 317 | 317 | 342 | 342 | 131.1 |
| 4x6 RE | 1 | 15.0 | 112.3 | 412 | 412 | 440 | 440 | 149.7 |
| 4x10 RE | 1 | 16.9 | 126.4 | 589 | 589 | 623 | 623 | 179.9 |
| 4x16 RE | 1 | 19.1 | 143.6 | 854 | 854 | 895 | 895 | 218.8 |
| 4x16 RM | 1 | 20.2 | 151.7 | 886 | 886 | 931 | 931 | 237.9 |
| 4x25 RE | 1 | 25.2 | 188.7 | 1409 | 1409 | 1507 | 1507 | 392.4 |
| 4x25 RM | 1 | 26.0 | 195.0 | 1453 | 1453 | 1556 | 1556 | 412.7 |
| 4x35 RM | 1 | 28.4 | 213.1 | 1866 | 1866 | 1985 | 1985 | 472.4 |
| 4x50 RM | 1 | 32.9 | 246.8 | 2667 | 2667 | 2824 | 2824 | 621.1 |
| 4x70 RM | 1 | 37.6 | 281.7 | 3504 | 3504 | 3705 | 3705 | 783.2 |
| 4x95 RM | 1 | 43.0 | 322.7 | 4697 | 4697 | 4956 | 4956 | 1004.7 |
| 4x120 RM | 1 | 47.2 | 354.0 | 5866 | 5866 | 6176 | 6176 | 1187.5 |
| 4x150 RM | 1 | 51.5 | 386.5 | 7126 | 7126 | 7484 | 7484 | 1391.8 |
| 4x185 RM | 1 | 57.4 | 430.2 | 8876 | 8876 | 9321 | 9321 | 1725.7 |
| 4x240 RM | 1 | 63.9 | 479.0 | 11195 | 11195 | 11727 | 11727 | 2075.8 |
| 5x1,5 RE | 1 | 12.7 | 95.0 | 225 | 225 | 246 | 246 | 114.0 |
| 5x2,5 RE | 1 | 13.8 | 103.1 | 290 | 290 | 314 | 314 | 130.0 |
| 5x4 RE | 1 | 15.0 | 112.5 | 382 | 382 | 409 | 409 | 149.0 |
| 5x6 RE | 1 | 16.3 | 122.6 | 505 | 505 | 535 | 535 | 170.2 |
| 5x10 RE | 1 | 18.5 | 138.4 | 721 | 721 | 758 | 758 | 204.5 |
| 5x16 RE | 1 | 21.0 | 157.6 | 1046 | 1046 | 1091 | 1091 | 248.5 |
| 5x16 RM | 1 | 22.2 | 166.7 | 1083 | 1083 | 1131 | 1131 | 270.1 |
| 5x25 RE | 1 | 27.5 | 206.0 | 1721 | 1721 | 1827 | 1827 | 442.8 |
| 5x25 RM | 1 | 28.4 | 213.1 | 1772 | 1772 | 1884 | 1884 | 465.7 |
| 5x35 RM | 1 | 31.5 | 236.3 | 2321 | 2321 | 2458 | 2458 | 553.2 |
| 5x50 RM | 1 | 36.9 | 276.8 | 3355 | 3355 | 3537 | 3537 | 749.1 |
| 5x70 RM | 1 | 41.2 | 309.2 | 4359 | 4359 | 4577 | 4577 | 881.9 |
| 5x95 RM | 1 | 48.1 | 360.7 | 5905 | 5905 | 6201 | 6201 | 1194.6 |
| 5x120 RM | 1 | 51.9 | 389.0 | 7235 | 7235 | 7569 | 7569 | 1335.4 |
| 5x150 RM | 1 | 57.7 | 433.0 | 8915 | 8915 | 9331 | 9331 | 1661.0 |
| 5x185 RM | 1 | 63.1 | 473.5 | 11056 | 11056 | 11536 | 11536 | 1943.4 |


POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

1. UNSHIELDED UNARMoured

IEC 60502-1

1.2 Cables sheathed with cross-linked highly elastic polymer compound

- TOFLEX R Rng(A)
- TOFLEX GRRng(A)
- TOFLEX ARRng(A)
- Cu/HEPR/XLFR, Al/HEPR/ XLFR

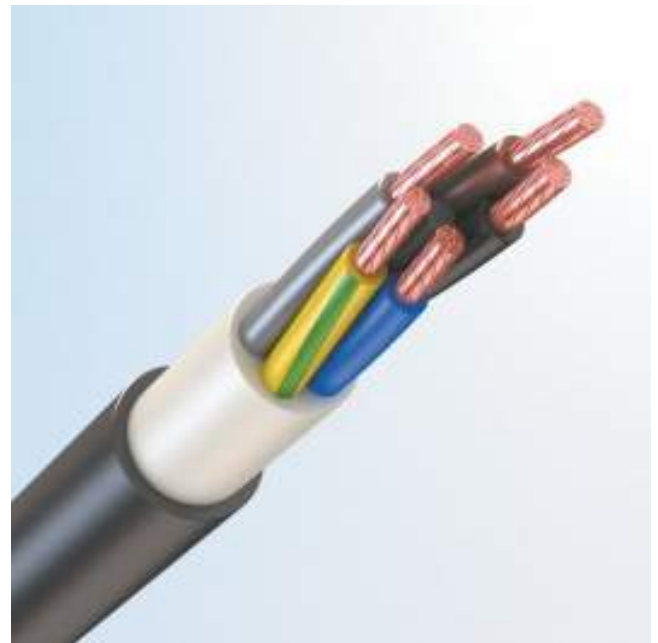

Possible options:

| | |
|---------------|----------------------------------|
| «ng(A)-HL» | |
| «ng(A)-HF» | (Cu/HEPR/XLHFFR, Al/HEPR/XLHFFR) |
| «ng(A)-HF-HL» | (materials as above) |



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; copper flexible (version GRR) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Outer sheath:**
 - «ng(A)» – made from cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HL» – made from cold-resistant cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HF» – made from halogen-free cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HF-HL» – made from cold-resistant halogen-free cross-linked highly elastic polymer compound with low fire hazard.

► **Ordering example:**

«TOFLEX R Rng(A)-HF-HL5x95RM(N,G)-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|-------------------|-------------------|----------------------|---------------------------------------|
| | | | | TOFLEX RRng(A) | TOFLEX RRng(A)-HL | TOFLEX RRng(A)-HF | TOFLEX RRng(A)-HF-HL | |
| 1x1,5 RE | 1 | 7.0 | 69.6 | 60 | 60 | 60 | 60 | 36.3 |
| 1x2,5 RE | 1 | 7.4 | 73.6 | 73 | 73 | 73 | 73 | 39.7 |
| 1x4 RE | 1 | 7.8 | 78.2 | 90 | 90 | 90 | 90 | 43.7 |
| 1x6 RE | 1 | 8.3 | 83.2 | 113 | 113 | 113 | 113 | 48.0 |
| 1x10 RE | 1 | 9.1 | 91.0 | 155 | 155 | 155 | 155 | 54.8 |
| 1x16 RE | 1 | 10.1 | 100.5 | 218 | 218 | 218 | 218 | 63.0 |
| 1x16 RM | 1 | 10.5 | 105.0 | 224 | 224 | 224 | 224 | 66.9 |
| 1x25 RE | 1 | 11.6 | 115.5 | 314 | 314 | 314 | 314 | 79.4 |
| 1x25 RM | 1 | 11.9 | 119.0 | 322 | 322 | 322 | 322 | 82.7 |
| 1x35 RM | 1 | 12.9 | 129.0 | 416 | 416 | 416 | 416 | 91.9 |
| 1x50 RM | 1 | 14.6 | 146.0 | 589 | 589 | 589 | 589 | 112.7 |
| 1x70 RM | 1 | 16.2 | 162.0 | 758 | 758 | 758 | 758 | 128.5 |
| 1x95 RM | 1 | 18.3 | 183.0 | 1012 | 1012 | 1012 | 1012 | 156.2 |
| 1x120 RM | 1 | 19.7 | 197.0 | 1255 | 1255 | 1255 | 1255 | 170.9 |
| 1x150 RM | 1 | 21.5 | 215.0 | 1531 | 1531 | 1531 | 1531 | 198.4 |
| 1x185 RM | 1 | 23.5 | 235.0 | 1888 | 1888 | 1888 | 1888 | 230.2 |
| 1x240 RM | 1 | 26.6 | 266.0 | 2417 | 2417 | 2417 | 2417 | 289.3 |
| 1x300 RM | 1 | 30.9 | 308.5 | 3053 | 3053 | 3053 | 3053 | 372.7 |
| 1x400 RM | 1 | 35.0 | 349.9 | 3926 | 3926 | 3926 | 3926 | 479.8 |
| 1x500 RM | 1 | 38.6 | 385.7 | 4916 | 4916 | 4916 | 4916 | 555.6 |
| 1x630 RM | 1 | 42.5 | 425.3 | 6274 | 6274 | 6274 | 6274 | 621.7 |
| 2x1,5 RE | 1 | 10.3 | 77.4 | 133 | 133 | 133 | 133 | 82.7 |
| 2x2,5 RE | 1 | 11.1 | 83.4 | 165 | 165 | 165 | 165 | 94.4 |
| 2x4 RE | 1 | 12.0 | 90.3 | 209 | 209 | 209 | 209 | 108.5 |
| 2x6 RE | 1 | 13.0 | 97.8 | 265 | 265 | 265 | 265 | 124.7 |
| 2x10 RE | 1 | 14.6 | 109.5 | 368 | 368 | 368 | 368 | 151.5 |
| 2x16 RE | 1 | 16.5 | 123.8 | 520 | 520 | 520 | 520 | 186.8 |
| 2x16 RM | 1 | 17.4 | 130.5 | 546 | 546 | 546 | 546 | 204.6 |
| 2x25 RE | 1 | 21.5 | 161.3 | 930 | 930 | 930 | 930 | 322.5 |
| 2x25 RM | 1 | 22.2 | 166.5 | 967 | 967 | 967 | 967 | 340.6 |
| 2x35 RM | 1 | 24.6 | 184.5 | 1241 | 1241 | 1241 | 1241 | 410.7 |
| 2x50 RM | 1 | 28.0 | 210.0 | 1718 | 1718 | 1718 | 1718 | 522.4 |
| 2x70 RM | 1 | 31.6 | 237.0 | 2231 | 2231 | 2231 | 2231 | 649.1 |
| 2x95 RM | 1 | 36.6 | 274.5 | 3011 | 3011 | 3011 | 3011 | 865.1 |
| 2x120 RM | 1 | 39.4 | 295.5 | 3658 | 3658 | 3658 | 3658 | 981.5 |
| 2x150 RM | 1 | 43.4 | 325.5 | 4483 | 4483 | 4483 | 4483 | 1186.3 |
| 2x185 RM | 1 | 48.2 | 361.5 | 5555 | 5555 | 5555 | 5555 | 1462.2 |
| 2x240 RM | 1 | 54.0 | 405.0 | 7052 | 7052 | 7052 | 7052 | 1812.4 |
| 3x1,5 RE | 1 | 10.8 | 81.2 | 152 | 152 | 152 | 152 | 88.8 |
| 3x2,5 RE | 1 | 11.7 | 87.6 | 194 | 194 | 194 | 194 | 101.0 |
| 3x4 RE | 1 | 12.7 | 95.0 | 251 | 251 | 251 | 251 | 115.7 |
| 3x6 RE | 1 | 13.7 | 103.1 | 323 | 323 | 323 | 323 | 132.2 |
| 3x10 RE | 1 | 15.4 | 115.7 | 460 | 460 | 460 | 460 | 159.2 |
| 3x16 RE | 1 | 17.5 | 131.0 | 664 | 664 | 664 | 664 | 194.2 |
| 3x16 RM | 1 | 18.4 | 138.3 | 690 | 690 | 690 | 690 | 211.6 |
| 3x25 RE | 1 | 22.7 | 170.2 | 1147 | 1147 | 1147 | 1147 | 335.4 |
| 3x25 RM | 1 | 23.4 | 175.8 | 1186 | 1186 | 1186 | 1186 | 353.3 |
| 3x35 RM | 1 | 26.0 | 195.0 | 1539 | 1539 | 1539 | 1539 | 423.0 |
| 3x50 RM | 1 | 29.7 | 222.4 | 2158 | 2158 | 2158 | 2158 | 536.2 |

| | | | | | | | | |
|----------|---|------|-------|-------|-------|-------|-------|--------|
| 3x70 RM | 1 | 33.5 | 251.2 | 2811 | 2811 | 2811 | 2811 | 659.8 |
| 3x95 RM | 1 | 38.8 | 291.0 | 3802 | 3802 | 3802 | 3802 | 877.6 |
| 3x120 RM | 1 | 41.8 | 313.6 | 4658 | 4658 | 4658 | 4658 | 987.9 |
| 3x150 RM | 1 | 46.9 | 351.6 | 5798 | 5798 | 5798 | 5798 | 1254.0 |
| 3x185 RM | 1 | 51.2 | 383.9 | 7093 | 7093 | 7093 | 7093 | 1470.5 |
| 3x240 RM | 1 | 58.0 | 434.9 | 9093 | 9093 | 9093 | 9093 | 1871.7 |
| 4x1,5 RE | 1 | 11.7 | 87.7 | 178 | 178 | 178 | 178 | 100.5 |
| 4x2,5 RE | 1 | 12.7 | 95.0 | 231 | 231 | 231 | 231 | 114.5 |
| 4x4 RE | 1 | 13.8 | 103.3 | 303 | 303 | 303 | 303 | 131.1 |
| 4x6 RE | 1 | 15.0 | 112.3 | 395 | 395 | 395 | 395 | 149.7 |
| 4x10 RE | 1 | 16.9 | 126.4 | 570 | 570 | 570 | 570 | 179.9 |
| 4x16 RE | 1 | 19.1 | 143.6 | 831 | 831 | 831 | 831 | 218.8 |
| 4x16 RM | 1 | 20.2 | 151.7 | 861 | 861 | 861 | 861 | 237.9 |
| 4x25 RE | 1 | 25.2 | 188.7 | 1434 | 1434 | 1434 | 1434 | 392.4 |
| 4x25 RM | 1 | 26.0 | 195.0 | 1481 | 1481 | 1481 | 1481 | 412.7 |
| 4x35 RM | 1 | 28.4 | 213.1 | 1901 | 1901 | 1901 | 1901 | 472.4 |
| 4x50 RM | 1 | 32.9 | 246.8 | 2724 | 2724 | 2724 | 2724 | 621.1 |
| 4x70 RM | 1 | 37.6 | 281.7 | 3569 | 3569 | 3569 | 3569 | 783.2 |
| 4x95 RM | 1 | 43.0 | 322.7 | 4795 | 4795 | 4795 | 4795 | 1004.7 |
| 4x120 RM | 1 | 47.2 | 354.0 | 5974 | 5974 | 5974 | 5974 | 1187.5 |
| 4x150 RM | 1 | 51.5 | 386.5 | 7260 | 7260 | 7260 | 7260 | 1391.8 |
| 4x185 RM | 1 | 57.4 | 430.2 | 9044 | 9044 | 9044 | 9044 | 1725.7 |
| 4x240 RM | 1 | 63.9 | 479.0 | 11412 | 11412 | 11412 | 11412 | 2075.8 |
| 5x1,5 RE | 1 | 12.7 | 95.0 | 213 | 213 | 213 | 213 | 114.0 |
| 5x2,5 RE | 1 | 13.8 | 103.1 | 276 | 276 | 276 | 276 | 130.0 |
| 5x4 RE | 1 | 15.0 | 112.5 | 367 | 367 | 366 | 366 | 149.0 |
| 5x6 RE | 1 | 16.3 | 122.6 | 487 | 487 | 486 | 486 | 170.2 |
| 5x10 RE | 1 | 18.5 | 138.4 | 700 | 700 | 700 | 700 | 204.5 |
| 5x16 RE | 1 | 21.0 | 157.6 | 1020 | 1020 | 1020 | 1020 | 248.5 |
| 5x16 RM | 1 | 22.2 | 166.7 | 1055 | 1055 | 1054 | 1054 | 270.1 |
| 5x25 RE | 1 | 27.5 | 206.0 | 1748 | 1748 | 1746 | 1746 | 442.8 |
| 5x25 RM | 1 | 28.4 | 213.1 | 1802 | 1802 | 1800 | 1800 | 465.7 |
| 5x35 RM | 1 | 31.5 | 236.3 | 2364 | 2364 | 2362 | 2362 | 553.2 |
| 5x50 RM | 1 | 36.9 | 276.8 | 3407 | 3407 | 3404 | 3404 | 749.1 |
| 5x70 RM | 1 | 41.2 | 309.2 | 4428 | 4428 | 4421 | 4421 | 881.9 |
| 5x95 RM | 1 | 48.1 | 360.7 | 5999 | 5999 | 5992 | 5992 | 1194.6 |
| 5x120 RM | 1 | 51.9 | 389.0 | 7348 | 7348 | 7341 | 7341 | 1335.4 |
| 5x150 RM | 1 | 57.7 | 433.0 | 9057 | 9057 | 9050 | 9050 | 1661.0 |
| 5x185 RM | 1 | 63.1 | 473.5 | 11232 | 11232 | 11216 | 11216 | 1943.4 |
| 5x240 RM | 1 | 71.8 | 538.7 | 14359 | 14359 | 14343 | 14343 | 2501.6 |


POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

1. UNSHIELDED UNARMOURED

IEC 60502-1

1.3 Cables sheathed with halogen-free polymer compound

- TOFLEX RPng(A)-HF
- TOFLEX GRPng(A)-HF
- TOFLEX ARPng(A)-HF
- Cu/HEPR/HFFR, Al/HEPR/HFFR

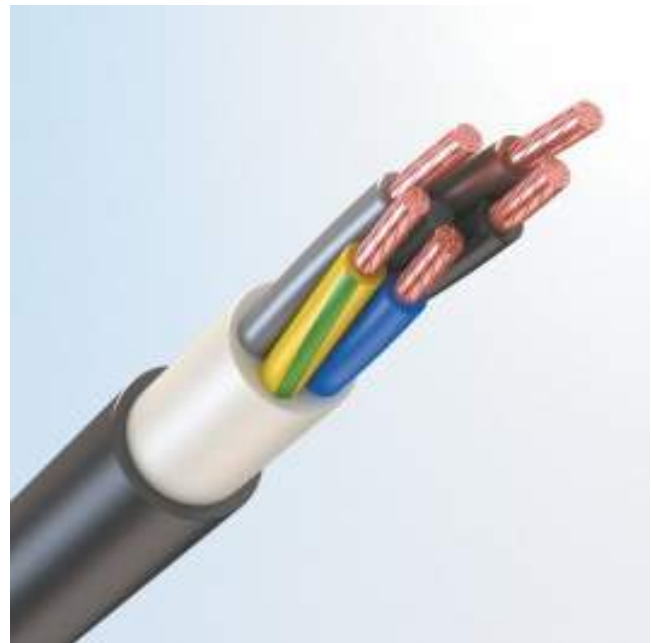

Possible options:

«ng(A)-HL»



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; copper flexible (version GRP) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Outer sheath:**
 - «ng(A)-HF» — made from halogen-free polymer compounds.
 - «ng(A)-HF-HL» — made from cold-resistant halogen-free polymer compounds.

► **Ordering example:**

«TOFLEX RPng(A)-HF-HL1×185RM-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|----------------------|---------------------------------------|
| | | | | TOFLEX RPng(A)-HF | TOFLEX RPng(A)-HF-HL | |
| 1x1,5 RE | 1 | 7.0 | 69.6 | 63 | 63 | 36.3 |
| 1x2,5 RE | 1 | 7.4 | 73.6 | 77 | 77 | 39.7 |
| 1x4 RE | 1 | 7.8 | 78.2 | 95 | 95 | 43.7 |
| 1x6 RE | 1 | 8.3 | 83.2 | 118 | 118 | 48.0 |
| 1x10 RE | 1 | 9.1 | 91.0 | 161 | 161 | 54.8 |
| 1x16 RE | 1 | 10.1 | 100.5 | 224 | 224 | 63.0 |
| 1x16 RM | 1 | 10.5 | 105.0 | 231 | 231 | 66.9 |
| 1x25 RE | 1 | 11.6 | 115.5 | 322 | 322 | 79.4 |
| 1x25 RM | 1 | 11.9 | 119.0 | 330 | 330 | 82.7 |
| 1x35 RM | 1 | 12.9 | 129.0 | 424 | 424 | 91.9 |
| 1x50 RM | 1 | 14.6 | 146.0 | 599 | 599 | 112.7 |
| 1x70 RM | 1 | 16.2 | 162.0 | 769 | 769 | 128.5 |
| 1x95 RM | 1 | 18.3 | 183.0 | 1024 | 1024 | 156.2 |
| 1x120 RM | 1 | 19.7 | 197.0 | 1268 | 1268 | 170.9 |
| 1x150 RM | 1 | 21.5 | 215.0 | 1546 | 1546 | 198.4 |
| 1x185 RM | 1 | 23.5 | 235.0 | 1904 | 1904 | 230.2 |
| 1x240 RM | 1 | 26.6 | 266.0 | 2437 | 2437 | 289.3 |
| 1x300 RM | 1 | 30.9 | 308.5 | 3077 | 3077 | 372.7 |
| 1x400 RM | 1 | 35.0 | 349.9 | 3959 | 3959 | 479.8 |
| 1x500 RM | 1 | 38.6 | 385.7 | 4952 | 4952 | 555.6 |
| 1x630 RM | 1 | 42.5 | 425.3 | 6314 | 6314 | 621.7 |
| 2x1,5 RE | 1 | 10.3 | 77.4 | 142 | 142 | 82.7 |
| 2x2,5 RE | 1 | 11.1 | 83.4 | 176 | 176 | 94.4 |
| 2x4 RE | 1 | 12.0 | 90.3 | 221 | 221 | 108.5 |
| 2x6 RE | 1 | 13.0 | 97.8 | 278 | 278 | 124.7 |
| 2x10 RE | 1 | 14.6 | 109.5 | 384 | 384 | 151.5 |
| 2x16 RE | 1 | 16.5 | 123.8 | 540 | 540 | 186.8 |
| 2x16 RM | 1 | 17.4 | 130.5 | 568 | 568 | 204.6 |
| 2x25 RE | 1 | 21.5 | 161.3 | 945 | 945 | 322.5 |
| 2x25 RM | 1 | 22.2 | 166.5 | 983 | 983 | 340.6 |
| 2x35 RM | 1 | 24.6 | 184.5 | 1261 | 1261 | 410.7 |
| 2x50 RM | 1 | 28.0 | 210.0 | 1740 | 1740 | 522.4 |
| 2x70 RM | 1 | 31.6 | 237.0 | 2257 | 2257 | 649.1 |
| 2x95 RM | 1 | 36.6 | 274.5 | 3047 | 3047 | 865.1 |
| 2x120 RM | 1 | 39.4 | 295.5 | 3696 | 3696 | 981.5 |
| 2x150 RM | 1 | 43.4 | 325.5 | 4526 | 4526 | 1186.3 |
| 2x185 RM | 1 | 48.2 | 361.5 | 5611 | 5611 | 1462.2 |
| 2x240 RM | 1 | 54.0 | 405.0 | 7114 | 7114 | 1812.4 |
| 3x1,5 RE | 1 | 10.8 | 81.2 | 161 | 161 | 88.8 |
| 3x2,5 RE | 1 | 11.7 | 87.6 | 204 | 204 | 101.0 |
| 3x4 RE | 1 | 12.7 | 95.0 | 262 | 262 | 115.7 |
| 3x6 RE | 1 | 13.7 | 103.1 | 337 | 337 | 132.2 |
| 3x10 RE | 1 | 15.4 | 115.7 | 476 | 476 | 159.2 |
| 3x16 RE | 1 | 17.5 | 131.0 | 683 | 683 | 194.2 |
| 3x16 RM | 1 | 18.4 | 138.3 | 711 | 711 | 211.6 |
| 3x25 RE | 1 | 22.7 | 170.2 | 1163 | 1163 | 335.4 |
| 3x25 RM | 1 | 23.4 | 175.8 | 1203 | 1203 | 353.3 |
| 3x35 RM | 1 | 26.0 | 195.0 | 1560 | 1560 | 423.0 |
| 3x50 RM | 1 | 29.7 | 222.4 | 2182 | 2182 | 536.2 |

| | | | | | | |
|----------|---|------|-------|-------|-------|--------|
| 3x70 RM | 1 | 33.5 | 251.2 | 2838 | 2838 | 659.8 |
| 3x95 RM | 1 | 38.8 | 291.0 | 3840 | 3840 | 877.6 |
| 3x120 RM | 1 | 41.8 | 313.6 | 4699 | 4699 | 987.9 |
| 3x150 RM | 1 | 46.9 | 351.6 | 5852 | 5852 | 1254.0 |
| 3x185 RM | 1 | 51.2 | 383.9 | 7152 | 7152 | 1470.5 |
| 3x240 RM | 1 | 58.0 | 434.9 | 9167 | 9167 | 1871.7 |
| 4x1,5 RE | 1 | 11.7 | 87.7 | 188 | 188 | 100.5 |
| 4x2,5 RE | 1 | 12.7 | 95.0 | 242 | 242 | 114.5 |
| 4x4 RE | 1 | 13.8 | 103.3 | 315 | 315 | 131.1 |
| 4x6 RE | 1 | 15.0 | 112.3 | 409 | 409 | 149.7 |
| 4x10 RE | 1 | 16.9 | 126.4 | 586 | 586 | 179.9 |
| 4x16 RE | 1 | 19.1 | 143.6 | 851 | 851 | 218.8 |
| 4x16 RM | 1 | 20.2 | 151.7 | 883 | 883 | 237.9 |
| 4x25 RE | 1 | 25.2 | 188.7 | 1454 | 1454 | 392.4 |
| 4x25 RM | 1 | 26.0 | 195.0 | 1502 | 1502 | 412.7 |
| 4x35 RM | 1 | 28.4 | 213.1 | 1924 | 1924 | 472.4 |
| 4x50 RM | 1 | 32.9 | 246.8 | 2750 | 2750 | 621.1 |
| 4x70 RM | 1 | 37.6 | 281.7 | 3606 | 3606 | 783.2 |
| 4x95 RM | 1 | 43.0 | 322.7 | 4838 | 4838 | 1004.7 |
| 4x120 RM | 1 | 47.2 | 354.0 | 6028 | 6028 | 1187.5 |
| 4x150 RM | 1 | 51.5 | 386.5 | 7319 | 7319 | 1391.8 |
| 4x185 RM | 1 | 57.4 | 430.2 | 9118 | 9118 | 1725.7 |
| 4x240 RM | 1 | 63.9 | 479.0 | 11495 | 11495 | 2075.8 |
| 5x1,5 RE | 1 | 12.7 | 95.0 | 223 | 223 | 114.0 |
| 5x2,5 RE | 1 | 13.8 | 103.1 | 288 | 288 | 130.0 |
| 5x4 RE | 1 | 15.0 | 112.5 | 380 | 380 | 149.0 |
| 5x6 RE | 1 | 16.3 | 122.6 | 502 | 502 | 170.2 |
| 5x10 RE | 1 | 18.5 | 138.4 | 718 | 718 | 204.5 |
| 5x16 RE | 1 | 21.0 | 157.6 | 1042 | 1042 | 248.5 |
| 5x16 RM | 1 | 22.2 | 166.7 | 1078 | 1078 | 270.1 |
| 5x25 RE | 1 | 27.5 | 206.0 | 1768 | 1768 | 442.8 |
| 5x25 RM | 1 | 28.4 | 213.1 | 1823 | 1823 | 465.7 |
| 5x35 RM | 1 | 31.5 | 236.3 | 2388 | 2388 | 553.2 |
| 5x50 RM | 1 | 36.9 | 276.8 | 3440 | 3440 | 749.1 |
| 5x70 RM | 1 | 41.2 | 309.2 | 4462 | 4462 | 881.9 |
| 5x95 RM | 1 | 48.1 | 360.7 | 6047 | 6047 | 1194.6 |
| 5x120 RM | 1 | 51.9 | 389.0 | 7401 | 7401 | 1335.4 |
| 5x150 RM | 1 | 57.7 | 433.0 | 9124 | 9124 | 1661.0 |
| 5x185 RM | 1 | 63.1 | 473.5 | 11298 | 11298 | 1943.4 |
| 5x240 RM | 1 | 71.2 | 534.2 | 14347 | 14347 | 2431.5 |


POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

1. UNSHIELDED UNARMOURED

IEC 60502-1

1.4 Cables sheathed with thermoplastic polyurethane elastomer

- TOFLEX RTng(A)
- TOFLEX GRTng(A)
- TOFLEX ARTng(A)
- Cu/HEPR/TPU, Al/HEPR/ TPU

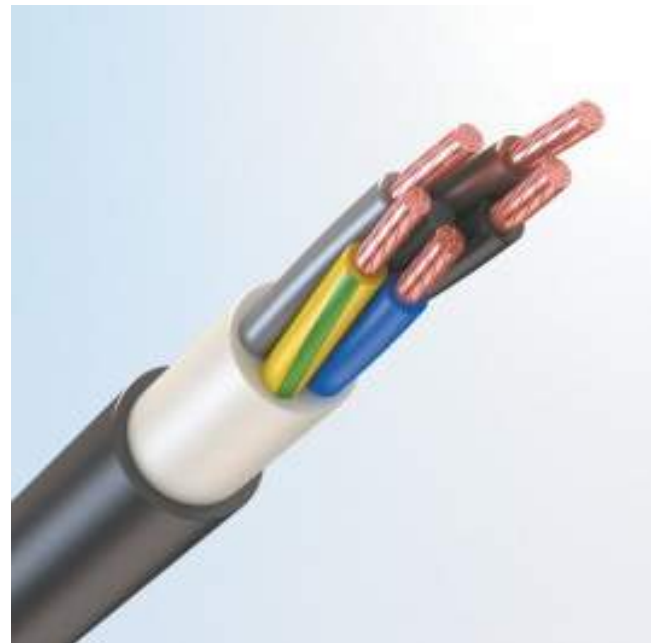

DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; flexible copper (version GRT) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Outer sheath:**
 - «ng(A)» – made from thermoplastic polyurethane elastomer.

► **Ordering example:**

«TOFLEX RTng(A)1×185RM-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|---------------------------------------|
| | | | | TOFLEX RTng(A) | |
| 1x1,5 RE | 1 | 7.0 | 69.6 | 61 | 36.3 |
| 1x2,5 RE | 1 | 7.4 | 73.6 | 75 | 39.7 |
| 1x4 RE | 1 | 7.8 | 78.2 | 92 | 43.7 |
| 1x6 RE | 1 | 8.3 | 83.2 | 115 | 48.0 |
| 1x10 RE | 1 | 9.1 | 91.0 | 158 | 54.8 |
| 1x16 RE | 1 | 10.1 | 100.5 | 221 | 63.0 |
| 1x16 RM | 1 | 10.5 | 105.0 | 227 | 66.9 |
| 1x25 RE | 1 | 11.6 | 115.5 | 318 | 79.4 |
| 1x25 RM | 1 | 11.9 | 119.0 | 326 | 82.7 |
| 1x35 RM | 1 | 12.9 | 129.0 | 420 | 91.9 |
| 1x50 RM | 1 | 14.6 | 146.0 | 594 | 112.7 |
| 1x70 RM | 1 | 16.2 | 162.0 | 764 | 128.5 |
| 1x95 RM | 1 | 18.3 | 183.0 | 1018 | 156.2 |
| 1x120 RM | 1 | 19.7 | 197.0 | 1261 | 170.9 |
| 1x150 RM | 1 | 21.5 | 215.0 | 1538 | 198.4 |
| 1x185 RM | 1 | 23.5 | 235.0 | 1895 | 230.2 |
| 1x240 RM | 1 | 26.6 | 266.0 | 2426 | 289.3 |
| 1x300 RM | 1 | 30.9 | 308.5 | 3064 | 372.7 |
| 1x400 RM | 1 | 35.0 | 349.9 | 3942 | 479.8 |
| 1x500 RM | 1 | 38.6 | 385.7 | 4933 | 555.6 |
| 1x630 RM | 1 | 42.5 | 425.3 | 6293 | 621.7 |
| 2x1,5 RE | 1 | 10.3 | 77.4 | 137 | 82.7 |
| 2x2,5 RE | 1 | 11.1 | 83.4 | 170 | 94.4 |
| 2x4 RE | 1 | 12.0 | 90.3 | 215 | 108.5 |
| 2x6 RE | 1 | 13.0 | 97.8 | 271 | 124.7 |
| 2x10 RE | 1 | 14.6 | 109.5 | 376 | 151.5 |
| 2x16 RE | 1 | 16.5 | 123.8 | 529 | 186.8 |
| 2x16 RM | 1 | 17.4 | 130.5 | 556 | 204.6 |
| 2x25 RE | 1 | 21.5 | 161.3 | 883 | 322.5 |
| 2x25 RM | 1 | 22.2 | 166.5 | 917 | 340.6 |
| 2x35 RM | 1 | 24.6 | 184.5 | 1181 | 410.7 |
| 2x50 RM | 1 | 28.0 | 210.0 | 1636 | 522.4 |
| 2x70 RM | 1 | 31.6 | 237.0 | 2121 | 649.1 |
| 2x95 RM | 1 | 36.6 | 274.5 | 2869 | 865.1 |
| 2x120 RM | 1 | 39.4 | 295.5 | 3489 | 981.5 |
| 2x150 RM | 1 | 43.4 | 325.5 | 4269 | 1186.3 |
| 2x185 RM | 1 | 48.2 | 361.5 | 5300 | 1462.2 |
| 2x240 RM | 1 | 54.0 | 405.0 | 6717 | 1812.4 |
| 3x1,5 RE | 1 | 10.8 | 81.2 | 156 | 88.8 |
| 3x2,5 RE | 1 | 11.7 | 87.6 | 198 | 101.0 |
| 3x4 RE | 1 | 12.7 | 95.0 | 256 | 115.7 |
| 3x6 RE | 1 | 13.7 | 103.1 | 330 | 132.2 |
| 3x10 RE | 1 | 15.4 | 115.7 | 468 | 159.2 |
| 3x16 RE | 1 | 17.5 | 131.0 | 673 | 194.2 |
| 3x16 RM | 1 | 18.4 | 138.3 | 700 | 211.6 |
| 3x25 RE | 1 | 22.7 | 170.2 | 1107 | 335.4 |
| 3x25 RM | 1 | 23.4 | 175.8 | 1144 | 353.3 |
| 3x35 RM | 1 | 26.0 | 195.0 | 1488 | 423.0 |
| 3x50 RM | 1 | 29.7 | 222.4 | 2090 | 536.2 |

| | | | | | |
|----------|---|------|-------|-------|--------|
| 3x70 RM | 1 | 33.5 | 251.2 | 2718 | 659.8 |
| 3x95 RM | 1 | 38.8 | 291.0 | 3684 | 877.6 |
| 3x120 RM | 1 | 41.8 | 313.6 | 4518 | 987.9 |
| 3x150 RM | 1 | 46.9 | 351.6 | 5624 | 1254.0 |
| 3x185 RM | 1 | 51.2 | 383.9 | 6882 | 1470.5 |
| 3x240 RM | 1 | 58.0 | 434.9 | 8819 | 1871.7 |
| 4x1,5 RE | 1 | 11.7 | 87.7 | 183 | 100.5 |
| 4x2,5 RE | 1 | 12.7 | 95.0 | 236 | 114.5 |
| 4x4 RE | 1 | 13.8 | 103.3 | 309 | 131.1 |
| 4x6 RE | 1 | 15.0 | 112.3 | 402 | 149.7 |
| 4x10 RE | 1 | 16.9 | 126.4 | 578 | 179.9 |
| 4x16 RE | 1 | 19.1 | 143.6 | 840 | 218.8 |
| 4x16 RM | 1 | 20.2 | 151.7 | 871 | 237.9 |
| 4x25 RE | 1 | 25.2 | 188.7 | 1395 | 392.4 |
| 4x25 RM | 1 | 26.0 | 195.0 | 1439 | 412.7 |
| 4x35 RM | 1 | 28.4 | 213.1 | 1850 | 472.4 |
| 4x50 RM | 1 | 32.9 | 246.8 | 2649 | 621.1 |
| 4x70 RM | 1 | 37.6 | 281.7 | 3479 | 783.2 |
| 4x95 RM | 1 | 43.0 | 322.7 | 4668 | 1004.7 |
| 4x120 RM | 1 | 47.2 | 354.0 | 5830 | 1187.5 |
| 4x150 RM | 1 | 51.5 | 386.5 | 7086 | 1391.8 |
| 4x185 RM | 1 | 57.4 | 430.2 | 8827 | 1725.7 |
| 4x240 RM | 1 | 63.9 | 479.0 | 11140 | 2075.8 |
| 5x1,5 RE | 1 | 12.7 | 95.0 | 218 | 114.0 |
| 5x2,5 RE | 1 | 13.8 | 103.1 | 282 | 130.0 |
| 5x4 RE | 1 | 15.0 | 112.5 | 373 | 149.0 |
| 5x6 RE | 1 | 16.3 | 122.6 | 495 | 170.2 |
| 5x10 RE | 1 | 18.5 | 138.4 | 709 | 204.5 |
| 5x16 RE | 1 | 21.0 | 157.6 | 1031 | 248.5 |
| 5x16 RM | 1 | 22.2 | 166.7 | 1066 | 270.1 |
| 5x25 RE | 1 | 27.5 | 206.0 | 1706 | 442.8 |
| 5x25 RM | 1 | 28.4 | 213.1 | 1757 | 465.7 |
| 5x35 RM | 1 | 31.5 | 236.3 | 2304 | 553.2 |
| 5x50 RM | 1 | 36.9 | 276.8 | 3331 | 749.1 |
| 5x70 RM | 1 | 41.2 | 309.2 | 4332 | 881.9 |
| 5x95 RM | 1 | 48.1 | 360.7 | 5868 | 1194.6 |
| 5x120 RM | 1 | 51.9 | 389.0 | 7194 | 1335.4 |
| 5x150 RM | 1 | 57.7 | 433.0 | 8865 | 1661.0 |
| 5x185 RM | 1 | 63.1 | 473.5 | 11001 | 1943.4 |
| 5x240 RM | 1 | 71.8 | 538.7 | 14063 | 2501.6 |

**POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLENE RUBBER (HEPR) INSULATION**

2. SHIELDED


IEC 60502-1

2.1 Cables with PVC sheath

- TOFLEX REVng(A)
- TOFLEX GREVng(A)
- TOFLEX AREVng(A)
- Cu/HEPR/OSCR/PVC, Al/HEPR/OSCR/PVC

Possible options:

| | |
|---------------|------------------------------------------|
| «ng(A)-HL» | |
| «ng(A)-LS» | (Cu/HEPR/OSCR/LSPVC, Al/HEPR/OSCR/LSPVC) |
| «ng(A)-LS-HL» | (materials as above) |

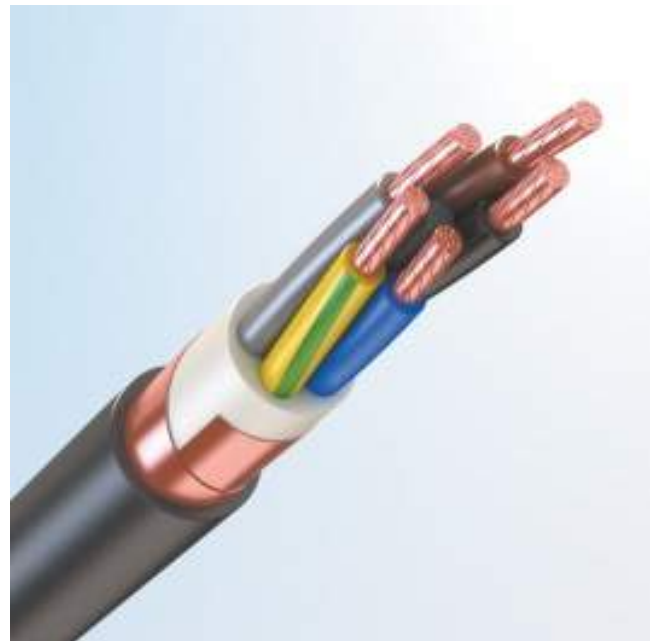

DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; copper flexible (version GREV) of 5th class (according to IEC 60228).
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑤ **Outer sheath:**
 - «ng(A)» – made from PVC-compound with low fire hazard.
 - «ng(A)-HL» – made from cold-resistant PVC-compound with low fire hazard.
 - «ng(A)-LS» – made from PVC-compound with low fire hazard, low smoke and gas emission.
 - «ng(A)-LS-HL» – made from cold-resistant PVC-compound with low fire hazard, low smoke and gas emission.

► **Ordering example:**

«TOFLEX REVng(A)-LS3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX REVng(A)-LS3×95/50RM(N,G)-1 IEC 60502-1»

CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|--------------------|--------------------|-----------------------|---------------------------------------|
| | | | | TOFLEX REVng(A) | TOFLEX REVng(A)-HL | TOFLEX REVng(A)-LS | TOFLEX REVng(A)-LS-HL | |
| 1x1,5 RE | 1 | 9.1 | 91.4 | 116 | 116 | 133 | 133 | 62.3 |
| 1x2,5 RE | 1 | 9.5 | 95.4 | 132 | 132 | 150 | 150 | 67.0 |
| 1x4 RE | 1 | 10.0 | 100.0 | 154 | 154 | 173 | 173 | 72.4 |
| 1x6 RE | 1 | 10.5 | 105.0 | 180 | 180 | 201 | 201 | 78.3 |
| 1x10 RE | 1 | 11.3 | 112.8 | 229 | 229 | 251 | 251 | 87.5 |
| 1x16 RE | 1 | 12.2 | 122.3 | 299 | 299 | 324 | 324 | 98.7 |
| 1x16 RM | 1 | 12.7 | 126.8 | 309 | 309 | 335 | 335 | 104.0 |
| 1x25 RE | 1 | 13.7 | 137.3 | 407 | 407 | 437 | 437 | 119.9 |
| 1x25 RM | 1 | 14.1 | 140.8 | 418 | 418 | 449 | 449 | 124.2 |
| 1x35 RM | 1 | 15.1 | 150.8 | 519 | 519 | 553 | 553 | 136.6 |
| 1x50 RM | 1 | 16.8 | 167.8 | 706 | 706 | 744 | 744 | 162.7 |
| 1x70 RM | 1 | 18.4 | 183.8 | 889 | 889 | 931 | 931 | 183.5 |
| 1x95 RM | 1 | 20.5 | 204.8 | 1159 | 1159 | 1207 | 1207 | 217.8 |
| 1x120 RM | 1 | 21.9 | 218.8 | 1413 | 1413 | 1465 | 1465 | 236.9 |
| 1x150 RM | 1 | 24.1 | 240.8 | 1726 | 1726 | 1787 | 1787 | 285.1 |
| 1x185 RM | 1 | 26.1 | 260.8 | 2100 | 2100 | 2167 | 2167 | 324.4 |
| 1x240 RM | 1 | 28.8 | 287.8 | 2631 | 2631 | 2706 | 2706 | 377.1 |
| 1x300 RM | 1 | 33.4 | 334.3 | 3334 | 3334 | 3429 | 3429 | 494.6 |
| 1x400 RM | 1 | 37.6 | 375.7 | 4249 | 4249 | 4368 | 4368 | 617.5 |
| 1x500 RM | 1 | 41.2 | 411.5 | 5271 | 5271 | 5403 | 5403 | 706.9 |
| 1x630 RM | 1 | 46.3 | 463.1 | 6796 | 6796 | 6968 | 6968 | 873.8 |
| 2x1,5 RE | 1 | 12.5 | 93.8 | 221 | 221 | 256 | 256 | 120.7 |
| 2x2,5 RE | 1 | 13.3 | 99.8 | 261 | 261 | 300 | 300 | 135.0 |
| 2x4 RE | 1 | 14.2 | 106.7 | 314 | 314 | 357 | 357 | 152.2 |
| 2x6 RE | 1 | 15.2 | 114.2 | 378 | 378 | 428 | 428 | 171.6 |
| 2x10 RE | 1 | 16.8 | 125.9 | 496 | 496 | 555 | 555 | 203.5 |
| 2x16 RE | 1 | 18.7 | 140.1 | 666 | 666 | 738 | 738 | 245.0 |
| 2x16 RM | 1 | 19.6 | 146.9 | 701 | 701 | 780 | 780 | 265.7 |
| 2x25 RE | 1 | 21.7 | 162.6 | 938 | 938 | 1033 | 1033 | 323.5 |
| 2x25 RM | 1 | 22.4 | 167.9 | 974 | 974 | 1074 | 1074 | 341.7 |
| 2x35 RM | 1 | 24.8 | 185.9 | 1246 | 1246 | 1368 | 1368 | 411.8 |
| 2x50 RM | 1 | 28.2 | 211.4 | 1711 | 1711 | 1866 | 1866 | 523.6 |
| 2x70 RM | 1 | 31.8 | 238.4 | 2206 | 2206 | 2403 | 2403 | 650.2 |
| 2x95 RM | 1 | 36.8 | 275.9 | 2971 | 2971 | 3232 | 3232 | 866.5 |
| 2x120 RM | 1 | 39.6 | 296.9 | 3600 | 3600 | 3899 | 3899 | 982.9 |
| 2x150 RM | 1 | 43.6 | 326.9 | 4393 | 4393 | 4756 | 4756 | 1187.7 |
| 2x185 RM | 1 | 48.4 | 362.9 | 5442 | 5442 | 5886 | 5886 | 1463.8 |
| 2x240 RM | 1 | 54.2 | 406.4 | 6878 | 6878 | 7433 | 7433 | 1814.0 |
| 3x1,5 RE | 1 | 13.0 | 97.5 | 244 | 244 | 278 | 278 | 128.4 |
| 3x2,5 RE | 1 | 13.9 | 104.0 | 293 | 293 | 331 | 331 | 143.5 |
| 3x4 RE | 1 | 14.9 | 111.4 | 359 | 359 | 402 | 402 | 161.4 |
| 3x6 RE | 1 | 15.9 | 119.5 | 442 | 442 | 490 | 490 | 181.4 |
| 3x10 RE | 1 | 17.6 | 132.0 | 593 | 593 | 651 | 651 | 213.9 |
| 3x16 RE | 1 | 19.6 | 147.4 | 816 | 816 | 885 | 885 | 255.6 |
| 3x16 RM | 1 | 20.6 | 154.6 | 852 | 852 | 926 | 926 | 276.1 |
| 3x25 RE | 1 | 22.9 | 171.5 | 1166 | 1166 | 1255 | 1255 | 336.5 |
| 3x25 RM | 1 | 24.0 | 180.2 | 1228 | 1228 | 1326 | 1326 | 369.9 |
| 3x35 RM | 1 | 26.2 | 196.3 | 1557 | 1557 | 1671 | 1671 | 424.1 |
| 3x50 RM | 1 | 29.8 | 223.7 | 2170 | 2170 | 2312 | 2312 | 537.4 |

| | | | | | | | | |
|----------|---|------|-------|-------|-------|-------|-------|--------|
| 3x70 RM | 1 | 33.7 | 252.5 | 2809 | 2809 | 2990 | 2990 | 660.9 |
| 3x95 RM | 1 | 39.0 | 292.4 | 3793 | 3793 | 4031 | 4031 | 879.0 |
| 3x120 RM | 1 | 42.0 | 315.0 | 4637 | 4637 | 4908 | 4908 | 989.3 |
| 3x150 RM | 1 | 47.1 | 353.0 | 5762 | 5762 | 6106 | 6106 | 1255.6 |
| 3x185 RM | 1 | 51.4 | 385.2 | 7034 | 7034 | 7435 | 7435 | 1472.2 |
| 3x240 RM | 1 | 58.2 | 436.3 | 8996 | 8996 | 9510 | 9510 | 1873.5 |
| 4x1,5 RE | 1 | 13.9 | 104.1 | 278 | 278 | 314 | 314 | 143.1 |
| 4x2,5 RE | 1 | 14.8 | 111.3 | 338 | 338 | 379 | 379 | 160.2 |
| 4x4 RE | 1 | 16.0 | 119.6 | 420 | 420 | 466 | 466 | 180.4 |
| 4x6 RE | 1 | 17.2 | 128.7 | 524 | 524 | 575 | 575 | 202.9 |
| 4x10 RE | 1 | 19.0 | 142.8 | 715 | 715 | 775 | 775 | 239.3 |
| 4x16 RE | 1 | 21.3 | 159.9 | 997 | 997 | 1070 | 1070 | 285.6 |
| 4x16 RM | 1 | 22.4 | 168.1 | 1037 | 1037 | 1116 | 1116 | 308.3 |
| 4x25 RE | 1 | 25.3 | 190.0 | 1461 | 1461 | 1560 | 1560 | 393.6 |
| 4x25 RM | 1 | 26.2 | 196.4 | 1507 | 1507 | 1612 | 1612 | 413.9 |
| 4x35 RM | 1 | 28.6 | 214.4 | 1926 | 1926 | 2046 | 2046 | 473.5 |
| 4x50 RM | 1 | 33.1 | 248.2 | 2738 | 2738 | 2896 | 2896 | 622.3 |
| 4x70 RM | 1 | 37.7 | 283.1 | 3584 | 3584 | 3786 | 3786 | 784.6 |
| 4x95 RM | 1 | 43.2 | 324.1 | 4791 | 4791 | 5050 | 5050 | 1006.1 |
| 4x120 RM | 1 | 47.4 | 355.4 | 5969 | 5969 | 6279 | 6279 | 1189.2 |
| 4x150 RM | 1 | 51.7 | 387.9 | 7238 | 7238 | 7597 | 7597 | 1393.4 |
| 4x185 RM | 1 | 57.5 | 431.5 | 9002 | 9002 | 9448 | 9448 | 1727.6 |
| 4x240 RM | 1 | 64.0 | 480.3 | 11336 | 11336 | 11870 | 11870 | 2077.6 |
| 5x1,5 RE | 1 | 14.9 | 111.4 | 320 | 320 | 360 | 360 | 159.7 |
| 5x2,5 RE | 1 | 15.9 | 119.5 | 393 | 393 | 437 | 437 | 179.3 |
| 5x4 RE | 1 | 17.2 | 128.8 | 494 | 494 | 544 | 544 | 202.3 |
| 5x6 RE | 1 | 18.5 | 138.9 | 627 | 627 | 683 | 683 | 227.9 |
| 5x10 RE | 1 | 20.6 | 154.7 | 859 | 859 | 925 | 925 | 269.1 |
| 5x16 RE | 1 | 23.2 | 174.0 | 1202 | 1202 | 1281 | 1281 | 321.4 |
| 5x16 RM | 1 | 24.8 | 186.1 | 1272 | 1272 | 1362 | 1362 | 363.1 |
| 5x25 RE | 1 | 27.6 | 207.3 | 1779 | 1779 | 1886 | 1886 | 444.0 |
| 5x25 RM | 1 | 28.6 | 214.4 | 1833 | 1833 | 1945 | 1945 | 466.9 |
| 5x35 RM | 1 | 31.7 | 237.7 | 2389 | 2389 | 2527 | 2527 | 554.4 |
| 5x50 RM | 1 | 37.1 | 278.1 | 3434 | 3434 | 3618 | 3618 | 750.5 |
| 5x70 RM | 1 | 41.4 | 310.5 | 4449 | 4449 | 4668 | 4668 | 883.4 |
| 5x95 RM | 1 | 48.3 | 362.0 | 6009 | 6009 | 6307 | 6307 | 1196.3 |
| 5x120 RM | 1 | 52.1 | 390.4 | 7348 | 7348 | 7684 | 7684 | 1337.0 |
| 5x150 RM | 1 | 57.9 | 434.3 | 9041 | 9041 | 9459 | 9459 | 1662.8 |
| 5x185 RM | 1 | 63.3 | 474.8 | 11195 | 11195 | 11677 | 11677 | 1945.3 |
| 5x240 RM | 1 | 72.0 | 540.0 | 14293 | 14293 | 14919 | 14919 | 2503.7 |


POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLENE RUBBER (HEPR) INSULATION

2. SHIELDED

IEC 60502-1

2.2 Cables sheathed with cross-linked highly elastic polymer compound

- TOFLEX RERng(A)
- TOFLEX GRERng(A)
- TOFLEX ARERng(A)
- Cu/HEPR/OSCR/ XLFR, Al/HEPR/OSCR/ XLFR

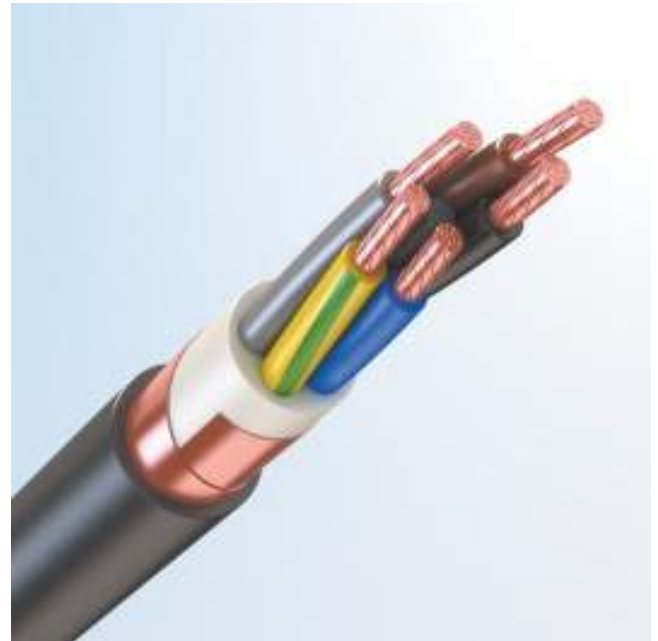

Possible options:

| | |
|---------------|----------------------------------------------|
| «ng(A)-HL» | |
| «ng(A)-HF» | (Cu/HEPR/OSCR/ XLHFFR, Al/HEPR/OSCR/ XLHFFR) |
| «ng(A)-HF-HL» | (materials as above) |



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; copper flexible (version GRER) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑤ **Outer sheath:**
 - «ng(A)» – made from cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HL» – made from cold-resistant cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HF» – made from halogen-free cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HF-HL» – made from cold-resistant halogen-free cross-linked highly elastic polymer compound with low fire hazard.

► Ordering example:

«TOFLEX RERng(A)3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX RERng(A)3×95/50RM(N,G)-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|--------------------|--------------------|-----------------------|---------------------------------------|
| | | | | TOFLEX RERng(A) | TOFLEX RERng(A)-HL | TOFLEX RERng(A)-HF | TOFLEX RERng(A)-HF-HL | |
| 1x1,5 RE | 1 | 9.1 | 91.4 | 114 | 114 | 114 | 114 | 62.3 |
| 1x2,5 RE | 1 | 9.5 | 95.4 | 131 | 131 | 131 | 131 | 67.0 |
| 1x4 RE | 1 | 10.0 | 100.0 | 152 | 152 | 152 | 152 | 72.4 |
| 1x6 RE | 1 | 10.5 | 105.0 | 179 | 179 | 179 | 179 | 78.3 |
| 1x10 RE | 1 | 11.3 | 112.8 | 227 | 227 | 227 | 227 | 87.5 |
| 1x16 RE | 1 | 12.2 | 122.3 | 298 | 298 | 298 | 298 | 98.7 |
| 1x16 RM | 1 | 12.7 | 126.8 | 308 | 308 | 308 | 308 | 104.0 |
| 1x25 RE | 1 | 13.7 | 137.3 | 407 | 407 | 407 | 407 | 119.9 |
| 1x25 RM | 1 | 14.1 | 140.8 | 417 | 417 | 417 | 417 | 124.2 |
| 1x35 RM | 1 | 15.1 | 150.8 | 519 | 519 | 519 | 519 | 136.6 |
| 1x50 RM | 1 | 16.8 | 167.8 | 706 | 706 | 706 | 706 | 162.7 |
| 1x70 RM | 1 | 18.4 | 183.8 | 889 | 889 | 889 | 889 | 183.5 |
| 1x95 RM | 1 | 20.5 | 204.8 | 1159 | 1159 | 1159 | 1159 | 217.8 |
| 1x120 RM | 1 | 21.9 | 218.8 | 1414 | 1414 | 1414 | 1414 | 236.9 |
| 1x150 RM | 1 | 24.1 | 240.8 | 1725 | 1725 | 1725 | 1725 | 285.1 |
| 1x185 RM | 1 | 26.1 | 260.8 | 2099 | 2099 | 2099 | 2099 | 324.4 |
| 1x240 RM | 1 | 28.8 | 287.8 | 2630 | 2630 | 2630 | 2630 | 377.1 |
| 1x300 RM | 1 | 33.4 | 334.3 | 3339 | 3339 | 3339 | 3339 | 494.6 |
| 1x400 RM | 1 | 37.6 | 375.7 | 4248 | 4248 | 4248 | 4248 | 617.5 |
| 1x500 RM | 1 | 41.2 | 411.5 | 5271 | 5271 | 5271 | 5271 | 706.9 |
| 1x630 RM | 1 | 46.3 | 463.1 | 6796 | 6796 | 6796 | 6796 | 873.8 |
| 2x1,5 RE | 1 | 12.5 | 93.8 | 227 | 227 | 227 | 227 | 120.7 |
| 2x2,5 RE | 1 | 13.3 | 99.8 | 268 | 268 | 268 | 268 | 135.0 |
| 2x4 RE | 1 | 14.2 | 106.7 | 323 | 323 | 323 | 323 | 152.2 |
| 2x6 RE | 1 | 15.2 | 114.2 | 390 | 390 | 390 | 390 | 171.6 |
| 2x10 RE | 1 | 16.8 | 125.9 | 513 | 513 | 513 | 513 | 203.5 |
| 2x16 RE | 1 | 18.7 | 140.1 | 689 | 689 | 689 | 689 | 245.0 |
| 2x16 RM | 1 | 19.6 | 146.9 | 728 | 728 | 728 | 728 | 265.7 |
| 2x25 RE | 1 | 21.7 | 162.6 | 974 | 974 | 974 | 974 | 323.5 |
| 2x25 RM | 1 | 22.4 | 167.9 | 1013 | 1013 | 1013 | 1013 | 341.7 |
| 2x35 RM | 1 | 24.8 | 185.9 | 1292 | 1292 | 1292 | 1292 | 411.8 |
| 2x50 RM | 1 | 28.2 | 211.4 | 1777 | 1777 | 1777 | 1777 | 523.6 |
| 2x70 RM | 1 | 31.8 | 238.4 | 2299 | 2299 | 2299 | 2299 | 650.2 |
| 2x95 RM | 1 | 36.8 | 275.9 | 3090 | 3090 | 3090 | 3090 | 866.5 |
| 2x120 RM | 1 | 39.6 | 296.9 | 3742 | 3742 | 3742 | 3742 | 982.9 |
| 2x150 RM | 1 | 43.6 | 326.9 | 4578 | 4578 | 4578 | 4578 | 1187.7 |
| 2x185 RM | 1 | 48.4 | 362.9 | 5660 | 5660 | 5660 | 5660 | 1463.8 |
| 2x240 RM | 1 | 54.2 | 406.4 | 7170 | 7170 | 7170 | 7170 | 1814.0 |
| 3x1,5 RE | 1 | 13.0 | 97.5 | 248 | 248 | 248 | 248 | 128.4 |
| 3x2,5 RE | 1 | 13.9 | 104.0 | 299 | 299 | 299 | 299 | 143.5 |
| 3x4 RE | 1 | 14.9 | 111.4 | 366 | 366 | 366 | 366 | 161.4 |
| 3x6 RE | 1 | 15.9 | 119.5 | 451 | 451 | 451 | 451 | 181.4 |
| 3x10 RE | 1 | 17.6 | 132.0 | 606 | 606 | 606 | 606 | 213.9 |
| 3x16 RE | 1 | 19.6 | 147.4 | 834 | 834 | 834 | 834 | 255.6 |
| 3x16 RM | 1 | 20.6 | 154.6 | 873 | 873 | 873 | 873 | 276.1 |
| 3x25 RE | 1 | 22.9 | 171.5 | 1194 | 1194 | 1194 | 1194 | 336.5 |
| 3x25 RM | 1 | 24.0 | 180.2 | 1256 | 1256 | 1256 | 1256 | 369.9 |
| 3x35 RM | 1 | 26.2 | 196.3 | 1593 | 1593 | 1593 | 1593 | 424.1 |
| 3x50 RM | 1 | 29.8 | 223.7 | 2221 | 2221 | 2221 | 2221 | 537.4 |


| | | | | | | | | |
|----------|---|------|-------|-------|-------|-------|-------|--------|
| 3x70 RM | 1 | 33.7 | 252.5 | 2883 | 2883 | 2883 | 2883 | 660.9 |
| 3x95 RM | 1 | 39.0 | 292.4 | 3886 | 3886 | 3886 | 3886 | 879.0 |
| 3x120 RM | 1 | 42.0 | 315.0 | 4749 | 4749 | 4749 | 4749 | 989.3 |
| 3x150 RM | 1 | 47.1 | 353.0 | 5899 | 5899 | 5899 | 5899 | 1255.6 |
| 3x185 RM | 1 | 51.4 | 385.2 | 7205 | 7205 | 7205 | 7205 | 1472.2 |
| 3x240 RM | 1 | 58.2 | 436.3 | 9220 | 9220 | 9220 | 9220 | 1873.5 |
| 4x1,5 RE | 1 | 13.9 | 104.1 | 282 | 282 | 282 | 282 | 143.1 |
| 4x2,5 RE | 1 | 14.8 | 111.3 | 344 | 344 | 344 | 344 | 160.2 |
| 4x4 RE | 1 | 16.0 | 119.6 | 427 | 427 | 427 | 427 | 180.4 |
| 4x6 RE | 1 | 17.2 | 128.7 | 533 | 533 | 533 | 533 | 202.9 |
| 4x10 RE | 1 | 19.0 | 142.8 | 728 | 728 | 728 | 728 | 239.3 |
| 4x16 RE | 1 | 21.3 | 159.9 | 1015 | 1015 | 1015 | 1015 | 285.6 |
| 4x16 RM | 1 | 22.4 | 168.1 | 1057 | 1057 | 1057 | 1057 | 308.3 |
| 4x25 RE | 1 | 25.3 | 190.0 | 1487 | 1487 | 1487 | 1487 | 393.6 |
| 4x25 RM | 1 | 26.2 | 196.4 | 1535 | 1535 | 1535 | 1535 | 413.9 |
| 4x35 RM | 1 | 28.6 | 214.4 | 1961 | 1961 | 1961 | 1961 | 473.5 |
| 4x50 RM | 1 | 33.1 | 248.2 | 2795 | 2795 | 2795 | 2795 | 622.3 |
| 4x70 RM | 1 | 37.7 | 283.1 | 3650 | 3650 | 3650 | 3650 | 784.6 |
| 4x95 RM | 1 | 43.2 | 324.1 | 4889 | 4889 | 4889 | 4889 | 1006.1 |
| 4x120 RM | 1 | 47.4 | 355.4 | 6076 | 6076 | 6076 | 6076 | 1189.2 |
| 4x150 RM | 1 | 51.7 | 387.9 | 7372 | 7372 | 7372 | 7372 | 1393.4 |
| 4x185 RM | 1 | 57.5 | 431.5 | 9170 | 9170 | 9170 | 9170 | 1727.6 |
| 4x240 RM | 1 | 64.0 | 480.3 | 11553 | 11553 | 11553 | 11553 | 2077.6 |
| 5x1,5 RE | 1 | 14.9 | 111.4 | 324 | 324 | 324 | 324 | 159.7 |
| 5x2,5 RE | 1 | 15.9 | 119.5 | 399 | 399 | 399 | 399 | 179.3 |
| 5x4 RE | 1 | 17.2 | 128.8 | 502 | 502 | 502 | 502 | 202.3 |
| 5x6 RE | 1 | 18.5 | 138.9 | 637 | 636 | 636 | 636 | 227.9 |
| 5x10 RE | 1 | 20.6 | 154.7 | 872 | 872 | 872 | 872 | 269.1 |
| 5x16 RE | 1 | 23.2 | 174.0 | 1221 | 1220 | 1220 | 1220 | 321.4 |
| 5x16 RM | 1 | 24.8 | 186.1 | 1291 | 1290 | 1290 | 1290 | 363.1 |
| 5x25 RE | 1 | 27.6 | 207.3 | 1806 | 1804 | 1804 | 1804 | 444.0 |
| 5x25 RM | 1 | 28.6 | 214.4 | 1862 | 1860 | 1860 | 1860 | 466.9 |
| 5x35 RM | 1 | 31.7 | 237.7 | 2432 | 2429 | 2429 | 2429 | 554.4 |
| 5x50 RM | 1 | 37.1 | 278.1 | 3486 | 3482 | 3482 | 3482 | 750.5 |
| 5x70 RM | 1 | 41.4 | 310.5 | 4518 | 4511 | 4511 | 4511 | 883.4 |
| 5x95 RM | 1 | 48.3 | 362.0 | 6103 | 6096 | 6096 | 6096 | 1196.3 |
| 5x120 RM | 1 | 52.1 | 390.4 | 7461 | 7454 | 7454 | 7454 | 1337.0 |
| 5x150 RM | 1 | 57.9 | 434.3 | 9183 | 9176 | 9176 | 9176 | 1662.8 |
| 5x185 RM | 1 | 63.3 | 474.8 | 11371 | 11355 | 11355 | 11355 | 1945.3 |
| 5x240 RM | 1 | 72.0 | 540.0 | 14517 | 14501 | 14501 | 14501 | 2503.7 |

POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

2. SHIELDED

IEC 60502-1

2.3 Cables sheathed with halogen-free polymer compound

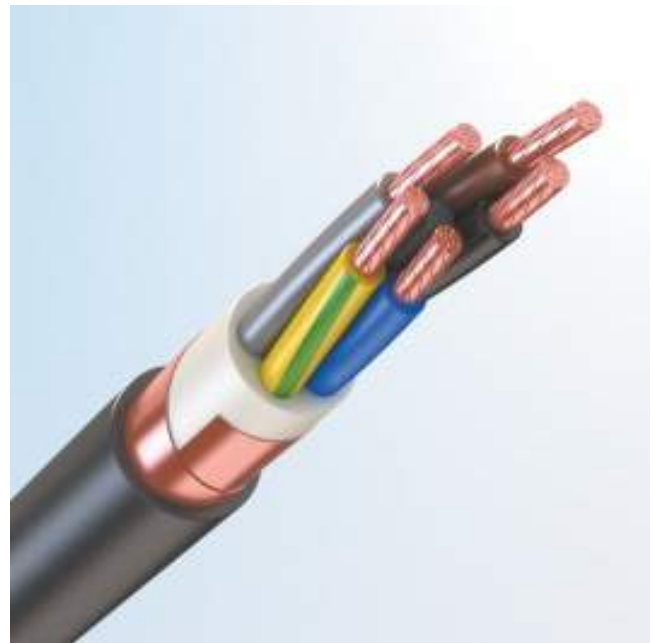

- TOFLEX REPng(A)-HF
- TOFLEX GREPng(A)-HF
- TOFLEX AREPng(A)-HF
- Cu/HEPR/OSCR/HFFR, Al/HEPR/OSCR/HFFR

Possible options:

«ng(A)-HL»

DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; copper flexible (version GREP) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑤ **Outer sheath:**
 - «ng(A)-HF» — made from halogen-free polymer compounds.
 - «ng(A)-HF-HL» — made from cold-resistant halogen-free polymer compounds.

► **Ordering example:**

«TOFLEX REPng(A)-HF3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX REPng(A)-HF3×95/50RM(N,G)-1 IEC 60502-1»

CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|-----------------------|---------------------------------------|
| | | | | TOFLEX REPng(A)-HF | TOFLEX REPng(A)-HF-HL | |
| 1x1,5 RE | 1 | 9.1 | 91.4 | 120 | 120 | 62.3 |
| 1x2,5 RE | 1 | 9.5 | 95.4 | 136 | 136 | 67.0 |
| 1x4 RE | 1 | 10.0 | 100.0 | 158 | 158 | 72.4 |
| 1x6 RE | 1 | 10.5 | 105.0 | 185 | 185 | 78.3 |
| 1x10 RE | 1 | 11.3 | 112.8 | 234 | 234 | 87.5 |
| 1x16 RE | 1 | 12.2 | 122.3 | 306 | 306 | 98.7 |
| 1x16 RM | 1 | 12.7 | 126.8 | 316 | 316 | 104.0 |
| 1x25 RE | 1 | 13.7 | 137.3 | 416 | 416 | 119.9 |
| 1x25 RM | 1 | 14.1 | 140.8 | 427 | 427 | 124.2 |
| 1x35 RM | 1 | 15.1 | 150.8 | 529 | 529 | 136.6 |
| 1x50 RM | 1 | 16.8 | 167.8 | 717 | 717 | 162.7 |
| 1x70 RM | 1 | 18.4 | 183.8 | 901 | 901 | 183.5 |
| 1x95 RM | 1 | 20.5 | 204.8 | 1174 | 1174 | 217.8 |
| 1x120 RM | 1 | 21.9 | 218.8 | 1429 | 1429 | 236.9 |
| 1x150 RM | 1 | 24.1 | 240.8 | 1744 | 1744 | 285.1 |
| 1x185 RM | 1 | 26.1 | 260.8 | 2120 | 2120 | 324.4 |
| 1x240 RM | 1 | 28.8 | 287.8 | 2653 | 2653 | 377.1 |
| 1x300 RM | 1 | 33.4 | 334.3 | 3366 | 3366 | 494.6 |
| 1x400 RM | 1 | 37.6 | 375.7 | 4284 | 4284 | 617.5 |
| 1x500 RM | 1 | 41.2 | 411.5 | 5310 | 5310 | 706.9 |
| 1x630 RM | 1 | 46.3 | 463.1 | 6847 | 6847 | 873.8 |
| 2x1,5 RE | 1 | 12.5 | 93.8 | 235 | 235 | 120.7 |
| 2x2,5 RE | 1 | 13.3 | 99.8 | 277 | 277 | 135.0 |
| 2x4 RE | 1 | 14.2 | 106.7 | 332 | 332 | 152.2 |
| 2x6 RE | 1 | 15.2 | 114.2 | 401 | 401 | 171.6 |
| 2x10 RE | 1 | 16.8 | 125.9 | 524 | 524 | 203.5 |
| 2x16 RE | 1 | 18.7 | 140.1 | 703 | 703 | 245.0 |
| 2x16 RM | 1 | 19.6 | 146.9 | 742 | 742 | 265.7 |
| 2x25 RE | 1 | 21.7 | 162.6 | 990 | 990 | 323.5 |
| 2x25 RM | 1 | 22.4 | 167.9 | 1029 | 1029 | 341.7 |
| 2x35 RM | 1 | 24.8 | 185.9 | 1312 | 1312 | 411.8 |
| 2x50 RM | 1 | 28.2 | 211.4 | 1800 | 1800 | 523.6 |
| 2x70 RM | 1 | 31.8 | 238.4 | 2325 | 2325 | 650.2 |
| 2x95 RM | 1 | 36.8 | 275.9 | 3126 | 3126 | 866.5 |
| 2x120 RM | 1 | 39.6 | 296.9 | 3781 | 3781 | 982.9 |
| 2x150 RM | 1 | 43.6 | 326.9 | 4621 | 4621 | 1187.7 |
| 2x185 RM | 1 | 48.4 | 362.9 | 5716 | 5716 | 1463.8 |
| 2x240 RM | 1 | 54.2 | 406.4 | 7233 | 7233 | 1814.0 |
| 3x1,5 RE | 1 | 13.0 | 97.5 | 257 | 257 | 128.4 |
| 3x2,5 RE | 1 | 13.9 | 104.0 | 308 | 308 | 143.5 |
| 3x4 RE | 1 | 14.9 | 111.4 | 376 | 376 | 161.4 |
| 3x6 RE | 1 | 15.9 | 119.5 | 462 | 462 | 181.4 |
| 3x10 RE | 1 | 17.6 | 132.0 | 619 | 619 | 213.9 |
| 3x16 RE | 1 | 19.6 | 147.4 | 848 | 848 | 255.6 |
| 3x16 RM | 1 | 20.6 | 154.6 | 888 | 888 | 276.1 |
| 3x25 RE | 1 | 22.9 | 171.5 | 1211 | 1211 | 336.5 |
| 3x25 RM | 1 | 24.0 | 180.2 | 1276 | 1276 | 369.9 |
| 3x35 RM | 1 | 26.2 | 196.3 | 1614 | 1614 | 424.1 |
| 3x50 RM | 1 | 29.8 | 223.7 | 2245 | 2245 | 537.4 |

| | | | | | | |
|----------|---|------|-------|-------|-------|--------|
| 3x70 RM | 1 | 33.7 | 252.5 | 2911 | 2911 | 660.9 |
| 3x95 RM | 1 | 39.0 | 292.4 | 3924 | 3924 | 879.0 |
| 3x120 RM | 1 | 42.0 | 315.0 | 4790 | 4790 | 989.3 |
| 3x150 RM | 1 | 47.1 | 353.0 | 5953 | 5953 | 1255.6 |
| 3x185 RM | 1 | 51.4 | 385.2 | 7264 | 7264 | 1472.2 |
| 3x240 RM | 1 | 58.2 | 436.3 | 9294 | 9294 | 1873.5 |
| 4x1,5 RE | 1 | 13.9 | 104.1 | 291 | 291 | 143.1 |
| 4x2,5 RE | 1 | 14.8 | 111.3 | 354 | 354 | 160.2 |
| 4x4 RE | 1 | 16.0 | 119.6 | 438 | 438 | 180.4 |
| 4x6 RE | 1 | 17.2 | 128.7 | 545 | 545 | 202.9 |
| 4x10 RE | 1 | 19.0 | 142.8 | 741 | 741 | 239.3 |
| 4x16 RE | 1 | 21.3 | 159.9 | 1030 | 1030 | 285.6 |
| 4x16 RM | 1 | 22.4 | 168.1 | 1074 | 1074 | 308.3 |
| 4x25 RE | 1 | 25.3 | 190.0 | 1508 | 1508 | 393.6 |
| 4x25 RM | 1 | 26.2 | 196.4 | 1557 | 1557 | 413.9 |
| 4x35 RM | 1 | 28.6 | 214.4 | 1985 | 1985 | 473.5 |
| 4x50 RM | 1 | 33.1 | 248.2 | 2822 | 2822 | 622.3 |
| 4x70 RM | 1 | 37.7 | 283.1 | 3687 | 3687 | 784.6 |
| 4x95 RM | 1 | 43.2 | 324.1 | 4932 | 4932 | 1006.1 |
| 4x120 RM | 1 | 47.4 | 355.4 | 6131 | 6131 | 1189.2 |
| 4x150 RM | 1 | 51.7 | 387.9 | 7432 | 7432 | 1393.4 |
| 4x185 RM | 1 | 57.5 | 431.5 | 9243 | 9243 | 1727.6 |
| 4x240 RM | 1 | 64.0 | 480.3 | 11636 | 11636 | 2077.6 |
| 5x1,5 RE | 1 | 14.9 | 111.4 | 334 | 334 | 159.7 |
| 5x2,5 RE | 1 | 15.9 | 119.5 | 410 | 410 | 179.3 |
| 5x4 RE | 1 | 17.2 | 128.8 | 514 | 514 | 202.3 |
| 5x6 RE | 1 | 18.5 | 138.9 | 649 | 649 | 227.9 |
| 5x10 RE | 1 | 20.6 | 154.7 | 886 | 886 | 269.1 |
| 5x16 RE | 1 | 23.2 | 174.0 | 1237 | 1237 | 321.4 |
| 5x16 RM | 1 | 24.8 | 186.1 | 1310 | 1310 | 363.1 |
| 5x25 RE | 1 | 27.6 | 207.3 | 1827 | 1827 | 444.0 |
| 5x25 RM | 1 | 28.6 | 214.4 | 1883 | 1883 | 466.9 |
| 5x35 RM | 1 | 31.7 | 237.7 | 2455 | 2455 | 554.4 |
| 5x50 RM | 1 | 37.1 | 278.1 | 3519 | 3519 | 750.5 |
| 5x70 RM | 1 | 41.4 | 310.5 | 4552 | 4552 | 883.4 |
| 5x95 RM | 1 | 48.3 | 362.0 | 6152 | 6152 | 1196.3 |
| 5x120 RM | 1 | 52.1 | 390.4 | 7514 | 7514 | 1337.0 |
| 5x150 RM | 1 | 57.9 | 434.3 | 9251 | 9251 | 1662.8 |
| 5x185 RM | 1 | 63.3 | 474.8 | 11437 | 11437 | 1945.3 |
| 5x240 RM | 1 | 72.0 | 540.0 | 14608 | 14608 | 2503.7 |


POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

2. SHIELDED

IEC 60502-1

2.4 Cables sheathed with thermoplastic polyurethane elastomer

- TOFLEX RETng(A)
- TOFLEX GREng(A)
- TOFLEX AREng(A)
- Cu/HEPR/OSCR/ TPU, Al/HEPR/OSCR/ TPU

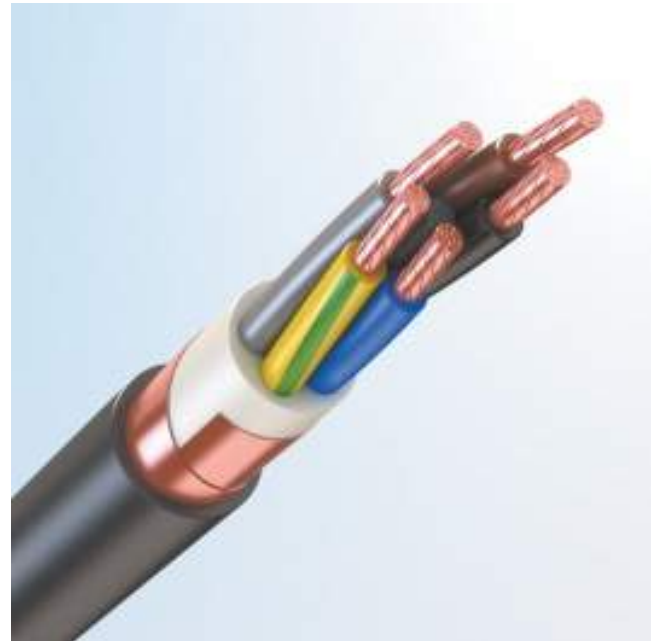

DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; flexible copper (version GRET) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑤ **Outer sheath:**
 - «ng(A)» — made from thermoplastic polyurethane elastomer.

► **Ordering example:**

«TOFLEX RETng(A)3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX RETng(A)3×95/50RM(N,G)-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|--------|---------------------------------------|
| | | | | TOFLEX RETng(A) | | |
| 1x1,5 RE | 1 | 9.1 | 91.4 | 116 | 62.3 | |
| 1x2,5 RE | 1 | 9.5 | 95.4 | 132 | 67.0 | |
| 1x4 RE | 1 | 10.0 | 100.0 | 154 | 72.4 | |
| 1x6 RE | 1 | 10.5 | 105.0 | 180 | 78.3 | |
| 1x10 RE | 1 | 11.3 | 112.8 | 229 | 87.5 | |
| 1x16 RE | 1 | 12.2 | 122.3 | 299 | 98.7 | |
| 1x16 RM | 1 | 12.7 | 126.8 | 309 | 104.0 | |
| 1x25 RE | 1 | 13.7 | 137.3 | 407 | 119.9 | |
| 1x25 RM | 1 | 14.1 | 140.8 | 418 | 124.2 | |
| 1x35 RM | 1 | 15.1 | 150.8 | 519 | 136.6 | |
| 1x50 RM | 1 | 16.8 | 167.8 | 706 | 162.7 | |
| 1x70 RM | 1 | 18.4 | 183.8 | 889 | 183.5 | |
| 1x95 RM | 1 | 20.5 | 204.8 | 1159 | 217.8 | |
| 1x120 RM | 1 | 21.9 | 218.8 | 1413 | 236.9 | |
| 1x150 RM | 1 | 24.1 | 240.8 | 1726 | 285.1 | |
| 1x185 RM | 1 | 26.1 | 260.8 | 2100 | 324.4 | |
| 1x240 RM | 1 | 28.8 | 287.8 | 2631 | 377.1 | |
| 1x300 RM | 1 | 33.4 | 334.3 | 3334 | 494.6 | |
| 1x400 RM | 1 | 37.6 | 375.7 | 4249 | 617.5 | |
| 1x500 RM | 1 | 41.2 | 411.5 | 5271 | 706.9 | |
| 1x630 RM | 1 | 46.3 | 463.1 | 6796 | 873.8 | |
| 2x1,5 RE | 1 | 12.5 | 93.8 | 221 | 120.7 | |
| 2x2,5 RE | 1 | 13.3 | 99.8 | 261 | 135.0 | |
| 2x4 RE | 1 | 14.2 | 106.7 | 314 | 152.2 | |
| 2x6 RE | 1 | 15.2 | 114.2 | 378 | 171.6 | |
| 2x10 RE | 1 | 16.8 | 125.9 | 496 | 203.5 | |
| 2x16 RE | 1 | 18.7 | 140.1 | 666 | 245.0 | |
| 2x16 RM | 1 | 19.6 | 146.9 | 701 | 265.7 | |
| 2x25 RE | 1 | 21.7 | 162.6 | 938 | 323.5 | |
| 2x25 RM | 1 | 22.4 | 167.9 | 974 | 341.7 | |
| 2x35 RM | 1 | 24.8 | 185.9 | 1246 | 411.8 | |
| 2x50 RM | 1 | 28.2 | 211.4 | 1711 | 523.6 | |
| 2x70 RM | 1 | 31.8 | 238.4 | 2206 | 650.2 | |
| 2x95 RM | 1 | 36.8 | 275.9 | 2971 | 866.5 | |
| 2x120 RM | 1 | 39.6 | 296.9 | 3600 | 982.9 | |
| 2x150 RM | 1 | 43.6 | 326.9 | 4393 | 1187.7 | |
| 2x185 RM | 1 | 48.4 | 362.9 | 5442 | 1463.8 | |
| 2x240 RM | 1 | 54.2 | 406.4 | 6878 | 1814.0 | |
| 3x1,5 RE | 1 | 13.0 | 97.5 | 244 | 128.4 | |
| 3x2,5 RE | 1 | 13.9 | 104.0 | 293 | 143.5 | |
| 3x4 RE | 1 | 14.9 | 111.4 | 359 | 161.4 | |
| 3x6 RE | 1 | 15.9 | 119.5 | 442 | 181.4 | |
| 3x10 RE | 1 | 17.6 | 132.0 | 593 | 213.9 | |
| 3x16 RE | 1 | 19.6 | 147.4 | 816 | 255.6 | |
| 3x16 RM | 1 | 20.6 | 154.6 | 852 | 276.1 | |
| 3x25 RE | 1 | 22.9 | 171.5 | 1166 | 336.5 | |
| 3x25 RM | 1 | 24.0 | 180.2 | 1228 | 369.9 | |
| 3x35 RM | 1 | 26.2 | 196.3 | 1557 | 424.1 | |
| 3x50 RM | 1 | 29.8 | 223.7 | 2170 | 537.4 | |

| | | | | | |
|----------|---|------|-------|-------|--------|
| 3x70 RM | 1 | 33.7 | 252.5 | 2809 | 660.9 |
| 3x95 RM | 1 | 39.0 | 292.4 | 3793 | 879.0 |
| 3x120 RM | 1 | 42.0 | 315.0 | 4637 | 989.3 |
| 3x150 RM | 1 | 47.1 | 353.0 | 5762 | 1255.6 |
| 3x185 RM | 1 | 51.4 | 385.2 | 7034 | 1472.2 |
| 3x240 RM | 1 | 58.2 | 436.3 | 8996 | 1873.5 |
| 4x1,5 RE | 1 | 13.9 | 104.1 | 278 | 143.1 |
| 4x2,5 RE | 1 | 14.8 | 111.3 | 338 | 160.2 |
| 4x4 RE | 1 | 16.0 | 119.6 | 420 | 180.4 |
| 4x6 RE | 1 | 17.2 | 128.7 | 524 | 202.9 |
| 4x10 RE | 1 | 19.0 | 142.8 | 715 | 239.3 |
| 4x16 RE | 1 | 21.3 | 159.9 | 997 | 285.6 |
| 4x16 RM | 1 | 22.4 | 168.1 | 1037 | 308.3 |
| 4x25 RE | 1 | 25.3 | 190.0 | 1461 | 393.6 |
| 4x25 RM | 1 | 26.2 | 196.4 | 1507 | 413.9 |
| 4x35 RM | 1 | 28.6 | 214.4 | 1926 | 473.5 |
| 4x50 RM | 1 | 33.1 | 248.2 | 2738 | 622.3 |
| 4x70 RM | 1 | 37.7 | 283.1 | 3584 | 784.6 |
| 4x95 RM | 1 | 43.2 | 324.1 | 4791 | 1006.1 |
| 4x120 RM | 1 | 47.4 | 355.4 | 5969 | 1189.2 |
| 4x150 RM | 1 | 51.7 | 387.9 | 7238 | 1393.4 |
| 4x185 RM | 1 | 57.5 | 431.5 | 9002 | 1727.6 |
| 4x240 RM | 1 | 64.0 | 480.3 | 11336 | 2077.6 |
| 5x1,5 RE | 1 | 14.9 | 111.4 | 320 | 159.7 |
| 5x2,5 RE | 1 | 15.9 | 119.5 | 393 | 179.3 |
| 5x4 RE | 1 | 17.2 | 128.8 | 494 | 202.3 |
| 5x6 RE | 1 | 18.5 | 138.9 | 627 | 227.9 |
| 5x10 RE | 1 | 20.6 | 154.7 | 859 | 269.1 |
| 5x16 RE | 1 | 23.2 | 174.0 | 1202 | 321.4 |
| 5x16 RM | 1 | 24.8 | 186.1 | 1272 | 363.1 |
| 5x25 RE | 1 | 27.6 | 207.3 | 1779 | 444.0 |
| 5x25 RM | 1 | 28.6 | 214.4 | 1833 | 466.9 |
| 5x35 RM | 1 | 31.7 | 237.7 | 2389 | 554.4 |
| 5x50 RM | 1 | 37.1 | 278.1 | 3434 | 750.5 |
| 5x70 RM | 1 | 41.4 | 310.5 | 4449 | 883.4 |
| 5x95 RM | 1 | 48.3 | 362.0 | 6009 | 1196.3 |
| 5x120 RM | 1 | 52.1 | 390.4 | 7348 | 1337.0 |
| 5x150 RM | 1 | 57.9 | 434.3 | 9041 | 1662.8 |
| 5x185 RM | 1 | 63.3 | 474.8 | 11195 | 1945.3 |
| 5x240 RM | 1 | 72.0 | 540.0 | 14293 | 2503.7 |


POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLENE RUBBER (HEPR) INSULATION

3. ARMoured WITH STEEL GALVANIZED TAPES*

IEC 60502-1

3.1 Cables with PVC sheath

- TOFLEX RBVng(A)
- TOFLEX GRBVng(A)
- TOFLEX ARBVng(A)
- Cu/HEPR/PVC/STA/PVC, Al/HEPR/PVC/STA/PVC

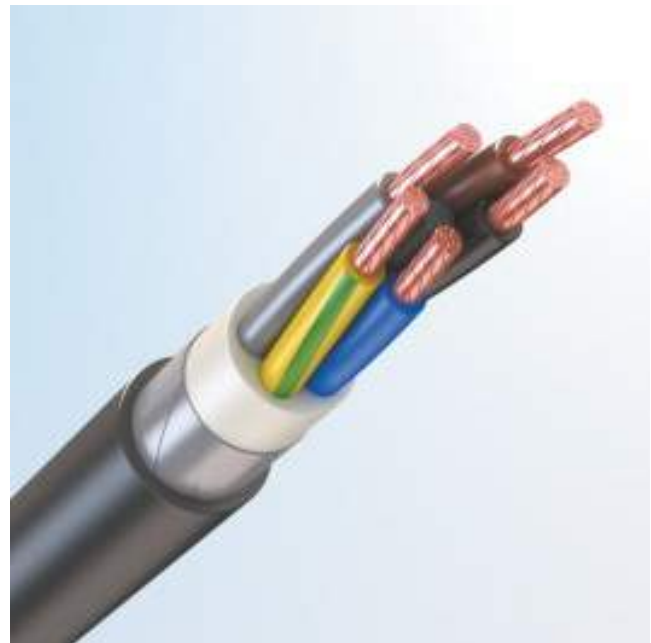

Possible options:

| | |
|---------------|------------------------------------------------|
| «ng(A)-HL» | |
| «ng(A)-LS» | (Cu/HEPR/PVC/STA/LSPVC, Al/HEPR/PVC/STA/LSPVC) |
| «ng(A)-LS-HL» | (materials as above) |



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; copper flexible (version GRBV) of 5th class (according to IEC 60228).
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Armour** – two steel galvanized tapes (the top tapes cover the gaps between the lower tape windings).
- ⑤ **Outer sheath:**
 - «ng(A)» – made from PVC-compound with low fire hazard.
 - «ng(A)-HL» – made from cold-resistant PVC-compound with low fire hazard.
 - «ng(A)-LS» – made from PVC-compound with low fire hazard, low smoke and gas emission.
 - «ng(A)-LS-HL» – made from cold-resistant PVC-compound with low fire hazard, low smoke and gas emission.

► **Ordering example:**

«TOFLEX RBVng(A)-LS 3×95RM(N,G)-1 IEC 60502-1»

*In the production of power cables with aluminium or aluminium alloy tapes armour in the cable grade «Ba» must be specified instead of «B».



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|--------------------|--------------------|-----------------------|---------------------------------------|
| | | | | TOFLEX RBVng(A) | TOFLEX RBVng(A)-HL | TOFLEX RBVng(A)-LS | TOFLEX RBVng(A)-LS-HL | |
| 2x1,5 RE | 1 | 13.4 | 100.5 | 285 | 285 | 322 | 322 | 130.0 |
| 2x2,5 RE | 1 | 13.9 | 104.4 | 318 | 318 | 357 | 357 | 138.7 |
| 2x4 RE | 1 | 14.8 | 111.3 | 375 | 375 | 420 | 420 | 155.8 |
| 2x6 RE | 1 | 15.8 | 118.8 | 445 | 445 | 495 | 495 | 175.3 |
| 2x10 RE | 1 | 17.4 | 130.5 | 571 | 571 | 631 | 631 | 207.2 |
| 2x16 RE | 1 | 19.3 | 144.8 | 745 | 745 | 818 | 818 | 248.7 |
| 2x16 RM | 1 | 20.2 | 151.5 | 784 | 784 | 863 | 863 | 269.4 |
| 2x25 RE | 1 | 22.3 | 167.3 | 1031 | 1031 | 1127 | 1127 | 327.2 |
| 2x25 RM | 1 | 23.0 | 172.5 | 1070 | 1070 | 1171 | 1171 | 345.3 |
| 2x35 RM | 1 | 25.4 | 190.5 | 1352 | 1352 | 1475 | 1475 | 415.9 |
| 2x50 RM | 1 | 28.8 | 216.0 | 1833 | 1833 | 1989 | 1989 | 527.7 |
| 2x70 RM | 1 | 32.4 | 243.0 | 2345 | 2345 | 2543 | 2543 | 654.3 |
| 2x95 RM | 1 | 37.8 | 283.5 | 3253 | 3253 | 3516 | 3516 | 874.5 |
| 2x120 RM | 1 | 40.6 | 304.5 | 3905 | 3905 | 4206 | 4206 | 990.9 |
| 2x150 RM | 1 | 44.6 | 334.5 | 4731 | 4731 | 5097 | 5097 | 1195.7 |
| 2x185 RM | 1 | 49.4 | 370.5 | 5815 | 5815 | 6263 | 6263 | 1473.2 |
| 2x240 RM | 1 | 56.6 | 424.5 | 7748 | 7748 | 8323 | 8323 | 1885.8 |
| 3x1,5 RE | 1 | 13.6 | 102.2 | 299 | 299 | 334 | 334 | 132.1 |
| 3x2,5 RE | 1 | 14.5 | 108.6 | 353 | 353 | 392 | 392 | 147.2 |
| 3x4 RE | 1 | 15.5 | 116.0 | 424 | 424 | 468 | 468 | 165.0 |
| 3x6 RE | 1 | 16.5 | 124.1 | 512 | 512 | 561 | 561 | 185.1 |
| 3x10 RE | 1 | 18.2 | 136.7 | 667 | 667 | 725 | 725 | 217.6 |
| 3x16 RE | 1 | 20.3 | 152.0 | 899 | 899 | 969 | 969 | 259.2 |
| 3x16 RM | 1 | 21.2 | 159.3 | 939 | 939 | 1015 | 1015 | 279.8 |
| 3x25 RE | 1 | 23.5 | 176.2 | 1264 | 1264 | 1354 | 1354 | 340.1 |
| 3x25 RM | 1 | 24.6 | 184.8 | 1331 | 1331 | 1430 | 1430 | 374.0 |
| 3x35 RM | 1 | 26.8 | 201.0 | 1670 | 1670 | 1785 | 1785 | 428.2 |
| 3x50 RM | 1 | 30.5 | 228.4 | 2300 | 2300 | 2443 | 2443 | 541.4 |
| 3x70 RM | 1 | 35.1 | 263.2 | 3026 | 3026 | 3219 | 3219 | 710.3 |
| 3x95 RM | 1 | 40.0 | 300.0 | 4093 | 4093 | 4334 | 4334 | 887.0 |
| 3x120 RM | 1 | 43.0 | 322.6 | 4962 | 4962 | 5235 | 5235 | 997.3 |
| 3x150 RM | 1 | 48.1 | 360.6 | 6124 | 6124 | 6471 | 6471 | 1264.9 |
| 3x185 RM | 1 | 53.2 | 398.9 | 7778 | 7778 | 8184 | 8184 | 1488.8 |
| 3x240 RM | 1 | 60.0 | 449.9 | 9839 | 9839 | 10358 | 10358 | 1891.9 |
| 4x1,5 RE | 1 | 14.5 | 108.7 | 337 | 337 | 375 | 375 | 146.7 |
| 4x2,5 RE | 1 | 15.5 | 116.0 | 403 | 403 | 445 | 445 | 163.8 |
| 4x4 RE | 1 | 16.6 | 124.3 | 491 | 491 | 537 | 537 | 184.0 |
| 4x6 RE | 1 | 17.8 | 133.3 | 595 | 595 | 647 | 647 | 206.6 |
| 4x10 RE | 1 | 19.7 | 147.4 | 795 | 795 | 856 | 856 | 243.0 |
| 4x16 RE | 1 | 21.9 | 164.6 | 1088 | 1088 | 1161 | 1161 | 289.3 |
| 4x16 RM | 1 | 23.0 | 172.7 | 1133 | 1133 | 1213 | 1213 | 312.0 |
| 4x25 RE | 1 | 26.0 | 194.7 | 1570 | 1570 | 1670 | 1670 | 397.6 |
| 4x25 RM | 1 | 26.8 | 201.0 | 1620 | 1620 | 1725 | 1725 | 417.9 |
| 4x35 RM | 1 | 29.2 | 219.1 | 2050 | 2050 | 2171 | 2171 | 477.6 |
| 4x50 RM | 1 | 33.7 | 252.8 | 2884 | 2884 | 3043 | 3043 | 626.3 |
| 4x70 RM | 1 | 38.8 | 290.7 | 3874 | 3874 | 4078 | 4078 | 792.6 |
| 4x95 RM | 1 | 44.2 | 331.7 | 5126 | 5126 | 5388 | 5388 | 1014.1 |
| 4x120 RM | 1 | 48.4 | 363.0 | 6334 | 6334 | 6647 | 6647 | 1198.5 |
| 4x150 RM | 1 | 53.5 | 401.5 | 7988 | 7988 | 8352 | 8352 | 1410.1 |

| | | | | | | | | |
|----------|---|------|-------|-------|-------|-------|-------|--------|
| 4x185 RM | 1 | 59.4 | 445.2 | 9835 | 9835 | 10286 | 10286 | 1746.0 |
| 4x240 RM | 1 | 65.9 | 494.0 | 12270 | 12270 | 12809 | 12809 | 2096.1 |
| 5x1,5 RE | 1 | 15.5 | 116.0 | 385 | 385 | 425 | 425 | 163.4 |
| 5x2,5 RE | 1 | 16.6 | 124.1 | 463 | 463 | 508 | 508 | 182.9 |
| 5x4 RE | 1 | 17.8 | 133.5 | 566 | 566 | 616 | 616 | 205.9 |
| 5x6 RE | 1 | 19.1 | 143.6 | 704 | 704 | 761 | 761 | 231.5 |
| 5x10 RE | 1 | 21.3 | 159.4 | 946 | 946 | 1013 | 1013 | 272.7 |
| 5x16 RE | 1 | 24.2 | 181.6 | 1325 | 1325 | 1410 | 1410 | 340.7 |
| 5x16 RM | 1 | 25.4 | 190.7 | 1378 | 1378 | 1469 | 1469 | 367.1 |
| 5x25 RE | 1 | 28.3 | 212.0 | 1899 | 1899 | 2007 | 2007 | 448.0 |
| 5x25 RM | 1 | 29.2 | 219.1 | 1957 | 1957 | 2071 | 2071 | 470.9 |
| 5x35 RM | 1 | 32.3 | 242.3 | 2528 | 2528 | 2667 | 2667 | 558.4 |
| 5x50 RM | 1 | 38.1 | 285.8 | 3718 | 3718 | 3904 | 3904 | 758.5 |
| 5x70 RM | 1 | 42.4 | 318.2 | 4769 | 4769 | 4990 | 4990 | 891.4 |
| 5x95 RM | 1 | 49.3 | 369.7 | 6382 | 6382 | 6682 | 6682 | 1205.6 |
| 5x120 RM | 1 | 53.9 | 404.0 | 8103 | 8103 | 8444 | 8444 | 1353.7 |
| 5x150 RM | 1 | 59.7 | 448.0 | 9880 | 9880 | 10303 | 10303 | 1681.2 |
| 5x185 RM | 1 | 65.1 | 488.5 | 12118 | 12118 | 12605 | 12605 | 1963.7 |
| 5x240 RM | 1 | 73.8 | 553.7 | 15340 | 15340 | 15971 | 15971 | 2525.1 |


| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|---------------------|---------------------|------------------------|---------------------------------------|
| | | | | TOFLEX RBaVng(A) | TOFLEX RBaVng(A)-HL | TOFLEX RBaVng(A)-LS | TOFLEX RBaVng(A)-LS-HL | |
| | | 13.4 | 100.5 | 285 | 285 | 322 | 322 | 130.0 |
| 1x4 RE | 1 | 14.6 | 146.0 | 291 | 291 | 330 | 330 | 131.6 |
| 1x6 RE | 1 | 14.6 | 146.0 | 305 | 305 | 343 | 343 | 129.6 |
| 1x10 RE | 1 | 14.6 | 146.0 | 331 | 331 | 367 | 367 | 125.7 |
| 1x16 RE | 1 | 14.6 | 146.0 | 374 | 374 | 406 | 406 | 119.6 |
| 1x16 RM | 1 | 14.6 | 146.0 | 370 | 370 | 400 | 400 | 116.3 |
| 1x25 RE | 1 | 15.6 | 155.5 | 469 | 469 | 501 | 501 | 130.2 |
| 1x25 RM | 1 | 15.9 | 159.0 | 481 | 481 | 514 | 514 | 134.5 |
| 1x35 RM | 1 | 16.9 | 169.0 | 586 | 586 | 622 | 622 | 146.9 |
| 1x50 RM | 1 | 18.6 | 186.0 | 780 | 780 | 821 | 821 | 173.0 |
| 1x70 RM | 1 | 20.2 | 202.0 | 964 | 964 | 1009 | 1009 | 193.8 |
| 1x95 RM | 1 | 22.3 | 223.0 | 1242 | 1242 | 1293 | 1293 | 228.1 |
| 1x120 RM | 1 | 24.1 | 241.0 | 1524 | 1524 | 1583 | 1583 | 262.2 |
| 1x150 RM | 1 | 25.9 | 259.0 | 1823 | 1823 | 1888 | 1888 | 296.5 |
| 1x185 RM | 1 | 27.9 | 279.0 | 2205 | 2205 | 2275 | 2275 | 335.8 |
| 1x240 RM | 1 | 30.6 | 306.0 | 2746 | 2746 | 2824 | 2824 | 388.5 |
| 1x300 RM | 1 | 36.1 | 360.5 | 3534 | 3534 | 3644 | 3644 | 550.8 |
| 1x400 RM | 1 | 39.4 | 393.9 | 4398 | 4398 | 4520 | 4520 | 631.2 |
| 1x500 RM | 1 | 43.0 | 429.7 | 5434 | 5434 | 5569 | 5569 | 720.6 |
| 1x630 RM | 1 | 48.1 | 481.3 | 6978 | 6978 | 7155 | 7155 | 889.8 |

POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

3. ARMoured WITH STEEL GALVANIZED TAPES*

IEC 60502-1

3.2 Cables sheathed with cross-linked highly elastic polymer compound

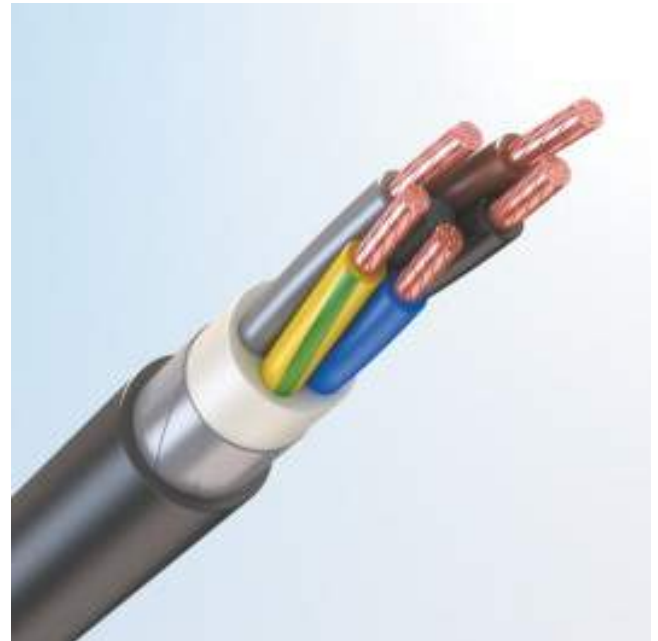

- TOFLEX RBRng(A)
- TOFLEX GRBRng(A)
- TOFLEX ARBRng(A)
- Cu/HEPR/HFFR/STA/ XLFR, Al/HEPR/HFFR/STA/ XLFR

Possible options:

| | |
|---------------|----------------------------------------------------|
| «ng(A)-HL» | |
| «ng(A)-HF» | (Cu/HEPR/HFFR/STA/XLHFFR, Al/HEPR/HFFR/STA/XLHFFR) |
| «ng(A)-HF-HL» | (materials as above) |



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; copper flexible (version GRBR) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Armour** – two steel galvanized tapes (the top tapes cover the gaps between the lower tape windings).
- ⑤ **Outer sheath:**
 - «ng(A)» – made from cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HL» – made from cold-resistant cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HF» – made from halogen-free cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HF-HL» – made from cold-resistant halogen-free cross-linked highly elastic polymer compound with low fire hazard.

► **Ordering example:**

«TOFLEX RBRng(A)-HL5×95RM(N,G)-1 IEC 60502-1»

*In the production of power cables with aluminium or aluminium alloy tapes armour in the cable grade «Ba» must be specified instead of «B».



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|--------------------|--------------------|-----------------------|---------------------------------------|
| | | | | TOFLEX RBRng(A) | TOFLEX RBRng(A)-HL | TOFLEX RBRng(A)-HF | TOFLEX RBRng(A)-HF-HL | |
| 2x1,5 RE | 1 | 13.4 | 100.5 | 290 | 290 | 290 | 290 | 130.0 |
| 2x2,5 RE | 1 | 13.9 | 104.4 | 324 | 324 | 324 | 324 | 138.7 |
| 2x4 RE | 1 | 14.8 | 111.3 | 384 | 384 | 384 | 384 | 155.8 |
| 2x6 RE | 1 | 15.8 | 118.8 | 456 | 456 | 456 | 456 | 175.3 |
| 2x10 RE | 1 | 17.4 | 130.5 | 586 | 586 | 586 | 586 | 207.2 |
| 2x16 RE | 1 | 19.3 | 144.8 | 767 | 767 | 767 | 767 | 248.7 |
| 2x16 RM | 1 | 20.2 | 151.5 | 810 | 810 | 810 | 810 | 269.4 |
| 2x25 RE | 1 | 22.3 | 167.3 | 1066 | 1066 | 1066 | 1066 | 327.2 |
| 2x25 RM | 1 | 23.0 | 172.5 | 1108 | 1108 | 1108 | 1108 | 345.3 |
| 2x35 RM | 1 | 25.4 | 190.5 | 1398 | 1398 | 1398 | 1398 | 415.9 |
| 2x50 RM | 1 | 28.8 | 216.0 | 1898 | 1898 | 1898 | 1898 | 527.7 |
| 2x70 RM | 1 | 32.4 | 243.0 | 2438 | 2438 | 2438 | 2438 | 654.3 |
| 2x95 RM | 1 | 37.8 | 283.5 | 3370 | 3370 | 3370 | 3370 | 874.5 |
| 2x120 RM | 1 | 40.6 | 304.5 | 4046 | 4046 | 4046 | 4046 | 990.9 |
| 2x150 RM | 1 | 44.6 | 334.5 | 4915 | 4915 | 4915 | 4915 | 1195.7 |
| 2x185 RM | 1 | 49.4 | 370.5 | 6032 | 6032 | 6032 | 6032 | 1473.2 |
| 2x240 RM | 1 | 56.6 | 424.5 | 8030 | 8030 | 8030 | 8030 | 1885.8 |
| 3x1,5 RE | 1 | 13.6 | 102.2 | 302 | 302 | 302 | 302 | 132.1 |
| 3x2,5 RE | 1 | 14.5 | 108.6 | 358 | 358 | 358 | 358 | 147.2 |
| 3x4 RE | 1 | 15.5 | 116.0 | 430 | 430 | 430 | 430 | 165.0 |
| 3x6 RE | 1 | 16.5 | 124.1 | 520 | 520 | 520 | 520 | 185.1 |
| 3x10 RE | 1 | 18.2 | 136.7 | 679 | 679 | 679 | 679 | 217.6 |
| 3x16 RE | 1 | 20.3 | 152.0 | 917 | 917 | 917 | 917 | 259.2 |
| 3x16 RM | 1 | 21.2 | 159.3 | 960 | 960 | 960 | 960 | 279.8 |
| 3x25 RE | 1 | 23.5 | 176.2 | 1292 | 1292 | 1292 | 1292 | 340.1 |
| 3x25 RM | 1 | 24.6 | 184.8 | 1358 | 1358 | 1358 | 1358 | 374.0 |
| 3x35 RM | 1 | 26.8 | 201.0 | 1705 | 1705 | 1705 | 1705 | 428.2 |
| 3x50 RM | 1 | 30.5 | 228.4 | 2351 | 2351 | 2351 | 2351 | 541.4 |
| 3x70 RM | 1 | 35.1 | 263.2 | 3092 | 3092 | 3092 | 3092 | 710.3 |
| 3x95 RM | 1 | 40.0 | 300.0 | 4185 | 4185 | 4185 | 4185 | 887.0 |
| 3x120 RM | 1 | 43.0 | 322.6 | 5072 | 5072 | 5072 | 5072 | 997.3 |
| 3x150 RM | 1 | 48.1 | 360.6 | 6261 | 6261 | 6261 | 6261 | 1264.9 |
| 3x185 RM | 1 | 53.2 | 398.9 | 7947 | 7947 | 7947 | 7947 | 1488.8 |
| 3x240 RM | 1 | 60.0 | 449.9 | 10060 | 10060 | 10060 | 10060 | 1891.9 |
| 4x1,5 RE | 1 | 14.5 | 108.7 | 341 | 341 | 341 | 341 | 146.7 |
| 4x2,5 RE | 1 | 15.5 | 116.0 | 408 | 408 | 408 | 408 | 163.8 |
| 4x4 RE | 1 | 16.6 | 124.3 | 497 | 497 | 497 | 497 | 184.0 |
| 4x6 RE | 1 | 17.8 | 133.3 | 603 | 603 | 603 | 603 | 206.6 |
| 4x10 RE | 1 | 19.7 | 147.4 | 807 | 807 | 807 | 807 | 243.0 |
| 4x16 RE | 1 | 21.9 | 164.6 | 1105 | 1105 | 1105 | 1105 | 289.3 |
| 4x16 RM | 1 | 23.0 | 172.7 | 1153 | 1153 | 1153 | 1153 | 312.0 |
| 4x25 RE | 1 | 26.0 | 194.7 | 1595 | 1595 | 1595 | 1595 | 397.6 |
| 4x25 RM | 1 | 26.8 | 201.0 | 1647 | 1647 | 1647 | 1647 | 417.9 |
| 4x35 RM | 1 | 29.2 | 219.1 | 2085 | 2085 | 2085 | 2085 | 477.6 |
| 4x50 RM | 1 | 33.7 | 252.8 | 2940 | 2940 | 2940 | 2940 | 626.3 |
| 4x70 RM | 1 | 38.8 | 290.7 | 3938 | 3938 | 3938 | 3938 | 792.6 |
| 4x95 RM | 1 | 44.2 | 331.7 | 5223 | 5223 | 5223 | 5223 | 1014.1 |
| 4x120 RM | 1 | 48.4 | 363.0 | 6440 | 6440 | 6440 | 6440 | 1198.5 |
| 4x150 RM | 1 | 53.5 | 401.5 | 8119 | 8119 | 8119 | 8119 | 1410.1 |

| | | | | | | | | |
|----------|---|------|-------|-------|-------|-------|-------|--------|
| 4x185 RM | 1 | 59.4 | 445.2 | 10000 | 10000 | 10000 | 10000 | 1746.0 |
| 4x240 RM | 1 | 65.9 | 494.0 | 12484 | 12484 | 12484 | 12484 | 2096.1 |
| 5x1,5 RE | 1 | 15.5 | 116.0 | 388 | 388 | 388 | 388 | 163.4 |
| 5x2,5 RE | 1 | 16.6 | 124.1 | 468 | 468 | 468 | 468 | 182.9 |
| 5x4 RE | 1 | 17.8 | 133.5 | 573 | 573 | 572 | 572 | 205.9 |
| 5x6 RE | 1 | 19.1 | 143.6 | 714 | 714 | 713 | 713 | 231.5 |
| 5x10 RE | 1 | 21.3 | 159.4 | 960 | 960 | 959 | 959 | 272.7 |
| 5x16 RE | 1 | 24.2 | 181.6 | 1342 | 1342 | 1341 | 1341 | 340.7 |
| 5x16 RM | 1 | 25.4 | 190.7 | 1397 | 1397 | 1396 | 1396 | 367.1 |
| 5x25 RE | 1 | 28.3 | 212.0 | 1925 | 1925 | 1923 | 1923 | 448.0 |
| 5x25 RM | 1 | 29.2 | 219.1 | 1986 | 1986 | 1984 | 1984 | 470.9 |
| 5x35 RM | 1 | 32.3 | 242.3 | 2570 | 2570 | 2568 | 2568 | 558.4 |
| 5x50 RM | 1 | 38.1 | 285.8 | 3769 | 3769 | 3765 | 3765 | 758.5 |
| 5x70 RM | 1 | 42.4 | 318.2 | 4837 | 4837 | 4830 | 4830 | 891.4 |
| 5x95 RM | 1 | 49.3 | 369.7 | 6475 | 6475 | 6468 | 6468 | 1205.6 |
| 5x120 RM | 1 | 53.9 | 404.0 | 8214 | 8214 | 8207 | 8207 | 1353.7 |
| 5x150 RM | 1 | 59.7 | 448.0 | 10020 | 10020 | 10013 | 10013 | 1681.2 |
| 5x185 RM | 1 | 65.1 | 488.5 | 12291 | 12291 | 12275 | 12275 | 1963.7 |
| 5x240 RM | 1 | 73.8 | 553.7 | 15560 | 15560 | 15544 | 15544 | 2525.1 |


| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|---------------------|---------------------|------------------------|---------------------------------------|
| | | | | TOFLEX RBaRng(A) | TOFLEX RBaRng(A)-HL | TOFLEX RBaRng(A)-HF | TOFLEX RBaRng(A)-HF-HL | |
| | 1 | 13.4 | 100.5 | 290 | 290 | 290 | 290 | 130.0 |
| HF" | | | | | | | | |
| 1x4 RE | 1 | 14.6 | 146.0 | 297 | 297 | 297 | 297 | 131.6 |
| 1x6 RE | 1 | 14.6 | 146.0 | 309 | 309 | 309 | 309 | 129.6 |
| 1x10 RE | 1 | 14.6 | 146.0 | 334 | 334 | 334 | 334 | 125.7 |
| 1x16 RE | 1 | 14.6 | 146.0 | 373 | 373 | 373 | 373 | 119.6 |
| 1x16 RM | 1 | 14.6 | 146.0 | 367 | 367 | 367 | 367 | 116.3 |
| 1x25 RE | 1 | 15.6 | 155.5 | 466 | 466 | 466 | 466 | 130.2 |
| 1x25 RM | 1 | 15.9 | 159.0 | 479 | 479 | 479 | 479 | 134.5 |
| 1x35 RM | 1 | 16.9 | 169.0 | 584 | 584 | 584 | 584 | 146.9 |
| 1x50 RM | 1 | 18.6 | 186.0 | 778 | 778 | 778 | 778 | 173.0 |
| 1x70 RM | 1 | 20.2 | 202.0 | 963 | 963 | 963 | 963 | 193.8 |
| 1x95 RM | 1 | 22.3 | 223.0 | 1241 | 1241 | 1241 | 1241 | 228.1 |
| 1x120 RM | 1 | 24.1 | 241.0 | 1521 | 1521 | 1521 | 1521 | 262.2 |
| 1x150 RM | 1 | 25.9 | 259.0 | 1821 | 1821 | 1821 | 1821 | 296.5 |
| 1x185 RM | 1 | 27.9 | 279.0 | 2202 | 2202 | 2202 | 2202 | 335.8 |
| 1x240 RM | 1 | 30.6 | 306.0 | 2744 | 2744 | 2744 | 2744 | 388.5 |
| 1x300 RM | 1 | 36.1 | 360.5 | 3531 | 3531 | 3531 | 3531 | 550.8 |
| 1x400 RM | 1 | 39.4 | 393.9 | 4395 | 4395 | 4395 | 4395 | 631.2 |
| 1x500 RM | 1 | 43.0 | 429.7 | 5432 | 5432 | 5432 | 5432 | 720.6 |
| 1x630 RM | 1 | 48.1 | 481.3 | 6976 | 6976 | 6976 | 6976 | 889.8 |

POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

3. ARMoured WITH STEEL GALVANIZED TAPES*

IEC 60502-1

3.3 Cables sheathed with halogen-free polymer compound

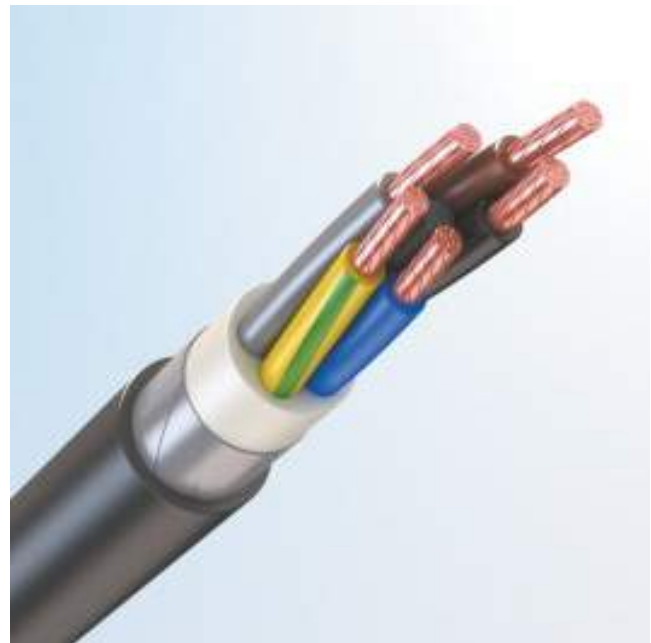

- TOFLEX RBPng(A)-HF
- TOFLEX GRBPng(A)-HF
- TOFLEX ARBPng(A)-HF
- Cu/HEPR/HFFR/STA/HFFR, Al/HEPR/HFFR/STA/HFFR

Possible options:

«ng(A)-HF-HL»



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; copper flexible (version GRBP) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Armour** – two steel galvanized tapes (the top tapes cover the gaps between the lower tape windings).
- ⑤ **Outer sheath:**
 - «ng(A)-HF» — made from halogen-free polymer compounds.
 - «ng(A)-HF-HL» — made from cold-resistant halogen-free polymer compounds.

► **Ordering example:**

«TOFLEX RBPng(A)-HF3×185RM-1 IEC 60502-1»

*In the production of power cables with aluminium or aluminium alloy tapes armour in the cable grade «Ba» must be specified instead of «B».



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|-----------------------|---------------------------------------|
| | | | | TOFLEX RBPng(A)-HF | TOFLEX RBPng(A)-HF-HL | |
| 2x1,5 RE | 1 | 13.4 | 100.5 | 299 | 299 | 130.0 |
| 2x2,5 RE | 1 | 13.9 | 104.4 | 334 | 334 | 138.7 |
| 2x4 RE | 1 | 14.8 | 111.3 | 394 | 394 | 155.8 |
| 2x6 RE | 1 | 15.8 | 118.8 | 467 | 467 | 175.3 |
| 2x10 RE | 1 | 17.4 | 130.5 | 599 | 599 | 207.2 |
| 2x16 RE | 1 | 19.3 | 144.8 | 781 | 781 | 248.7 |
| 2x16 RM | 1 | 20.2 | 151.5 | 824 | 824 | 269.4 |
| 2x25 RE | 1 | 22.3 | 167.3 | 1082 | 1082 | 327.2 |
| 2x25 RM | 1 | 23.0 | 172.5 | 1125 | 1125 | 345.3 |
| 2x35 RM | 1 | 25.4 | 190.5 | 1418 | 1418 | 415.9 |
| 2x50 RM | 1 | 28.8 | 216.0 | 1922 | 1922 | 527.7 |
| 2x70 RM | 1 | 32.4 | 243.0 | 2464 | 2464 | 654.3 |
| 2x95 RM | 1 | 37.8 | 283.5 | 3407 | 3407 | 874.5 |
| 2x120 RM | 1 | 40.6 | 304.5 | 4086 | 4086 | 990.9 |
| 2x150 RM | 1 | 44.6 | 334.5 | 4959 | 4959 | 1195.7 |
| 2x185 RM | 1 | 49.4 | 370.5 | 6089 | 6089 | 1473.2 |
| 2x240 RM | 1 | 56.6 | 424.5 | 8102 | 8102 | 1885.8 |
| 3x1,5 RE | 1 | 13.6 | 102.2 | 312 | 312 | 132.1 |
| 3x2,5 RE | 1 | 14.5 | 108.6 | 367 | 367 | 147.2 |
| 3x4 RE | 1 | 15.5 | 116.0 | 441 | 441 | 165.0 |
| 3x6 RE | 1 | 16.5 | 124.1 | 532 | 532 | 185.1 |
| 3x10 RE | 1 | 18.2 | 136.7 | 692 | 692 | 217.6 |
| 3x16 RE | 1 | 20.3 | 152.0 | 931 | 931 | 259.2 |
| 3x16 RM | 1 | 21.2 | 159.3 | 975 | 975 | 279.8 |
| 3x25 RE | 1 | 23.5 | 176.2 | 1309 | 1309 | 340.1 |
| 3x25 RM | 1 | 24.6 | 184.8 | 1378 | 1378 | 374.0 |
| 3x35 RM | 1 | 26.8 | 201.0 | 1727 | 1727 | 428.2 |
| 3x50 RM | 1 | 30.5 | 228.4 | 2376 | 2376 | 541.4 |
| 3x70 RM | 1 | 35.1 | 263.2 | 3126 | 3126 | 710.3 |
| 3x95 RM | 1 | 40.0 | 300.0 | 4224 | 4224 | 887.0 |
| 3x120 RM | 1 | 43.0 | 322.6 | 5115 | 5115 | 997.3 |
| 3x150 RM | 1 | 48.1 | 360.6 | 6316 | 6316 | 1264.9 |
| 3x185 RM | 1 | 53.2 | 398.9 | 8008 | 8008 | 1488.8 |
| 3x240 RM | 1 | 60.0 | 449.9 | 10137 | 10137 | 1891.9 |
| 4x1,5 RE | 1 | 14.5 | 108.7 | 351 | 351 | 146.7 |
| 4x2,5 RE | 1 | 15.5 | 116.0 | 418 | 418 | 163.8 |
| 4x4 RE | 1 | 16.6 | 124.3 | 509 | 509 | 184.0 |
| 4x6 RE | 1 | 17.8 | 133.3 | 616 | 616 | 206.6 |
| 4x10 RE | 1 | 19.7 | 147.4 | 821 | 821 | 243.0 |
| 4x16 RE | 1 | 21.9 | 164.6 | 1121 | 1121 | 289.3 |
| 4x16 RM | 1 | 23.0 | 172.7 | 1170 | 1170 | 312.0 |
| 4x25 RE | 1 | 26.0 | 194.7 | 1616 | 1616 | 397.6 |
| 4x25 RM | 1 | 26.8 | 201.0 | 1669 | 1669 | 417.9 |
| 4x35 RM | 1 | 29.2 | 219.1 | 2109 | 2109 | 477.6 |
| 4x50 RM | 1 | 33.7 | 252.8 | 2967 | 2967 | 626.3 |
| 4x70 RM | 1 | 38.8 | 290.7 | 3977 | 3977 | 792.6 |
| 4x95 RM | 1 | 44.2 | 331.7 | 5267 | 5267 | 1014.1 |
| 4x120 RM | 1 | 48.4 | 363.0 | 6496 | 6496 | 1198.5 |
| 4x150 RM | 1 | 53.5 | 401.5 | 8181 | 8181 | 1410.1 |

| | | | | | | |
|----------|---|------|-------|-------|-------|--------|
| 4x185 RM | 1 | 59.4 | 445.2 | 10076 | 10076 | 1746.0 |
| 4x240 RM | 1 | 65.9 | 494.0 | 12569 | 12569 | 2096.1 |
| 5x1,5 RE | 1 | 15.5 | 116.0 | 399 | 399 | 163.4 |
| 5x2,5 RE | 1 | 16.6 | 124.1 | 480 | 480 | 182.9 |
| 5x4 RE | 1 | 17.8 | 133.5 | 585 | 585 | 205.9 |
| 5x6 RE | 1 | 19.1 | 143.6 | 726 | 726 | 231.5 |
| 5x10 RE | 1 | 21.3 | 159.4 | 974 | 974 | 272.7 |
| 5x16 RE | 1 | 24.2 | 181.6 | 1360 | 1360 | 340.7 |
| 5x16 RM | 1 | 25.4 | 190.7 | 1416 | 1416 | 367.1 |
| 5x25 RE | 1 | 28.3 | 212.0 | 1946 | 1946 | 448.0 |
| 5x25 RM | 1 | 29.2 | 219.1 | 2008 | 2008 | 470.9 |
| 5x35 RM | 1 | 32.3 | 242.3 | 2594 | 2594 | 558.4 |
| 5x50 RM | 1 | 38.1 | 285.8 | 3803 | 3803 | 758.5 |
| 5x70 RM | 1 | 42.4 | 318.2 | 4872 | 4872 | 891.4 |
| 5x95 RM | 1 | 49.3 | 369.7 | 6524 | 6524 | 1205.6 |
| 5x120 RM | 1 | 53.9 | 404.0 | 8269 | 8269 | 1353.7 |
| 5x150 RM | 1 | 59.7 | 448.0 | 10089 | 10089 | 1681.2 |
| 5x185 RM | 1 | 65.1 | 488.5 | 12359 | 12359 | 1963.7 |
| 5x240 RM | 1 | 73.8 | 553.7 | 15654 | 15654 | 2525.1 |


| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|------------------------|---------------------------------------|
| | | | | TOFLEX RBaPng(A)-HF | TOFLEX RBaPng(A)-HF-HL | |
| 1x4 RE | 1 | 14.6 | 146.0 | 306 | 306 | 131.6 |
| 1x6 RE | 1 | 14.6 | 146.0 | 319 | 319 | 129.6 |
| 1x10 RE | 1 | 14.6 | 146.0 | 344 | 344 | 125.7 |
| 1x16 RE | 1 | 14.6 | 146.0 | 383 | 383 | 119.6 |
| 1x16 RM | 1 | 14.6 | 146.0 | 377 | 377 | 116.3 |
| 1x25 RE | 1 | 15.6 | 155.5 | 477 | 477 | 130.2 |
| 1x25 RM | 1 | 15.9 | 159.0 | 489 | 489 | 134.5 |
| 1x35 RM | 1 | 16.9 | 169.0 | 596 | 596 | 146.9 |
| 1x50 RM | 1 | 18.6 | 186.0 | 791 | 791 | 173.0 |
| 1x70 RM | 1 | 20.2 | 202.0 | 976 | 976 | 193.8 |
| 1x95 RM | 1 | 22.3 | 223.0 | 1257 | 1257 | 228.1 |
| 1x120 RM | 1 | 24.1 | 241.0 | 1540 | 1540 | 262.2 |
| 1x150 RM | 1 | 25.9 | 259.0 | 1841 | 1841 | 296.5 |
| 1x185 RM | 1 | 27.9 | 279.0 | 2224 | 2224 | 335.8 |
| 1x240 RM | 1 | 30.6 | 306.0 | 2768 | 2768 | 388.5 |
| 1x300 RM | 1 | 36.1 | 360.5 | 3564 | 3564 | 550.8 |
| 1x400 RM | 1 | 39.4 | 393.9 | 4432 | 4432 | 631.2 |
| 1x500 RM | 1 | 43.0 | 429.7 | 5472 | 5472 | 720.6 |
| 1x630 RM | 1 | 48.1 | 481.3 | 7029 | 7029 | 889.8 |

POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

3. ARMoured WITH STEEL GALVANIZED TAPES*

IEC 60502-1

3.4 Cables sheathed with thermoplastic polyurethane elastomer

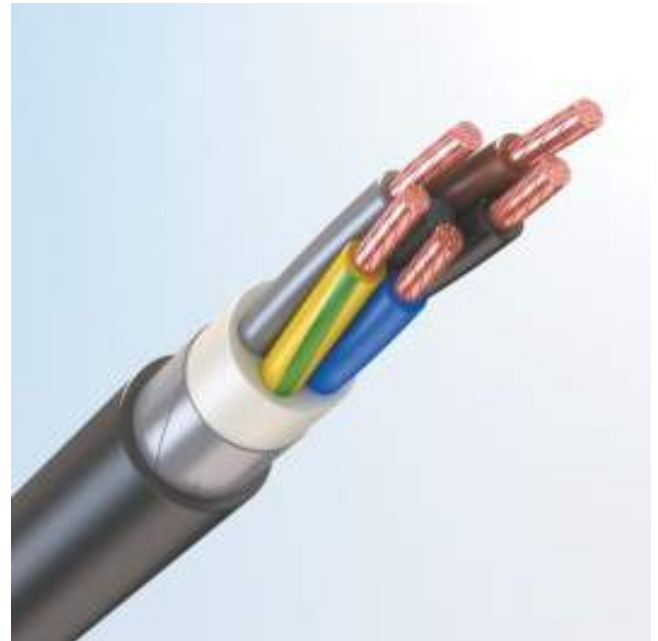

- TOFLEX RBTng(A)
- TOFLEX GRBTng(A)
- TOFLEX ARBTng(A)
- Cu/HEPR/TPE/STA/ TPU, Al/HEPR/ TPE /STA/ TPU



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; copper flexible (version GRBT) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Armour** – two steel galvanized tapes (the top tapes cover the gaps between the lower tape windings).
- ⑤ **Outer sheath:**
 - «ng(A)» — made from thermoplastic polyurethane elastomer.

► **Ordering example:**

«TOFLEX RBTng(A)3×185RM-1 IEC 60502-1»

*In the production of power cables with aluminium or aluminium alloy tapes armour in the cable grade «Ba» must be specified instead of «B».



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|--------|---------------------------------------|
| | | | | TOFLEX RBTng(A) | | |
| 2x1,5 RE | 1 | 13.4 | 100.5 | 285 | 130.0 | |
| 2x2,5 RE | 1 | 13.9 | 104.4 | 318 | 138.7 | |
| 2x4 RE | 1 | 14.8 | 111.3 | 375 | 155.8 | |
| 2x6 RE | 1 | 15.8 | 118.8 | 445 | 175.3 | |
| 2x10 RE | 1 | 17.4 | 130.5 | 571 | 207.2 | |
| 2x16 RE | 1 | 19.3 | 144.8 | 745 | 248.7 | |
| 2x16 RM | 1 | 20.2 | 151.5 | 784 | 269.4 | |
| 2x25 RE | 1 | 22.3 | 167.3 | 1031 | 327.2 | |
| 2x25 RM | 1 | 23.0 | 172.5 | 1070 | 345.3 | |
| 2x35 RM | 1 | 25.4 | 190.5 | 1352 | 415.9 | |
| 2x50 RM | 1 | 28.8 | 216.0 | 1833 | 527.7 | |
| 2x70 RM | 1 | 32.4 | 243.0 | 2345 | 654.3 | |
| 2x95 RM | 1 | 37.8 | 283.5 | 3253 | 874.5 | |
| 2x120 RM | 1 | 40.6 | 304.5 | 3905 | 990.9 | |
| 2x150 RM | 1 | 44.6 | 334.5 | 4731 | 1195.7 | |
| 2x185 RM | 1 | 49.4 | 370.5 | 5815 | 1473.2 | |
| 2x240 RM | 1 | 56.6 | 424.5 | 7748 | 1885.8 | |
| 3x1,5 RE | 1 | 13.6 | 102.2 | 299 | 132.1 | |
| 3x2,5 RE | 1 | 14.5 | 108.6 | 353 | 147.2 | |
| 3x4 RE | 1 | 15.5 | 116.0 | 424 | 165.0 | |
| 3x6 RE | 1 | 16.5 | 124.1 | 512 | 185.1 | |
| 3x10 RE | 1 | 18.2 | 136.7 | 667 | 217.6 | |
| 3x16 RE | 1 | 20.3 | 152.0 | 899 | 259.2 | |
| 3x16 RM | 1 | 21.2 | 159.3 | 939 | 279.8 | |
| 3x25 RE | 1 | 23.5 | 176.2 | 1264 | 340.1 | |
| 3x25 RM | 1 | 24.6 | 184.8 | 1331 | 374.0 | |
| 3x35 RM | 1 | 26.8 | 201.0 | 1670 | 428.2 | |
| 3x50 RM | 1 | 30.5 | 228.4 | 2300 | 541.4 | |
| 3x70 RM | 1 | 35.1 | 263.2 | 3026 | 710.3 | |
| 3x95 RM | 1 | 40.0 | 300.0 | 4093 | 887.0 | |
| 3x120 RM | 1 | 43.0 | 322.6 | 4962 | 997.3 | |
| 3x150 RM | 1 | 48.1 | 360.6 | 6124 | 1264.9 | |
| 3x185 RM | 1 | 53.2 | 398.9 | 7778 | 1488.8 | |
| 3x240 RM | 1 | 60.0 | 449.9 | 9839 | 1891.9 | |
| 4x1,5 RE | 1 | 14.5 | 108.7 | 337 | 146.7 | |
| 4x2,5 RE | 1 | 15.5 | 116.0 | 403 | 163.8 | |
| 4x4 RE | 1 | 16.6 | 124.3 | 491 | 184.0 | |
| 4x6 RE | 1 | 17.8 | 133.3 | 595 | 206.6 | |
| 4x10 RE | 1 | 19.7 | 147.4 | 795 | 243.0 | |
| 4x16 RE | 1 | 21.9 | 164.6 | 1088 | 289.3 | |
| 4x16 RM | 1 | 23.0 | 172.7 | 1133 | 312.0 | |
| 4x25 RE | 1 | 26.0 | 194.7 | 1570 | 397.6 | |
| 4x25 RM | 1 | 26.8 | 201.0 | 1620 | 417.9 | |
| 4x35 RM | 1 | 29.2 | 219.1 | 2050 | 477.6 | |
| 4x50 RM | 1 | 33.7 | 252.8 | 2884 | 626.3 | |
| 4x70 RM | 1 | 38.8 | 290.7 | 3874 | 792.6 | |
| 4x95 RM | 1 | 44.2 | 331.7 | 5126 | 1014.1 | |
| 4x120 RM | 1 | 48.4 | 363.0 | 6334 | 1198.5 | |
| 4x150 RM | 1 | 53.5 | 401.5 | 7988 | 1410.1 | |

| | | | | | |
|----------|---|------|-------|-------|--------|
| 4x185 RM | 1 | 59.4 | 445.2 | 9835 | 1746.0 |
| 4x240 RM | 1 | 65.9 | 494.0 | 12270 | 2096.1 |
| 5x1,5 RE | 1 | 15.5 | 116.0 | 385 | 163.4 |
| 5x2,5 RE | 1 | 16.6 | 124.1 | 463 | 182.9 |
| 5x4 RE | 1 | 17.8 | 133.5 | 566 | 205.9 |
| 5x6 RE | 1 | 19.1 | 143.6 | 704 | 231.5 |
| 5x10 RE | 1 | 21.3 | 159.4 | 946 | 272.7 |
| 5x16 RE | 1 | 24.2 | 181.6 | 1325 | 340.7 |
| 5x16 RM | 1 | 25.4 | 190.7 | 1378 | 367.1 |
| 5x25 RE | 1 | 28.3 | 212.0 | 1899 | 448.0 |
| 5x25 RM | 1 | 29.2 | 219.1 | 1957 | 470.9 |
| 5x35 RM | 1 | 32.3 | 242.3 | 2528 | 558.4 |
| 5x50 RM | 1 | 38.1 | 285.8 | 3718 | 758.5 |
| 5x70 RM | 1 | 42.4 | 318.2 | 4769 | 891.4 |
| 5x95 RM | 1 | 49.3 | 369.7 | 6382 | 1205.6 |
| 5x120 RM | 1 | 53.9 | 404.0 | 8103 | 1353.7 |
| 5x150 RM | 1 | 59.7 | 448.0 | 9880 | 1681.2 |
| 5x185 RM | 1 | 65.1 | 488.5 | 12118 | 1963.7 |
| 5x240 RM | 1 | 73.8 | 553.7 | 15340 | 2525.1 |


| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------------|-------|---------------------------------------|
| | | | | TOFLEX RBA _{Tng} (A) | | |
| 1x4 RE | 1 | 14.6 | 146.0 | 291 | 131.6 | |
| 1x6 RE | 1 | 14.6 | 146.0 | 305 | 129.6 | |
| 1x10 RE | 1 | 14.6 | 146.0 | 331 | 125.7 | |
| 1x16 RE | 1 | 14.6 | 146.0 | 374 | 119.6 | |
| 1x16 RM | 1 | 14.6 | 146.0 | 370 | 116.3 | |
| 1x25 RE | 1 | 15.6 | 155.5 | 469 | 130.2 | |
| 1x25 RM | 1 | 15.9 | 159.0 | 481 | 134.5 | |
| 1x35 RM | 1 | 16.9 | 169.0 | 586 | 146.9 | |
| 1x50 RM | 1 | 18.6 | 186.0 | 780 | 173.0 | |
| 1x70 RM | 1 | 20.2 | 202.0 | 964 | 193.8 | |
| 1x95 RM | 1 | 22.3 | 223.0 | 1242 | 228.1 | |
| 1x120 RM | 1 | 24.1 | 241.0 | 1524 | 262.2 | |
| 1x150 RM | 1 | 25.9 | 259.0 | 1823 | 296.5 | |
| 1x185 RM | 1 | 27.9 | 279.0 | 2205 | 335.8 | |
| 1x240 RM | 1 | 30.6 | 306.0 | 2746 | 388.5 | |
| 1x300 RM | 1 | 36.1 | 360.5 | 3534 | 550.8 | |
| 1x400 RM | 1 | 39.4 | 393.9 | 4398 | 631.2 | |
| 1x500 RM | 1 | 43.0 | 429.7 | 5434 | 720.6 | |
| 1x630 RM | 1 | 48.1 | 481.3 | 6978 | 889.8 | |

POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

4. ARMoured WITH FULL LAY-UP FROM STEEL GALVANIZED WIRES

IEC 60502-1

4.1 Cables with PVC sheath

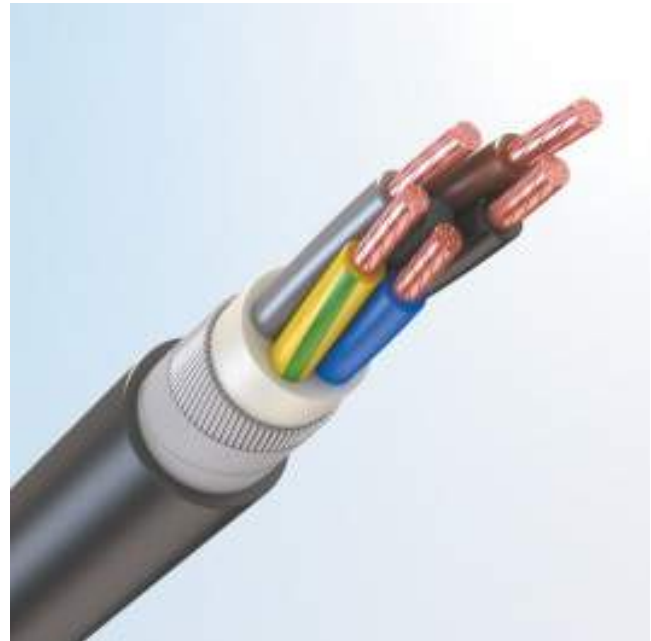

- TOFLEX RkVng(A)
- TOFLEX GRkVng(A)
- TOFLEX ARkVng(A)
- Cu/HEPR/PVC/SWA/PVC, Al/HEPR/PVC/SWA/PVC

Possible options:

| | |
|---------------|----------------------------------------------------|
| «ng(A)-HL» | |
| «ng(A)-LS» | (Cu/HEPR/LSPVC/SWA/LSPVC, Al/HEPR/LSPVC/SWA/LSPVC) |
| «ng(A)-LS-HL» | (materials as above) |



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; copper flexible (version GRkV) of 5th class (according to IEC 60228).
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Armour** – steel galvanized wires.
- ⑤ **Outer sheath:**
 - «ng(A)» – made from PVC-compound with low fire hazard.
 - «ng(A)-HL» – made from cold-resistant PVC-compound with low fire hazard.
 - «ng(A)-LS» – made from PVC-compound with low fire hazard, low smoke and gas emission.
 - «ng(A)-LS-HL» – made from cold-resistant PVC-compound with low fire hazard, low smoke and gas emission.

► Ordering example:

«TOFLEX RkVng(A)-LS3×95RM(N,G)-1 IEC 60502-1»



CABLE FEATURES




| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|--------------------|--------------------|-----------------------|---------------------------------------|
| | | | | TOFLEX RKVng(A) | TOFLEX RKVng(A)-HL | TOFLEX RKVng(A)-LS | TOFLEX RKVng(A)-LS-HL | |
| 2x1,5 RE | 1 | 14.3 | 107.1 | 374 | 374 | 411 | 411 | 131.2 |
| 2x2,5 RE | 1 | 15.1 | 113.1 | 424 | 424 | 466 | 466 | 145.5 |
| 2x4 RE | 1 | 16.8 | 126.0 | 597 | 597 | 644 | 644 | 167.4 |
| 2x6 RE | 1 | 17.8 | 133.5 | 687 | 687 | 741 | 741 | 186.8 |
| 2x10 RE | 1 | 19.4 | 145.2 | 839 | 839 | 903 | 903 | 218.7 |
| 2x16 RE | 1 | 21.3 | 159.5 | 1053 | 1053 | 1129 | 1129 | 260.2 |
| 2x16 RM | 1 | 23.0 | 172.2 | 1265 | 1265 | 1349 | 1349 | 285.6 |
| 2x25 RE | 1 | 25.5 | 191.0 | 1590 | 1590 | 1694 | 1694 | 359.9 |
| 2x25 RM | 1 | 26.2 | 196.2 | 1641 | 1641 | 1751 | 1751 | 378.5 |
| 2x35 RM | 1 | 28.2 | 211.2 | 1953 | 1953 | 2081 | 2081 | 433.9 |
| 2x70 RM | 1 | 36.8 | 275.7 | 3459 | 3459 | 3676 | 3676 | 725.0 |
| 3x1,5 RE | 1 | 14.8 | 110.9 | 404 | 404 | 441 | 441 | 138.9 |
| 3x2,5 RE | 1 | 16.4 | 123.3 | 568 | 568 | 610 | 610 | 158.7 |
| 3x4 RE | 1 | 17.4 | 130.7 | 660 | 660 | 707 | 707 | 176.5 |
| 3x6 RE | 1 | 18.5 | 138.8 | 759 | 759 | 811 | 811 | 196.6 |
| 3x10 RE | 1 | 20.2 | 151.4 | 954 | 954 | 1015 | 1015 | 229.1 |
| 3x16 RE | 1 | 23.0 | 172.7 | 1380 | 1380 | 1454 | 1454 | 275.4 |
| 3x16 RM | 1 | 24.4 | 183.0 | 1471 | 1471 | 1555 | 1555 | 311.8 |
| 3x25 RE | 1 | 26.7 | 199.9 | 1849 | 1849 | 1948 | 1948 | 373.6 |
| 3x25 RM | 1 | 27.4 | 205.5 | 1920 | 1920 | 2025 | 2025 | 392.0 |
| 3x35 RM | 1 | 29.6 | 221.7 | 2311 | 2311 | 2431 | 2431 | 446.2 |
| 3x50 RM | 1 | 34.8 | 261.1 | 3345 | 3345 | 3507 | 3507 | 609.6 |
| 4x1,5 RE | 1 | 16.5 | 123.4 | 552 | 552 | 593 | 593 | 158.2 |
| 4x2,5 RE | 1 | 17.4 | 130.7 | 639 | 639 | 684 | 684 | 175.4 |
| 4x4 RE | 1 | 18.5 | 139.0 | 737 | 737 | 787 | 787 | 195.6 |
| 4x6 RE | 1 | 19.7 | 148.0 | 875 | 875 | 931 | 931 | 218.1 |
| 4x10 RE | 1 | 22.4 | 168.1 | 1263 | 1263 | 1329 | 1329 | 259.2 |
| 4x16 RE | 1 | 25.1 | 188.3 | 1632 | 1632 | 1714 | 1714 | 321.8 |
| 4x16 RM | 1 | 26.2 | 196.4 | 1704 | 1704 | 1793 | 1793 | 345.2 |
| 4x25 RE | 1 | 28.7 | 215.4 | 2184 | 2184 | 2289 | 2289 | 415.7 |
| 4x25 RM | 1 | 29.6 | 221.7 | 2262 | 2262 | 2372 | 2372 | 436.0 |
| 4x50 RM | 1 | 38.1 | 285.5 | 4043 | 4043 | 4221 | 4221 | 698.8 |
| 5x1,5 RE | 1 | 17.4 | 130.7 | 621 | 621 | 664 | 664 | 174.9 |
| 5x2,5 RE | 1 | 18.5 | 138.8 | 710 | 710 | 758 | 758 | 194.4 |
| 5x4 RE | 1 | 19.8 | 148.2 | 846 | 846 | 900 | 900 | 217.4 |
| 5x6 RE | 1 | 21.1 | 158.3 | 1004 | 1004 | 1064 | 1064 | 243.0 |
| 5x10 RE | 1 | 24.4 | 183.1 | 1478 | 1478 | 1553 | 1553 | 304.8 |
| 5x16 RE | 1 | 27.0 | 202.3 | 1902 | 1902 | 1991 | 1991 | 358.8 |
| 5x16 RM | 1 | 28.2 | 211.4 | 1979 | 1979 | 2075 | 2075 | 385.1 |
| 5x35 RM | 1 | 36.7 | 275.0 | 3642 | 3642 | 3800 | 3800 | 629.0 |
| 5x70 RM | 1 | 47.4 | 355.4 | 6478 | 6478 | 6725 | 6725 | 985.3 |

POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

4. ARMoured WITH FULL LAY-UP FROM STEEL GALVANIZED WIRES

IEC 60502-1

4.2 Cables sheathed with cross-linked highly elastic polymer compound

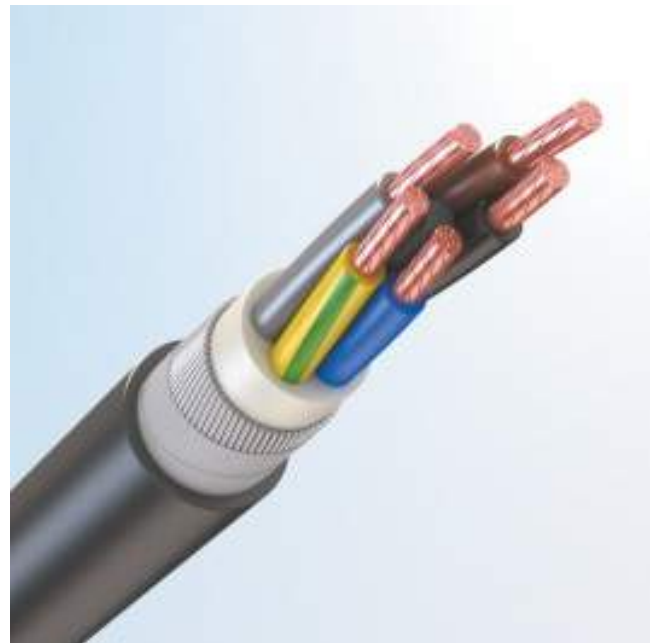

- TOFLEX RKRng(A)
- TOFLEX GRKRng(A)
- TOFLEX ARKRng(A)
- Cu/HEPR/HFFR/SWA/XLFR, Al/HEPR/HFFR/SWA/XLFR

Possible options:

| | |
|---------------|----------------------------------------------------|
| «ng(A)-HL» | |
| «ng(A)-HF» | (Cu/HEPR/HFFR/SWA/XLHFFR, Al/HEPR/HFFR/SWA/XLHFFR) |
| «ng(A)-HF-HL» | (materials as above) |



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; flexible copper (version GRKR) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Armour** – steel galvanized wires.
- ⑤ **Outer sheath:**
 - «ng(A)» – made from cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HL» – made from cold-resistant cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HF» – made from halogen-free cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HF-HL» – made from cold-resistant halogen-free cross-linked highly elastic polymer compound with low fire hazard.

► **Ordering example:**

«TOFLEX RKRng(A)-HF-HL5×95RM(N,G)-1 IEC 60502-1»



CABLE FEATURES




| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|--------------------|--------------------|-----------------------|---------------------------------------|
| | | | | TOFLEX RKRng(A) | TOFLEX RKRng(A)-HL | TOFLEX RKRng(A)-HF | TOFLEX RKRng(A)-HF-HL | |
| 2x1,5 RE | 1 | 14.3 | 107.1 | 377 | 377 | 377 | 377 | 131.2 |
| 2x2,5 RE | 1 | 15.1 | 113.1 | 430 | 430 | 430 | 430 | 145.5 |
| 2x4 RE | 1 | 16.8 | 126.0 | 603 | 603 | 603 | 603 | 167.4 |
| 2x6 RE | 1 | 17.8 | 133.5 | 697 | 697 | 697 | 697 | 186.8 |
| 2x10 RE | 1 | 19.4 | 145.2 | 853 | 853 | 853 | 853 | 218.7 |
| 2x16 RE | 1 | 21.3 | 159.5 | 1073 | 1073 | 1073 | 1073 | 260.2 |
| 2x16 RM | 1 | 23.0 | 172.2 | 1289 | 1289 | 1289 | 1289 | 285.6 |
| 2x25 RE | 1 | 25.5 | 191.0 | 1620 | 1620 | 1620 | 1620 | 359.9 |
| 2x25 RM | 1 | 26.2 | 196.2 | 1674 | 1674 | 1674 | 1674 | 378.5 |
| 2x35 RM | 1 | 28.2 | 211.2 | 1996 | 1996 | 1996 | 1996 | 433.9 |
| 2x70 RM | 1 | 36.8 | 275.7 | 3540 | 3540 | 3540 | 3540 | 725.0 |
| 3x1,5 RE | 1 | 14.8 | 110.9 | 406 | 406 | 406 | 406 | 138.9 |
| 3x2,5 RE | 1 | 16.4 | 123.3 | 571 | 571 | 571 | 571 | 158.7 |
| 3x4 RE | 1 | 17.4 | 130.7 | 664 | 664 | 664 | 664 | 176.5 |
| 3x6 RE | 1 | 18.5 | 138.8 | 766 | 766 | 766 | 766 | 196.6 |
| 3x10 RE | 1 | 20.2 | 151.4 | 964 | 964 | 964 | 964 | 229.1 |
| 3x16 RE | 1 | 23.0 | 172.7 | 1395 | 1395 | 1395 | 1395 | 275.4 |
| 3x16 RM | 1 | 24.4 | 183.0 | 1486 | 1486 | 1486 | 1486 | 311.8 |
| 3x25 RE | 1 | 26.7 | 199.9 | 1872 | 1872 | 1872 | 1872 | 373.6 |
| 3x25 RM | 1 | 27.4 | 205.5 | 1945 | 1945 | 1945 | 1945 | 392.0 |
| 3x35 RM | 1 | 29.6 | 221.7 | 2344 | 2344 | 2344 | 2344 | 446.2 |
| 3x50 RM | 1 | 34.8 | 261.1 | 3385 | 3385 | 3385 | 3385 | 609.6 |
| 4x1,5 RE | 1 | 16.5 | 123.4 | 554 | 554 | 554 | 554 | 158.2 |
| 4x2,5 RE | 1 | 17.4 | 130.7 | 642 | 642 | 642 | 642 | 175.4 |
| 4x4 RE | 1 | 18.5 | 139.0 | 742 | 742 | 742 | 742 | 195.6 |
| 4x6 RE | 1 | 19.7 | 148.0 | 882 | 882 | 882 | 882 | 218.1 |
| 4x10 RE | 1 | 22.4 | 168.1 | 1273 | 1273 | 1273 | 1273 | 259.2 |
| 4x16 RE | 1 | 25.1 | 188.3 | 1644 | 1644 | 1644 | 1644 | 321.8 |
| 4x16 RM | 1 | 26.2 | 196.4 | 1719 | 1719 | 1719 | 1719 | 345.2 |
| 4x25 RE | 1 | 28.7 | 215.4 | 2206 | 2206 | 2206 | 2206 | 415.7 |
| 4x25 RM | 1 | 29.6 | 221.7 | 2286 | 2286 | 2286 | 2286 | 436.0 |
| 4x50 RM | 1 | 38.1 | 285.5 | 4087 | 4087 | 4087 | 4087 | 698.8 |
| 5x1,5 RE | 1 | 17.4 | 130.7 | 623 | 623 | 623 | 623 | 174.9 |
| 5x2,5 RE | 1 | 18.5 | 138.8 | 713 | 713 | 713 | 713 | 194.4 |
| 5x4 RE | 1 | 19.8 | 148.2 | 852 | 852 | 852 | 852 | 217.4 |
| 5x6 RE | 1 | 21.1 | 158.3 | 1012 | 1012 | 1012 | 1012 | 243.0 |
| 5x10 RE | 1 | 24.4 | 183.1 | 1486 | 1486 | 1486 | 1486 | 304.8 |
| 5x16 RE | 1 | 27.0 | 202.3 | 1915 | 1915 | 1915 | 1915 | 358.8 |
| 5x16 RM | 1 | 28.2 | 211.4 | 1995 | 1995 | 1995 | 1995 | 385.1 |
| 5x35 RM | 1 | 36.7 | 275.0 | 3673 | 3673 | 3673 | 3673 | 629.0 |
| 5x70 RM | 1 | 47.4 | 355.4 | 6531 | 6531 | 6531 | 6531 | 985.3 |

POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLENE RUBBER (HEPR) INSULATION

4. ARMoured WITH FULL LAY-UP FROM STEEL GALVANIZED WIRES

IEC 60502-1

4.3 Cables sheathed with halogen-free polymer compound

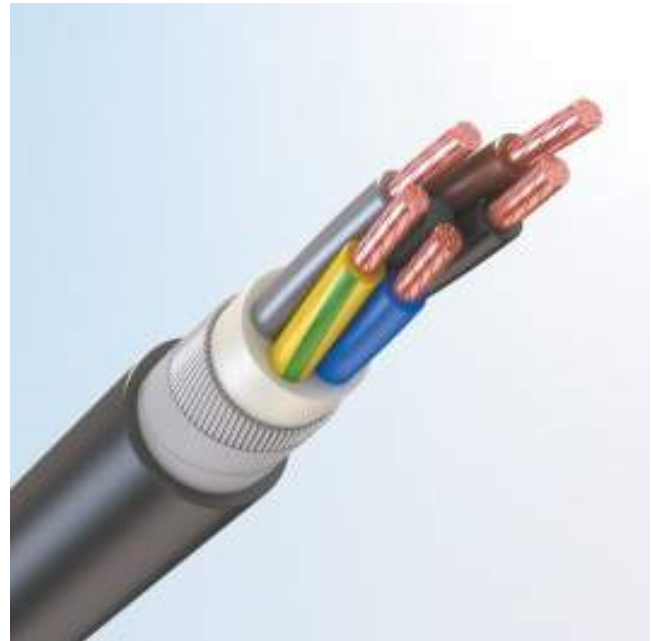

- TOFLEX RKPng(A)-HF
- TOFLEX GRKPng(A)-HF
- TOFLEX ARKPng(A)-HF
- Cu/HEPR/HFFR/SWA/HFFR, Al/HEPR/HFFR/SWA/HFFR

Possible options:

«ng(A)-HF-HL»



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; flexible copper (version GRKP) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Armour** – steel galvanized wires.
- ⑤ **Outer sheath:**
 - «ng(A)-HF» — made from halogen-free polymer compounds.
 - «ng(A)-HF-HL» — made from cold-resistant halogen-free polymer compounds.

► **Ordering example:**

«TOFLEX RKPng(A)-HF-HL3×185RM-1 IEC 60502-1»



CABLE FEATURES




| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|-----------------------|---------------------------------------|
| | | | | TOFLEX RKPng(A)-HF | TOFLEX RKPng(A)-HF-HL | |
| 2x1,5 RE | 1 | 14.3 | 107.1 | 387 | 387 | 131.2 |
| 2x2,5 RE | 1 | 15.1 | 113.1 | 440 | 440 | 145.5 |
| 2x4 RE | 1 | 16.8 | 126.0 | 615 | 615 | 167.4 |
| 2x6 RE | 1 | 17.8 | 133.5 | 709 | 709 | 186.8 |
| 2x10 RE | 1 | 19.4 | 145.2 | 867 | 867 | 218.7 |
| 2x16 RE | 1 | 21.3 | 159.5 | 1089 | 1089 | 260.2 |
| 2x16 RM | 1 | 23.0 | 172.2 | 1306 | 1306 | 285.6 |
| 2x25 RE | 1 | 25.5 | 191.0 | 1640 | 1640 | 359.9 |
| 2x25 RM | 1 | 26.2 | 196.2 | 1696 | 1696 | 378.5 |
| 2x35 RM | 1 | 28.2 | 211.2 | 2019 | 2019 | 433.9 |
| 2x70 RM | 1 | 36.8 | 275.7 | 3576 | 3576 | 725.0 |
| 3x1,5 RE | 1 | 14.8 | 110.9 | 416 | 416 | 138.9 |
| 3x2,5 RE | 1 | 16.4 | 123.3 | 582 | 582 | 158.7 |
| 3x4 RE | 1 | 17.4 | 130.7 | 677 | 677 | 176.5 |
| 3x6 RE | 1 | 18.5 | 138.8 | 779 | 779 | 196.6 |
| 3x10 RE | 1 | 20.2 | 151.4 | 979 | 979 | 229.1 |
| 3x16 RE | 1 | 23.0 | 172.7 | 1412 | 1412 | 275.4 |
| 3x16 RM | 1 | 24.4 | 183.0 | 1506 | 1506 | 311.8 |
| 3x25 RE | 1 | 26.7 | 199.9 | 1893 | 1893 | 373.6 |
| 3x25 RM | 1 | 27.4 | 205.5 | 1968 | 1968 | 392.0 |
| 3x35 RM | 1 | 29.6 | 221.7 | 2368 | 2368 | 446.2 |
| 3x50 RM | 1 | 34.8 | 261.1 | 3419 | 3419 | 609.6 |
| 4x1,5 RE | 1 | 16.5 | 123.4 | 565 | 565 | 158.2 |
| 4x2,5 RE | 1 | 17.4 | 130.7 | 654 | 654 | 175.4 |
| 4x4 RE | 1 | 18.5 | 139.0 | 755 | 755 | 195.6 |
| 4x6 RE | 1 | 19.7 | 148.0 | 896 | 896 | 218.1 |
| 4x10 RE | 1 | 22.4 | 168.1 | 1289 | 1289 | 259.2 |
| 4x16 RE | 1 | 25.1 | 188.3 | 1664 | 1664 | 321.8 |
| 4x16 RM | 1 | 26.2 | 196.4 | 1740 | 1740 | 345.2 |
| 4x25 RE | 1 | 28.7 | 215.4 | 2230 | 2230 | 415.7 |
| 4x25 RM | 1 | 29.6 | 221.7 | 2310 | 2310 | 436.0 |
| 4x50 RM | 1 | 38.1 | 285.5 | 4125 | 4125 | 698.8 |
| 5x1,5 RE | 1 | 17.4 | 130.7 | 635 | 635 | 174.9 |
| 5x2,5 RE | 1 | 18.5 | 138.8 | 726 | 726 | 194.4 |
| 5x4 RE | 1 | 19.8 | 148.2 | 865 | 865 | 217.4 |
| 5x6 RE | 1 | 21.1 | 158.3 | 1026 | 1026 | 243.0 |
| 5x10 RE | 1 | 24.4 | 183.1 | 1505 | 1505 | 304.8 |
| 5x16 RE | 1 | 27.0 | 202.3 | 1936 | 1936 | 358.8 |
| 5x16 RM | 1 | 28.2 | 211.4 | 2017 | 2017 | 385.1 |
| 5x35 RM | 1 | 36.7 | 275.0 | 3707 | 3707 | 629.0 |
| 5x70 RM | 1 | 47.4 | 355.4 | 6579 | 6579 | 985.3 |

POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLENE RUBBER (HEPR) INSULATION

4. ARMoured WITH FULL LAY-UP FROM STEEL GALVANIZED WIRES

IEC 60502-1

4.4 Cables sheathed with thermoplastic polyurethane elastomer

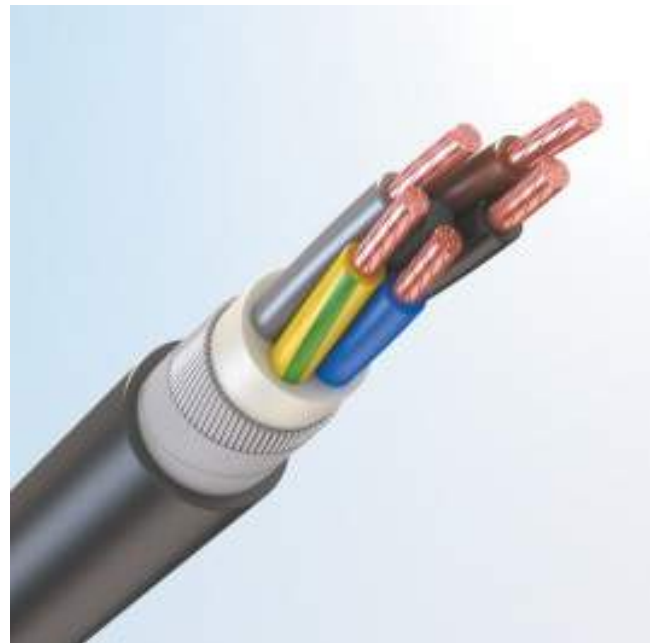

- TOFLEX RKTng(A)
- TOFLEX GRKTng(A)
- TOFLEX ARKTng(A)
- Cu/HEPR/ TPE /SWA/ TPU, Al/HEPR/ TPE /SWA/ TPU



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; flexible copper (version GRKT) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Armour** – steel galvanized wires.
- ⑤ **Outer sheath:**
 - «ng(A)» — made from thermoplastic polyurethane elastomer.

► **Ordering example:**

«TOFLEX RKTng(A)3×185RM-1 IEC 60502-1»



CABLE FEATURES




| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|-------|---------------------------------------|
| | | | | TOFLEX RKTng(A) | | |
| 2x1,5 RE | 1 | 14.3 | 107.1 | 374 | 131.2 | |
| 2x2,5 RE | 1 | 15.1 | 113.1 | 424 | 145.5 | |
| 2x4 RE | 1 | 16.8 | 126.0 | 597 | 167.4 | |
| 2x6 RE | 1 | 17.8 | 133.5 | 687 | 186.8 | |
| 2x10 RE | 1 | 19.4 | 145.2 | 839 | 218.7 | |
| 2x16 RE | 1 | 21.3 | 159.5 | 1053 | 260.2 | |
| 2x16 RM | 1 | 23.0 | 172.2 | 1265 | 285.6 | |
| 2x25 RE | 1 | 25.5 | 191.0 | 1590 | 359.9 | |
| 2x25 RM | 1 | 26.2 | 196.2 | 1641 | 378.5 | |
| 2x35 RM | 1 | 28.2 | 211.2 | 1953 | 433.9 | |
| 2x70 RM | 1 | 36.8 | 275.7 | 3459 | 725.0 | |
| 3x1,5 RE | 1 | 14.8 | 110.9 | 404 | 138.9 | |
| 3x2,5 RE | 1 | 16.4 | 123.3 | 568 | 158.7 | |
| 3x4 RE | 1 | 17.4 | 130.7 | 660 | 176.5 | |
| 3x6 RE | 1 | 18.5 | 138.8 | 759 | 196.6 | |
| 3x10 RE | 1 | 20.2 | 151.4 | 954 | 229.1 | |
| 3x16 RE | 1 | 23.0 | 172.7 | 1380 | 275.4 | |
| 3x16 RM | 1 | 24.4 | 183.0 | 1471 | 311.8 | |
| 3x25 RE | 1 | 26.7 | 199.9 | 1849 | 373.6 | |
| 3x25 RM | 1 | 27.4 | 205.5 | 1920 | 392.0 | |
| 3x35 RM | 1 | 29.6 | 221.7 | 2311 | 446.2 | |
| 3x50 RM | 1 | 34.8 | 261.1 | 3345 | 609.6 | |
| 4x1,5 RE | 1 | 16.5 | 123.4 | 552 | 158.2 | |
| 4x2,5 RE | 1 | 17.4 | 130.7 | 639 | 175.4 | |
| 4x4 RE | 1 | 18.5 | 139.0 | 737 | 195.6 | |
| 4x6 RE | 1 | 19.7 | 148.0 | 875 | 218.1 | |
| 4x10 RE | 1 | 22.4 | 168.1 | 1263 | 259.2 | |
| 4x16 RE | 1 | 25.1 | 188.3 | 1632 | 321.8 | |
| 4x16 RM | 1 | 26.2 | 196.4 | 1704 | 345.2 | |
| 4x25 RE | 1 | 28.7 | 215.4 | 2184 | 415.7 | |
| 4x25 RM | 1 | 29.6 | 221.7 | 2262 | 436.0 | |
| 4x50 RM | 1 | 38.1 | 285.5 | 4043 | 698.8 | |
| 5x1,5 RE | 1 | 17.4 | 130.7 | 621 | 174.9 | |
| 5x2,5 RE | 1 | 18.5 | 138.8 | 710 | 194.4 | |
| 5x4 RE | 1 | 19.8 | 148.2 | 846 | 217.4 | |
| 5x6 RE | 1 | 21.1 | 158.3 | 1004 | 243.0 | |
| 5x10 RE | 1 | 24.4 | 183.1 | 1478 | 304.8 | |
| 5x16 RE | 1 | 27.0 | 202.3 | 1902 | 358.8 | |
| 5x16 RM | 1 | 28.2 | 211.4 | 1979 | 385.1 | |
| 5x35 RM | 1 | 36.7 | 275.0 | 3642 | 629.0 | |
| 5x70 RM | 1 | 47.4 | 355.4 | 6478 | 985.3 | |

POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

5. ARMoured WITH BRAIDING FROM STEEL GALVANIZED WIRES

IEC 60502-1

5.1 Cables with PVC sheath

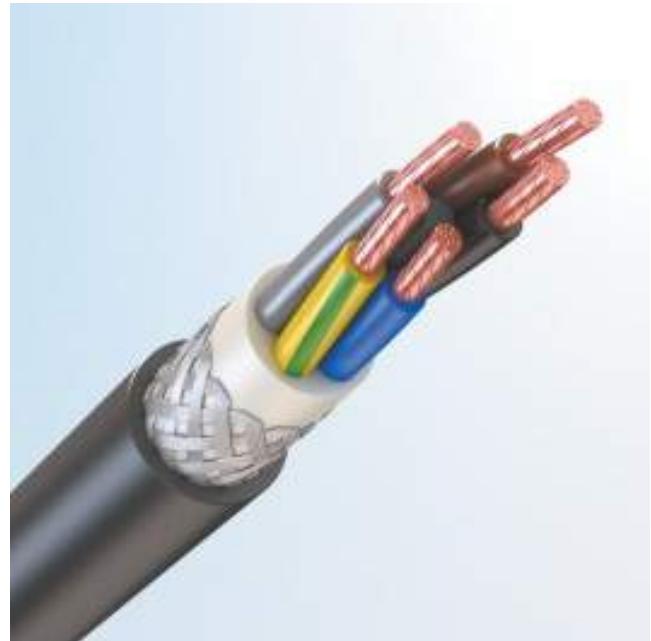

- TOFLEX RPVng(A)
- TOFLEX GRPVng(A)
- TOFLEX ARPVng(A)
- Cu/HEPR/PVC/SWB/PVC, Al/HEPR/PVC/SWB/PVC

Possible options:

| | |
|---------------|----------------------------------------------------|
| «ng(A)-HL» | |
| «ng(A)-LS» | (Cu/HEPR/LSPVC/SWB/LSPVC, Al/HEPR/LSPVC/SWB/LSPVC) |
| «ng(A)-LS-HL» | (materials as above) |



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; copper flexible (version GRPV) of 5th class (according to IEC 60228).
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Armour** – with full lay-up from galvanized steel wires.
- ⑤ **Outer sheath:**
 - «ng(A)» – made from PVC-compound with low fire hazard.
 - «ng(A)-HL» – made from cold-resistant PVC-compound with low fire hazard.
 - «ng(A)-LS» – made from PVC-compound with low fire hazard, low smoke and gas emission.
 - «ng(A)-LS-HL» – made from cold-resistant PVC-compound with low fire hazard, low smoke and gas emission.

► Ordering example:

«TOFLEX RPVng(A)-LS3×95RM(N,G)-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|--------------------|--------------------|-----------------------|---------------------------------------|
| | | | | TOFLEX RPVng(A) | TOFLEX RPVng(A)-HL | TOFLEX RPVng(A)-LS | TOFLEX RPVng(A)-LS-HL | |
| 2x1,5 RE | 1 | 13.5 | 101.4 | 277 | 277 | 313 | 313 | 126.7 |
| 2x2,5 RE | 1 | 14.3 | 107.4 | 321 | 321 | 361 | 361 | 141.0 |
| 2x4 RE | 1 | 15.2 | 114.3 | 378 | 378 | 423 | 423 | 158.2 |
| 2x6 RE | 1 | 16.2 | 121.8 | 448 | 448 | 499 | 499 | 177.6 |
| 2x10 RE | 1 | 17.8 | 133.5 | 573 | 573 | 633 | 633 | 209.5 |
| 2x16 RE | 1 | 19.7 | 147.8 | 752 | 752 | 826 | 826 | 251.0 |
| 2x16 RM | 1 | 20.6 | 154.5 | 792 | 792 | 872 | 872 | 271.7 |
| 2x25 RE | 1 | 22.7 | 170.3 | 1039 | 1039 | 1135 | 1135 | 329.5 |
| 2x25 RM | 1 | 23.4 | 175.5 | 1078 | 1078 | 1180 | 1180 | 347.7 |
| 2x35 RM | 1 | 25.8 | 193.5 | 1361 | 1361 | 1484 | 1484 | 418.5 |
| 2x50 RM | 1 | 29.2 | 219.0 | 1842 | 1842 | 1999 | 1999 | 530.3 |
| 2x70 RM | 1 | 32.8 | 246.0 | 2355 | 2355 | 2554 | 2554 | 656.9 |
| 2x95 RM | 1 | 37.8 | 283.5 | 3143 | 3143 | 3406 | 3406 | 874.5 |
| 2x120 RM | 1 | 40.6 | 304.5 | 3785 | 3785 | 4086 | 4086 | 990.9 |
| 2x150 RM | 1 | 44.6 | 334.5 | 4598 | 4598 | 4963 | 4963 | 1195.7 |
| 2x185 RM | 1 | 49.4 | 370.5 | 5668 | 5668 | 6115 | 6115 | 1473.2 |
| 2x240 RM | 1 | 55.2 | 414.0 | 7132 | 7132 | 7691 | 7691 | 1823.3 |
| 3x1,5 RE | 1 | 14.0 | 105.2 | 302 | 302 | 338 | 338 | 134.4 |
| 3x2,5 RE | 1 | 14.9 | 111.6 | 356 | 356 | 396 | 396 | 149.5 |
| 3x4 RE | 1 | 15.9 | 119.0 | 426 | 426 | 471 | 471 | 167.4 |
| 3x6 RE | 1 | 16.9 | 127.1 | 514 | 514 | 564 | 564 | 187.4 |
| 3x10 RE | 1 | 18.6 | 139.7 | 674 | 674 | 733 | 733 | 219.9 |
| 3x16 RE | 1 | 20.7 | 155.0 | 907 | 907 | 977 | 977 | 261.6 |
| 3x16 RM | 1 | 21.6 | 162.3 | 947 | 947 | 1024 | 1024 | 282.1 |
| 3x25 RE | 1 | 24.3 | 182.2 | 1296 | 1296 | 1391 | 1391 | 358.2 |
| 3x25 RM | 1 | 25.0 | 187.8 | 1339 | 1339 | 1439 | 1439 | 376.6 |
| 3x35 RM | 1 | 27.2 | 204.0 | 1679 | 1679 | 1794 | 1794 | 430.8 |
| 3x50 RM | 1 | 30.9 | 231.4 | 2309 | 2309 | 2454 | 2454 | 544.0 |
| 3x70 RM | 1 | 35.5 | 266.2 | 3036 | 3036 | 3231 | 3231 | 713.4 |
| 3x95 RM | 1 | 40.0 | 300.0 | 3976 | 3976 | 4216 | 4216 | 887.0 |
| 3x120 RM | 1 | 43.0 | 322.6 | 4834 | 4834 | 5107 | 5107 | 997.3 |
| 3x150 RM | 1 | 48.1 | 360.6 | 5982 | 5982 | 6329 | 6329 | 1264.9 |
| 3x185 RM | 1 | 52.4 | 392.9 | 7275 | 7275 | 7679 | 7679 | 1481.5 |
| 4x1,5 RE | 1 | 14.9 | 111.7 | 340 | 340 | 378 | 378 | 149.1 |
| 4x2,5 RE | 1 | 15.9 | 119.0 | 406 | 406 | 448 | 448 | 166.2 |
| 4x4 RE | 1 | 17.0 | 127.3 | 493 | 493 | 540 | 540 | 186.4 |
| 4x6 RE | 1 | 18.2 | 136.3 | 602 | 602 | 655 | 655 | 208.9 |
| 4x10 RE | 1 | 20.1 | 150.4 | 802 | 802 | 865 | 865 | 245.3 |
| 4x16 RE | 1 | 22.3 | 167.6 | 1096 | 1096 | 1170 | 1170 | 291.6 |
| 4x16 RM | 1 | 23.4 | 175.7 | 1141 | 1141 | 1222 | 1222 | 314.3 |
| 4x25 RE | 1 | 26.4 | 197.7 | 1579 | 1579 | 1679 | 1679 | 400.2 |
| 4x25 RM | 1 | 27.2 | 204.0 | 1629 | 1629 | 1735 | 1735 | 420.5 |
| 4x35 RM | 1 | 29.6 | 222.1 | 2059 | 2059 | 2181 | 2181 | 480.2 |
| 4x50 RM | 1 | 34.9 | 261.8 | 2962 | 2962 | 3133 | 3133 | 674.0 |
| 4x70 RM | 1 | 38.8 | 290.7 | 3761 | 3761 | 3965 | 3965 | 792.6 |
| 4x95 RM | 1 | 44.2 | 331.7 | 4994 | 4994 | 5256 | 5256 | 1014.1 |
| 4x120 RM | 1 | 48.4 | 363.0 | 6190 | 6190 | 6503 | 6503 | 1198.5 |
| 4x150 RM | 1 | 52.7 | 395.5 | 7481 | 7481 | 7843 | 7843 | 1402.8 |
| 5x1,5 RE | 1 | 15.9 | 119.0 | 387 | 387 | 429 | 429 | 165.7 |

| | | | | | | | | |
|----------|---|------|-------|------|------|------|------|--------|
| 5x2,5 RE | 1 | 17.0 | 127.1 | 466 | 466 | 512 | 512 | 185.3 |
| 5x4 RE | 1 | 18.2 | 136.5 | 573 | 573 | 624 | 624 | 208.3 |
| 5x6 RE | 1 | 19.5 | 146.6 | 712 | 712 | 770 | 770 | 233.9 |
| 5x10 RE | 1 | 21.7 | 162.4 | 954 | 954 | 1022 | 1022 | 275.1 |
| 5x16 RE | 1 | 24.6 | 184.6 | 1334 | 1334 | 1419 | 1419 | 343.3 |
| 5x16 RM | 1 | 25.8 | 193.7 | 1387 | 1387 | 1479 | 1479 | 369.7 |
| 5x25 RE | 1 | 28.7 | 215.0 | 1908 | 1908 | 2017 | 2017 | 450.7 |
| 5x25 RM | 1 | 29.6 | 222.1 | 1966 | 1966 | 2081 | 2081 | 473.5 |
| 5x35 RM | 1 | 32.7 | 245.3 | 2538 | 2538 | 2677 | 2677 | 561.0 |
| 5x50 RM | 1 | 38.1 | 285.8 | 3607 | 3607 | 3793 | 3793 | 758.5 |
| 5x70 RM | 1 | 42.4 | 318.2 | 4643 | 4643 | 4864 | 4864 | 891.4 |
| 5x95 RM | 1 | 49.3 | 369.7 | 6235 | 6235 | 6536 | 6536 | 1205.6 |
| 5x120 RM | 1 | 53.1 | 398.0 | 7593 | 7593 | 7931 | 7931 | 1346.3 |

CABLE FEATURES




POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

5. ARMoured WITH BRAIDING FROM STEEL GALVANIZED WIRES

IEC 60502-1

5.2 Cables sheathed with cross-linked highly elastic polymer compound

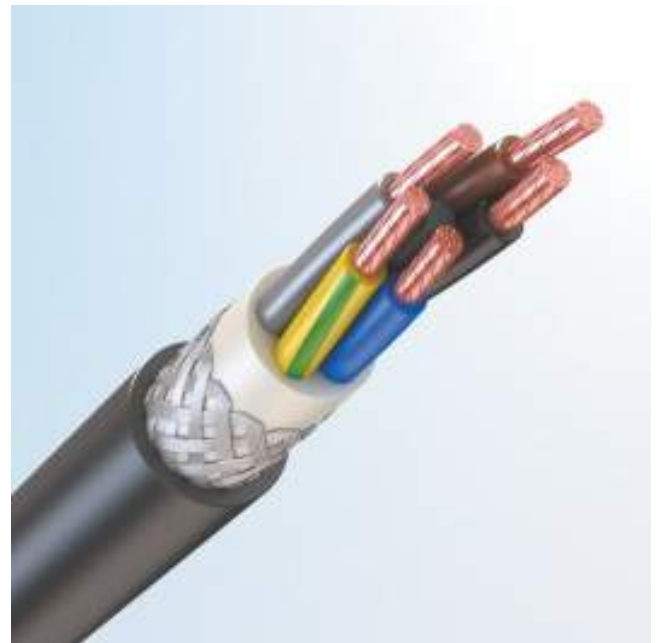

- TOFLEX RPRng(A)
- TOFLEX GRPRng(A)
- TOFLEX ARPRng(A)
- Cu/HEPR/HFFR/SWB/ XLFR, Al/HEPR/HFFR/SWB/ XLFR

Possible options:

| | |
|---------------|----------------------------------------------------|
| «ng(A)-HL» | |
| «ng(A)-HF» | (Cu/HEPR/HFFR/SWB/XLHFFR, Al/HEPR/HFFR/SWB/XLHFFR) |
| «ng(A)-HF-HL» | (materials as above) |



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; copper flexible (version GRPR) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Armour** – with full lay-up from galvanized steel wires.
- ⑤ **Outer sheath:**
 - «ng(A)» – made from cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HL» – made from cold-resistant cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HF» – made from halogen-free cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HF-HL» – made from cold-resistant halogen-free cross-linked highly elastic polymer compound with low fire hazard.

► **Ordering example:**

«TOFLEX RPRng(A)-HF-HL5×95RM(N,G)-1 IEC 60502-1»

| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|--------------------|--------------------|-----------------------|---------------------------------------|
| | | | | TOFLEX RPRng(A) | TOFLEX RPRng(A)-HL | TOFLEX RPRng(A)-LS | TOFLEX RPRng(A)-LS-HL | |
| 2x1,5 RE | 1 | 13.5 | 101.4 | 281 | 281 | 281 | 281 | 126.7 |
| 2x2,5 RE | 1 | 14.3 | 107.4 | 327 | 327 | 327 | 327 | 141.0 |
| 2x4 RE | 1 | 15.2 | 114.3 | 386 | 386 | 386 | 386 | 158.2 |
| 2x6 RE | 1 | 16.2 | 121.8 | 458 | 458 | 458 | 458 | 177.6 |
| 2x10 RE | 1 | 17.8 | 133.5 | 588 | 588 | 588 | 588 | 209.5 |
| 2x16 RE | 1 | 19.7 | 147.8 | 775 | 775 | 775 | 775 | 251.0 |
| 2x16 RM | 1 | 20.6 | 154.5 | 817 | 817 | 817 | 817 | 271.7 |
| 2x25 RE | 1 | 22.7 | 170.3 | 1074 | 1074 | 1074 | 1074 | 329.5 |
| 2x25 RM | 1 | 23.4 | 175.5 | 1116 | 1116 | 1116 | 1116 | 347.7 |
| 2x35 RM | 1 | 25.8 | 193.5 | 1406 | 1406 | 1406 | 1406 | 418.5 |
| 2x50 RM | 1 | 29.2 | 219.0 | 1907 | 1907 | 1907 | 1907 | 530.3 |
| 2x70 RM | 1 | 32.8 | 246.0 | 2447 | 2447 | 2447 | 2447 | 656.9 |
| 2x95 RM | 1 | 37.8 | 283.5 | 3260 | 3260 | 3260 | 3260 | 874.5 |
| 2x120 RM | 1 | 40.6 | 304.5 | 3927 | 3927 | 3927 | 3927 | 990.9 |
| 2x150 RM | 1 | 44.6 | 334.5 | 4782 | 4782 | 4782 | 4782 | 1195.7 |
| 2x185 RM | 1 | 49.4 | 370.5 | 5885 | 5885 | 5885 | 5885 | 1473.2 |
| 2x240 RM | 1 | 55.2 | 414.0 | 7423 | 7423 | 7423 | 7423 | 1823.3 |
| 3x1,5 RE | 1 | 14.0 | 105.2 | 305 | 305 | 305 | 305 | 134.4 |
| 3x2,5 RE | 1 | 14.9 | 111.6 | 360 | 360 | 360 | 360 | 149.5 |
| 3x4 RE | 1 | 15.9 | 119.0 | 433 | 433 | 433 | 433 | 167.4 |
| 3x6 RE | 1 | 16.9 | 127.1 | 523 | 523 | 523 | 523 | 187.4 |
| 3x10 RE | 1 | 18.6 | 139.7 | 686 | 686 | 686 | 686 | 219.9 |
| 3x16 RE | 1 | 20.7 | 155.0 | 924 | 924 | 924 | 924 | 261.6 |
| 3x16 RM | 1 | 21.6 | 162.3 | 967 | 967 | 967 | 967 | 282.1 |
| 3x25 RE | 1 | 24.3 | 182.2 | 1321 | 1321 | 1321 | 1321 | 358.2 |
| 3x25 RM | 1 | 25.0 | 187.8 | 1367 | 1367 | 1367 | 1367 | 376.6 |
| 3x35 RM | 1 | 27.2 | 204.0 | 1714 | 1714 | 1714 | 1714 | 430.8 |
| 3x50 RM | 1 | 30.9 | 231.4 | 2360 | 2360 | 2360 | 2360 | 544.0 |
| 3x70 RM | 1 | 35.5 | 266.2 | 3102 | 3102 | 3102 | 3102 | 713.4 |
| 3x95 RM | 1 | 40.0 | 300.0 | 4067 | 4067 | 4067 | 4067 | 887.0 |
| 3x120 RM | 1 | 43.0 | 322.6 | 4944 | 4944 | 4944 | 4944 | 997.3 |
| 3x150 RM | 1 | 48.1 | 360.6 | 6118 | 6118 | 6118 | 6118 | 1264.9 |
| 3x185 RM | 1 | 52.4 | 392.9 | 7444 | 7444 | 7444 | 7444 | 1481.5 |
| 4x1,5 RE | 1 | 14.9 | 111.7 | 343 | 343 | 343 | 343 | 149.1 |
| 4x2,5 RE | 1 | 15.9 | 119.0 | 410 | 410 | 410 | 410 | 166.2 |
| 4x4 RE | 1 | 17.0 | 127.3 | 499 | 499 | 499 | 499 | 186.4 |
| 4x6 RE | 1 | 18.2 | 136.3 | 610 | 610 | 610 | 610 | 208.9 |
| 4x10 RE | 1 | 20.1 | 150.4 | 814 | 814 | 814 | 814 | 245.3 |
| 4x16 RE | 1 | 22.3 | 167.6 | 1113 | 1113 | 1113 | 1113 | 291.6 |
| 4x16 RM | 1 | 23.4 | 175.7 | 1161 | 1161 | 1161 | 1161 | 314.3 |
| 4x25 RE | 1 | 26.4 | 197.7 | 1603 | 1603 | 1603 | 1603 | 400.2 |
| 4x25 RM | 1 | 27.2 | 204.0 | 1656 | 1656 | 1656 | 1656 | 420.5 |
| 4x35 RM | 1 | 29.6 | 222.1 | 2094 | 2094 | 2094 | 2094 | 480.2 |
| 4x50 RM | 1 | 34.9 | 261.8 | 3010 | 3010 | 3010 | 3010 | 674.0 |
| 4x70 RM | 1 | 38.8 | 290.7 | 3825 | 3825 | 3825 | 3825 | 792.6 |
| 4x95 RM | 1 | 44.2 | 331.7 | 5091 | 5091 | 5091 | 5091 | 1014.1 |
| 4x120 RM | 1 | 48.4 | 363.0 | 6296 | 6296 | 6296 | 6296 | 1198.5 |
| 4x150 RM | 1 | 52.7 | 395.5 | 7613 | 7613 | 7613 | 7613 | 1402.8 |
| 5x1,5 RE | 1 | 15.9 | 119.0 | 391 | 391 | 391 | 391 | 165.7 |


| | | | | | | | | |
|----------|---|------|-------|------|------|------|------|--------|
| 5x2,5 RE | 1 | 17.0 | 127.1 | 470 | 470 | 470 | 470 | 185.3 |
| 5x4 RE | 1 | 18.2 | 136.5 | 579 | 579 | 579 | 579 | 208.3 |
| 5x6 RE | 1 | 19.5 | 146.6 | 720 | 720 | 720 | 720 | 233.9 |
| 5x10 RE | 1 | 21.7 | 162.4 | 966 | 966 | 966 | 966 | 275.1 |
| 5x16 RE | 1 | 24.6 | 184.6 | 1349 | 1349 | 1349 | 1349 | 343.3 |
| 5x16 RM | 1 | 25.8 | 193.7 | 1404 | 1404 | 1404 | 1404 | 369.7 |
| 5x25 RE | 1 | 28.7 | 215.0 | 1932 | 1932 | 1932 | 1932 | 450.7 |
| 5x25 RM | 1 | 29.6 | 222.1 | 1993 | 1993 | 1993 | 1993 | 473.5 |
| 5x35 RM | 1 | 32.7 | 245.3 | 2577 | 2577 | 2577 | 2577 | 561.0 |
| 5x50 RM | 1 | 38.1 | 285.8 | 3654 | 3654 | 3654 | 3654 | 758.5 |
| 5x70 RM | 1 | 42.4 | 318.2 | 4704 | 4704 | 4704 | 4704 | 891.4 |
| 5x95 RM | 1 | 49.3 | 369.7 | 6321 | 6321 | 6321 | 6321 | 1205.6 |
| 5x120 RM | 1 | 53.1 | 398.0 | 7697 | 7697 | 7697 | 7697 | 1346.3 |

POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

5. ARMoured WITH BRAIDING FROM STEEL GALVANIZED WIRES

IEC 60502-1

5.3 Cables sheathed with halogen-free polymer compound

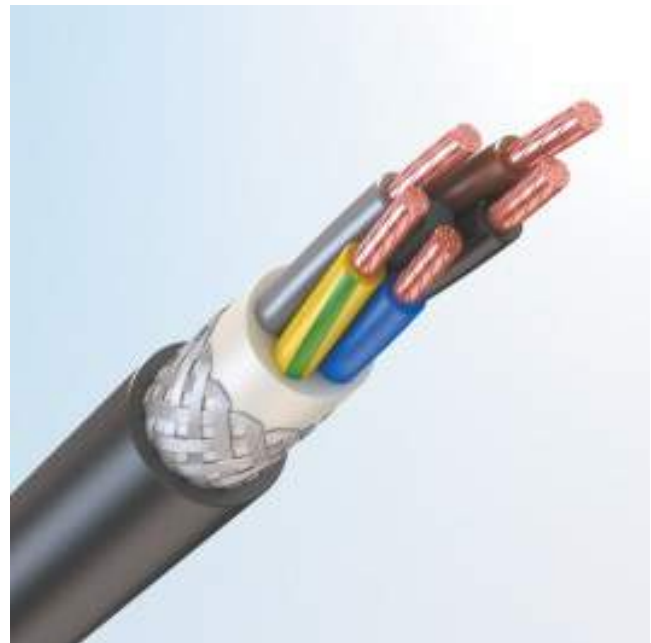

- TOFLEX RPPng(A)-HF
- TOFLEX GRPPng(A)-HF
- TOFLEX ARPPng(A)-HF
- Cu/HEPR/HFFR/SWB/HFFR, Al/HEPR/HFFR/SWB/HFFR

Possible options:

«ng(A)-HF-HL»



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; flexible copper (version GRPP) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Armour** – with full lay-up from galvanized steel wires.
- ⑤ **Outer sheath:**
 - «ng(A)-HF» – made from halogen-free polymer compounds.
 - «ng(A)-HF-HL» – made from cold-resistant halogen-free polymer compounds.

► **Ordering example:**

«TOFLEX RPPng(A)-HF-HL3×185RM-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|-----------------------|---------------------------------------|
| | | | | TOFLEX RPPng(A)-HF | TOFLEX RPPng(A)-HF-HL | |
| 2x1,5 RE | 1 | 13.5 | 101.4 | 292 | 292 | 126.7 |
| 2x2,5 RE | 1 | 14.3 | 107.4 | 339 | 339 | 141.0 |
| 2x4 RE | 1 | 15.2 | 114.3 | 399 | 399 | 158.2 |
| 2x6 RE | 1 | 16.2 | 121.8 | 472 | 472 | 177.6 |
| 2x10 RE | 1 | 17.8 | 133.5 | 603 | 603 | 209.5 |
| 2x16 RE | 1 | 19.7 | 147.8 | 791 | 791 | 251.0 |
| 2x16 RM | 1 | 20.6 | 154.5 | 835 | 835 | 271.7 |
| 2x25 RE | 1 | 22.7 | 170.3 | 1094 | 1094 | 329.5 |
| 2x25 RM | 1 | 23.4 | 175.5 | 1137 | 1137 | 347.7 |
| 2x35 RM | 1 | 25.8 | 193.5 | 1431 | 1431 | 418.5 |
| 2x50 RM | 1 | 29.2 | 219.0 | 1936 | 1936 | 530.3 |
| 2x70 RM | 1 | 32.8 | 246.0 | 2479 | 2479 | 656.9 |
| 2x95 RM | 1 | 37.8 | 283.5 | 3304 | 3304 | 874.5 |
| 2x120 RM | 1 | 40.6 | 304.5 | 3974 | 3974 | 990.9 |
| 2x150 RM | 1 | 44.6 | 334.5 | 4834 | 4834 | 1195.7 |
| 2x185 RM | 1 | 49.4 | 370.5 | 5953 | 5953 | 1473.2 |
| 2x240 RM | 1 | 55.2 | 414.0 | 7500 | 7500 | 1823.3 |
| 3x1,5 RE | 1 | 14.0 | 105.2 | 317 | 317 | 134.4 |
| 3x2,5 RE | 1 | 14.9 | 111.6 | 372 | 372 | 149.5 |
| 3x4 RE | 1 | 15.9 | 119.0 | 446 | 446 | 167.4 |
| 3x6 RE | 1 | 16.9 | 127.1 | 537 | 537 | 187.4 |
| 3x10 RE | 1 | 18.6 | 139.7 | 702 | 702 | 219.9 |
| 3x16 RE | 1 | 20.7 | 155.0 | 942 | 942 | 261.6 |
| 3x16 RM | 1 | 21.6 | 162.3 | 986 | 986 | 282.1 |
| 3x25 RE | 1 | 24.3 | 182.2 | 1344 | 1344 | 358.2 |
| 3x25 RM | 1 | 25.0 | 187.8 | 1391 | 1391 | 376.6 |
| 3x35 RM | 1 | 27.2 | 204.0 | 1740 | 1740 | 430.8 |
| 3x50 RM | 1 | 30.9 | 231.4 | 2390 | 2390 | 544.0 |
| 3x70 RM | 1 | 35.5 | 266.2 | 3144 | 3144 | 713.4 |
| 3x95 RM | 1 | 40.0 | 300.0 | 4114 | 4114 | 887.0 |
| 3x120 RM | 1 | 43.0 | 322.6 | 4995 | 4995 | 997.3 |
| 3x150 RM | 1 | 48.1 | 360.6 | 6184 | 6184 | 1264.9 |
| 3x185 RM | 1 | 52.4 | 392.9 | 7517 | 7517 | 1481.5 |
| 4x1,5 RE | 1 | 14.9 | 111.7 | 356 | 356 | 149.1 |
| 4x2,5 RE | 1 | 15.9 | 119.0 | 423 | 423 | 166.2 |
| 4x4 RE | 1 | 17.0 | 127.3 | 513 | 513 | 186.4 |
| 4x6 RE | 1 | 18.2 | 136.3 | 626 | 626 | 208.9 |
| 4x10 RE | 1 | 20.1 | 150.4 | 832 | 832 | 245.3 |
| 4x16 RE | 1 | 22.3 | 167.6 | 1132 | 1132 | 291.6 |
| 4x16 RM | 1 | 23.4 | 175.7 | 1181 | 1181 | 314.3 |
| 4x25 RE | 1 | 26.4 | 197.7 | 1629 | 1629 | 400.2 |
| 4x25 RM | 1 | 27.2 | 204.0 | 1682 | 1682 | 420.5 |
| 4x35 RM | 1 | 29.6 | 222.1 | 2123 | 2123 | 480.2 |
| 4x50 RM | 1 | 34.9 | 261.8 | 3050 | 3050 | 674.0 |
| 4x70 RM | 1 | 38.8 | 290.7 | 3871 | 3871 | 792.6 |
| 4x95 RM | 1 | 44.2 | 331.7 | 5143 | 5143 | 1014.1 |
| 4x120 RM | 1 | 48.4 | 363.0 | 6363 | 6363 | 1198.5 |
| 4x150 RM | 1 | 52.7 | 395.5 | 7687 | 7687 | 1402.8 |
| 5x1,5 RE | 1 | 15.9 | 119.0 | 404 | 404 | 165.7 |


| | | | | | | |
|----------|---|------|-------|------|------|--------|
| 5x2,5 RE | 1 | 17.0 | 127.1 | 485 | 485 | 185.3 |
| 5x4 RE | 1 | 18.2 | 136.5 | 595 | 595 | 208.3 |
| 5x6 RE | 1 | 19.5 | 146.6 | 737 | 737 | 233.9 |
| 5x10 RE | 1 | 21.7 | 162.4 | 985 | 985 | 275.1 |
| 5x16 RE | 1 | 24.6 | 184.6 | 1373 | 1373 | 343.3 |
| 5x16 RM | 1 | 25.8 | 193.7 | 1429 | 1429 | 369.7 |
| 5x25 RE | 1 | 28.7 | 215.0 | 1960 | 1960 | 450.7 |
| 5x25 RM | 1 | 29.6 | 222.1 | 2022 | 2022 | 473.5 |
| 5x35 RM | 1 | 32.7 | 245.3 | 2609 | 2609 | 561.0 |
| 5x50 RM | 1 | 38.1 | 285.8 | 3699 | 3699 | 758.5 |
| 5x70 RM | 1 | 42.4 | 318.2 | 4754 | 4754 | 891.4 |
| 5x95 RM | 1 | 49.3 | 369.7 | 6389 | 6389 | 1205.6 |
| 5x120 RM | 1 | 53.1 | 398.0 | 7771 | 7771 | 1346.3 |

POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

5. ARMoured WITH BRAIDING FROM STEEL GALVANIZED WIRES

IEC 60502-1

5.4 Cables sheathed with thermoplastic polyurethane elastomer

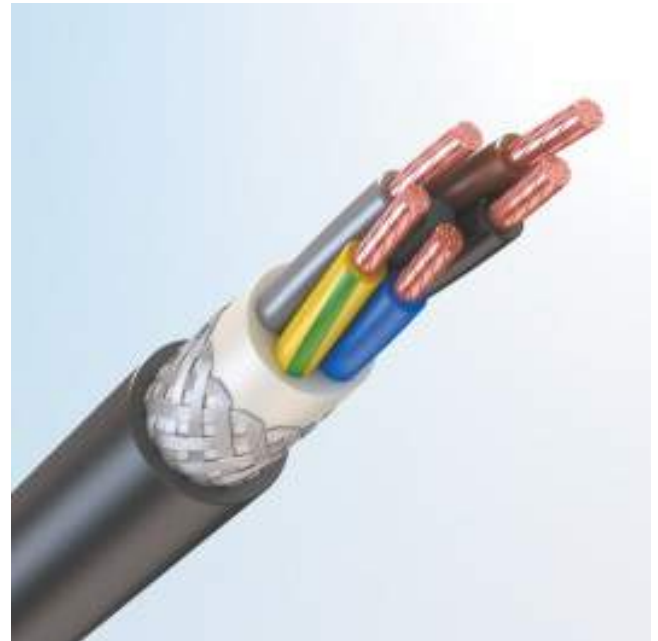

- TOFLEX RPTng(A)
- TOFLEX GRPTng(A)
- TOFLEX ARPTng(A)
- Cu/HEPR/TPE/SWB/ TPU, Al/HEPR/TPE/SWB/ TPU



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; flexible copper (version GRPT) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Armour** – with full lay-up from galvanized steel wires.
- ⑤ **Outer sheath:**
 - «ng(A)» – made from thermoplastic polyurethane elastomer.

► **Ordering example:**

«TOFLEX RPTng(A)3×185RM-1 IEC 60502-1»



CABLE FEATURES




| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|--------|---------------------------------------|
| | | | | TOFLEX RPTng(A) | | |
| 2x1,5 RE | 1 | 13.5 | 101.4 | 277 | 126.7 | |
| 2x2,5 RE | 1 | 14.3 | 107.4 | 321 | 141.0 | |
| 2x4 RE | 1 | 15.2 | 114.3 | 378 | 158.2 | |
| 2x6 RE | 1 | 16.2 | 121.8 | 448 | 177.6 | |
| 2x10 RE | 1 | 17.8 | 133.5 | 573 | 209.5 | |
| 2x16 RE | 1 | 19.7 | 147.8 | 752 | 251.0 | |
| 2x16 RM | 1 | 20.6 | 154.5 | 792 | 271.7 | |
| 2x25 RE | 1 | 22.7 | 170.3 | 1039 | 329.5 | |
| 2x25 RM | 1 | 23.4 | 175.5 | 1078 | 347.7 | |
| 2x35 RM | 1 | 25.8 | 193.5 | 1361 | 418.5 | |
| 2x50 RM | 1 | 29.2 | 219.0 | 1842 | 530.3 | |
| 2x70 RM | 1 | 32.8 | 246.0 | 2355 | 656.9 | |
| 2x95 RM | 1 | 37.8 | 283.5 | 3143 | 874.5 | |
| 2x120 RM | 1 | 40.6 | 304.5 | 3785 | 990.9 | |
| 2x150 RM | 1 | 44.6 | 334.5 | 4598 | 1195.7 | |
| 2x185 RM | 1 | 49.4 | 370.5 | 5668 | 1473.2 | |
| 2x240 RM | 1 | 55.2 | 414.0 | 7132 | 1823.3 | |
| 3x1,5 RE | 1 | 14.0 | 105.2 | 302 | 134.4 | |
| 3x2,5 RE | 1 | 14.9 | 111.6 | 356 | 149.5 | |
| 3x4 RE | 1 | 15.9 | 119.0 | 426 | 167.4 | |
| 3x6 RE | 1 | 16.9 | 127.1 | 514 | 187.4 | |
| 3x10 RE | 1 | 18.6 | 139.7 | 674 | 219.9 | |
| 3x16 RE | 1 | 20.7 | 155.0 | 907 | 261.6 | |
| 3x16 RM | 1 | 21.6 | 162.3 | 947 | 282.1 | |
| 3x25 RE | 1 | 24.3 | 182.2 | 1296 | 358.2 | |
| 3x25 RM | 1 | 25.0 | 187.8 | 1339 | 376.6 | |
| 3x35 RM | 1 | 27.2 | 204.0 | 1679 | 430.8 | |
| 3x50 RM | 1 | 30.9 | 231.4 | 2309 | 544.0 | |
| 3x70 RM | 1 | 35.5 | 266.2 | 3036 | 713.4 | |
| 3x95 RM | 1 | 40.0 | 300.0 | 3976 | 887.0 | |
| 3x120 RM | 1 | 43.0 | 322.6 | 4834 | 997.3 | |
| 3x150 RM | 1 | 48.1 | 360.6 | 5982 | 1264.9 | |
| 3x185 RM | 1 | 52.4 | 392.9 | 7275 | 1481.5 | |
| 4x1,5 RE | 1 | 14.9 | 111.7 | 340 | 149.1 | |
| 4x2,5 RE | 1 | 15.9 | 119.0 | 406 | 166.2 | |
| 4x4 RE | 1 | 17.0 | 127.3 | 493 | 186.4 | |
| 4x6 RE | 1 | 18.2 | 136.3 | 602 | 208.9 | |
| 4x10 RE | 1 | 20.1 | 150.4 | 802 | 245.3 | |
| 4x16 RE | 1 | 22.3 | 167.6 | 1096 | 291.6 | |
| 4x16 RM | 1 | 23.4 | 175.7 | 1141 | 314.3 | |
| 4x25 RE | 1 | 26.4 | 197.7 | 1579 | 400.2 | |
| 4x25 RM | 1 | 27.2 | 204.0 | 1629 | 420.5 | |
| 4x35 RM | 1 | 29.6 | 222.1 | 2059 | 480.2 | |
| 4x50 RM | 1 | 34.9 | 261.8 | 2962 | 674.0 | |
| 4x70 RM | 1 | 38.8 | 290.7 | 3761 | 792.6 | |
| 4x95 RM | 1 | 44.2 | 331.7 | 4994 | 1014.1 | |
| 4x120 RM | 1 | 48.4 | 363.0 | 6190 | 1198.5 | |
| 4x150 RM | 1 | 52.7 | 395.5 | 7481 | 1402.8 | |
| 5x1,5 RE | 1 | 15.9 | 119.0 | 387 | 165.7 | |

| | | | | | |
|----------|---|------|-------|------|--------|
| 5x2,5 RE | 1 | 17.0 | 127.1 | 466 | 185.3 |
| 5x4 RE | 1 | 18.2 | 136.5 | 573 | 208.3 |
| 5x6 RE | 1 | 19.5 | 146.6 | 712 | 233.9 |
| 5x10 RE | 1 | 21.7 | 162.4 | 954 | 275.1 |
| 5x16 RE | 1 | 24.6 | 184.6 | 1334 | 343.3 |
| 5x16 RM | 1 | 25.8 | 193.7 | 1387 | 369.7 |
| 5x25 RE | 1 | 28.7 | 215.0 | 1908 | 450.7 |
| 5x25 RM | 1 | 29.6 | 222.1 | 1966 | 473.5 |
| 5x35 RM | 1 | 32.7 | 245.3 | 2538 | 561.0 |
| 5x50 RM | 1 | 38.1 | 285.8 | 3607 | 758.5 |
| 5x70 RM | 1 | 42.4 | 318.2 | 4643 | 891.4 |
| 5x95 RM | 1 | 49.3 | 369.7 | 6235 | 1205.6 |
| 5x120 RM | 1 | 53.1 | 398.0 | 7593 | 1346.3 |

POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

6. SHIELDED, ARMoured WITH STEEL GALVANIZED TAPES*

IEC 60502-1

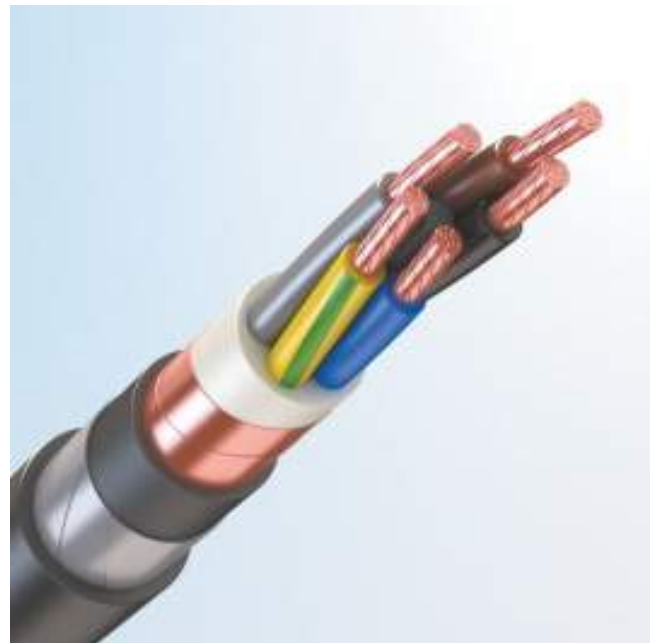

6.1 Cables with PVC sheath

- TOFLEX REBVng(A)
- TOFLEX GREBVng(A)
- TOFLEX AREBVng(A)
- Cu/HEPR/OSCR/PVC/STA/PVC, Al/HEPR/OSCR/PVC/STA/PVC

Possible options:

| | |
|---------------|--------------------------------------------------------------|
| «ng(A)-HL» | |
| «ng(A)-LS» | (Cu/HEPR/OSCR/LSPVC/STA/LSPVC, Al/HEPR/OSCR/LSPVC/STA/LSPVC) |
| «ng(A)-LS-HL» | (materials as above) |

DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; copper flexible (version GREBV) of 5th class (according to IEC 60228).
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑤ **Separation layer** – corresponds to the type of the outer sheath.
- ⑥ **Armour** – two steel galvanized tapes (the top tapes cover the gaps between the lower tape windings).
- ⑦ **Outer sheath:**
 - «ng(A)» – made from PVC-compound with low fire hazard.
 - «ng(A)-HL» – made from cold-resistant PVC-compound with low fire hazard.
 - «ng(A)-LS» – made from PVC-compound with low fire hazard, low smoke and gas emission.
 - «ng(A)-LS-HL» – made from cold-resistant PVC-compound with low fire hazard, low smoke and gas emission.

► Ordering example:

«TOFLEX RPTng(A)3×185RM-1 IEC 60502-1»

CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|---------------------|---------------------|---------------------|---------------------------------------|
| | | | | TOFLEX REBVng(A) | TOFLEX REBVng(A)-HL | TOFLEX REBVng(A)-LS | TOFLEX REBVng(A)-LS | |
| 2x1,5 RE | 1 | 15.3 | 114.8 | 379 | 379 | 437 | 437 | 169.5 |
| 2x2,5 RE | 1 | 16.1 | 120.8 | 429 | 429 | 492 | 492 | 186.4 |
| 2x4 RE | 1 | 17.0 | 127.7 | 493 | 493 | 563 | 563 | 206.6 |
| 2x6 RE | 1 | 18.0 | 135.2 | 565 | 565 | 642 | 642 | 229.3 |
| 2x10 RE | 1 | 19.6 | 146.9 | 701 | 701 | 791 | 791 | 266.3 |
| 2x16 RE | 1 | 21.5 | 161.1 | 894 | 894 | 1000 | 1000 | 314.0 |
| 2x16 RM | 1 | 22.4 | 167.9 | 940 | 940 | 1053 | 1053 | 337.6 |
| 2x25 RE | 1 | 24.9 | 186.6 | 1226 | 1226 | 1366 | 1366 | 418.4 |
| 2x25 RM | 1 | 25.6 | 191.9 | 1271 | 1271 | 1418 | 1418 | 439.3 |
| 2x35 RM | 1 | 27.6 | 206.9 | 1545 | 1545 | 1713 | 1713 | 501.2 |
| 2x50 RM | 1 | 31.0 | 232.4 | 2051 | 2051 | 2257 | 2257 | 624.1 |
| 2x70 RM | 1 | 36.2 | 271.4 | 2810 | 2810 | 3091 | 3091 | 834.1 |
| 2x95 RM | 1 | 40.4 | 302.9 | 3582 | 3582 | 3924 | 3924 | 1024.8 |
| 2x120 RM | 1 | 43.2 | 323.9 | 4257 | 4257 | 4644 | 4644 | 1152.1 |
| 2x150 RM | 1 | 48.4 | 362.9 | 5260 | 5260 | 5753 | 5753 | 1465.4 |
| 2x185 RM | 1 | 53.2 | 398.9 | 6639 | 6639 | 7210 | 7210 | 1709.7 |
| 2x240 RM | 1 | 60.0 | 449.9 | 8369 | 8369 | 9099 | 9099 | 2182.2 |
| 3x1,5 RE | 1 | 15.8 | 118.5 | 408 | 408 | 466 | 466 | 178.9 |
| 3x2,5 RE | 1 | 16.7 | 125.0 | 468 | 468 | 532 | 532 | 196.8 |
| 3x4 RE | 1 | 17.7 | 132.4 | 541 | 541 | 611 | 611 | 217.9 |
| 3x6 RE | 1 | 18.7 | 140.5 | 636 | 636 | 714 | 714 | 241.4 |
| 3x10 RE | 1 | 20.4 | 153.0 | 808 | 808 | 897 | 897 | 279.4 |
| 3x16 RE | 1 | 22.4 | 168.4 | 1056 | 1056 | 1160 | 1160 | 327.7 |
| 3x16 RM | 1 | 23.4 | 175.6 | 1103 | 1103 | 1214 | 1214 | 351.4 |
| 3x25 RE | 1 | 26.1 | 195.5 | 1470 | 1470 | 1606 | 1606 | 436.0 |
| 3x25 RM | 1 | 26.8 | 201.2 | 1518 | 1518 | 1661 | 1661 | 456.9 |
| 3x35 RM | 1 | 29.0 | 217.3 | 1873 | 1873 | 2035 | 2035 | 518.1 |
| 3x50 RM | 1 | 33.0 | 247.7 | 2564 | 2564 | 2767 | 2767 | 664.2 |
| 3x70 RM | 1 | 38.1 | 285.5 | 3449 | 3449 | 3718 | 3718 | 854.6 |
| 3x95 RM | 1 | 42.6 | 319.4 | 4441 | 4441 | 4765 | 4765 | 1045.9 |
| 3x120 RM | 1 | 46.8 | 351.0 | 5473 | 5473 | 5869 | 5869 | 1257.7 |
| 3x150 RM | 1 | 51.1 | 383.0 | 6590 | 6590 | 7055 | 7055 | 1488.2 |
| 3x185 RM | 1 | 57.2 | 428.7 | 8449 | 8449 | 9016 | 9016 | 1822.9 |
| 3x240 RM | 1 | 63.4 | 475.3 | 10495 | 10495 | 11178 | 11178 | 2206.0 |
| 4x1,5 RE | 1 | 16.7 | 125.1 | 452 | 452 | 515 | 515 | 196.4 |
| 4x2,5 RE | 1 | 17.6 | 132.3 | 520 | 520 | 588 | 588 | 216.6 |
| 4x4 RE | 1 | 18.8 | 140.6 | 615 | 615 | 690 | 690 | 240.5 |
| 4x6 RE | 1 | 20.0 | 149.7 | 733 | 733 | 816 | 816 | 266.9 |
| 4x10 RE | 1 | 21.8 | 163.8 | 947 | 947 | 1042 | 1042 | 309.4 |
| 4x16 RE | 1 | 24.5 | 183.9 | 1280 | 1280 | 1397 | 1397 | 379.1 |
| 4x16 RM | 1 | 25.6 | 192.1 | 1334 | 1334 | 1460 | 1460 | 406.1 |
| 4x25 RE | 1 | 28.1 | 211.0 | 1768 | 1768 | 1913 | 1913 | 484.8 |
| 4x25 RM | 1 | 29.0 | 217.4 | 1824 | 1824 | 1976 | 1976 | 507.9 |
| 4x35 RM | 1 | 31.4 | 235.4 | 2272 | 2272 | 2444 | 2444 | 575.4 |
| 4x50 RM | 1 | 37.5 | 281.2 | 3368 | 3368 | 3612 | 3612 | 812.9 |
| 4x70 RM | 1 | 41.3 | 310.1 | 4211 | 4211 | 4497 | 4497 | 946.6 |
| 4x95 RM | 1 | 48.0 | 360.1 | 5651 | 5651 | 6039 | 6039 | 1281.6 |
| 4x120 RM | 1 | 51.4 | 385.4 | 6803 | 6803 | 7234 | 7234 | 1423.2 |
| 4x150 RM | 1 | 57.5 | 431.4 | 8663 | 8663 | 9189 | 9189 | 1746.4 |

| | | | | | | | | |
|----------|---|------|-------|-------|-------|-------|-------|--------|
| 4x185 RM | 1 | 62.7 | 470.5 | 10484 | 10484 | 11097 | 11097 | 2056.8 |
| 4x240 RM | 1 | 70.2 | 526.8 | 13157 | 13157 | 13921 | 13921 | 2554.8 |
| 5x1,5 RE | 1 | 17.7 | 132.4 | 502 | 502 | 569 | 569 | 216.2 |
| 5x2,5 RE | 1 | 18.7 | 140.5 | 588 | 588 | 661 | 661 | 239.3 |
| 5x4 RE | 1 | 20.0 | 149.8 | 704 | 704 | 785 | 785 | 266.3 |
| 5x6 RE | 1 | 21.3 | 159.9 | 853 | 853 | 942 | 942 | 296.3 |
| 5x10 RE | 1 | 23.4 | 175.7 | 1110 | 1110 | 1213 | 1213 | 344.4 |
| 5x16 RE | 1 | 26.4 | 198.0 | 1510 | 1510 | 1637 | 1637 | 422.2 |
| 5x16 RM | 1 | 27.6 | 207.1 | 1571 | 1571 | 1707 | 1707 | 452.6 |
| 5x25 RE | 1 | 30.4 | 228.3 | 2113 | 2113 | 2271 | 2271 | 542.8 |
| 5x25 RM | 1 | 31.4 | 235.4 | 2178 | 2178 | 2343 | 2343 | 568.7 |
| 5x35 RM | 1 | 36.1 | 270.7 | 2992 | 2992 | 3213 | 3213 | 737.7 |
| 5x50 RM | 1 | 40.7 | 305.1 | 4050 | 4050 | 4316 | 4316 | 909.9 |
| 5x70 RM | 1 | 46.2 | 346.5 | 5274 | 5274 | 5616 | 5616 | 1148.3 |
| 5x95 RM | 1 | 53.1 | 398.0 | 7204 | 7204 | 7628 | 7628 | 1441.7 |
| 5x120 RM | 1 | 57.9 | 433.9 | 8782 | 8782 | 9286 | 9286 | 1692.0 |
| 5x150 RM | 1 | 63.1 | 473.3 | 10533 | 10533 | 11119 | 11119 | 1994.0 |
| 5x185 RM | 1 | 69.5 | 521.3 | 12995 | 12995 | 13705 | 13705 | 2417.3 |
| 5x240 RM | 1 | 77.6 | 582.0 | 16216 | 16216 | 17078 | 17078 | 2961.0 |

| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|----------------------|----------------------|-------------------------|---------------------------------------|
| | | | | TOFLEX REBaVng(A) | TOFLEX REBaVng(A)-HL | TOFLEX REBaVng(A)-LS | TOFLEX REBaVng(A)-LS-HL | |
| 1x1,5 RE | 1 | 14.6 | 146.0 | 285 | 285 | 330 | 330 | 132.6 |
| 1x2,5 RE | 1 | 14.6 | 146.0 | 293 | 293 | 337 | 337 | 131.5 |
| 1x4 RE | 1 | 14.6 | 146.0 | 303 | 303 | 347 | 347 | 129.8 |
| 1x6 RE | 1 | 14.6 | 146.0 | 318 | 318 | 361 | 361 | 127.7 |
| 1x10 RE | 1 | 15.3 | 152.8 | 372 | 372 | 418 | 418 | 137.4 |
| 1x16 RE | 1 | 16.2 | 162.3 | 453 | 453 | 503 | 503 | 151.6 |
| 1x16 RM | 1 | 16.7 | 166.8 | 468 | 468 | 520 | 520 | 158.3 |
| 1x25 RE | 1 | 17.7 | 177.3 | 578 | 578 | 635 | 635 | 177.4 |
| 1x25 RM | 1 | 18.1 | 180.8 | 593 | 593 | 651 | 651 | 182.9 |
| 1x35 RM | 1 | 19.1 | 190.8 | 700 | 700 | 763 | 763 | 198.4 |
| 1x50 RM | 1 | 20.8 | 207.8 | 906 | 906 | 976 | 976 | 229.9 |
| 1x70 RM | 1 | 22.4 | 223.8 | 1105 | 1105 | 1182 | 1182 | 255.7 |
| 1x95 RM | 1 | 24.9 | 248.8 | 1422 | 1422 | 1514 | 1514 | 312.1 |
| 1x120 RM | 1 | 26.3 | 262.8 | 1693 | 1693 | 1791 | 1791 | 336.4 |
| 1x150 RM | 1 | 28.1 | 280.8 | 2005 | 2005 | 2112 | 2112 | 376.4 |
| 1x185 RM | 1 | 30.1 | 300.8 | 2400 | 2400 | 2517 | 2517 | 422.0 |
| 1x240 RM | 1 | 32.8 | 327.8 | 2961 | 2961 | 3089 | 3089 | 483.2 |
| 1x300 RM | 1 | 38.6 | 386.3 | 3822 | 3822 | 4005 | 4005 | 685.7 |
| 1x400 RM | 1 | 42.0 | 419.7 | 4713 | 4713 | 4914 | 4914 | 778.6 |
| 1x500 RM | 1 | 46.8 | 467.5 | 5909 | 5909 | 6161 | 6161 | 967.2 |
| 1x630 RM | 1 | 51.1 | 511.1 | 7411 | 7411 | 7700 | 7700 | 1101.1 |


POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

6. SHIELDED, ARMoured WITH STEEL GALVANIZED TAPES*

IEC 60502-1

6.2 Cables sheathed with cross-linked highly elastic compound

- TOFLEX REBRng(A)
- TOFLEX GREBRng(A)
- TOFLEX AREBRng(A)
- Cu/HEPR/OSCR/HFFR/STA/ XLFR, Al/HEPR/OSCR/HFFR/STA/ XLFR

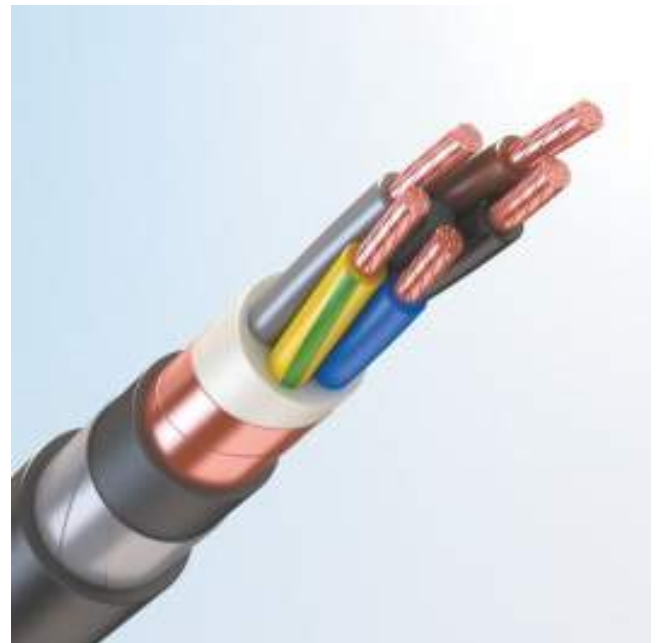

Possible options:

| | |
|---------------|--------------------------------------------------------------|
| «ng(A)-HL» | |
| «ng(A)-HF» | (Cu/HEPR/OSCR/HFFR/STA/XLHFFR, Al/HEPR/OSCR/HFFR/STA/XLHFFR) |
| «ng(A)-HF-HL» | (materials as above) |



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; copper flexible (version GREBR) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑤ **Separation layer** – corresponds to the type of the outer sheath.
- ⑥ **Armour** – two steel galvanized tapes (the top tapes cover the gaps between the lower tape windings).
- ⑦ **Outer sheath:**
 - «ng(A)» – made from cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HL» – made from cold-resistant cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HF» – made from halogen-free cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HF-HL» – made from cold-resistant halogen-free cross-linked highly elastic polymer compound with low fire hazard.

► **Ordering example:**

«TOFLEX REBRng(A)-HL3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX REBRng(A)-HL3×95/50RM(N,G)-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|---------------------|---------------------|---------------------|---------------------------------------|
| | | | | TOFLEX REBRng(A) | TOFLEX REBRng(A)-HL | TOFLEX REBRng(A)-HF | TOFLEX REBRng(A)-HF | |
| 2x1,5 RE | 1 | 15.3 | 114.8 | 415 | 415 | 415 | 415 | 169.5 |
| 2x2,5 RE | 1 | 16.1 | 120.8 | 468 | 468 | 468 | 468 | 186.4 |
| 2x4 RE | 1 | 17.0 | 127.7 | 537 | 537 | 537 | 537 | 206.6 |
| 2x6 RE | 1 | 18.0 | 135.2 | 613 | 613 | 613 | 613 | 229.3 |
| 2x10 RE | 1 | 19.6 | 146.9 | 758 | 758 | 758 | 758 | 266.3 |
| 2x16 RE | 1 | 21.5 | 161.1 | 962 | 962 | 962 | 962 | 314.0 |
| 2x16 RM | 1 | 22.4 | 167.9 | 1014 | 1014 | 1014 | 1014 | 337.6 |
| 2x25 RE | 1 | 24.9 | 186.6 | 1320 | 1320 | 1320 | 1320 | 418.4 |
| 2x25 RM | 1 | 25.6 | 191.9 | 1370 | 1370 | 1370 | 1370 | 439.3 |
| 2x35 RM | 1 | 27.6 | 206.9 | 1658 | 1658 | 1658 | 1658 | 501.2 |
| 2x50 RM | 1 | 31.0 | 232.4 | 2193 | 2193 | 2193 | 2193 | 624.1 |
| 2x70 RM | 1 | 36.2 | 271.4 | 3003 | 3003 | 3003 | 3003 | 834.1 |
| 2x95 RM | 1 | 40.4 | 302.9 | 3820 | 3820 | 3820 | 3820 | 1024.8 |
| 2x120 RM | 1 | 43.2 | 323.9 | 4528 | 4528 | 4528 | 4528 | 1152.1 |
| 2x150 RM | 1 | 48.4 | 362.9 | 5604 | 5604 | 5604 | 5604 | 1465.4 |
| 2x185 RM | 1 | 53.2 | 398.9 | 7041 | 7041 | 7041 | 7041 | 1709.7 |
| 2x240 RM | 1 | 60.0 | 449.9 | 8882 | 8882 | 8882 | 8882 | 2182.2 |
| 3x1,5 RE | 1 | 15.8 | 118.5 | 444 | 444 | 444 | 444 | 178.9 |
| 3x2,5 RE | 1 | 16.7 | 125.0 | 507 | 507 | 507 | 507 | 196.8 |
| 3x4 RE | 1 | 17.7 | 132.4 | 584 | 584 | 584 | 584 | 217.9 |
| 3x6 RE | 1 | 18.7 | 140.5 | 684 | 684 | 684 | 684 | 241.4 |
| 3x10 RE | 1 | 20.4 | 153.0 | 864 | 864 | 864 | 864 | 279.4 |
| 3x16 RE | 1 | 22.4 | 168.4 | 1121 | 1121 | 1121 | 1121 | 327.7 |
| 3x16 RM | 1 | 23.4 | 175.6 | 1174 | 1174 | 1174 | 1174 | 351.4 |
| 3x25 RE | 1 | 26.1 | 195.5 | 1558 | 1558 | 1558 | 1558 | 436.0 |
| 3x25 RM | 1 | 26.8 | 201.2 | 1611 | 1611 | 1611 | 1611 | 456.9 |
| 4x1,5 RE | 1 | 16.7 | 125.1 | 490 | 490 | 490 | 490 | 196.4 |
| 4x2,5 RE | 1 | 17.6 | 132.3 | 561 | 561 | 561 | 561 | 216.6 |
| 4x4 RE | 1 | 18.8 | 140.6 | 661 | 661 | 661 | 661 | 240.5 |
| 4x6 RE | 1 | 20.0 | 149.7 | 784 | 784 | 784 | 784 | 266.9 |
| 4x10 RE | 1 | 21.8 | 163.8 | 1005 | 1005 | 1005 | 1005 | 309.4 |
| 4x16 RE | 1 | 24.5 | 183.9 | 1355 | 1355 | 1355 | 1355 | 379.1 |
| 4x16 RM | 1 | 25.6 | 192.1 | 1414 | 1414 | 1414 | 1414 | 406.1 |
| 4x25 RE | 1 | 28.1 | 211.0 | 1861 | 1861 | 1861 | 1861 | 484.8 |
| 4x25 RM | 1 | 29.0 | 217.4 | 1922 | 1922 | 1922 | 1922 | 507.9 |
| 4x35 RM | 1 | 31.4 | 235.4 | 2384 | 2384 | 2384 | 2384 | 575.4 |
| 4x50 RM | 1 | 37.5 | 281.2 | 3527 | 3527 | 3527 | 3527 | 812.9 |
| 4x70 RM | 1 | 41.3 | 310.1 | 4399 | 4399 | 4399 | 4399 | 946.6 |
| 4x95 RM | 1 | 48.0 | 360.1 | 5906 | 5906 | 5906 | 5906 | 1281.6 |
| 4x120 RM | 1 | 51.4 | 385.4 | 7088 | 7088 | 7088 | 7088 | 1423.2 |
| 4x150 RM | 1 | 57.5 | 431.4 | 9008 | 9008 | 9008 | 9008 | 1746.4 |
| 4x185 RM | 1 | 62.7 | 470.5 | 10892 | 10892 | 10892 | 10892 | 2056.8 |
| 4x240 RM | 1 | 70.2 | 526.8 | 13679 | 13679 | 13679 | 13679 | 2554.8 |
| 5x1,5 RE | 1 | 17.7 | 132.4 | 542 | 542 | 542 | 542 | 216.2 |
| 5x2,5 RE | 1 | 18.7 | 140.5 | 632 | 632 | 632 | 632 | 239.3 |
| 5x4 RE | 1 | 20.0 | 149.8 | 753 | 753 | 753 | 753 | 266.3 |
| 5x6 RE | 1 | 21.3 | 159.9 | 907 | 907 | 907 | 907 | 296.3 |
| 5x10 RE | 1 | 23.4 | 175.7 | 1173 | 1173 | 1173 | 1173 | 344.4 |
| 5x16 RE | 1 | 26.4 | 198.0 | 1590 | 1590 | 1590 | 1590 | 422.2 |

| | | | | | | | | |
|----------|---|------|-------|-------|-------|-------|-------|--------|
| 5x16 RM | 1 | 27.6 | 207.1 | 1658 | 1658 | 1658 | 1658 | 452.6 |
| 5x25 RE | 1 | 30.4 | 228.3 | 2214 | 2214 | 2214 | 2214 | 542.8 |
| 5x25 RM | 1 | 31.4 | 235.4 | 2284 | 2284 | 2284 | 2284 | 568.7 |
| 5x35 RM | 1 | 36.1 | 270.7 | 3134 | 3134 | 3134 | 3134 | 737.7 |
| 5x50 RM | 1 | 40.7 | 305.1 | 4222 | 4222 | 4222 | 4222 | 909.9 |
| 5x70 RM | 1 | 46.2 | 346.5 | 5493 | 5493 | 5493 | 5493 | 1148.3 |
| 5x95 RM | 1 | 53.1 | 398.0 | 7482 | 7482 | 7482 | 7482 | 1441.7 |
| 5x120 RM | 1 | 57.9 | 433.9 | 9107 | 9107 | 9107 | 9107 | 1692.0 |
| 5x150 RM | 1 | 63.1 | 473.3 | 10917 | 10917 | 10917 | 10917 | 1994.0 |
| 5x185 RM | 1 | 69.5 | 521.3 | 13473 | 13473 | 13473 | 13473 | 2417.3 |
| 5x240 RM | 1 | 77.6 | 582.0 | 16788 | 16788 | 16788 | 16788 | 2961.0 |

| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|----------------------|----------------------|-------------------------|---------------------------------------|
| | | | | TOFLEX REBaRng(A) | TOFLEX REBaRng(A)-HL | TOFLEX REBaRng(A)-HF | TOFLEX REBaRng(A)-HF-HL | |
| 1x1,5 RE | 1 | 14.6 | 146.0 | 307 | 307 | 307 | 307 | 132.6 |
| 1x2,5 RE | 1 | 14.6 | 146.0 | 316 | 316 | 316 | 316 | 131.5 |
| 1x4 RE | 1 | 14.6 | 146.0 | 328 | 328 | 328 | 328 | 129.8 |
| 1x6 RE | 1 | 14.6 | 146.0 | 344 | 344 | 344 | 344 | 127.7 |
| 1x10 RE | 1 | 15.3 | 152.8 | 399 | 399 | 399 | 399 | 137.4 |
| 1x16 RE | 1 | 16.2 | 162.3 | 483 | 483 | 483 | 483 | 151.6 |
| 1x16 RM | 1 | 16.7 | 166.8 | 499 | 499 | 499 | 499 | 158.3 |
| 1x25 RE | 1 | 17.7 | 177.3 | 612 | 612 | 612 | 612 | 177.4 |
| 1x25 RM | 1 | 18.1 | 180.8 | 627 | 627 | 627 | 627 | 182.9 |
| 1x35 RM | 1 | 19.1 | 190.8 | 737 | 737 | 737 | 737 | 198.4 |
| 1x50 RM | 1 | 20.8 | 207.8 | 947 | 947 | 947 | 947 | 229.9 |
| 1x70 RM | 1 | 22.4 | 223.8 | 1151 | 1151 | 1151 | 1151 | 255.7 |
| 1x95 RM | 1 | 24.9 | 248.8 | 1477 | 1477 | 1477 | 1477 | 312.1 |
| 1x120 RM | 1 | 26.3 | 262.8 | 1752 | 1752 | 1752 | 1752 | 336.4 |
| 1x150 RM | 1 | 28.1 | 280.8 | 2069 | 2069 | 2069 | 2069 | 376.4 |
| 1x185 RM | 1 | 30.1 | 300.8 | 2470 | 2470 | 2470 | 2470 | 422.0 |
| 1x240 RM | 1 | 32.8 | 327.8 | 3037 | 3037 | 3037 | 3037 | 483.2 |
| 1x300 RM | 1 | 38.6 | 386.3 | 3930 | 3930 | 3930 | 3930 | 685.7 |
| 1x400 RM | 1 | 42.0 | 419.7 | 4832 | 4832 | 4832 | 4832 | 778.6 |
| 1x500 RM | 1 | 46.8 | 467.5 | 6055 | 6055 | 6055 | 6055 | 967.2 |
| 1x630 RM | 1 | 51.1 | 511.1 | 7581 | 7581 | 7581 | 7581 | 1101.1 |


POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

6. SHIELDED, ARMoured WITH STEEL GALVANIZED TAPES*

IEC 60502-1

6.3 Cables sheathed with halogen-free polymer compound

- TOFLEX REBPng(A)-HF
- TOFLEX GREBPng(A)-HF
- TOFLEX AREBPng(A)-HF
- Cu/HEPR/OSCR/HFFR/STA/HFFR, Al/HEPR/OSCR/HFFR/STA/HFFR

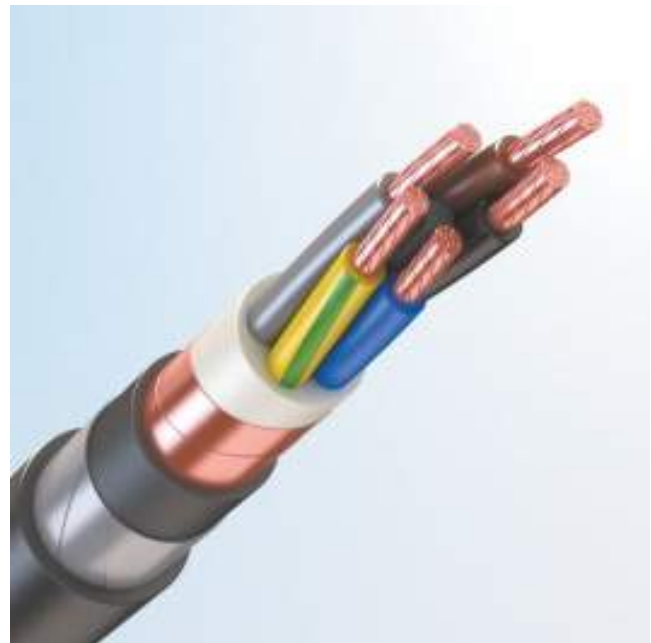

Possible options:

«ng(A)-HF-HL»



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st,2nd class; flexible copper (version GREBP) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑤ **Separation layer** – corresponds to the type of the outer sheath.
- ⑥ **Armour** – two steel galvanizing tapes (the top tapes cover the gaps between the lower tape windings).
- ⑦ **Outer sheath:**
 - «ng(A)-HF» – made from halogen-free polymer compounds.
 - «ng(A)-HF-HL» – made from cold-resistant halogen-free polymer compounds.

► **Ordering example:**

«TOFLEX REBPng(A)-HF-HL3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX REBPng(A)-HF-HL3×95/50RM(N,G)-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|------------------------|---------------------------------------|
| | | | | TOFLEX REBPng(A)-HF | TOFLEX REBPng(A)-HF-HL | |
| 2x1,5 RE | 1 | 15.3 | 114.8 | 420 | 420 | 169.5 |
| 2x2,5 RE | 1 | 16.1 | 120.8 | 474 | 474 | 186.4 |
| 2x4 RE | 1 | 17.0 | 127.7 | 543 | 543 | 206.6 |
| 2x6 RE | 1 | 18.0 | 135.2 | 620 | 620 | 229.3 |
| 2x10 RE | 1 | 19.6 | 146.9 | 766 | 766 | 266.3 |
| 2x16 RE | 1 | 21.5 | 161.1 | 971 | 971 | 314.0 |
| 2x16 RM | 1 | 22.4 | 167.9 | 1023 | 1023 | 337.6 |
| 2x25 RE | 1 | 24.9 | 186.6 | 1330 | 1330 | 418.4 |
| 2x25 RM | 1 | 25.6 | 191.9 | 1380 | 1380 | 439.3 |
| 2x35 RM | 1 | 27.6 | 206.9 | 1670 | 1670 | 501.2 |
| 2x50 RM | 1 | 31.0 | 232.4 | 2206 | 2206 | 624.1 |
| 2x70 RM | 1 | 36.2 | 271.4 | 3021 | 3021 | 834.1 |
| 2x95 RM | 1 | 40.4 | 302.9 | 3841 | 3841 | 1024.8 |
| 2x120 RM | 1 | 43.2 | 323.9 | 4551 | 4551 | 1152.1 |
| 2x150 RM | 1 | 48.4 | 362.9 | 5633 | 5633 | 1465.4 |
| 2x185 RM | 1 | 53.2 | 398.9 | 7074 | 7074 | 1709.7 |
| 2x240 RM | 1 | 60.0 | 449.9 | 8924 | 8924 | 2182.2 |
| 3x1,5 RE | 1 | 15.8 | 118.5 | 449 | 449 | 178.9 |
| 3x2,5 RE | 1 | 16.7 | 125.0 | 513 | 513 | 196.8 |
| 3x4 RE | 1 | 17.7 | 132.4 | 590 | 590 | 217.9 |
| 3x6 RE | 1 | 18.7 | 140.5 | 691 | 691 | 241.4 |
| 3x10 RE | 1 | 20.4 | 153.0 | 872 | 872 | 279.4 |
| 3x16 RE | 1 | 22.4 | 168.4 | 1130 | 1130 | 327.7 |
| 3x16 RM | 1 | 23.4 | 175.6 | 1183 | 1183 | 351.4 |
| 3x25 RE | 1 | 26.1 | 195.5 | 1569 | 1569 | 436.0 |
| 3x25 RM | 1 | 26.8 | 201.2 | 1622 | 1622 | 456.9 |
| 3x35 RM | 1 | 29.0 | 217.3 | 1992 | 1992 | 518.1 |
| 3x50 RM | 1 | 33.0 | 247.7 | 2710 | 2710 | 664.2 |
| 3x70 RM | 1 | 38.1 | 285.5 | 3647 | 3647 | 854.6 |
| 3x95 RM | 1 | 42.6 | 319.4 | 4682 | 4682 | 1045.9 |
| 3x120 RM | 1 | 46.8 | 351.0 | 5766 | 5766 | 1257.7 |
| 3x150 RM | 1 | 51.1 | 383.0 | 6936 | 6936 | 1488.2 |
| 3x185 RM | 1 | 57.2 | 428.7 | 8869 | 8869 | 1822.9 |
| 3x240 RM | 1 | 63.4 | 475.3 | 11006 | 11006 | 2206.0 |
| 4x1,5 RE | 1 | 16.7 | 125.1 | 496 | 496 | 196.4 |
| 4x2,5 RE | 1 | 17.6 | 132.3 | 568 | 568 | 216.6 |
| 4x4 RE | 1 | 18.8 | 140.6 | 668 | 668 | 240.5 |
| 4x6 RE | 1 | 20.0 | 149.7 | 791 | 791 | 266.9 |
| 4x10 RE | 1 | 21.8 | 163.8 | 1014 | 1014 | 309.4 |
| 4x16 RE | 1 | 24.5 | 183.9 | 1364 | 1364 | 379.1 |
| 4x16 RM | 1 | 25.6 | 192.1 | 1425 | 1425 | 406.1 |
| 4x25 RE | 1 | 28.1 | 211.0 | 1873 | 1873 | 484.8 |
| 4x25 RM | 1 | 29.0 | 217.4 | 1934 | 1934 | 507.9 |
| 4x35 RM | 1 | 31.4 | 235.4 | 2397 | 2397 | 575.4 |
| 4x50 RM | 1 | 37.5 | 281.2 | 3546 | 3546 | 812.9 |
| 4x70 RM | 1 | 41.3 | 310.1 | 4421 | 4421 | 946.6 |
| 4x95 RM | 1 | 48.0 | 360.1 | 5935 | 5935 | 1281.6 |
| 4x120 RM | 1 | 51.4 | 385.4 | 7120 | 7120 | 1423.2 |
| 4x150 RM | 1 | 57.5 | 431.4 | 9048 | 9048 | 1746.4 |

| | | | | | | |
|----------|---|------|-------|-------|-------|--------|
| 4x185 RM | 1 | 62.7 | 470.5 | 10936 | 10936 | 2056.8 |
| 4x240 RM | 1 | 70.2 | 526.8 | 13729 | 13729 | 2554.8 |
| 5x1,5 RE | 1 | 17.7 | 132.4 | 549 | 549 | 216.2 |
| 5x2,5 RE | 1 | 18.7 | 140.5 | 639 | 639 | 239.3 |
| 5x4 RE | 1 | 20.0 | 149.8 | 761 | 761 | 266.3 |
| 5x6 RE | 1 | 21.3 | 159.9 | 916 | 916 | 296.3 |
| 5x10 RE | 1 | 23.4 | 175.7 | 1183 | 1183 | 344.4 |
| 5x16 RE | 1 | 26.4 | 198.0 | 1601 | 1601 | 422.2 |
| 5x16 RM | 1 | 27.6 | 207.1 | 1669 | 1669 | 452.6 |
| 5x25 RE | 1 | 30.4 | 228.3 | 2227 | 2227 | 542.8 |
| 5x25 RM | 1 | 31.4 | 235.4 | 2297 | 2297 | 568.7 |
| 5x35 RM | 1 | 36.1 | 270.7 | 3152 | 3152 | 737.7 |
| 5x50 RM | 1 | 40.7 | 305.1 | 4243 | 4243 | 909.9 |
| 5x70 RM | 1 | 46.2 | 346.5 | 5521 | 5521 | 1148.3 |
| 5x95 RM | 1 | 53.1 | 398.0 | 7514 | 7514 | 1441.7 |
| 5x120 RM | 1 | 57.9 | 433.9 | 9148 | 9148 | 1692.0 |
| 5x150 RM | 1 | 63.1 | 473.3 | 10962 | 10962 | 1994.0 |
| 5x185 RM | 1 | 69.5 | 521.3 | 13522 | 13522 | 2417.3 |
| 5x240 RM | 1 | 77.6 | 582.0 | 16851 | 16851 | 2961.0 |


| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|-------------------------|---------------------------------------|
| | | | | TOFLEX REBaPng(A)-HF | TOFLEX REBaPng(A)-HF-HL | |
| 1x1,5 RE | 1 | 14.6 | 146.0 | 314 | 314 | 132.6 |
| 1x2,5 RE | 1 | 14.6 | 146.0 | 322 | 322 | 131.5 |
| 1x4 RE | 1 | 14.6 | 146.0 | 333 | 333 | 129.8 |
| 1x6 RE | 1 | 14.6 | 146.0 | 348 | 348 | 127.7 |
| 1x10 RE | 1 | 15.3 | 152.8 | 404 | 404 | 137.4 |
| 1x16 RE | 1 | 16.2 | 162.3 | 488 | 488 | 151.6 |
| 1x16 RM | 1 | 16.7 | 166.8 | 504 | 504 | 158.3 |
| 1x25 RE | 1 | 17.7 | 177.3 | 617 | 617 | 177.4 |
| 1x25 RM | 1 | 18.1 | 180.8 | 633 | 633 | 182.9 |
| 1x35 RM | 1 | 19.1 | 190.8 | 744 | 744 | 198.4 |
| 1x50 RM | 1 | 20.8 | 207.8 | 954 | 954 | 229.9 |
| 1x70 RM | 1 | 22.4 | 223.8 | 1158 | 1158 | 255.7 |
| 1x95 RM | 1 | 24.9 | 248.8 | 1486 | 1486 | 312.1 |
| 1x120 RM | 1 | 26.3 | 262.8 | 1761 | 1761 | 336.4 |
| 1x150 RM | 1 | 28.1 | 280.8 | 2079 | 2079 | 376.4 |
| 1x185 RM | 1 | 30.1 | 300.8 | 2481 | 2481 | 422.0 |
| 1x240 RM | 1 | 32.8 | 327.8 | 3050 | 3050 | 483.2 |
| 1x300 RM | 1 | 38.6 | 386.3 | 3949 | 3949 | 685.7 |
| 1x400 RM | 1 | 42.0 | 419.7 | 4852 | 4852 | 778.6 |
| 1x500 RM | 1 | 46.8 | 467.5 | 6082 | 6082 | 967.2 |
| 1x630 RM | 1 | 51.1 | 511.1 | 7610 | 7610 | 1101.1 |

POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

6. SHIELDED, ARMoured WITH STEEL GALVANIZED TAPES*

IEC 60502-1

6.4 Cables sheathed with thermoplastic polyurethane elastomer

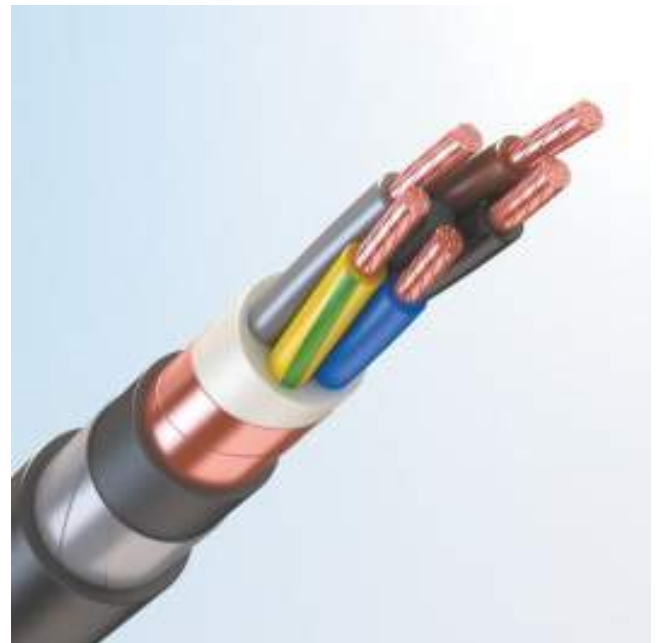

- TOFLEX REBTng(A)
- TOFLEX GREBTng(A)
- TOFLEX AREBTng(A)
- Cu/HEPR/OSCR/ TPE /STA/ TPU, Al/HEPR/OSCR/ TPE /STA/ TPU



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; flexible copper (version GREBT) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑤ **Separation layer** – corresponds to the type of the outer sheath.
- ⑥ **Armour** – two steel galvanized tapes (the top tapes cover the gaps between the lower tape windings).
- ⑦ **Outer sheath:**
 - «ng(A)» — made from thermoplastic polyurethane elastomer.

► **Ordering example:**

«TOFLEX REBTng(A)3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX REBTng(A)3×95/50RM(N,G)-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|---------------------------------------|
| | | | | TOFLEX REBTng(A) | |
| 2x1,5 RE | 1 | 15.3 | 114.8 | 379 | 169.5 |
| 2x2,5 RE | 1 | 16.1 | 120.8 | 429 | 186.4 |
| 2x4 RE | 1 | 17.0 | 127.7 | 493 | 206.6 |
| 2x6 RE | 1 | 18.0 | 135.2 | 565 | 229.3 |
| 2x10 RE | 1 | 19.6 | 146.9 | 701 | 266.3 |
| 2x16 RE | 1 | 21.5 | 161.1 | 894 | 314.0 |
| 2x16 RM | 1 | 22.4 | 167.9 | 940 | 337.6 |
| 2x25 RE | 1 | 24.9 | 186.6 | 1226 | 418.4 |
| 2x25 RM | 1 | 25.6 | 191.9 | 1271 | 439.3 |
| 2x35 RM | 1 | 27.6 | 206.9 | 1545 | 501.2 |
| 2x50 RM | 1 | 31.0 | 232.4 | 2051 | 624.1 |
| 2x70 RM | 1 | 36.2 | 271.4 | 2810 | 834.1 |
| 2x95 RM | 1 | 40.4 | 302.9 | 3582 | 1024.8 |
| 2x120 RM | 1 | 43.2 | 323.9 | 4257 | 1152.1 |
| 2x150 RM | 1 | 48.4 | 362.9 | 5260 | 1465.4 |
| 2x185 RM | 1 | 53.2 | 398.9 | 6639 | 1709.7 |
| 2x240 RM | 1 | 60.0 | 449.9 | 8369 | 2182.2 |
| 3x1,5 RE | 1 | 15.8 | 118.5 | 408 | 178.9 |
| 3x2,5 RE | 1 | 16.7 | 125.0 | 468 | 196.8 |
| 3x4 RE | 1 | 17.7 | 132.4 | 541 | 217.9 |
| 3x6 RE | 1 | 18.7 | 140.5 | 636 | 241.4 |
| 3x10 RE | 1 | 20.4 | 153.0 | 808 | 279.4 |
| 3x16 RE | 1 | 22.4 | 168.4 | 1056 | 327.7 |
| 3x16 RM | 1 | 23.4 | 175.6 | 1103 | 351.4 |
| 3x25 RE | 1 | 26.1 | 195.5 | 1470 | 436.0 |
| 3x25 RM | 1 | 26.8 | 201.2 | 1518 | 456.9 |
| 3x35 RM | 1 | 29.0 | 217.3 | 1873 | 518.1 |
| 3x50 RM | 1 | 33.0 | 247.7 | 2564 | 664.2 |
| 3x70 RM | 1 | 38.1 | 285.5 | 3449 | 854.6 |
| 3x95 RM | 1 | 42.6 | 319.4 | 4441 | 1045.9 |
| 3x120 RM | 1 | 46.8 | 351.0 | 5473 | 1257.7 |
| 3x150 RM | 1 | 51.1 | 383.0 | 6590 | 1488.2 |
| 3x185 RM | 1 | 57.2 | 428.7 | 8449 | 1822.9 |
| 3x240 RM | 1 | 63.4 | 475.3 | 10495 | 2206.0 |
| 4x1,5 RE | 1 | 16.7 | 125.1 | 452 | 196.4 |
| 4x2,5 RE | 1 | 17.6 | 132.3 | 520 | 216.6 |
| 4x4 RE | 1 | 18.8 | 140.6 | 615 | 240.5 |
| 4x6 RE | 1 | 20.0 | 149.7 | 733 | 266.9 |
| 4x10 RE | 1 | 21.8 | 163.8 | 947 | 309.4 |
| 4x16 RE | 1 | 24.5 | 183.9 | 1280 | 379.1 |
| 4x16 RM | 1 | 25.6 | 192.1 | 1334 | 406.1 |
| 4x25 RE | 1 | 28.1 | 211.0 | 1768 | 484.8 |
| 4x25 RM | 1 | 29.0 | 217.4 | 1824 | 507.9 |
| 4x35 RM | 1 | 31.4 | 235.4 | 2272 | 575.4 |
| 4x50 RM | 1 | 37.5 | 281.2 | 3368 | 812.9 |
| 4x70 RM | 1 | 41.3 | 310.1 | 4211 | 946.6 |
| 4x95 RM | 1 | 48.0 | 360.1 | 5651 | 1281.6 |
| 4x120 RM | 1 | 51.4 | 385.4 | 6803 | 1423.2 |
| 4x150 RM | 1 | 57.5 | 431.4 | 8663 | 1746.4 |

| | | | | | |
|----------|---|------|-------|-------|--------|
| 4x185 RM | 1 | 62.7 | 470.5 | 10484 | 2056.8 |
| 4x240 RM | 1 | 70.2 | 526.8 | 13157 | 2554.8 |
| 5x1,5 RE | 1 | 17.7 | 132.4 | 502 | 216.2 |
| 5x2,5 RE | 1 | 18.7 | 140.5 | 588 | 239.3 |
| 5x4 RE | 1 | 20.0 | 149.8 | 704 | 266.3 |
| 5x6 RE | 1 | 21.3 | 159.9 | 853 | 296.3 |
| 5x10 RE | 1 | 23.4 | 175.7 | 1110 | 344.4 |
| 5x16 RE | 1 | 26.4 | 198.0 | 1510 | 422.2 |
| 5x16 RM | 1 | 27.6 | 207.1 | 1571 | 452.6 |
| 5x25 RE | 1 | 30.4 | 228.3 | 2113 | 542.8 |
| 5x25 RM | 1 | 31.4 | 235.4 | 2178 | 568.7 |
| 5x35 RM | 1 | 36.1 | 270.7 | 2992 | 737.7 |
| 5x50 RM | 1 | 40.7 | 305.1 | 4050 | 909.9 |
| 5x70 RM | 1 | 46.2 | 346.5 | 5274 | 1148.3 |
| 5x95 RM | 1 | 53.1 | 398.0 | 7204 | 1441.7 |
| 5x120 RM | 1 | 57.9 | 433.9 | 8782 | 1692.0 |
| 5x150 RM | 1 | 63.1 | 473.3 | 10533 | 1994.0 |
| 5x185 RM | 1 | 69.5 | 521.3 | 12995 | 2417.3 |
| 5x240 RM | 1 | 77.6 | 582.0 | 16216 | 2961.0 |

| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|--------|---------------------------------------|
| | | | | TOFLEX REBaTng(A) | | |
| 1x1,5 RE | 1 | 14.6 | 146.0 | 285 | 132.6 | |
| 1x2,5 RE | 1 | 14.6 | 146.0 | 293 | 131.5 | |
| 1x4 RE | 1 | 14.6 | 146.0 | 303 | 129.8 | |
| 1x6 RE | 1 | 14.6 | 146.0 | 318 | 127.7 | |
| 1x10 RE | 1 | 15.3 | 152.8 | 372 | 137.4 | |
| 1x16 RE | 1 | 16.2 | 162.3 | 453 | 151.6 | |
| 1x16 RM | 1 | 16.7 | 166.8 | 468 | 158.3 | |
| 1x25 RE | 1 | 17.7 | 177.3 | 578 | 177.4 | |
| 1x25 RM | 1 | 18.1 | 180.8 | 593 | 182.9 | |
| 1x35 RM | 1 | 19.1 | 190.8 | 700 | 198.4 | |
| 1x50 RM | 1 | 20.8 | 207.8 | 906 | 229.9 | |
| 1x70 RM | 1 | 22.4 | 223.8 | 1105 | 255.7 | |
| 1x95 RM | 1 | 24.9 | 248.8 | 1422 | 312.1 | |
| 1x120 RM | 1 | 26.3 | 262.8 | 1693 | 336.4 | |
| 1x150 RM | 1 | 28.1 | 280.8 | 2005 | 376.4 | |
| 1x185 RM | 1 | 30.1 | 300.8 | 2400 | 422.0 | |
| 1x240 RM | 1 | 32.8 | 327.8 | 2961 | 483.2 | |
| 1x300 RM | 1 | 38.6 | 386.3 | 3822 | 685.7 | |
| 1x400 RM | 1 | 42.0 | 419.7 | 4713 | 778.6 | |
| 1x500 RM | 1 | 46.8 | 467.5 | 5909 | 967.2 | |
| 1x630 RM | 1 | 51.1 | 511.1 | 7411 | 1101.1 | |

POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

7. SHIELDED, ARMoured WITH FULL LAY-UP FROM STEEL GALVANIZED WIRES


IEC 60502-1

7.1 Cables with PVC sheath

- TOFLEX REKVng(A)
- TOFLEX GREKVng(A)
- TOFLEX AREKVng(A)
- Cu/HEPR/OSCR/PVC/SWA/PVC, Al/HEPR/OSCR/PVC/SWA/PVC

Possible options:

| | |
|---------------|--------------------------------------------------------------|
| «ng(A)-HL» | |
| «ng(A)-LS» | (Cu/HEPR/OSCR/LSPVC/SWA/LSPVC, Al/HEPR/OSCR/LSPVC/SWA/LSPVC) |
| «ng(A)-LS-HL» | (materials as above) |

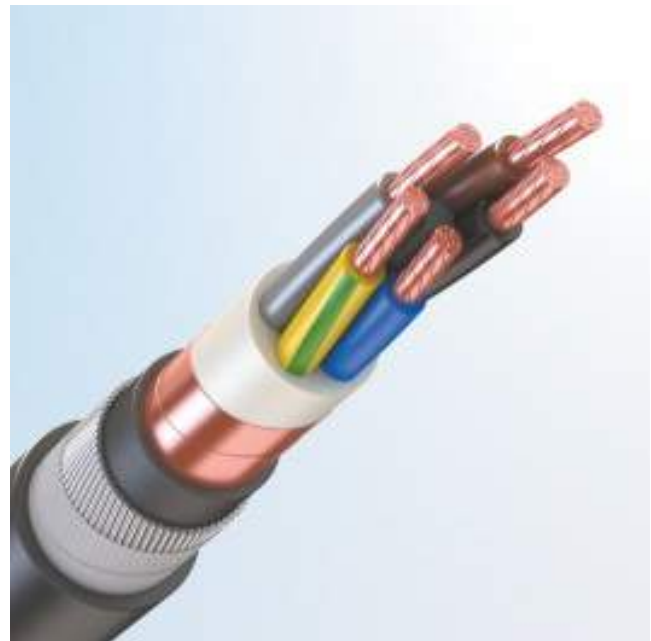

DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; copper flexible (version GREKV) of 5th class (according to IEC 60228).
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑤ **Separation layer** – corresponds to the type of the outer sheath.
- ⑥ **Armour** – steel galvanized wires.
- ⑦ **Outer sheath:**
 - «ng(A)» – made from PVC-compound with low fire hazard.
 - «ng(A)-HL» – made from cold-resistant PVC-compound with low fire hazard.
 - «ng(A)-LS» – made from PVC-compound with low fire hazard, low smoke and gas emission.
 - «ng(A)-LS-HL» – made from cold-resistant PVC-compound with low fire hazard, low smoke and gas emission.

► **Ordering example:**

«TOFLEX REKVng(A)-LS 3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX REKVng(A)-LS 3×95/50RM(N,G)-1 IEC 60502-1»

CABLE FEATURES




| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|---------------------|---------------------|------------------------|---------------------------------------|
| | | | | TOFLEX REKVng(A) | TOFLEX REKVng(A)-HL | TOFLEX REKVng(A)-LS | TOFLEX REKVng(A)-LS-HL | |
| 2x1,5 RE | 1 | 17.3 | 129.5 | 607 | 607 | 669 | 669 | 181.0 |
| 2x2,5 RE | 1 | 18.1 | 135.5 | 670 | 670 | 738 | 738 | 198.0 |
| 2x4 RE | 1 | 19.0 | 142.4 | 755 | 755 | 829 | 829 | 218.1 |
| 2x6 RE | 1 | 20.0 | 149.9 | 844 | 844 | 926 | 926 | 240.8 |
| 2x10 RE | 1 | 22.3 | 167.6 | 1153 | 1153 | 1250 | 1250 | 282.5 |
| 2x16 RE | 1 | 24.6 | 184.8 | 1424 | 1424 | 1543 | 1543 | 346.2 |
| 2x16 RM | 1 | 25.5 | 191.6 | 1498 | 1498 | 1625 | 1625 | 370.4 |
| 2x25 RE | 1 | 27.6 | 207.3 | 1815 | 1815 | 1962 | 1962 | 436.4 |
| 2x25 RM | 1 | 28.3 | 212.6 | 1871 | 1871 | 2025 | 2025 | 457.3 |
| 2x35 RM | 1 | 30.3 | 227.6 | 2198 | 2198 | 2373 | 2373 | 519.3 |
| 2x50 RM | 1 | 35.3 | 265.1 | 3119 | 3119 | 3353 | 3353 | 693.0 |
| 3x1,5 RE | 1 | 17.8 | 133.2 | 641 | 641 | 705 | 705 | 190.4 |
| 3x2,5 RE | 1 | 18.6 | 139.7 | 723 | 723 | 792 | 792 | 208.3 |
| 3x4 RE | 1 | 19.6 | 147.1 | 813 | 813 | 888 | 888 | 229.4 |
| 3x6 RE | 1 | 20.7 | 155.2 | 929 | 929 | 1011 | 1011 | 252.9 |
| 3x10 RE | 1 | 23.2 | 173.7 | 1288 | 1288 | 1384 | 1384 | 295.6 |
| 3x16 RE | 1 | 25.6 | 192.1 | 1613 | 1613 | 1730 | 1730 | 360.5 |
| 3x16 RM | 1 | 26.6 | 199.3 | 1688 | 1688 | 1813 | 1813 | 384.8 |
| 3x25 RE | 1 | 28.8 | 216.2 | 2083 | 2083 | 2227 | 2227 | 454.0 |
| 3x25 RM | 1 | 29.6 | 221.9 | 2160 | 2160 | 2310 | 2310 | 474.9 |
| 3x50 RM | 1 | 37.4 | 280.4 | 3700 | 3700 | 3932 | 3932 | 735.8 |
| 4x1,5 RE | 1 | 18.6 | 139.8 | 708 | 708 | 775 | 775 | 207.9 |
| 4x2,5 RE | 1 | 19.6 | 147.0 | 792 | 792 | 865 | 865 | 228.2 |
| 4x4 RE | 1 | 20.7 | 155.3 | 908 | 908 | 988 | 988 | 252.0 |
| 4x6 RE | 1 | 22.7 | 170.4 | 1200 | 1200 | 1289 | 1289 | 283.1 |
| 4x10 RE | 1 | 25.0 | 187.5 | 1491 | 1491 | 1599 | 1599 | 341.9 |
| 4x16 RE | 1 | 27.3 | 204.6 | 1854 | 1854 | 1979 | 1979 | 397.1 |
| 4x16 RM | 1 | 28.4 | 212.8 | 1934 | 1934 | 2067 | 2067 | 424.1 |
| 4x25 RE | 1 | 30.9 | 231.7 | 2434 | 2434 | 2586 | 2586 | 502.8 |
| 4x35 RM | 1 | 35.8 | 268.1 | 3338 | 3338 | 3538 | 3538 | 644.8 |
| 4x70 RM | 1 | 46.3 | 347.3 | 5889 | 5889 | 6211 | 6211 | 1039.2 |
| 5x1,5 RE | 1 | 19.6 | 147.1 | 774 | 774 | 846 | 846 | 227.7 |
| 5x2,5 RE | 1 | 20.7 | 155.2 | 881 | 881 | 959 | 959 | 250.8 |
| 5x4 RE | 1 | 22.7 | 170.5 | 1171 | 1171 | 1258 | 1258 | 282.5 |
| 5x6 RE | 1 | 24.5 | 183.6 | 1384 | 1384 | 1486 | 1486 | 328.4 |
| 5x10 RE | 1 | 26.6 | 199.4 | 1695 | 1695 | 1812 | 1812 | 377.9 |
| 5x16 RE | 1 | 29.2 | 218.7 | 2138 | 2138 | 2272 | 2272 | 440.2 |
| 5x16 RM | 1 | 30.4 | 227.8 | 2224 | 2224 | 2367 | 2367 | 470.6 |
| 5x25 RE | 1 | 34.8 | 261.0 | 3158 | 3158 | 3343 | 3343 | 611.0 |
| 5x25 RM | 1 | 35.8 | 268.1 | 3244 | 3244 | 3437 | 3437 | 638.1 |

POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

7. SHIELDED, ARMoured WITH FULL LAY-UP FROM STEEL GALVANIZED WIRES

IEC 60502-1

7.2 Cables sheathed with cross-linked highly elastic polymer compound

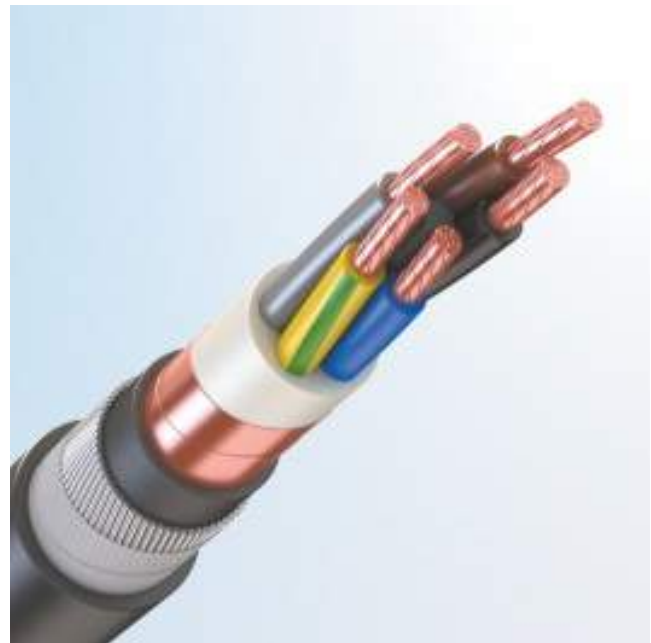

- TOFLEX REKRng(A)
- TOFLEX GREKRng(A)
- TOFLEX AREKRng(A)
- Cu/HEPR/OSCR/HFFR/SWA/XLFR, Al/HEPR/OSCR/HFFR/SWA/XLFR

Possible options:

| | |
|---------------|--------------------------------------------------------------|
| «ng(A)-HL» | |
| «ng(A)-HF» | (Cu/HEPR/OSCR/HFFR/SWA/XLHFFR, Al/HEPR/OSCR/HFFR/SWA/XLHFFR) |
| «ng(A)-HF-HL» | (materials as above) |



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; flexible copper (version GREKR) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑤ **Separation layer** – corresponds to the type of the outer sheath.
- ⑥ **Armour** – steel galvanized wires.
- ⑦ **Outer sheath:**
 - «ng(A)» – made from cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HL» – made from cold-resistant cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HF» – made from halogen-free cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HF-HL» – made from cold-resistant halogen-free cross-linked highly elastic polymer compound with low fire hazard.

► **Ordering example:**

«TOFLEX REKRng(A)-HL3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX REKRng(A)-HL3×95/50RM(N,G)-1 IEC 60502-1»



CABLE FEATURES




| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|---------------------|---------------------|------------------------|---------------------------------------|
| | | | | TOFLEX REKRng(A) | TOFLEX REKRng(A)-HL | TOFLEX REKRng(A)-HF | TOFLEX REKRng(A)-HF-HL | |
| 2x1,5 RE | 1 | 17.3 | 129.5 | 624 | 624 | 624 | 624 | 181.0 |
| 2x2,5 RE | 1 | 18.1 | 135.5 | 689 | 689 | 689 | 689 | 198.0 |
| 2x4 RE | 1 | 19.0 | 142.4 | 778 | 778 | 778 | 778 | 218.1 |
| 2x6 RE | 1 | 20.0 | 149.9 | 871 | 871 | 871 | 871 | 240.8 |
| 2x10 RE | 1 | 22.3 | 167.6 | 1187 | 1187 | 1187 | 1187 | 282.5 |
| 2x16 RE | 1 | 24.6 | 184.8 | 1466 | 1466 | 1466 | 1466 | 346.2 |
| 2x16 RM | 1 | 25.5 | 191.6 | 1545 | 1545 | 1545 | 1545 | 370.4 |
| 2x25 RE | 1 | 27.6 | 207.3 | 1873 | 1873 | 1873 | 1873 | 436.4 |
| 2x25 RM | 1 | 28.3 | 212.6 | 1934 | 1934 | 1934 | 1934 | 457.3 |
| 2x35 RM | 1 | 30.3 | 227.6 | 2273 | 2273 | 2273 | 2273 | 519.3 |
| 2x50 RM | 1 | 35.3 | 265.1 | 3216 | 3216 | 3216 | 3216 | 693.0 |
| 3x1,5 RE | 1 | 17.8 | 133.2 | 658 | 658 | 658 | 658 | 190.4 |
| 3x2,5 RE | 1 | 18.6 | 139.7 | 742 | 742 | 742 | 742 | 208.3 |
| 3x4 RE | 1 | 19.6 | 147.1 | 835 | 835 | 835 | 835 | 229.4 |
| 3x6 RE | 1 | 20.7 | 155.2 | 955 | 955 | 955 | 955 | 252.9 |
| 3x10 RE | 1 | 23.2 | 173.7 | 1320 | 1320 | 1320 | 1320 | 295.6 |
| 3x16 RE | 1 | 25.6 | 192.1 | 1652 | 1652 | 1652 | 1652 | 360.5 |
| 3x16 RM | 1 | 26.6 | 199.3 | 1731 | 1731 | 1731 | 1731 | 384.8 |
| 3x25 RE | 1 | 28.8 | 216.2 | 2135 | 2135 | 2135 | 2135 | 454.0 |
| 3x25 RM | 1 | 29.6 | 221.9 | 2216 | 2216 | 2216 | 2216 | 474.9 |
| 3x50 RM | 1 | 37.4 | 280.4 | 3788 | 3788 | 3788 | 3788 | 735.8 |
| 4x1,5 RE | 1 | 18.6 | 139.8 | 725 | 725 | 725 | 725 | 207.9 |
| 4x2,5 RE | 1 | 19.6 | 147.0 | 813 | 813 | 813 | 813 | 228.2 |
| 4x4 RE | 1 | 20.7 | 155.3 | 931 | 931 | 931 | 931 | 252.0 |
| 4x6 RE | 1 | 22.7 | 170.4 | 1226 | 1226 | 1226 | 1226 | 283.1 |
| 4x10 RE | 1 | 25.0 | 187.5 | 1524 | 1524 | 1524 | 1524 | 341.9 |
| 4x16 RE | 1 | 27.3 | 204.6 | 1894 | 1894 | 1894 | 1894 | 397.1 |
| 4x16 RM | 1 | 28.4 | 212.8 | 1979 | 1979 | 1979 | 1979 | 424.1 |
| 4x25 RE | 1 | 30.9 | 231.7 | 2488 | 2488 | 2488 | 2488 | 502.8 |
| 4x35 RM | 1 | 35.8 | 268.1 | 3404 | 3404 | 3404 | 3404 | 644.8 |
| 4x70 RM | 1 | 46.3 | 347.3 | 6005 | 6005 | 6005 | 6005 | 1039.2 |
| 5x1,5 RE | 1 | 19.6 | 147.1 | 793 | 793 | 793 | 793 | 227.7 |
| 5x2,5 RE | 1 | 20.7 | 155.2 | 903 | 903 | 903 | 903 | 250.8 |
| 5x4 RE | 1 | 22.7 | 170.5 | 1196 | 1196 | 1196 | 1196 | 282.5 |
| 5x6 RE | 1 | 24.5 | 183.6 | 1412 | 1412 | 1412 | 1412 | 328.4 |
| 5x10 RE | 1 | 26.6 | 199.4 | 1730 | 1730 | 1730 | 1730 | 377.9 |
| 5x16 RE | 1 | 29.2 | 218.7 | 2182 | 2182 | 2182 | 2182 | 440.2 |
| 5x16 RM | 1 | 30.4 | 227.8 | 2272 | 2272 | 2272 | 2272 | 470.6 |
| 5x25 RE | 1 | 34.8 | 261.0 | 3215 | 3215 | 3215 | 3215 | 611.0 |
| 5x25 RM | 1 | 35.8 | 268.1 | 3305 | 3305 | 3305 | 3305 | 638.1 |

POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLENE RUBBER (HEPR) INSULATION

7. SHIELDED, ARMoured WITH FULL LAY-UP FROM STEEL GALVANIZED WIRES

IEC 60502-1

7.3 Cables sheathed with halogen-free polymer compound

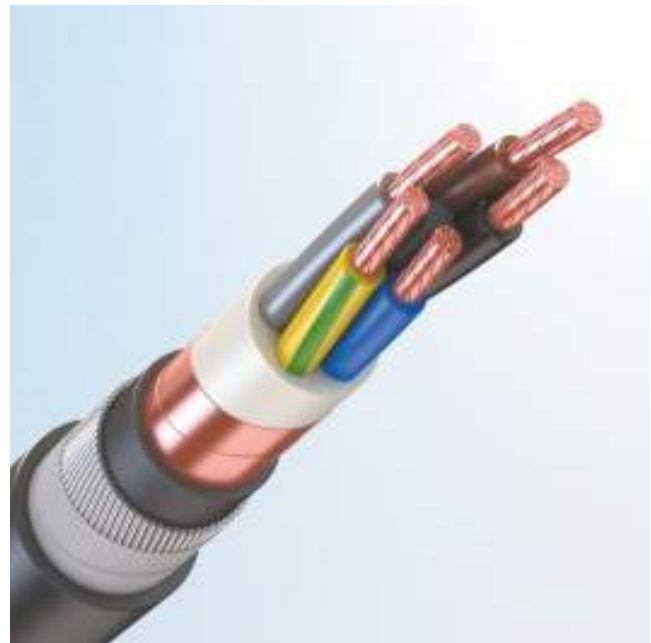

- TOFLEX REK_{Png}(A)-HF
- TOFLEX GREK_{Png}(A)-HF
- TOFLEX AREK_{Png}(A)-HF
- Cu/HEPR/OSCR/HFFR/SWA/HFFR, Al/HEPR/OSCR/HFFR/SWA/HFFR

Possible options:

«ng(A)-HF-HL»

DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; flexible copper (version GREKP) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑤ **Separation layer** – corresponds to the type of the outer sheath.
- ⑥ **Armour** – steel galvanized wires.
- ⑦ **Outer sheath:**
 - «ng(A)-HF» – made from halogen-free polymer compounds.
 - «ng(A)-HF-HL» – made from cold-resistant halogen-free polymer compounds.

► **Ordering example:**

«TOFLEX REK_{Png}(A)-HF-HL3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX REK_{Png}(A)-HF-HL3×95/50RM(N,G)-1 IEC 60502-1»

CABLE FEATURES




| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|------------------------|---------------------------------------|
| | | | | TOFLEX REKПng(A)-HF | TOFLEX REKПng(A)-HF-HL | |
| 2x1,5 RE | 1 | 17.3 | 129.5 | 638 | 638 | 181.0 |
| 2x2,5 RE | 1 | 18.1 | 135.5 | 705 | 705 | 198.0 |
| 2x4 RE | 1 | 19.0 | 142.4 | 794 | 794 | 218.1 |
| 2x6 RE | 1 | 20.0 | 149.9 | 888 | 888 | 240.8 |
| 2x10 RE | 1 | 22.3 | 167.6 | 1206 | 1206 | 282.5 |
| 2x16 RE | 1 | 24.6 | 184.8 | 1490 | 1490 | 346.2 |
| 2x16 RM | 1 | 25.5 | 191.6 | 1569 | 1569 | 370.4 |
| 2x25 RE | 1 | 27.6 | 207.3 | 1900 | 1900 | 436.4 |
| 2x25 RM | 1 | 28.3 | 212.6 | 1961 | 1961 | 457.3 |
| 2x35 RM | 1 | 30.3 | 227.6 | 2303 | 2303 | 519.3 |
| 2x50 RM | 1 | 35.3 | 265.1 | 3257 | 3257 | 693.0 |
| 3x1,5 RE | 1 | 17.8 | 133.2 | 673 | 673 | 190.4 |
| 3x2,5 RE | 1 | 18.6 | 139.7 | 758 | 758 | 208.3 |
| 3x4 RE | 1 | 19.6 | 147.1 | 852 | 852 | 229.4 |
| 3x6 RE | 1 | 20.7 | 155.2 | 973 | 973 | 252.9 |
| 3x10 RE | 1 | 23.2 | 173.7 | 1340 | 1340 | 295.6 |
| 3x16 RE | 1 | 25.6 | 192.1 | 1676 | 1676 | 360.5 |
| 3x16 RM | 1 | 26.6 | 199.3 | 1756 | 1756 | 384.8 |
| 3x25 RE | 1 | 28.8 | 216.2 | 2163 | 2163 | 454.0 |
| 3x25 RM | 1 | 29.6 | 221.9 | 2245 | 2245 | 474.9 |
| 3x50 RM | 1 | 37.4 | 280.4 | 3832 | 3832 | 735.8 |
| 4x1,5 RE | 1 | 18.6 | 139.8 | 741 | 741 | 207.9 |
| 4x2,5 RE | 1 | 19.6 | 147.0 | 829 | 829 | 228.2 |
| 4x4 RE | 1 | 20.7 | 155.3 | 949 | 949 | 252.0 |
| 4x6 RE | 1 | 22.7 | 170.4 | 1246 | 1246 | 283.1 |
| 4x10 RE | 1 | 25.0 | 187.5 | 1548 | 1548 | 341.9 |
| 4x16 RE | 1 | 27.3 | 204.6 | 1921 | 1921 | 397.1 |
| 4x16 RM | 1 | 28.4 | 212.8 | 2006 | 2006 | 424.1 |
| 4x25 RE | 1 | 30.9 | 231.7 | 2519 | 2519 | 502.8 |
| 4x35 RM | 1 | 35.8 | 268.1 | 3446 | 3446 | 644.8 |
| 4x70 RM | 1 | 46.3 | 347.3 | 6069 | 6069 | 1039 |
| 5x1,5 RE | 1 | 19.6 | 147.1 | 810 | 810 | 227.7 |
| 5x2,5 RE | 1 | 20.7 | 155.2 | 921 | 921 | 250.8 |
| 5x4 RE | 1 | 22.7 | 170.5 | 1216 | 1216 | 282.5 |
| 5x6 RE | 1 | 24.5 | 183.6 | 1436 | 1436 | 328.4 |
| 5x10 RE | 1 | 26.6 | 199.4 | 1756 | 1756 | 377.9 |
| 5x16 RE | 1 | 29.2 | 218.7 | 2210 | 2210 | 440.2 |
| 5x16 RM | 1 | 30.4 | 227.8 | 2302 | 2302 | 470.6 |
| 5x25 RE | 1 | 34.8 | 261.0 | 3255 | 3255 | 611.0 |
| 5x25 RM | 1 | 35.8 | 268.1 | 3346 | 3346 | 638.1 |

POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

7. SHIELDED, ARMoured WITH FULL LAY-UP FROM STEEL GALVANIZED WIRES

IEC 60502-1

7.4 Cables sheathed with thermoplastic polyurethane elastomer

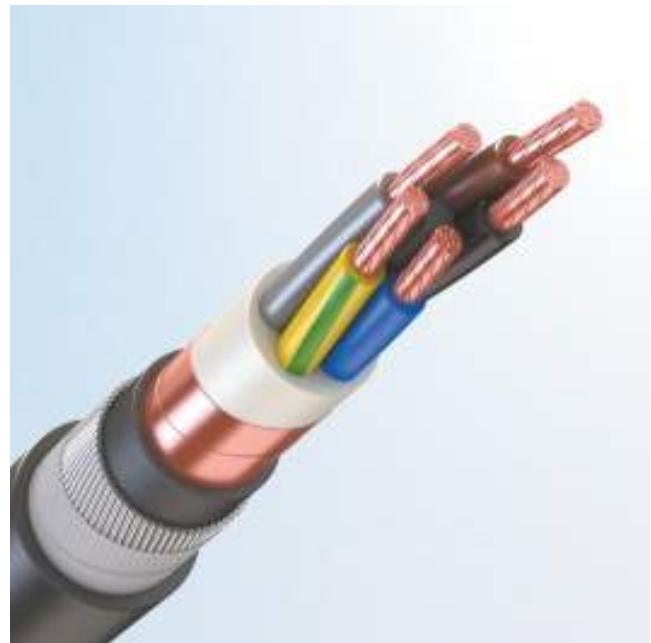

- TOFLEX REKTng(A)
- TOFLEX GREKTng(A)
- TOFLEX AREKTng(A)
- Cu/HEPR/OSCR/ TPE /SWA/ TPU, Al/HEPR/OSCR/ TPE /SWA/ TPU



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; flexible copper (version GREKT) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑤ **Separation layer** – corresponds to the type of the outer sheath.
- ⑥ **Armour** – steel galvanized wires.
- ⑦ **Outer sheath:**
 - «ng(A)» – made from thermoplastic polyurethane elastomer.

► **Ordering example:**

«TOFLEX REKTng(A)3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX REKTng(A)3×95/50RM(N,G)-1 IEC 60502-1»



CABLE FEATURES




| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|--------|---------------------------------------|
| | | | | TOFLEX REKTng(A) | | |
| 2x1,5 RE | 1 | 17.3 | 129.5 | 607 | 181.0 | |
| 2x2,5 RE | 1 | 18.1 | 135.5 | 670 | 198.0 | |
| 2x4 RE | 1 | 19.0 | 142.4 | 755 | 218.1 | |
| 2x6 RE | 1 | 20.0 | 149.9 | 844 | 240.8 | |
| 2x10 RE | 1 | 22.3 | 167.6 | 1153 | 282.5 | |
| 2x16 RE | 1 | 24.6 | 184.8 | 1424 | 346.2 | |
| 2x16 RM | 1 | 25.5 | 191.6 | 1498 | 370.4 | |
| 2x25 RE | 1 | 27.6 | 207.3 | 1815 | 436.4 | |
| 2x25 RM | 1 | 28.3 | 212.6 | 1871 | 457.3 | |
| 2x35 RM | 1 | 30.3 | 227.6 | 2198 | 519.3 | |
| 2x50 RM | 1 | 35.3 | 265.1 | 3119 | 693.0 | |
| 3x1,5 RE | 1 | 17.8 | 133.2 | 641 | 190.4 | |
| 3x2,5 RE | 1 | 18.6 | 139.7 | 723 | 208.3 | |
| 3x4 RE | 1 | 19.6 | 147.1 | 813 | 229.4 | |
| 3x6 RE | 1 | 20.7 | 155.2 | 929 | 252.9 | |
| 3x10 RE | 1 | 23.2 | 173.7 | 1288 | 295.6 | |
| 3x16 RE | 1 | 25.6 | 192.1 | 1613 | 360.5 | |
| 3x16 RM | 1 | 26.6 | 199.3 | 1688 | 384.8 | |
| 3x25 RE | 1 | 28.8 | 216.2 | 2083 | 454.0 | |
| 3x25 RM | 1 | 29.6 | 221.9 | 2160 | 474.9 | |
| 3x50 RM | 1 | 37.4 | 280.4 | 3700 | 735.8 | |
| 4x1,5 RE | 1 | 18.6 | 139.8 | 708 | 207.9 | |
| 4x2,5 RE | 1 | 19.6 | 147.0 | 792 | 228.2 | |
| 4x4 RE | 1 | 20.7 | 155.3 | 908 | 252.0 | |
| 4x6 RE | 1 | 22.7 | 170.4 | 1200 | 283.1 | |
| 4x10 RE | 1 | 25.0 | 187.5 | 1491 | 341.9 | |
| 4x16 RE | 1 | 27.3 | 204.6 | 1854 | 397.1 | |
| 4x16 RM | 1 | 28.4 | 212.8 | 1934 | 424.1 | |
| 4x25 RE | 1 | 30.9 | 231.7 | 2434 | 502.8 | |
| 4x35 RM | 1 | 35.8 | 268.1 | 3338 | 644.8 | |
| 4x70 RM | 1 | 46.3 | 347.3 | 5889 | 1039.2 | |
| 5x1,5 RE | 1 | 19.6 | 147.1 | 774 | 227.7 | |
| 5x2,5 RE | 1 | 20.7 | 155.2 | 881 | 250.8 | |
| 5x4 RE | 1 | 22.7 | 170.5 | 1171 | 282.5 | |
| 5x6 RE | 1 | 24.5 | 183.6 | 1384 | 328.4 | |
| 5x10 RE | 1 | 26.6 | 199.4 | 1695 | 377.9 | |
| 5x16 RE | 1 | 29.2 | 218.7 | 2138 | 440.2 | |
| 5x16 RM | 1 | 30.4 | 227.8 | 2224 | 470.6 | |
| 5x25 RE | 1 | 34.8 | 261.0 | 3158 | 611.0 | |
| 5x25 RM | 1 | 35.8 | 268.1 | 3244 | 638.1 | |

POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

8. SHIELDED, ARMoured WITH BRAIDING FROM STEEL GALVANIZED WIRES

IEC 60502-1

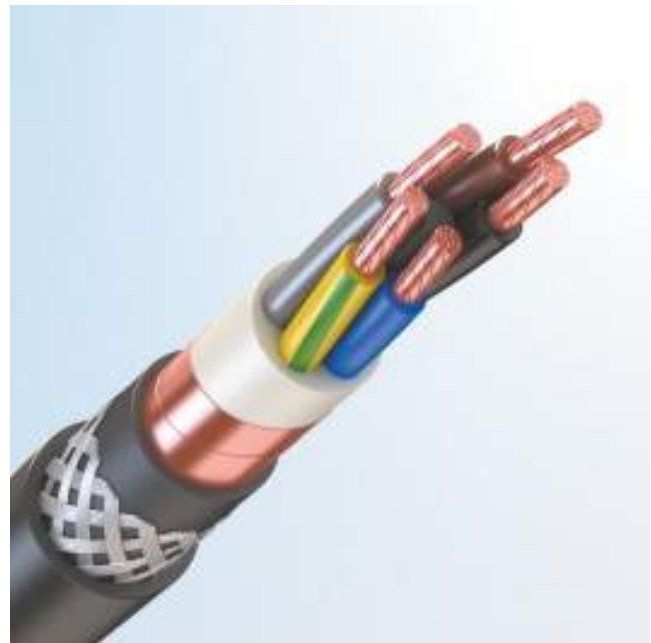

8.1 Cables with PVC sheath

- TOFLEX REPVng(A)
- TOFLEX GREPVng(A)
- TOFLEX AREPVng(A)
- Cu/HEPR/OSCR/PVC/SWB/PVC, Al/HEPR/OSCR/PVC/SWB/PVC

Possible options:

| | |
|---------------|--------------------------------------------------------------|
| «ng(A)-HL» | |
| «ng(A)-LS» | (Cu/HEPR/OSCR/LSPVC/SWB/LSPVC, Al/HEPR/OSCR/LSPVC/SWB/LSPVC) |
| «ng(A)-LS-HL» | (materials as above) |



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; copper flexible (version GREPV) of 5th class (according to IEC 60228).
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑤ **Separation layer** – corresponds to the type of the outer sheath.
- ⑥ **Armour** – with full lay-up from galvanized steel wires.
- ⑦ **Outer sheath:**
 - «ng(A)» – made from PVC-compound with low fire hazard.
 - «ng(A)-HL» – made from cold-resistant PVC-compound with low fire hazard.
 - «ng(A)-LS» – made from PVC-compound with low fire hazard, low smoke and gas emission.
 - «ng(A)-LS-HL» – made from cold-resistant PVC-compound with low fire hazard, low smoke and gas emission.

► **Ordering example:**

«TOFLEX REPVng(A)-LS 3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX REPVng(A)-LS 3×95/95RM(N,G)-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|---------------------|---------------------|------------------------|---------------------------------------|
| | | | | TOFLEX REPVng(A) | TOFLEX REPVng(A)-HL | TOFLEX REPVng(A)-LS | TOFLEX REPVng(A)-LS-HL | |
| 2x1,5 RE | 1 | 15.7 | 117.8 | 382 | 382 | 434 | 434 | 171.8 |
| 2x2,5 RE | 1 | 16.5 | 123.8 | 431 | 431 | 489 | 489 | 188.8 |
| 2x4 RE | 1 | 17.4 | 130.7 | 495 | 495 | 559 | 559 | 208.9 |
| 2x6 RE | 1 | 18.4 | 138.2 | 572 | 572 | 643 | 643 | 231.6 |
| 2x10 RE | 1 | 20.0 | 149.9 | 709 | 709 | 791 | 791 | 268.6 |
| 2x16 RE | 1 | 21.9 | 164.1 | 902 | 902 | 1000 | 1000 | 316.4 |
| 2x16 RM | 1 | 22.8 | 170.9 | 948 | 948 | 1054 | 1054 | 340.0 |
| 2x25 RE | 1 | 25.3 | 189.6 | 1235 | 1235 | 1364 | 1364 | 421.0 |
| 2x25 RM | 1 | 26.0 | 194.9 | 1280 | 1280 | 1416 | 1416 | 441.9 |
| 2x35 RM | 1 | 28.0 | 209.9 | 1554 | 1554 | 1710 | 1710 | 503.9 |
| 2x50 RM | 1 | 31.4 | 235.4 | 2061 | 2061 | 2254 | 2254 | 626.7 |
| 2x70 RM | 1 | 36.2 | 271.4 | 2706 | 2706 | 2967 | 2967 | 834.1 |
| 2x95 RM | 1 | 40.4 | 302.9 | 3463 | 3463 | 3784 | 3784 | 1024.8 |
| 2x120 RM | 1 | 43.2 | 323.9 | 4129 | 4129 | 4492 | 4492 | 1152.1 |
| 2x150 RM | 1 | 48.4 | 362.9 | 5117 | 5117 | 5579 | 5579 | 1465.4 |
| 2x185 RM | 1 | 52.4 | 392.9 | 6136 | 6136 | 6671 | 6671 | 1702.4 |
| 3x1,5 RE | 1 | 16.2 | 121.5 | 411 | 411 | 463 | 463 | 181.2 |
| 3x2,5 RE | 1 | 17.1 | 128.0 | 470 | 470 | 528 | 528 | 199.1 |
| 3x4 RE | 1 | 18.1 | 135.4 | 548 | 548 | 612 | 612 | 220.2 |
| 3x6 RE | 1 | 19.1 | 143.5 | 644 | 644 | 715 | 715 | 243.7 |
| 3x10 RE | 1 | 20.8 | 156.0 | 816 | 816 | 898 | 898 | 281.7 |
| 3x16 RE | 1 | 22.8 | 171.4 | 1064 | 1064 | 1160 | 1160 | 330.1 |
| 3x16 RM | 1 | 24.2 | 181.6 | 1135 | 1135 | 1242 | 1242 | 369.4 |
| 3x25 RE | 1 | 26.5 | 198.5 | 1478 | 1478 | 1604 | 1604 | 438.6 |
| 3x25 RM | 1 | 27.2 | 204.2 | 1527 | 1527 | 1659 | 1659 | 459.5 |
| 3x35 RM | 1 | 29.4 | 220.3 | 1882 | 1882 | 2032 | 2032 | 520.7 |
| 3x50 RM | 1 | 33.4 | 250.7 | 2574 | 2574 | 2765 | 2765 | 666.8 |
| 3x70 RM | 1 | 38.1 | 285.5 | 3338 | 3338 | 3586 | 3586 | 854.6 |
| 3x95 RM | 1 | 42.6 | 319.4 | 4314 | 4314 | 4616 | 4616 | 1045.9 |
| 3x120 RM | 1 | 46.8 | 351.0 | 5335 | 5335 | 5702 | 5702 | 1257.7 |
| 3x150 RM | 1 | 51.1 | 383.0 | 6437 | 6437 | 6870 | 6870 | 1488.2 |
| 4x1,5 RE | 1 | 17.1 | 128.1 | 455 | 455 | 511 | 511 | 198.7 |
| 4x2,5 RE | 1 | 18.0 | 135.3 | 527 | 527 | 589 | 589 | 219.0 |
| 4x4 RE | 1 | 19.2 | 143.6 | 623 | 623 | 691 | 691 | 242.8 |
| 4x6 RE | 1 | 20.4 | 152.7 | 741 | 741 | 816 | 816 | 269.3 |
| 4x10 RE | 1 | 22.2 | 166.8 | 955 | 955 | 1042 | 1042 | 311.8 |
| 4x16 RE | 1 | 24.9 | 186.9 | 1289 | 1289 | 1396 | 1396 | 381.7 |
| 4x16 RM | 1 | 26.0 | 195.1 | 1343 | 1343 | 1458 | 1458 | 408.7 |
| 4x25 RE | 1 | 28.5 | 214.0 | 1777 | 1777 | 1910 | 1910 | 487.4 |
| 4x25 RM | 1 | 29.4 | 220.4 | 1833 | 1833 | 1973 | 1973 | 510.5 |
| 4x35 RM | 1 | 31.8 | 238.4 | 2281 | 2281 | 2440 | 2440 | 578.0 |
| 4x50 RM | 1 | 37.5 | 281.2 | 3259 | 3259 | 3483 | 3483 | 812.9 |
| 4x70 RM | 1 | 41.3 | 310.1 | 4089 | 4089 | 4352 | 4352 | 946.6 |
| 4x95 RM | 1 | 48.0 | 360.1 | 5509 | 5509 | 5866 | 5866 | 1281.6 |
| 4x120 RM | 1 | 51.4 | 385.4 | 6649 | 6649 | 7048 | 7048 | 1423.2 |
| 5x1,5 RE | 1 | 18.1 | 135.4 | 509 | 509 | 570 | 570 | 218.5 |
| 5x2,5 RE | 1 | 19.1 | 143.5 | 595 | 595 | 662 | 662 | 241.6 |
| 5x4 RE | 1 | 20.4 | 152.8 | 712 | 712 | 786 | 786 | 268.7 |
| 5x6 RE | 1 | 21.7 | 162.9 | 861 | 861 | 942 | 942 | 298.7 |

| | | | | | | | | |
|---------|---|------|-------|------|------|------|------|--------|
| 5x10 RE | 1 | 24.2 | 181.7 | 1142 | 1142 | 1241 | 1241 | 362.5 |
| 5x16 RE | 1 | 26.8 | 201.0 | 1519 | 1519 | 1635 | 1635 | 424.8 |
| 5x16 RM | 1 | 28.0 | 210.1 | 1580 | 1580 | 1705 | 1705 | 455.2 |
| 5x25 RE | 1 | 30.8 | 231.3 | 2123 | 2123 | 2267 | 2267 | 545.4 |
| 5x25 RM | 1 | 31.8 | 238.4 | 2188 | 2188 | 2339 | 2339 | 571.3 |
| 5x35 RM | 1 | 36.1 | 270.7 | 2888 | 2888 | 3090 | 3090 | 737.7 |
| 5x50 RM | 1 | 40.7 | 305.1 | 3930 | 3930 | 4174 | 4174 | 909.9 |
| 5x70 RM | 1 | 46.2 | 346.5 | 5138 | 5138 | 5451 | 5451 | 1148.3 |
| 5x95 RM | 1 | 52.3 | 392.0 | 6702 | 6702 | 7090 | 7090 | 1434.3 |


POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

8. SHIELDED, ARMoured WITH BRAIDING FROM STEEL GALVANIZED WIRES

IEC 60502-1

8.2 Cables sheathed with cross-linked highly elastic polymer compound

- TOFLEX REPRng(A)
- TOFLEX GREPRng(A)
- TOFLEX AREPRng(A)
- Cu/HEPR/OSCR/HFFR/SWB/XLFR, Al/ HEPR/OSCR/HFFR/SWB/XLFR

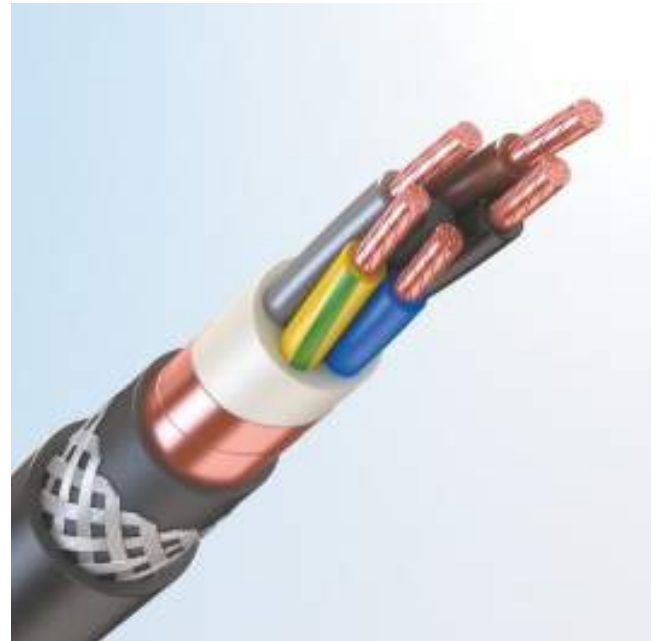

Possible options:

| | |
|---------------|--------------------------------------------------------------|
| «ng(A)-HL» | |
| «ng(A)-HF» | (Cu/HEPR/OSCR/HFFR/SWB/XLHFFR, Al/HEPR/OSCR/HFFR/SWB/XLHFFR) |
| «ng(A)-HF-HL» | (materials as above) |



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; copper flexible (version GREPR) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑤ **Separation layer** – corresponds to the type of the outer sheath.
- ⑥ **Armour** – with full lay-up from galvanized steel wires.
- ⑦ **Outer sheath:**
 - «ng(A)» – made from cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HL» – made from cold-resistant cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HF» – made from halogen-free cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-HF-HL» – made from cold-resistant halogen-free cross-linked highly elastic polymer compound with low fire hazard.

► **Ordering example:**

«TOFLEX REPRng(A)-HF3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX REPRng(A)-HF3×95/50RM(N,G)-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|---------------------|---------------------|------------------------|---------------------------------------|
| | | | | TOFLEX REPRng(A) | TOFLEX REPRng(A)-HL | TOFLEX REPRng(A)-HF | TOFLEX REPRng(A)-HF-HL | |
| 2x1,5 RE | 1 | 15.7 | 117.8 | 393 | 393 | 393 | 393 | 171.8 |
| 2x2,5 RE | 1 | 16.5 | 123.8 | 445 | 445 | 445 | 445 | 188.8 |
| 2x4 RE | 1 | 17.4 | 130.7 | 512 | 512 | 512 | 512 | 208.9 |
| 2x6 RE | 1 | 18.4 | 138.2 | 592 | 592 | 592 | 592 | 231.6 |
| 2x10 RE | 1 | 20.0 | 149.9 | 735 | 735 | 735 | 735 | 268.6 |
| 2x16 RE | 1 | 21.9 | 164.1 | 937 | 937 | 937 | 937 | 316.4 |
| 2x16 RM | 1 | 22.8 | 170.9 | 987 | 987 | 987 | 987 | 340.0 |
| 2x25 RE | 1 | 25.3 | 189.6 | 1283 | 1283 | 1283 | 1283 | 421.0 |
| 2x25 RM | 1 | 26.0 | 194.9 | 1331 | 1331 | 1331 | 1331 | 441.9 |
| 2x35 RM | 1 | 28.0 | 209.9 | 1617 | 1617 | 1617 | 1617 | 503.9 |
| 2x50 RM | 1 | 31.4 | 235.4 | 2146 | 2146 | 2146 | 2146 | 626.7 |
| 2x70 RM | 1 | 36.2 | 271.4 | 2820 | 2820 | 2820 | 2820 | 834.1 |
| 2x95 RM | 1 | 40.4 | 302.9 | 3614 | 3614 | 3614 | 3614 | 1024.8 |
| 2x120 RM | 1 | 43.2 | 323.9 | 4307 | 4307 | 4307 | 4307 | 1152.1 |
| 2x150 RM | 1 | 48.4 | 362.9 | 5339 | 5339 | 5339 | 5339 | 1465.4 |
| 2x185 RM | 1 | 52.4 | 392.9 | 6405 | 6405 | 6405 | 6405 | 1702.4 |
| 3x1,5 RE | 1 | 16.2 | 121.5 | 421 | 421 | 421 | 421 | 181.2 |
| 3x2,5 RE | 1 | 17.1 | 128.0 | 483 | 483 | 483 | 483 | 199.1 |
| 3x4 RE | 1 | 18.1 | 135.4 | 564 | 564 | 564 | 564 | 220.2 |
| 3x6 RE | 1 | 19.1 | 143.5 | 662 | 662 | 662 | 662 | 243.7 |
| 3x10 RE | 1 | 20.8 | 156.0 | 840 | 840 | 840 | 840 | 281.7 |
| 3x16 RE | 1 | 22.8 | 171.4 | 1095 | 1095 | 1095 | 1095 | 330.1 |
| 3x16 RM | 1 | 24.2 | 181.6 | 1167 | 1167 | 1167 | 1167 | 369.4 |
| 3x25 RE | 1 | 26.5 | 198.5 | 1519 | 1519 | 1519 | 1519 | 438.6 |
| 3x25 RM | 1 | 27.2 | 204.2 | 1571 | 1571 | 1571 | 1571 | 459.5 |
| 3x35 RM | 1 | 29.4 | 220.3 | 1936 | 1936 | 1936 | 1936 | 520.7 |
| 3x50 RM | 1 | 33.4 | 250.7 | 2652 | 2652 | 2652 | 2652 | 666.8 |
| 3x70 RM | 1 | 38.1 | 285.5 | 3434 | 3434 | 3434 | 3434 | 854.6 |
| 3x95 RM | 1 | 42.6 | 319.4 | 4441 | 4441 | 4441 | 4441 | 1045.9 |
| 4x1,5 RE | 1 | 17.1 | 128.1 | 466 | 466 | 466 | 466 | 198.7 |
| 4x2,5 RE | 1 | 18.0 | 135.3 | 541 | 541 | 541 | 541 | 219.0 |
| 4x4 RE | 1 | 19.2 | 143.6 | 639 | 639 | 639 | 639 | 242.8 |
| 4x6 RE | 1 | 20.4 | 152.7 | 760 | 760 | 760 | 760 | 269.3 |
| 4x10 RE | 1 | 22.2 | 166.8 | 980 | 980 | 980 | 980 | 311.8 |
| 4x16 RE | 1 | 24.9 | 186.9 | 1318 | 1318 | 1318 | 1318 | 381.7 |
| 4x16 RM | 1 | 26.0 | 195.1 | 1376 | 1376 | 1376 | 1376 | 408.7 |
| 4x25 RE | 1 | 28.5 | 214.0 | 1819 | 1819 | 1819 | 1819 | 487.4 |
| 4x25 RM | 1 | 29.4 | 220.4 | 1879 | 1879 | 1879 | 1879 | 510.5 |
| 4x35 RM | 1 | 31.8 | 238.4 | 2337 | 2337 | 2337 | 2337 | 578.0 |
| 4x50 RM | 1 | 37.5 | 281.2 | 3337 | 3337 | 3337 | 3337 | 812.9 |
| 4x70 RM | 1 | 41.3 | 310.1 | 4188 | 4188 | 4188 | 4188 | 946.6 |
| 4x95 RM | 1 | 48.0 | 360.1 | 5643 | 5643 | 5643 | 5643 | 1281.6 |
| 4x120 RM | 1 | 51.4 | 385.4 | 6806 | 6806 | 6806 | 6806 | 1423.2 |
| 5x1,5 RE | 1 | 18.1 | 135.4 | 522 | 522 | 522 | 522 | 218.5 |
| 5x2,5 RE | 1 | 19.1 | 143.5 | 610 | 610 | 610 | 610 | 241.6 |
| 5x4 RE | 1 | 20.4 | 152.8 | 730 | 730 | 730 | 730 | 268.7 |
| 5x6 RE | 1 | 21.7 | 162.9 | 882 | 882 | 882 | 882 | 298.7 |
| 5x10 RE | 1 | 24.2 | 181.7 | 1166 | 1166 | 1166 | 1166 | 362.5 |
| 5x16 RE | 1 | 26.8 | 201.0 | 1551 | 1551 | 1551 | 1551 | 424.8 |


| | | | | | | | | |
|---------|---|------|-------|------|------|------|------|--------|
| 5x16 RM | 1 | 28.0 | 210.1 | 1616 | 1616 | 1616 | 1616 | 455.2 |
| 5x25 RE | 1 | 30.8 | 231.3 | 2168 | 2168 | 2168 | 2168 | 545.4 |
| 5x25 RM | 1 | 31.8 | 238.4 | 2237 | 2237 | 2237 | 2237 | 571.3 |
| 5x35 RM | 1 | 36.1 | 270.7 | 2951 | 2951 | 2951 | 2951 | 737.7 |
| 5x50 RM | 1 | 40.7 | 305.1 | 4014 | 4014 | 4014 | 4014 | 909.9 |
| 5x70 RM | 1 | 46.2 | 346.5 | 5241 | 5241 | 5241 | 5241 | 1148.3 |
| 5x95 RM | 1 | 52.3 | 392.0 | 6847 | 6847 | 6847 | 6847 | 1434.3 |

POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLENE RUBBER (HEPR) INSULATION

8. SHIELDED, ARMoured WITH BRAIDING FROM STEEL GALVANIZED WIRES

IEC 60502-1

8.3 Cables sheathed with halogen-free polymer compound

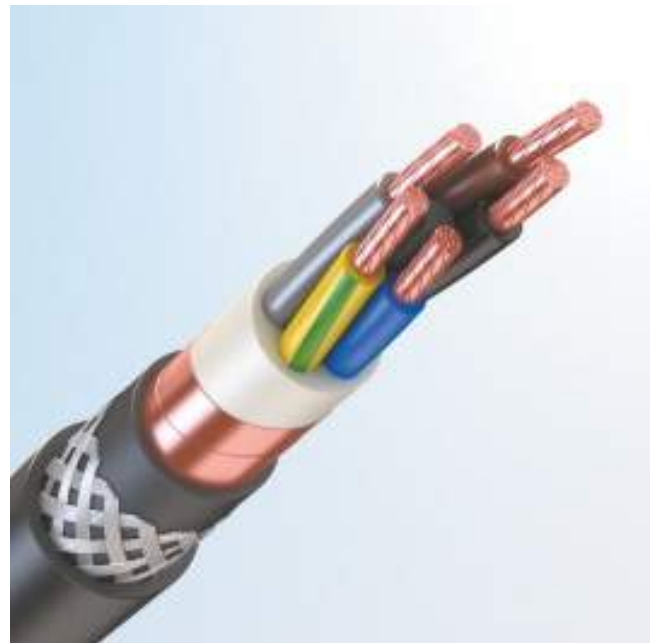

- TOFLEX REPPng(A)-HF
- TOFLEX GREPPng(A)-HF
- TOFLEX AREPPng(A)-HF
- Cu/HEPR/OSCR/HFFR/SWB/HFFR, Al/HEPR/OSCR/HFFR/SWB/HFFR

Possible options:

«ng(A)-HF-HL»

DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; flexible copper (version GREPP) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑤ **Separation layer** – corresponds to the type of the outer sheath.
- ⑥ **Armour** – with full lay-up from galvanized steel wires.
- ⑦ **Outer sheath:**
 - «ng(A)-HF» – made from halogen-free polymer compounds.
 - «ng(A)-HF-HL» – made from cold-resistant halogen-free polymer compounds.

► Ordering example:

«TOFLEX REPPng(A)-HF-HL3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX REPPng(A)-HF-HL3×95/50RM(N,G)-1 IEC 60502-1»

CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|------------------------|---------------------------------------|
| | | | | TOFLEX REPPng(A)-HF | TOFLEX REPPng(A)-HF-HL | |
| 2x1,5 RE | 1 | 15.7 | 117.8 | 406 | 406 | 171.8 |
| 2x2,5 RE | 1 | 16.5 | 123.8 | 459 | 459 | 188.8 |
| 2x4 RE | 1 | 17.4 | 130.7 | 526 | 526 | 208.9 |
| 2x6 RE | 1 | 18.4 | 138.2 | 608 | 608 | 231.6 |
| 2x10 RE | 1 | 20.0 | 149.9 | 752 | 752 | 268.6 |
| 2x16 RE | 1 | 21.9 | 164.1 | 956 | 956 | 316.4 |
| 2x16 RM | 1 | 22.8 | 170.9 | 1007 | 1007 | 340.0 |
| 2x25 RE | 1 | 25.3 | 189.6 | 1307 | 1307 | 421.0 |
| 2x25 RM | 1 | 26.0 | 194.9 | 1357 | 1357 | 441.9 |
| 2x35 RM | 1 | 28.0 | 209.9 | 1644 | 1644 | 503.9 |
| 2x50 RM | 1 | 31.4 | 235.4 | 2177 | 2177 | 626.7 |
| 2x70 RM | 1 | 36.2 | 271.4 | 2862 | 2862 | 834.1 |
| 2x95 RM | 1 | 40.4 | 302.9 | 3661 | 3661 | 1024.8 |
| 2x120 RM | 1 | 43.2 | 323.9 | 4358 | 4358 | 1152.1 |
| 2x150 RM | 1 | 48.4 | 362.9 | 5405 | 5405 | 1465.4 |
| 2x185 RM | 1 | 52.4 | 392.9 | 6478 | 6478 | 1702.4 |
| 3x1,5 RE | 1 | 16.2 | 121.5 | 434 | 434 | 181.2 |
| 3x2,5 RE | 1 | 17.1 | 128.0 | 497 | 497 | 199.1 |
| 3x4 RE | 1 | 18.1 | 135.4 | 579 | 579 | 220.2 |
| 3x6 RE | 1 | 19.1 | 143.5 | 679 | 679 | 243.7 |
| 3x10 RE | 1 | 20.8 | 156.0 | 858 | 858 | 281.7 |
| 3x16 RE | 1 | 22.8 | 171.4 | 1115 | 1115 | 330.1 |
| 3x16 RM | 1 | 24.2 | 181.6 | 1190 | 1190 | 369.4 |
| 3x25 RE | 1 | 26.5 | 198.5 | 1545 | 1545 | 438.6 |
| 3x25 RM | 1 | 27.2 | 204.2 | 1598 | 1598 | 459.5 |
| 3x35 RM | 1 | 29.4 | 220.3 | 1965 | 1965 | 520.7 |
| 3x50 RM | 1 | 33.4 | 250.7 | 2685 | 2685 | 666.8 |
| 3x70 RM | 1 | 38.1 | 285.5 | 3479 | 3479 | 854.6 |
| 3x95 RM | 1 | 42.6 | 319.4 | 4492 | 4492 | 1045.9 |
| 3x120 RM | 1 | 46.8 | 351.0 | 5546 | 5546 | 1257.7 |
| 3x150 RM | 1 | 51.1 | 383.0 | 6695 | 6695 | 1488.2 |
| 4x1,5 RE | 1 | 17.1 | 128.1 | 480 | 480 | 198.7 |
| 4x2,5 RE | 1 | 18.0 | 135.3 | 556 | 556 | 219.0 |
| 4x4 RE | 1 | 19.2 | 143.6 | 655 | 655 | 242.8 |
| 4x6 RE | 1 | 20.4 | 152.7 | 778 | 778 | 269.3 |
| 4x10 RE | 1 | 22.2 | 166.8 | 999 | 999 | 311.8 |
| 4x16 RE | 1 | 24.9 | 186.9 | 1342 | 1342 | 381.7 |
| 4x16 RM | 1 | 26.0 | 195.1 | 1401 | 1401 | 408.7 |
| 4x25 RE | 1 | 28.5 | 214.0 | 1847 | 1847 | 487.4 |
| 4x25 RM | 1 | 29.4 | 220.4 | 1907 | 1907 | 510.5 |
| 4x35 RM | 1 | 31.8 | 238.4 | 2368 | 2368 | 578.0 |
| 4x50 RM | 1 | 37.5 | 281.2 | 3381 | 3381 | 812.9 |
| 4x70 RM | 1 | 41.3 | 310.1 | 4237 | 4237 | 946.6 |
| 4x95 RM | 1 | 48.0 | 360.1 | 5709 | 5709 | 1281.6 |
| 4x120 RM | 1 | 51.4 | 385.4 | 6877 | 6877 | 1423.2 |
| 5x1,5 RE | 1 | 18.1 | 135.4 | 537 | 537 | 218.5 |
| 5x2,5 RE | 1 | 19.1 | 143.5 | 627 | 627 | 241.6 |
| 5x4 RE | 1 | 20.4 | 152.8 | 747 | 747 | 268.7 |
| 5x6 RE | 1 | 21.7 | 162.9 | 901 | 901 | 298.7 |


| | | | | | | |
|---------|---|------|-------|------|------|--------|
| 5x10 RE | 1 | 24.2 | 181.7 | 1190 | 1190 | 362.5 |
| 5x16 RE | 1 | 26.8 | 201.0 | 1577 | 1577 | 424.8 |
| 5x16 RM | 1 | 28.0 | 210.1 | 1644 | 1644 | 455.2 |
| 5x25 RE | 1 | 30.8 | 231.3 | 2199 | 2199 | 545.4 |
| 5x25 RM | 1 | 31.8 | 238.4 | 2268 | 2268 | 571.3 |
| 5x35 RM | 1 | 36.1 | 270.7 | 2994 | 2994 | 737.7 |
| 5x50 RM | 1 | 40.7 | 305.1 | 4062 | 4062 | 909.9 |
| 5x70 RM | 1 | 46.2 | 346.5 | 5305 | 5305 | 1148.3 |
| 5x95 RM | 1 | 52.3 | 392.0 | 6919 | 6919 | 1434.3 |

POWER CABLES WITH HARD GRADE
ETHYLENE PROPYLEN RUBBER (HEPR) INSULATION

8. SHIELDED, ARMoured WITH BRAIDING FROM STEEL GALVANIZED WIRES

IEC 60502-1

8.4 Cables sheathed with thermoplastic polyurethane elastomer

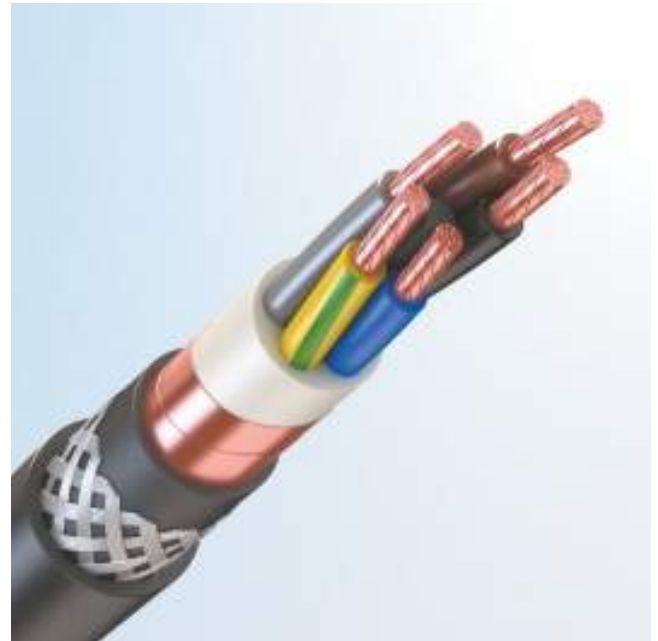

- TOFLEX REPTng(A)
- TOFLEX GREPTng(A)
- TOFLEX AREPTng(A)
- Cu/HEPR/OSCR/ TPE /SWB/ TPU, Al/HEPR/OSCR/TPE/SWB/ TPU



DESIGN FEATURES

- ① **Electrical conductor** – copper or aluminium of 1st, 2nd class; flexible copper (version GREPT) of 5th class.
- ② **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ③ **Inner sheath** – corresponds to the type of the outer sheath.
- ④ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑤ **Separation layer** – corresponds to the type of the outer sheath.
- ⑥ **Armour** – with full lay-up from galvanized steel wires.
- ⑦ **Outer sheath:**
 - «ng(A)» — made from thermoplastic polyurethane elastomer.

► **Ordering example:**

«TOFLEX REPTng(A)3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX REPTng(A)3×95/50RM(N,G)-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|---------------------------------------|
| | | | | TOFLEX REPTng(A) | |
| 2x1,5 RE | 1 | 15.7 | 117.8 | 382 | 171.8 |
| 2x2,5 RE | 1 | 16.5 | 123.8 | 431 | 188.8 |
| 2x4 RE | 1 | 17.4 | 130.7 | 495 | 208.9 |
| 2x6 RE | 1 | 18.4 | 138.2 | 572 | 231.6 |
| 2x10 RE | 1 | 20.0 | 149.9 | 709 | 268.6 |
| 2x16 RE | 1 | 21.9 | 164.1 | 902 | 316.4 |
| 2x16 RM | 1 | 22.8 | 170.9 | 948 | 340.0 |
| 2x25 RE | 1 | 25.3 | 189.6 | 1235 | 421.0 |
| 2x25 RM | 1 | 26.0 | 194.9 | 1280 | 441.9 |
| 2x35 RM | 1 | 28.0 | 209.9 | 1554 | 503.9 |
| 2x50 RM | 1 | 31.4 | 235.4 | 2061 | 626.7 |
| 2x70 RM | 1 | 36.2 | 271.4 | 2706 | 834.1 |
| 2x95 RM | 1 | 40.4 | 302.9 | 3463 | 1024.8 |
| 2x120 RM | 1 | 43.2 | 323.9 | 4129 | 1152.1 |
| 2x150 RM | 1 | 48.4 | 362.9 | 5117 | 1465.4 |
| 2x185 RM | 1 | 52.4 | 392.9 | 6136 | 1702.4 |
| 3x1,5 RE | 1 | 16.2 | 121.5 | 411 | 181.2 |
| 3x2,5 RE | 1 | 17.1 | 128.0 | 470 | 199.1 |
| 3x4 RE | 1 | 18.1 | 135.4 | 548 | 220.2 |
| 3x6 RE | 1 | 19.1 | 143.5 | 644 | 243.7 |
| 3x10 RE | 1 | 20.8 | 156.0 | 816 | 281.7 |
| 3x16 RE | 1 | 22.8 | 171.4 | 1064 | 330.1 |
| 3x16 RM | 1 | 24.2 | 181.6 | 1135 | 369.4 |
| 3x25 RE | 1 | 26.5 | 198.5 | 1478 | 438.6 |
| 3x25 RM | 1 | 27.2 | 204.2 | 1527 | 459.5 |
| 3x35 RM | 1 | 29.4 | 220.3 | 1882 | 520.7 |
| 3x50 RM | 1 | 33.4 | 250.7 | 2574 | 666.8 |
| 3x70 RM | 1 | 38.1 | 285.5 | 3338 | 854.6 |
| 3x95 RM | 1 | 42.6 | 319.4 | 4314 | 1045.9 |
| 3x120 RM | 1 | 46.8 | 351.0 | 5335 | 1257.7 |
| 3x150 RM | 1 | 51.1 | 383.0 | 6437 | 1488.2 |
| 4x1,5 RE | 1 | 17.1 | 128.1 | 455 | 198.7 |
| 4x2,5 RE | 1 | 18.0 | 135.3 | 527 | 219.0 |
| 4x4 RE | 1 | 19.2 | 143.6 | 623 | 242.8 |
| 4x6 RE | 1 | 20.4 | 152.7 | 741 | 269.3 |
| 4x10 RE | 1 | 22.2 | 166.8 | 955 | 311.8 |
| 4x16 RE | 1 | 24.9 | 186.9 | 1289 | 381.7 |
| 4x16 RM | 1 | 26.0 | 195.1 | 1343 | 408.7 |
| 4x25 RE | 1 | 28.5 | 214.0 | 1777 | 487.4 |
| 4x25 RM | 1 | 29.4 | 220.4 | 1833 | 510.5 |
| 4x35 RM | 1 | 31.8 | 238.4 | 2281 | 578.0 |
| 4x50 RM | 1 | 37.5 | 281.2 | 3259 | 812.9 |
| 4x70 RM | 1 | 41.3 | 310.1 | 4089 | 946.6 |
| 4x95 RM | 1 | 48.0 | 360.1 | 5509 | 1281.6 |
| 4x120 RM | 1 | 51.4 | 385.4 | 6649 | 1423.2 |
| 5x1,5 RE | 1 | 18.1 | 135.4 | 509 | 218.5 |
| 5x2,5 RE | 1 | 19.1 | 143.5 | 595 | 241.6 |
| 5x4 RE | 1 | 20.4 | 152.8 | 712 | 268.7 |
| 5x6 RE | 1 | 21.7 | 162.9 | 861 | 298.7 |

| | | | | | |
|---------|---|------|-------|------|--------|
| 5x10 RE | 1 | 24.2 | 181.7 | 1142 | 362.5 |
| 5x16 RE | 1 | 26.8 | 201.0 | 1519 | 424.8 |
| 5x16 RM | 1 | 28.0 | 210.1 | 1580 | 455.2 |
| 5x25 RE | 1 | 30.8 | 231.3 | 2123 | 545.4 |
| 5x25 RM | 1 | 31.8 | 238.4 | 2188 | 571.3 |
| 5x35 RM | 1 | 36.1 | 270.7 | 2888 | 737.7 |
| 5x50 RM | 1 | 40.7 | 305.1 | 3930 | 909.9 |
| 5x70 RM | 1 | 46.2 | 346.5 | 5138 | 1148.3 |
| 5x95 RM | 1 | 52.3 | 392.0 | 6702 | 1434.3 |


**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLEN RUBBER (HEPR) INSULATION**

9. UNSHIELDED UNARMOURED

IEC 60502-1

9.1 Cables with PVC sheath

- TOFLEX RVng(A)-FRLS
- TOFLEX GRVng(A)-FRLS
- Cu/MGT/HEPR/LSPVC

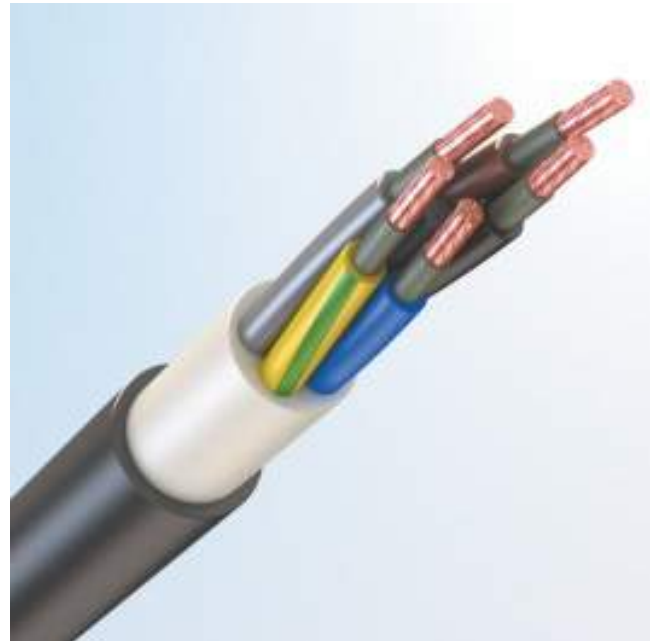

Possible options:

«ng(A)-FRLS-HL»



DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GRV) of 5th class (according to IEC 60228).
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Outer sheath:**
 - «ng(A)-FRLS» – made from PVC-compound with low fire hazard, low smoke and gas emission.
 - «ng(A)-FRLS-HL» – made from cold-resistant PVC-compound with low fire hazard, low smoke and gas emission.

► **Ordering example:**

«TOFLEX RVng(A)-FRLS3×95RM(N,G)-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|------------------------|---------------------------------------|
| | | | | TOFLEX RVng(A)-FRLS | TOFLEX RVng(A)-FRLS-HL | |
| 1x1,5 RE | 1 | 7.7 | 76.8 | 84 | 79 | 42.5 |
| 1x2,5 RE | 1 | 8.1 | 80.8 | 99 | 93 | 45.9 |
| 1x4 RE | 1 | 8.5 | 85.4 | 118 | 112 | 49.9 |
| 1x6 RE | 1 | 9.0 | 90.4 | 143 | 136 | 54.3 |
| 1x10 RE | 1 | 9.8 | 98.2 | 188 | 181 | 61.0 |
| 1x16 RE | 1 | 10.8 | 107.7 | 255 | 247 | 69.2 |
| 1x16 RM | 1 | 11.2 | 112.2 | 263 | 255 | 73.1 |
| 1x25 RE | 1 | 12.3 | 122.7 | 357 | 348 | 86.1 |
| 1x25 RM | 1 | 12.6 | 126.2 | 367 | 357 | 89.3 |
| 1x35 RM | 1 | 13.6 | 136.2 | 464 | 453 | 98.6 |
| 1x50 RM | 1 | 15.3 | 153.2 | 644 | 632 | 119.8 |
| 1x70 RM | 1 | 16.9 | 169.2 | 820 | 807 | 135.6 |
| 1x95 RM | 1 | 19.0 | 190.2 | 1082 | 1067 | 163.8 |
| 1x120 RM | 1 | 20.4 | 204.2 | 1331 | 1314 | 178.4 |
| 1x150 RM | 1 | 22.2 | 222.2 | 1614 | 1596 | 206.4 |
| 1x185 RM | 1 | 24.6 | 246.2 | 2006 | 1983 | 253.9 |
| 1x240 RM | 1 | 27.3 | 273.2 | 2526 | 2501 | 298.6 |
| 1x300 RM | 1 | 31.6 | 315.7 | 3181 | 3152 | 382.9 |
| 1x400 RM | 1 | 35.7 | 357.1 | 4089 | 4049 | 491.3 |
| 1x500 RM | 1 | 39.3 | 392.9 | 5096 | 5051 | 567.7 |
| 1x630 RM | 1 | 43.3 | 432.5 | 6473 | 6424 | 633.7 |
| 2x1,5 RE | 1 | 11.8 | 88.2 | 202 | 189 | 104.2 |
| 2x2,5 RE | 1 | 12.6 | 94.2 | 242 | 227 | 116.8 |
| 2x4 RE | 1 | 13.5 | 101.1 | 294 | 277 | 132.1 |
| 2x6 RE | 1 | 14.5 | 108.6 | 359 | 339 | 149.4 |
| 2x10 RE | 1 | 16.0 | 120.3 | 477 | 454 | 178.0 |
| 2x16 RE | 1 | 17.9 | 134.6 | 649 | 620 | 215.6 |
| 2x16 RM | 1 | 18.8 | 141.3 | 684 | 653 | 234.4 |
| 2x25 RE | 1 | 22.9 | 172.1 | 1074 | 1054 | 360.3 |
| 2x25 RM | 1 | 24.0 | 180.3 | 1144 | 1121 | 394.8 |
| 2x35 RM | 1 | 26.0 | 195.3 | 1414 | 1389 | 452.5 |
| 2x50 RM | 1 | 29.4 | 220.8 | 1917 | 1888 | 569.2 |
| 2x70 RM | 1 | 33.0 | 247.8 | 2460 | 2428 | 700.5 |
| 2x95 RM | 1 | 38.0 | 285.3 | 3298 | 3253 | 924.2 |
| 2x120 RM | 1 | 40.8 | 306.3 | 3969 | 3921 | 1043.9 |
| 2x150 RM | 1 | 45.6 | 342.3 | 4937 | 4874 | 1313.7 |
| 2x185 RM | 1 | 49.6 | 372.3 | 5971 | 5902 | 1537.9 |
| 2x240 RM | 1 | 55.4 | 415.8 | 7527 | 7450 | 1896.3 |
| 3x1,5 RE | 1 | 12.4 | 92.8 | 224 | 210 | 111.2 |
| 3x2,5 RE | 1 | 13.2 | 99.2 | 273 | 258 | 124.2 |
| 3x4 RE | 1 | 14.2 | 106.7 | 338 | 321 | 139.7 |
| 3x6 RE | 1 | 15.3 | 114.7 | 420 | 401 | 157.1 |
| 3x10 RE | 1 | 17.0 | 127.3 | 571 | 549 | 185.5 |
| 3x16 RE | 1 | 19.0 | 142.6 | 794 | 768 | 222.3 |
| 3x16 RM | 1 | 20.0 | 149.9 | 830 | 801 | 240.4 |
| 3x25 RE | 1 | 24.6 | 184.8 | 1328 | 1304 | 388.5 |
| 3x25 RM | 1 | 25.4 | 190.4 | 1374 | 1349 | 407.5 |
| 3x35 RM | 1 | 27.5 | 206.6 | 1722 | 1695 | 463.6 |
| 3x50 RM | 1 | 31.6 | 237.0 | 2407 | 2376 | 601.7 |

| | | | | | | |
|----------|---|------|-------|-------|-------|--------|
| 3x70 RM | 1 | 35.8 | 268.8 | 3134 | 3092 | 755.0 |
| 3x95 RM | 1 | 40.4 | 302.6 | 4103 | 4056 | 933.7 |
| 3x120 RM | 1 | 43.8 | 328.2 | 5039 | 4987 | 1075.0 |
| 3x150 RM | 1 | 48.4 | 363.2 | 6193 | 6126 | 1320.2 |
| 3x185 RM | 1 | 52.7 | 395.5 | 7528 | 7455 | 1541.8 |
| 3x240 RM | 1 | 59.5 | 446.5 | 9615 | 9523 | 1951.6 |
| 4x1,5 RE | 1 | 13.4 | 100.7 | 259 | 245 | 126.0 |
| 4x2,5 RE | 1 | 14.4 | 108.0 | 319 | 303 | 140.7 |
| 4x4 RE | 1 | 15.5 | 116.3 | 400 | 383 | 158.1 |
| 4x6 RE | 1 | 16.7 | 125.3 | 503 | 484 | 177.6 |
| 4x10 RE | 1 | 18.6 | 139.4 | 694 | 671 | 209.2 |
| 4x16 RE | 1 | 20.9 | 156.6 | 976 | 948 | 249.7 |
| 4x16 RM | 1 | 22.0 | 164.7 | 1016 | 986 | 269.6 |
| 4x25 RE | 1 | 26.9 | 201.7 | 1616 | 1590 | 434.5 |
| 4x25 RM | 1 | 27.7 | 208.0 | 1669 | 1642 | 455.4 |
| 4x35 RM | 1 | 30.1 | 226.1 | 2108 | 2079 | 516.8 |
| 4x50 RM | 1 | 35.4 | 265.8 | 3047 | 3006 | 717.2 |
| 4x70 RM | 1 | 39.3 | 294.8 | 3867 | 3821 | 838.6 |
| 4x95 RM | 1 | 44.8 | 335.7 | 5140 | 5087 | 1066.7 |
| 4x120 RM | 1 | 48.9 | 367.0 | 6379 | 6311 | 1254.2 |
| 4x150 RM | 1 | 53.3 | 399.6 | 7704 | 7630 | 1463.4 |
| 4x185 RM | 1 | 59.1 | 443.2 | 9566 | 9476 | 1805.5 |
| 4x240 RM | 1 | 65.6 | 492.0 | 11999 | 11898 | 2162.0 |
| 5x1,5 RE | 1 | 14.6 | 109.6 | 304 | 288 | 143.2 |
| 5x2,5 RE | 1 | 15.7 | 117.7 | 376 | 359 | 159.9 |
| 5x4 RE | 1 | 16.9 | 127.0 | 477 | 458 | 179.7 |
| 5x6 RE | 1 | 18.3 | 137.2 | 608 | 587 | 201.8 |
| 5x10 RE | 1 | 20.4 | 153.0 | 840 | 815 | 237.6 |
| 5x16 RE | 1 | 23.0 | 172.2 | 1184 | 1154 | 283.3 |
| 5x16 RM | 1 | 24.6 | 184.3 | 1258 | 1223 | 321.6 |
| 5x25 RE | 1 | 29.4 | 220.6 | 1953 | 1924 | 490.2 |
| 5x25 RM | 1 | 30.4 | 227.7 | 2014 | 1984 | 513.7 |
| 5x35 RM | 1 | 33.5 | 250.9 | 2602 | 2569 | 604.3 |
| 5x50 RM | 1 | 38.8 | 291.3 | 3704 | 3658 | 808.1 |
| 5x70 RM | 1 | 43.6 | 326.7 | 4813 | 4761 | 972.2 |
| 5x95 RM | 1 | 50.0 | 375.3 | 6415 | 6346 | 1266.4 |
| 5x120 RM | 1 | 54.2 | 406.6 | 7866 | 7791 | 1445.0 |
| 5x150 RM | 1 | 59.7 | 447.6 | 9587 | 9496 | 1743.9 |
| 5x185 RM | 1 | 65.1 | 488.1 | 11807 | 11707 | 2032.3 |
| 5x240 RM | 1 | 73.8 | 553.2 | 15069 | 14937 | 2602.0 |

**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLENE RUBBER (HEPR) INSULATION**

9. UNSHIELDED UNARMOURED


IEC 60502-1

9.2 Cables sheathed with cross-linked highly elastic polymer compound

- TOFLEX RRng(A)-FRHF
- TOFLEX GRRng(A)-FRHF
- Cu/MGT/HEPR/ XLHFFR

Possible options:

«ng(A)-FRHF-HL»

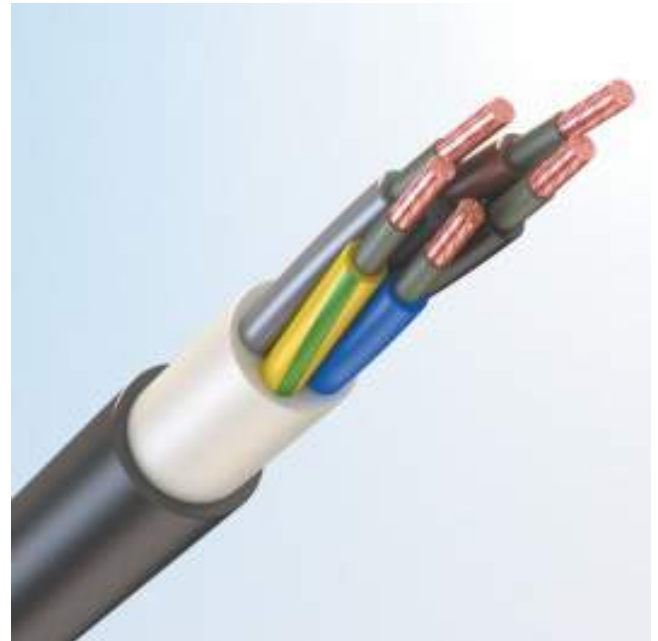

DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GRR) – of 5th class.
- ② **Thermal barrier** - micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Outer sheath:**
 - «ng(A)-FRHF» – made from halogen-free cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-FRHF-HL» – made from cold-resistant halogen-free cross-linked highly elastic polymer compound with low fire hazard.

► **Ordering example:**

«TOFLEX RRng(A)-FRHF-HL5×95RM(N,G)-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|------------------------|---------------------------------------|
| | | | | TOFLEX RRng(A)-FRHF | TOFLEX RRng(A)-FRHF-HL | |
| 1x1,5 RE | 1 | 7.7 | 76.8 | 70 | 70 | 42.5 |
| 1x2,5 RE | 1 | 8.1 | 80.8 | 84 | 84 | 45.9 |
| 1x4 RE | 1 | 8.5 | 85.4 | 102 | 102 | 49.9 |
| 1x6 RE | 1 | 9.0 | 90.4 | 126 | 126 | 54.3 |
| 1x10 RE | 1 | 9.8 | 98.2 | 169 | 169 | 61.0 |
| 1x16 RE | 1 | 10.8 | 107.7 | 234 | 234 | 69.2 |
| 1x16 RM | 1 | 11.2 | 112.2 | 241 | 241 | 73.1 |
| 1x25 RE | 1 | 12.3 | 122.7 | 332 | 332 | 86.1 |
| 1x25 RM | 1 | 12.6 | 126.2 | 341 | 341 | 89.3 |
| 1x35 RM | 1 | 13.6 | 136.2 | 436 | 436 | 98.6 |
| 1x50 RM | 1 | 15.3 | 153.2 | 612 | 612 | 119.8 |
| 1x70 RM | 1 | 16.9 | 169.2 | 784 | 784 | 135.6 |
| 1x95 RM | 1 | 19.0 | 190.2 | 1041 | 1041 | 163.8 |
| 1x120 RM | 1 | 20.4 | 204.2 | 1286 | 1286 | 178.4 |
| 1x150 RM | 1 | 22.2 | 222.2 | 1566 | 1566 | 206.4 |
| 1x185 RM | 1 | 24.6 | 246.2 | 1945 | 1945 | 253.9 |
| 1x240 RM | 1 | 27.3 | 273.2 | 2459 | 2459 | 298.6 |
| 1x300 RM | 1 | 31.6 | 315.7 | 3103 | 3103 | 382.9 |
| 1x400 RM | 1 | 35.7 | 357.1 | 3983 | 3983 | 491.3 |
| 1x500 RM | 1 | 39.3 | 392.9 | 4978 | 4978 | 567.7 |
| 1x630 RM | 1 | 43.3 | 432.5 | 6343 | 6343 | 633.7 |
| 2x1,5 RE | 1 | 11.8 | 88.2 | 166 | 166 | 104.2 |
| 2x2,5 RE | 1 | 12.6 | 94.2 | 201 | 201 | 116.8 |
| 2x4 RE | 1 | 13.5 | 101.1 | 248 | 248 | 132.1 |
| 2x6 RE | 1 | 14.5 | 108.6 | 307 | 307 | 149.4 |
| 2x10 RE | 1 | 16.0 | 120.3 | 415 | 415 | 178.0 |
| 2x16 RE | 1 | 17.9 | 134.6 | 573 | 573 | 215.6 |
| 2x16 RM | 1 | 18.8 | 141.3 | 602 | 602 | 234.4 |
| 2x25 RE | 1 | 22.9 | 172.1 | 1011 | 1011 | 360.3 |
| 2x25 RM | 1 | 24.0 | 180.3 | 1072 | 1072 | 394.8 |
| 2x35 RM | 1 | 26.0 | 195.3 | 1334 | 1334 | 452.5 |
| 2x50 RM | 1 | 29.4 | 220.8 | 1823 | 1823 | 569.2 |
| 2x70 RM | 1 | 33.0 | 247.8 | 2350 | 2350 | 700.5 |
| 2x95 RM | 1 | 38.0 | 285.3 | 3149 | 3149 | 924.2 |
| 2x120 RM | 1 | 40.8 | 306.3 | 3806 | 3806 | 1043.9 |
| 2x150 RM | 1 | 45.6 | 342.3 | 4727 | 4727 | 1313.7 |
| 2x185 RM | 1 | 49.6 | 372.3 | 5737 | 5737 | 1537.9 |
| 2x240 RM | 1 | 55.4 | 415.8 | 7255 | 7255 | 1896.3 |
| 3x1,5 RE | 1 | 12.4 | 92.8 | 189 | 189 | 111.2 |
| 3x2,5 RE | 1 | 13.2 | 99.2 | 233 | 233 | 124.2 |
| 3x4 RE | 1 | 14.2 | 106.7 | 294 | 294 | 139.7 |
| 3x6 RE | 1 | 15.3 | 114.7 | 370 | 370 | 157.1 |
| 3x10 RE | 1 | 17.0 | 127.3 | 513 | 513 | 185.5 |
| 3x16 RE | 1 | 19.0 | 142.6 | 724 | 724 | 222.3 |
| 3x16 RM | 1 | 20.0 | 149.9 | 754 | 754 | 240.4 |
| 3x25 RE | 1 | 24.6 | 184.8 | 1256 | 1256 | 388.5 |
| 3x25 RM | 1 | 25.4 | 190.4 | 1299 | 1299 | 407.5 |
| 3x35 RM | 1 | 27.5 | 206.6 | 1639 | 1639 | 463.6 |
| 3x50 RM | 1 | 31.6 | 237.0 | 2308 | 2308 | 601.7 |

| | | | | | | |
|----------|---|------|-------|-------|-------|--------|
| 3x70 RM | 1 | 35.8 | 268.8 | 3003 | 3003 | 755.0 |
| 3x95 RM | 1 | 40.4 | 302.6 | 3951 | 3951 | 933.7 |
| 3x120 RM | 1 | 43.8 | 328.2 | 4870 | 4870 | 1075.0 |
| 3x150 RM | 1 | 48.4 | 363.2 | 5978 | 5978 | 1320.2 |
| 3x185 RM | 1 | 52.7 | 395.5 | 7290 | 7290 | 1541.8 |
| 3x240 RM | 1 | 59.5 | 446.5 | 9315 | 9315 | 1951.6 |
| 4x1,5 RE | 1 | 13.4 | 100.7 | 221 | 221 | 126.0 |
| 4x2,5 RE | 1 | 14.4 | 108.0 | 277 | 277 | 140.7 |
| 4x4 RE | 1 | 15.5 | 116.3 | 354 | 354 | 158.1 |
| 4x6 RE | 1 | 16.7 | 125.3 | 451 | 451 | 177.6 |
| 4x10 RE | 1 | 18.6 | 139.4 | 632 | 632 | 209.2 |
| 4x16 RE | 1 | 20.9 | 156.6 | 902 | 902 | 249.7 |
| 4x16 RM | 1 | 22.0 | 164.7 | 936 | 936 | 269.6 |
| 4x25 RE | 1 | 26.9 | 201.7 | 1538 | 1538 | 434.5 |
| 4x25 RM | 1 | 27.7 | 208.0 | 1587 | 1587 | 455.4 |
| 4x35 RM | 1 | 30.1 | 226.1 | 2018 | 2018 | 516.8 |
| 4x50 RM | 1 | 35.4 | 265.8 | 2920 | 2920 | 717.2 |
| 4x70 RM | 1 | 39.3 | 294.8 | 3724 | 3724 | 838.6 |
| 4x95 RM | 1 | 44.8 | 335.7 | 4972 | 4972 | 1066.7 |
| 4x120 RM | 1 | 48.9 | 367.0 | 6168 | 6168 | 1254.2 |
| 4x150 RM | 1 | 53.3 | 399.6 | 7470 | 7470 | 1463.4 |
| 4x185 RM | 1 | 59.1 | 443.2 | 9279 | 9279 | 1805.5 |
| 4x240 RM | 1 | 65.6 | 492.0 | 11673 | 11673 | 2162.0 |
| 5x1,5 RE | 1 | 14.6 | 109.6 | 263 | 263 | 143.2 |
| 5x2,5 RE | 1 | 15.7 | 117.7 | 331 | 331 | 159.9 |
| 5x4 RE | 1 | 16.9 | 127.0 | 426 | 426 | 179.7 |
| 5x6 RE | 1 | 18.3 | 137.2 | 551 | 551 | 201.8 |
| 5x10 RE | 1 | 20.4 | 153.0 | 773 | 773 | 237.6 |
| 5x16 RE | 1 | 23.0 | 172.2 | 1104 | 1104 | 283.3 |
| 5x16 RM | 1 | 24.6 | 184.3 | 1164 | 1164 | 321.6 |
| 5x25 RE | 1 | 29.4 | 220.6 | 1867 | 1867 | 490.2 |
| 5x25 RM | 1 | 30.4 | 227.7 | 1924 | 1924 | 513.7 |
| 5x35 RM | 1 | 33.5 | 250.9 | 2500 | 2500 | 604.3 |
| 5x50 RM | 1 | 38.8 | 291.3 | 3565 | 3565 | 808.1 |
| 5x70 RM | 1 | 43.6 | 326.7 | 4652 | 4652 | 972.2 |
| 5x95 RM | 1 | 50.0 | 375.3 | 6202 | 6202 | 1266.4 |
| 5x120 RM | 1 | 54.2 | 406.6 | 7631 | 7631 | 1445.0 |
| 5x150 RM | 1 | 59.7 | 447.6 | 9302 | 9302 | 1743.9 |
| 5x185 RM | 1 | 65.1 | 488.1 | 11491 | 11491 | 2032.3 |
| 5x240 RM | 1 | 73.8 | 553.2 | 14655 | 14655 | 2602.0 |


**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLENE RUBBER (HEPR) INSULATION**

9. UNSHIELDED UNARMoured

IEC 60502-1

9.3 Cables sheathed with halogen-free polymer compound

- TOFLEX RPng(A)-FRHF
- TOFLEX GRPng(A)-FRHF
- Cu/MGT/HEPR/HFFR

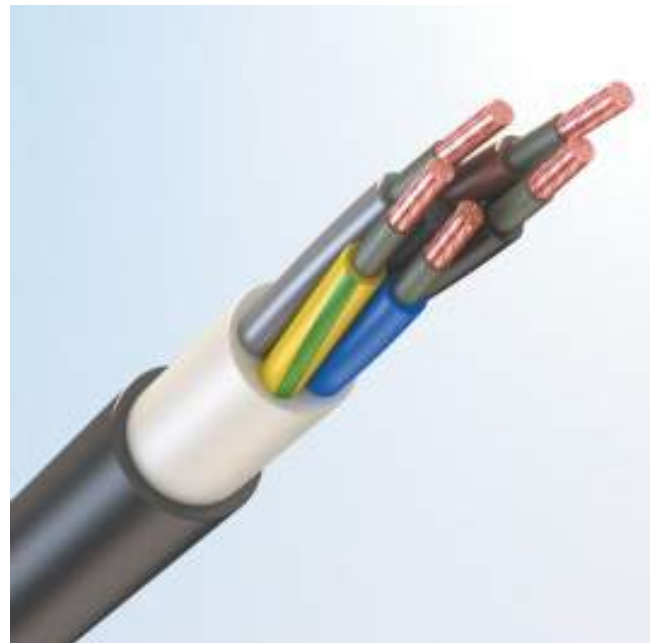

Possible options:

"ng(A)-FRHF-HL"



DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GRP) of 5th class.
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Outer sheath:**
 - «ng(A)-FRHF» – made from halogen-free polymer compounds.
 - «ng(A)-FRHF-HL» – made from cold-resistant halogen-free polymer compounds.

► **Ordering example:**

«TOFLEX RPng(A)-FRHF-HL1×185RM-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|------------------------|---------------------------------------|
| | | | | TOFLEX RPng(A)-FRHF | TOFLEX RPng(A)-FRHF-HL | |
| 1x1,5 RE | 1 | 7.7 | 76.8 | 74 | 74 | 42.5 |
| 1x2,5 RE | 1 | 8.1 | 80.8 | 88 | 88 | 45.9 |
| 1x4 RE | 1 | 8.5 | 85.4 | 107 | 107 | 49.9 |
| 1x6 RE | 1 | 9.0 | 90.4 | 131 | 131 | 54.3 |
| 1x10 RE | 1 | 9.8 | 98.2 | 175 | 175 | 61.0 |
| 1x16 RE | 1 | 10.8 | 107.7 | 240 | 240 | 69.2 |
| 1x16 RM | 1 | 11.2 | 112.2 | 248 | 248 | 73.1 |
| 1x25 RE | 1 | 12.3 | 122.7 | 340 | 340 | 86.1 |
| 1x25 RM | 1 | 12.6 | 126.2 | 349 | 349 | 89.3 |
| 1x35 RM | 1 | 13.6 | 136.2 | 445 | 445 | 98.6 |
| 1x50 RM | 1 | 15.3 | 153.2 | 622 | 622 | 119.8 |
| 1x70 RM | 1 | 16.9 | 169.2 | 796 | 796 | 135.6 |
| 1x95 RM | 1 | 19.0 | 190.2 | 1054 | 1054 | 163.8 |
| 1x120 RM | 1 | 20.4 | 204.2 | 1300 | 1300 | 178.4 |
| 1x150 RM | 1 | 22.2 | 222.2 | 1581 | 1581 | 206.4 |
| 1x185 RM | 1 | 24.6 | 246.2 | 1964 | 1964 | 253.9 |
| 1x240 RM | 1 | 27.3 | 273.2 | 2480 | 2480 | 298.6 |
| 1x300 RM | 1 | 31.6 | 315.7 | 3127 | 3127 | 382.9 |
| 1x400 RM | 1 | 35.7 | 357.1 | 4016 | 4016 | 491.3 |
| 1x500 RM | 1 | 39.3 | 392.9 | 5015 | 5015 | 567.7 |
| 1x630 RM | 1 | 43.3 | 432.5 | 6384 | 6384 | 633.7 |
| 2x1,5 RE | 1 | 11.8 | 88.2 | 178 | 178 | 104.2 |
| 2x2,5 RE | 1 | 12.6 | 94.2 | 214 | 214 | 116.8 |
| 2x4 RE | 1 | 13.5 | 101.1 | 263 | 263 | 132.1 |
| 2x6 RE | 1 | 14.5 | 108.6 | 323 | 323 | 149.4 |
| 2x10 RE | 1 | 16.0 | 120.3 | 435 | 435 | 178.0 |
| 2x16 RE | 1 | 17.9 | 134.6 | 597 | 597 | 215.6 |
| 2x16 RM | 1 | 18.8 | 141.3 | 628 | 628 | 234.4 |
| 2x25 RE | 1 | 22.9 | 172.1 | 1027 | 1027 | 360.3 |
| 2x25 RM | 1 | 24.0 | 180.3 | 1091 | 1091 | 394.8 |
| 2x35 RM | 1 | 26.0 | 195.3 | 1355 | 1355 | 452.5 |
| 2x50 RM | 1 | 29.4 | 220.8 | 1847 | 1847 | 569.2 |
| 2x70 RM | 1 | 33.0 | 247.8 | 2377 | 2377 | 700.5 |
| 2x95 RM | 1 | 38.0 | 285.3 | 3186 | 3186 | 924.2 |
| 2x120 RM | 1 | 40.8 | 306.3 | 3846 | 3846 | 1043.9 |
| 2x150 RM | 1 | 45.6 | 342.3 | 4779 | 4779 | 1313.7 |
| 2x185 RM | 1 | 49.6 | 372.3 | 5794 | 5794 | 1537.9 |
| 2x240 RM | 1 | 55.4 | 415.8 | 7319 | 7319 | 1896.3 |
| 3x1,5 RE | 1 | 12.4 | 92.8 | 200 | 200 | 111.2 |
| 3x2,5 RE | 1 | 13.2 | 99.2 | 246 | 246 | 124.2 |
| 3x4 RE | 1 | 14.2 | 106.7 | 308 | 308 | 139.7 |
| 3x6 RE | 1 | 15.3 | 114.7 | 386 | 386 | 157.1 |
| 3x10 RE | 1 | 17.0 | 127.3 | 531 | 531 | 185.5 |
| 3x16 RE | 1 | 19.0 | 142.6 | 746 | 746 | 222.3 |
| 3x16 RM | 1 | 20.0 | 149.9 | 778 | 778 | 240.4 |
| 3x25 RE | 1 | 24.6 | 184.8 | 1276 | 1276 | 388.5 |
| 3x25 RM | 1 | 25.4 | 190.4 | 1319 | 1319 | 407.5 |
| 3x35 RM | 1 | 27.5 | 206.6 | 1661 | 1661 | 463.6 |
| 3x50 RM | 1 | 31.6 | 237.0 | 2334 | 2334 | 601.7 |

| | | | | | | |
|----------|---|------|-------|-------|-------|--------|
| 3x70 RM | 1 | 35.8 | 268.8 | 3038 | 3038 | 755.0 |
| 3x95 RM | 1 | 40.4 | 302.6 | 3991 | 3991 | 933.7 |
| 3x120 RM | 1 | 43.8 | 328.2 | 4913 | 4913 | 1075.0 |
| 3x150 RM | 1 | 48.4 | 363.2 | 6034 | 6034 | 1320.2 |
| 3x185 RM | 1 | 52.7 | 395.5 | 7351 | 7351 | 1541.8 |
| 3x240 RM | 1 | 59.5 | 446.5 | 9392 | 9392 | 1951.6 |
| 4x1,5 RE | 1 | 13.4 | 100.7 | 233 | 233 | 126.0 |
| 4x2,5 RE | 1 | 14.4 | 108.0 | 291 | 291 | 140.7 |
| 4x4 RE | 1 | 15.5 | 116.3 | 368 | 368 | 158.1 |
| 4x6 RE | 1 | 16.7 | 125.3 | 467 | 467 | 177.6 |
| 4x10 RE | 1 | 18.6 | 139.4 | 652 | 652 | 209.2 |
| 4x16 RE | 1 | 20.9 | 156.6 | 925 | 925 | 249.7 |
| 4x16 RM | 1 | 22.0 | 164.7 | 961 | 961 | 269.6 |
| 4x25 RE | 1 | 26.9 | 201.7 | 1559 | 1559 | 434.5 |
| 4x25 RM | 1 | 27.7 | 208.0 | 1610 | 1610 | 455.4 |
| 4x35 RM | 1 | 30.1 | 226.1 | 2042 | 2042 | 516.8 |
| 4x50 RM | 1 | 35.4 | 265.8 | 2955 | 2955 | 717.2 |
| 4x70 RM | 1 | 39.3 | 294.8 | 3762 | 3762 | 838.6 |
| 4x95 RM | 1 | 44.8 | 335.7 | 5016 | 5016 | 1066.7 |
| 4x120 RM | 1 | 48.9 | 367.0 | 6224 | 6224 | 1254.2 |
| 4x150 RM | 1 | 53.3 | 399.6 | 7532 | 7532 | 1463.4 |
| 4x185 RM | 1 | 59.1 | 443.2 | 9355 | 9355 | 1805.5 |
| 4x240 RM | 1 | 65.6 | 492.0 | 11757 | 11757 | 2162.0 |
| 5x1,5 RE | 1 | 14.6 | 109.6 | 276 | 276 | 143.2 |
| 5x2,5 RE | 1 | 15.7 | 117.7 | 345 | 345 | 159.9 |
| 5x4 RE | 1 | 16.9 | 127.0 | 442 | 442 | 179.7 |
| 5x6 RE | 1 | 18.3 | 137.2 | 569 | 569 | 201.8 |
| 5x10 RE | 1 | 20.4 | 153.0 | 794 | 794 | 237.6 |
| 5x16 RE | 1 | 23.0 | 172.2 | 1129 | 1129 | 283.3 |
| 5x16 RM | 1 | 24.6 | 184.3 | 1194 | 1194 | 321.6 |
| 5x25 RE | 1 | 29.4 | 220.6 | 1890 | 1890 | 490.2 |
| 5x25 RM | 1 | 30.4 | 227.7 | 1949 | 1949 | 513.7 |
| 5x35 RM | 1 | 33.5 | 250.9 | 2528 | 2528 | 604.3 |
| 5x50 RM | 1 | 38.8 | 291.3 | 3603 | 3603 | 808.1 |
| 5x70 RM | 1 | 43.6 | 326.7 | 4695 | 4695 | 972.2 |
| 5x95 RM | 1 | 50.0 | 375.3 | 6259 | 6259 | 1266.4 |
| 5x120 RM | 1 | 54.2 | 406.6 | 7693 | 7693 | 1445.0 |
| 5x150 RM | 1 | 59.7 | 447.6 | 9378 | 9378 | 1743.9 |
| 5x185 RM | 1 | 65.1 | 488.1 | 11574 | 11574 | 2032.3 |
| 5x240 RM | 1 | 73.8 | 553.2 | 14765 | 14765 | 2602.0 |

**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLENE RUBBER (HEPR) INSULATION**

10. SHIELDED


IEC 60502-1

10.1 Cables with PVC sheath

- TOFLEX REVng(A)-FRLS
- TOFLEX GREVng(A)-FRLS
- Cu/MGT/HEPR/OSCR/LSPVC

Possible options:

«ng(A)-FRLS-HL»

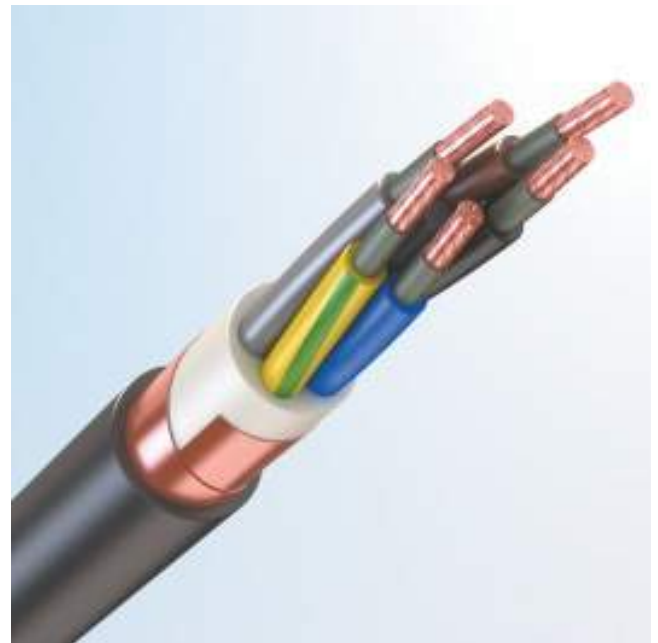

DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GREV) of 5th class (according to IEC 60228).
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑥ **Outer sheath:**
 - «ng(A)-FRLS» – made from PVC-compound with low fire hazard, low smoke and gas emission.
 - «ng(A)-FRLS-HL» – made from cold-resistant PVC-compound with low fire hazard, low smoke and gas emission.

► **Ordering example:**

«TOFLEX REVng(A)-FRLS3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX REVng(A)-FRLS3×95/50RM(N,G)-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|-------------------------|---------------------------------------|
| | | | | TOFLEX REVng(A)-FRLS | TOFLEX REVng(A)-FRLS-HL | |
| 1x1,5 RE | 1 | 9.9 | 98.6 | 151 | 144 | 70.8 |
| 1x2,5 RE | 1 | 10.3 | 102.6 | 169 | 161 | 75.5 |
| 1x4 RE | 1 | 10.7 | 107.2 | 193 | 184 | 80.9 |
| 1x6 RE | 1 | 11.2 | 112.2 | 221 | 213 | 86.8 |
| 1x10 RE | 1 | 12.0 | 120.0 | 273 | 264 | 96.0 |
| 1x16 RE | 1 | 13.0 | 129.5 | 348 | 338 | 107.2 |
| 1x16 RM | 1 | 13.4 | 134.0 | 360 | 350 | 112.5 |
| 1x25 RE | 1 | 14.5 | 144.5 | 463 | 452 | 128.8 |
| 1x25 RM | 1 | 14.8 | 148.0 | 475 | 464 | 133.1 |
| 1x35 RM | 1 | 15.8 | 158.0 | 581 | 568 | 145.5 |
| 1x50 RM | 1 | 17.5 | 175.0 | 775 | 761 | 172.1 |
| 1x70 RM | 1 | 19.1 | 191.0 | 965 | 949 | 192.9 |
| 1x95 RM | 1 | 21.2 | 212.0 | 1245 | 1227 | 227.6 |
| 1x120 RM | 1 | 22.6 | 226.0 | 1505 | 1486 | 246.7 |
| 1x150 RM | 1 | 24.8 | 248.0 | 1831 | 1808 | 295.8 |
| 1x185 RM | 1 | 26.8 | 268.0 | 2214 | 2189 | 335.5 |
| 1x240 RM | 1 | 29.5 | 295.0 | 2758 | 2730 | 388.7 |
| 1x300 RM | 1 | 35.0 | 349.5 | 3566 | 3527 | 550.9 |
| 1x400 RM | 1 | 38.3 | 382.9 | 4435 | 4392 | 631.7 |
| 1x500 RM | 1 | 41.9 | 418.7 | 5476 | 5428 | 721.6 |
| 1x630 RM | 1 | 47.0 | 470.3 | 7051 | 6988 | 889.9 |
| 2x1,5 RE | 1 | 13.9 | 104.6 | 310 | 299 | 146.9 |
| 2x2,5 RE | 1 | 14.7 | 110.6 | 357 | 345 | 162.2 |
| 2x4 RE | 1 | 15.7 | 117.5 | 418 | 405 | 180.4 |
| 2x6 RE | 1 | 16.7 | 125.0 | 493 | 479 | 201.0 |
| 2x10 RE | 1 | 18.2 | 136.7 | 626 | 611 | 234.7 |
| 2x16 RE | 1 | 20.1 | 150.9 | 817 | 800 | 278.5 |
| 2x16 RM | 1 | 21.0 | 157.7 | 862 | 844 | 300.2 |
| 2x25 RE | 1 | 23.1 | 173.4 | 1123 | 1103 | 361.3 |
| 2x25 RM | 1 | 24.2 | 181.7 | 1195 | 1172 | 396.0 |
| 2x35 RM | 1 | 26.2 | 196.7 | 1470 | 1445 | 453.7 |
| 2x50 RM | 1 | 29.6 | 222.2 | 1981 | 1952 | 570.3 |
| 2x70 RM | 1 | 33.2 | 249.2 | 2533 | 2500 | 701.6 |
| 2x95 RM | 1 | 38.2 | 286.7 | 3382 | 3337 | 925.6 |
| 2x120 RM | 1 | 41.0 | 307.7 | 4060 | 4011 | 1045.3 |
| 2x150 RM | 1 | 45.8 | 343.7 | 5038 | 4975 | 1315.3 |
| 2x185 RM | 1 | 49.8 | 373.7 | 6082 | 6013 | 1539.6 |
| 2x240 RM | 1 | 56.2 | 421.7 | 7749 | 7662 | 1952.7 |
| 3x1,5 RE | 1 | 14.6 | 109.1 | 336 | 324 | 155.9 |
| 3x2,5 RE | 1 | 15.4 | 115.6 | 393 | 380 | 171.7 |
| 3x4 RE | 1 | 16.4 | 123.0 | 467 | 454 | 190.4 |
| 3x6 RE | 1 | 17.5 | 131.1 | 560 | 545 | 211.4 |
| 3x10 RE | 1 | 19.2 | 143.6 | 727 | 711 | 245.3 |
| 3x16 RE | 1 | 21.2 | 159.0 | 970 | 952 | 288.7 |
| 3x16 RM | 1 | 22.2 | 166.2 | 1015 | 996 | 310.0 |
| 3x25 RE | 1 | 24.8 | 186.2 | 1381 | 1357 | 389.7 |
| 3x25 RM | 1 | 25.6 | 191.8 | 1428 | 1404 | 408.7 |
| 3x35 RM | 1 | 27.7 | 207.9 | 1782 | 1755 | 464.7 |
| 3x50 RM | 1 | 31.8 | 238.3 | 2477 | 2446 | 602.9 |

| | | | | | | |
|----------|---|------|-------|-------|-------|--------|
| 3x70 RM | 1 | 36.0 | 270.1 | 3213 | 3171 | 756.4 |
| 3x95 RM | 1 | 40.5 | 304.0 | 4193 | 4146 | 935.1 |
| 3x120 RM | 1 | 43.9 | 329.6 | 5137 | 5085 | 1076.4 |
| 3x150 RM | 1 | 48.6 | 364.6 | 6301 | 6234 | 1321.9 |
| 3x185 RM | 1 | 52.9 | 396.8 | 7647 | 7573 | 1543.4 |
| 3x240 RM | 1 | 59.7 | 447.9 | 9749 | 9658 | 1953.5 |
| 4x1,5 RE | 1 | 15.6 | 117.1 | 380 | 367 | 174.2 |
| 4x2,5 RE | 1 | 16.6 | 124.3 | 450 | 436 | 192.0 |
| 4x4 RE | 1 | 17.7 | 132.6 | 541 | 526 | 213.0 |
| 4x6 RE | 1 | 18.9 | 141.7 | 655 | 639 | 236.5 |
| 4x10 RE | 1 | 20.8 | 155.8 | 864 | 846 | 274.2 |
| 4x16 RE | 1 | 23.1 | 172.9 | 1168 | 1148 | 322.2 |
| 4x16 RM | 1 | 24.5 | 184.1 | 1247 | 1223 | 361.6 |
| 4x25 RE | 1 | 27.1 | 203.1 | 1675 | 1649 | 435.7 |
| 4x25 RM | 1 | 27.9 | 209.4 | 1730 | 1703 | 456.6 |
| 4x35 RM | 1 | 30.3 | 227.5 | 2175 | 2146 | 518.0 |
| 4x50 RM | 1 | 35.6 | 267.2 | 3126 | 3084 | 718.6 |
| 4x70 RM | 1 | 39.5 | 296.1 | 3955 | 3908 | 840.0 |
| 4x95 RM | 1 | 45.7 | 343.1 | 5346 | 5284 | 1127.3 |
| 4x120 RM | 1 | 49.1 | 368.4 | 6489 | 6421 | 1255.9 |
| 4x150 RM | 1 | 53.5 | 400.9 | 7825 | 7751 | 1465.1 |
| 4x185 RM | 1 | 59.3 | 444.6 | 9700 | 9609 | 1807.3 |
| 4x240 RM | 1 | 65.8 | 493.4 | 12149 | 12048 | 2163.9 |
| 5x1,5 RE | 1 | 16.8 | 126.0 | 436 | 422 | 195.2 |
| 5x2,5 RE | 1 | 17.9 | 134.1 | 518 | 503 | 215.5 |
| 5x4 RE | 1 | 19.1 | 143.4 | 631 | 614 | 239.3 |
| 5x6 RE | 1 | 20.5 | 153.5 | 775 | 758 | 265.9 |
| 5x10 RE | 1 | 22.6 | 169.3 | 1027 | 1007 | 308.5 |
| 5x16 RE | 1 | 25.5 | 191.5 | 1424 | 1400 | 379.1 |
| 5x16 RM | 1 | 26.8 | 200.7 | 1484 | 1458 | 406.3 |
| 5x25 RE | 1 | 29.6 | 221.9 | 2019 | 1991 | 491.4 |
| 5x25 RM | 1 | 30.5 | 229.0 | 2083 | 2053 | 514.9 |
| 5x35 RM | 1 | 33.6 | 252.3 | 2679 | 2646 | 605.5 |
| 5x50 RM | 1 | 39.0 | 292.7 | 3794 | 3748 | 809.5 |
| 5x70 RM | 1 | 43.7 | 328.1 | 4918 | 4866 | 973.6 |
| 5x95 RM | 1 | 50.2 | 376.6 | 6535 | 6465 | 1268.0 |
| 5x120 RM | 1 | 54.4 | 408.0 | 7997 | 7921 | 1446.6 |
| 5x150 RM | 1 | 59.9 | 448.9 | 9730 | 9638 | 1745.8 |
| 5x185 RM | 1 | 65.3 | 489.4 | 11972 | 11871 | 2034.1 |
| 5x240 RM | 1 | 73.9 | 554.6 | 15254 | 15121 | 2604.1 |


**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLENE RUBBER (HEPR) INSULATION**

10. SHIELDED

IEC 60502-1

10.2 Cables sheathed with cross-linked highly elastic polymer compound

- TOFLEX RERng(A)-FRHF,
- TOFLEX GRERng(A)-FRHF
- Cu/MGT/HEPR/OSCR/ XLHFFR

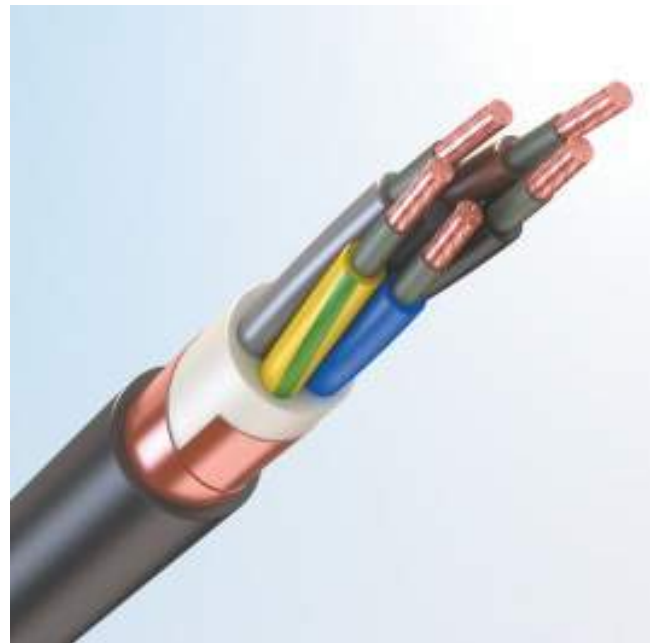

Possible options:

"ng(A)-FRHF-HL"

DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GRER) – of 5th class.
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑥ **Outer sheath:**
 - «ng(A)-FRHF» – made from halogen-free cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-FRHF-HL» – made from cold-resistant halogen-free cross-linked highly elastic polymer compound with low fire hazard.

► **Ordering example:**

«TOFLEX RERng(A)-FRHF3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX RERng(A)-FRHF3×95/50RM(N,G)-1 IEC 60502-1»

CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|-------------------------|---------------------------------------|
| | | | | TOFLEX RERng(A)-FRHF | TOFLEX RERng(A)-FRHF-HL | |
| 1x1,5 RE | 1 | 9.9 | 98.6 | 131 | 131 | 70.8 |
| 1x2,5 RE | 1 | 10.3 | 102.6 | 148 | 148 | 75.5 |
| 1x4 RE | 1 | 10.7 | 107.2 | 170 | 170 | 80.9 |
| 1x6 RE | 1 | 11.2 | 112.2 | 198 | 198 | 86.8 |
| 1x10 RE | 1 | 12.0 | 120.0 | 248 | 248 | 96.0 |
| 1x16 RE | 1 | 13.0 | 129.5 | 320 | 320 | 107.2 |
| 1x16 RM | 1 | 13.4 | 134.0 | 331 | 331 | 112.5 |
| 1x25 RE | 1 | 14.5 | 144.5 | 431 | 431 | 128.8 |
| 1x25 RM | 1 | 14.8 | 148.0 | 442 | 442 | 133.1 |
| 1x35 RM | 1 | 15.8 | 158.0 | 546 | 546 | 145.5 |
| 1x50 RM | 1 | 17.5 | 175.0 | 736 | 736 | 172.1 |
| 1x70 RM | 1 | 19.1 | 191.0 | 921 | 921 | 192.9 |
| 1x95 RM | 1 | 21.2 | 212.0 | 1195 | 1195 | 227.6 |
| 1x120 RM | 1 | 22.6 | 226.0 | 1452 | 1452 | 246.7 |
| 1x150 RM | 1 | 24.8 | 248.0 | 1767 | 1767 | 295.8 |
| 1x185 RM | 1 | 26.8 | 268.0 | 2144 | 2144 | 335.5 |
| 1x240 RM | 1 | 29.5 | 295.0 | 2680 | 2680 | 388.7 |
| 1x300 RM | 1 | 35.0 | 349.5 | 3456 | 3456 | 550.9 |
| 1x400 RM | 1 | 38.3 | 382.9 | 4313 | 4313 | 631.7 |
| 1x500 RM | 1 | 41.9 | 418.7 | 5342 | 5342 | 721.6 |
| 1x630 RM | 1 | 47.0 | 470.3 | 6875 | 6875 | 889.9 |
| 2x1,5 RE | 1 | 13.9 | 104.6 | 276 | 276 | 146.9 |
| 2x2,5 RE | 1 | 14.7 | 110.6 | 321 | 321 | 162.2 |
| 2x4 RE | 1 | 15.7 | 117.5 | 379 | 379 | 180.4 |
| 2x6 RE | 1 | 16.7 | 125.0 | 451 | 451 | 201.0 |
| 2x10 RE | 1 | 18.2 | 136.7 | 579 | 579 | 234.7 |
| 2x16 RE | 1 | 20.1 | 150.9 | 764 | 764 | 278.5 |
| 2x16 RM | 1 | 21.0 | 157.7 | 805 | 805 | 300.2 |
| 2x25 RE | 1 | 23.1 | 173.4 | 1059 | 1059 | 361.3 |
| 2x25 RM | 1 | 24.2 | 181.7 | 1122 | 1122 | 396.0 |
| 2x35 RM | 1 | 26.2 | 196.7 | 1389 | 1389 | 453.7 |
| 2x50 RM | 1 | 29.6 | 222.2 | 1887 | 1887 | 570.3 |
| 2x70 RM | 1 | 33.2 | 249.2 | 2423 | 2423 | 701.6 |
| 2x95 RM | 1 | 38.2 | 286.7 | 3232 | 3232 | 925.6 |
| 2x120 RM | 1 | 41.0 | 307.7 | 3896 | 3896 | 1045.3 |
| 2x150 RM | 1 | 45.8 | 343.7 | 4827 | 4827 | 1315.3 |
| 2x185 RM | 1 | 49.8 | 373.7 | 5846 | 5846 | 1539.6 |
| 2x240 RM | 1 | 56.2 | 421.7 | 7453 | 7453 | 1952.7 |
| 3x1,5 RE | 1 | 14.6 | 109.1 | 301 | 301 | 155.9 |
| 3x2,5 RE | 1 | 15.4 | 115.6 | 355 | 355 | 171.7 |
| 3x4 RE | 1 | 16.4 | 123.0 | 427 | 427 | 190.4 |
| 3x6 RE | 1 | 17.5 | 131.1 | 516 | 516 | 211.4 |
| 3x10 RE | 1 | 19.2 | 143.6 | 678 | 678 | 245.3 |
| 3x16 RE | 1 | 21.2 | 159.0 | 914 | 914 | 288.7 |
| 3x16 RM | 1 | 22.2 | 166.2 | 957 | 957 | 310.0 |
| 3x25 RE | 1 | 24.8 | 186.2 | 1308 | 1308 | 389.7 |
| 3x25 RM | 1 | 25.6 | 191.8 | 1353 | 1353 | 408.7 |
| 3x35 RM | 1 | 27.7 | 207.9 | 1698 | 1698 | 464.7 |
| 3x50 RM | 1 | 31.8 | 238.3 | 2378 | 2378 | 602.9 |

| | | | | | | |
|----------|---|------|-------|-------|-------|--------|
| 3x70 RM | 1 | 36.0 | 270.1 | 3081 | 3081 | 756.4 |
| 3x95 RM | 1 | 40.5 | 304.0 | 4041 | 4041 | 935.1 |
| 3x120 RM | 1 | 43.9 | 329.6 | 4967 | 4967 | 1076.4 |
| 3x150 RM | 1 | 48.6 | 364.6 | 6086 | 6086 | 1321.9 |
| 3x185 RM | 1 | 52.9 | 396.8 | 7408 | 7408 | 1543.4 |
| 3x240 RM | 1 | 59.7 | 447.9 | 9449 | 9449 | 1953.5 |
| 4x1,5 RE | 1 | 15.6 | 117.1 | 343 | 343 | 174.2 |
| 4x2,5 RE | 1 | 16.6 | 124.3 | 409 | 409 | 192.0 |
| 4x4 RE | 1 | 17.7 | 132.6 | 497 | 497 | 213.0 |
| 4x6 RE | 1 | 18.9 | 141.7 | 608 | 608 | 236.5 |
| 4x10 RE | 1 | 20.8 | 155.8 | 811 | 811 | 274.2 |
| 4x16 RE | 1 | 23.1 | 172.9 | 1108 | 1108 | 322.2 |
| 4x16 RM | 1 | 24.5 | 184.1 | 1176 | 1176 | 361.6 |
| 4x25 RE | 1 | 27.1 | 203.1 | 1596 | 1596 | 435.7 |
| 4x25 RM | 1 | 27.9 | 209.4 | 1648 | 1648 | 456.6 |
| 4x35 RM | 1 | 30.3 | 227.5 | 2084 | 2084 | 518.0 |
| 4x50 RM | 1 | 35.6 | 267.2 | 2998 | 2998 | 718.6 |
| 4x70 RM | 1 | 39.5 | 296.1 | 3811 | 3811 | 840.0 |
| 4x95 RM | 1 | 45.7 | 343.1 | 5152 | 5152 | 1127.3 |
| 4x120 RM | 1 | 49.1 | 368.4 | 6277 | 6277 | 1255.9 |
| 4x150 RM | 1 | 53.5 | 400.9 | 7591 | 7591 | 1465.1 |
| 4x185 RM | 1 | 59.3 | 444.6 | 9412 | 9412 | 1807.3 |
| 4x240 RM | 1 | 65.8 | 493.4 | 11822 | 11822 | 2163.9 |
| 5x1,5 RE | 1 | 16.8 | 126.0 | 394 | 394 | 195.2 |
| 5x2,5 RE | 1 | 17.9 | 134.1 | 474 | 474 | 215.5 |
| 5x4 RE | 1 | 19.1 | 143.4 | 582 | 582 | 239.3 |
| 5x6 RE | 1 | 20.5 | 153.5 | 723 | 723 | 265.9 |
| 5x10 RE | 1 | 22.6 | 169.3 | 968 | 968 | 308.5 |
| 5x16 RE | 1 | 25.5 | 191.5 | 1351 | 1351 | 379.1 |
| 5x16 RM | 1 | 26.8 | 200.7 | 1406 | 1406 | 406.3 |
| 5x25 RE | 1 | 29.6 | 221.9 | 1931 | 1931 | 491.4 |
| 5x25 RM | 1 | 30.5 | 229.0 | 1991 | 1991 | 514.9 |
| 5x35 RM | 1 | 33.6 | 252.3 | 2575 | 2575 | 605.5 |
| 5x50 RM | 1 | 39.0 | 292.7 | 3651 | 3651 | 809.5 |
| 5x70 RM | 1 | 43.7 | 328.1 | 4750 | 4750 | 973.6 |
| 5x95 RM | 1 | 50.2 | 376.6 | 6314 | 6314 | 1268.0 |
| 5x120 RM | 1 | 54.4 | 408.0 | 7753 | 7753 | 1446.6 |
| 5x150 RM | 1 | 59.9 | 448.9 | 9437 | 9437 | 1745.8 |
| 5x185 RM | 1 | 65.3 | 489.4 | 11639 | 11639 | 2034.1 |
| 5x240 RM | 1 | 73.9 | 554.6 | 14823 | 14823 | 2604.1 |


**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLENE RUBBER (HEPR) INSULATION**

10. SHIELDED

IEC 60502-1

10.3 Cables sheathed with halogen-free polymer compound

- TOFLEX REPng(A)-FRHF
- TOFLEX GREPng(A)-FRHF
- Cu/MGT/HEPR/OSCR/HFFR

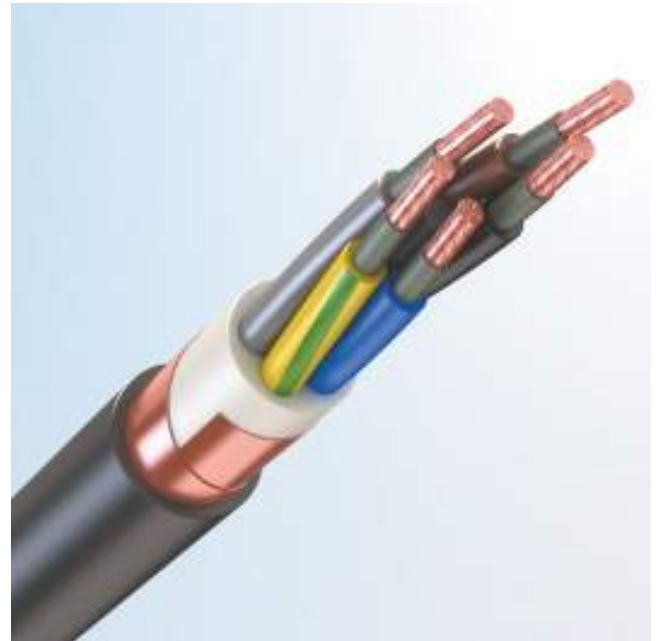

Possible options:

"ng(A)-FRHF-HL"



DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GREP) – of 5th class.
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑥ **Outer sheath:**
 - «ng(A)-FRHF» – made from halogen-free polymer compounds.
 - «ng(A)-FRHF-HL» – made from cold-resistant halogen-free polymer compounds.

► **Ordering example:**

«TOFLEX REPng(A)-FRHF3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX REPng(A)-FRHF3×95/50RM(N,G)-1 IEC 60502-1»



CABLE FEATURES




| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|-------------------------|---------------------------------------|
| | | | | TOFLEX REPng(A)-FRHF | TOFLEX REPng(A)-FRHF-HL | |
| 1x1,5 RE | 1 | 9.9 | 98.6 | 137 | 137 | 70.8 |
| 1x2,5 RE | 1 | 10.3 | 102.6 | 154 | 154 | 75.5 |
| 1x4 RE | 1 | 10.7 | 107.2 | 177 | 177 | 80.9 |
| 1x6 RE | 1 | 11.2 | 112.2 | 205 | 205 | 86.8 |
| 1x10 RE | 1 | 12.0 | 120.0 | 255 | 255 | 96.0 |
| 1x16 RE | 1 | 13.0 | 129.5 | 328 | 328 | 107.2 |
| 1x16 RM | 1 | 13.4 | 134.0 | 339 | 339 | 112.5 |
| 1x25 RE | 1 | 14.5 | 144.5 | 440 | 440 | 128.8 |
| 1x25 RM | 1 | 14.8 | 148.0 | 452 | 452 | 133.1 |
| 1x35 RM | 1 | 15.8 | 158.0 | 556 | 556 | 145.5 |
| 1x50 RM | 1 | 17.5 | 175.0 | 747 | 747 | 172.1 |
| 1x70 RM | 1 | 19.1 | 191.0 | 934 | 934 | 192.9 |
| 1x95 RM | 1 | 21.2 | 212.0 | 1210 | 1210 | 227.6 |
| 1x120 RM | 1 | 22.6 | 226.0 | 1468 | 1468 | 246.7 |
| 1x150 RM | 1 | 24.8 | 248.0 | 1786 | 1786 | 295.8 |
| 1x185 RM | 1 | 26.8 | 268.0 | 2165 | 2165 | 335.5 |
| 1x240 RM | 1 | 29.5 | 295.0 | 2703 | 2703 | 388.7 |
| 1x300 RM | 1 | 35.0 | 349.5 | 3488 | 3488 | 550.9 |
| 1x400 RM | 1 | 38.3 | 382.9 | 4349 | 4349 | 631.7 |
| 1x500 RM | 1 | 41.9 | 418.7 | 5382 | 5382 | 721.6 |
| 1x630 RM | 1 | 47.0 | 470.3 | 6927 | 6927 | 889.9 |
| 2x1,5 RE | 1 | 13.9 | 104.6 | 286 | 286 | 146.9 |
| 2x2,5 RE | 1 | 14.7 | 110.6 | 331 | 331 | 162.2 |
| 2x4 RE | 1 | 15.7 | 117.5 | 390 | 390 | 180.4 |
| 2x6 RE | 1 | 16.7 | 125.0 | 462 | 462 | 201.0 |
| 2x10 RE | 1 | 18.2 | 136.7 | 592 | 592 | 234.7 |
| 2x16 RE | 1 | 20.1 | 150.9 | 778 | 778 | 278.5 |
| 2x16 RM | 1 | 21.0 | 157.7 | 821 | 821 | 300.2 |
| 2x25 RE | 1 | 23.1 | 173.4 | 1076 | 1076 | 361.3 |
| 2x25 RM | 1 | 24.2 | 181.7 | 1142 | 1142 | 396.0 |
| 2x35 RM | 1 | 26.2 | 196.7 | 1410 | 1410 | 453.7 |
| 2x50 RM | 1 | 29.6 | 222.2 | 1911 | 1911 | 570.3 |
| 2x70 RM | 1 | 33.2 | 249.2 | 2450 | 2450 | 701.6 |
| 2x95 RM | 1 | 38.2 | 286.7 | 3270 | 3270 | 925.6 |
| 2x120 RM | 1 | 41.0 | 307.7 | 3936 | 3936 | 1045.3 |
| 2x150 RM | 1 | 45.8 | 343.7 | 4879 | 4879 | 1315.3 |
| 2x185 RM | 1 | 49.8 | 373.7 | 5904 | 5904 | 1539.6 |
| 2x240 RM | 1 | 56.2 | 421.7 | 7525 | 7525 | 1952.7 |
| 3x1,5 RE | 1 | 14.6 | 109.1 | 311 | 311 | 155.9 |
| 3x2,5 RE | 1 | 15.4 | 115.6 | 366 | 366 | 171.7 |
| 3x4 RE | 1 | 16.4 | 123.0 | 438 | 438 | 190.4 |
| 3x6 RE | 1 | 17.5 | 131.1 | 528 | 528 | 211.4 |
| 3x10 RE | 1 | 19.2 | 143.6 | 692 | 692 | 245.3 |
| 3x16 RE | 1 | 21.2 | 159.0 | 930 | 930 | 288.7 |
| 3x16 RM | 1 | 22.2 | 166.2 | 973 | 973 | 310.0 |
| 3x25 RE | 1 | 24.8 | 186.2 | 1328 | 1328 | 389.7 |
| 3x25 RM | 1 | 25.6 | 191.8 | 1374 | 1374 | 408.7 |
| 3x35 RM | 1 | 27.7 | 207.9 | 1721 | 1721 | 464.7 |
| 3x50 RM | 1 | 31.8 | 238.3 | 2404 | 2404 | 602.9 |

| | | | | | | |
|----------|---|------|-------|-------|-------|--------|
| 3x70 RM | 1 | 36.0 | 270.1 | 3116 | 3116 | 756.4 |
| 3x95 RM | 1 | 40.5 | 304.0 | 4081 | 4081 | 935.1 |
| 3x120 RM | 1 | 43.9 | 329.6 | 5011 | 5011 | 1076.4 |
| 3x150 RM | 1 | 48.6 | 364.6 | 6142 | 6142 | 1321.9 |
| 3x185 RM | 1 | 52.9 | 396.8 | 7469 | 7469 | 1543.4 |
| 3x240 RM | 1 | 59.7 | 447.9 | 9526 | 9526 | 1953.5 |
| 4x1,5 RE | 1 | 15.6 | 117.1 | 353 | 353 | 174.2 |
| 4x2,5 RE | 1 | 16.6 | 124.3 | 421 | 421 | 192.0 |
| 4x4 RE | 1 | 17.7 | 132.6 | 510 | 510 | 213.0 |
| 4x6 RE | 1 | 18.9 | 141.7 | 621 | 621 | 236.5 |
| 4x10 RE | 1 | 20.8 | 155.8 | 826 | 826 | 274.2 |
| 4x16 RE | 1 | 23.1 | 172.9 | 1124 | 1124 | 322.2 |
| 4x16 RM | 1 | 24.5 | 184.1 | 1196 | 1196 | 361.6 |
| 4x25 RE | 1 | 27.1 | 203.1 | 1618 | 1618 | 435.7 |
| 4x25 RM | 1 | 27.9 | 209.4 | 1671 | 1671 | 456.6 |
| 4x35 RM | 1 | 30.3 | 227.5 | 2109 | 2109 | 518.0 |
| 4x50 RM | 1 | 35.6 | 267.2 | 3033 | 3033 | 718.6 |
| 4x70 RM | 1 | 39.5 | 296.1 | 3850 | 3850 | 840.0 |
| 4x95 RM | 1 | 45.7 | 343.1 | 5205 | 5205 | 1127.3 |
| 4x120 RM | 1 | 49.1 | 368.4 | 6334 | 6334 | 1255.9 |
| 4x150 RM | 1 | 53.5 | 400.9 | 7653 | 7653 | 1465.1 |
| 4x185 RM | 1 | 59.3 | 444.6 | 9488 | 9488 | 1807.3 |
| 4x240 RM | 1 | 65.8 | 493.4 | 11907 | 11907 | 2163.9 |
| 5x1,5 RE | 1 | 16.8 | 126.0 | 406 | 406 | 195.2 |
| 5x2,5 RE | 1 | 17.9 | 134.1 | 487 | 487 | 215.5 |
| 5x4 RE | 1 | 19.1 | 143.4 | 596 | 596 | 239.3 |
| 5x6 RE | 1 | 20.5 | 153.5 | 738 | 738 | 265.9 |
| 5x10 RE | 1 | 22.6 | 169.3 | 985 | 985 | 308.5 |
| 5x16 RE | 1 | 25.5 | 191.5 | 1372 | 1372 | 379.1 |
| 5x16 RM | 1 | 26.8 | 200.7 | 1428 | 1428 | 406.3 |
| 5x25 RE | 1 | 29.6 | 221.9 | 1957 | 1957 | 491.4 |
| 5x25 RM | 1 | 30.5 | 229.0 | 2018 | 2018 | 514.9 |
| 5x35 RM | 1 | 33.6 | 252.3 | 2605 | 2605 | 605.5 |
| 5x50 RM | 1 | 39.0 | 292.7 | 3693 | 3693 | 809.5 |
| 5x70 RM | 1 | 43.7 | 328.1 | 4800 | 4800 | 973.6 |
| 5x95 RM | 1 | 50.2 | 376.6 | 6379 | 6379 | 1268.0 |
| 5x120 RM | 1 | 54.4 | 408.0 | 7823 | 7823 | 1446.6 |
| 5x150 RM | 1 | 59.9 | 448.9 | 9521 | 9521 | 1745.8 |
| 5x185 RM | 1 | 65.3 | 489.4 | 11739 | 11739 | 2034.1 |
| 5x240 RM | 1 | 73.9 | 554.6 | 14949 | 14949 | 2604.1 |

**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLEN RUBBER (HEPR) INSULATION**

11. ARMoured WITH STEEL GALVANIZED TAPES

IEC 60502-1

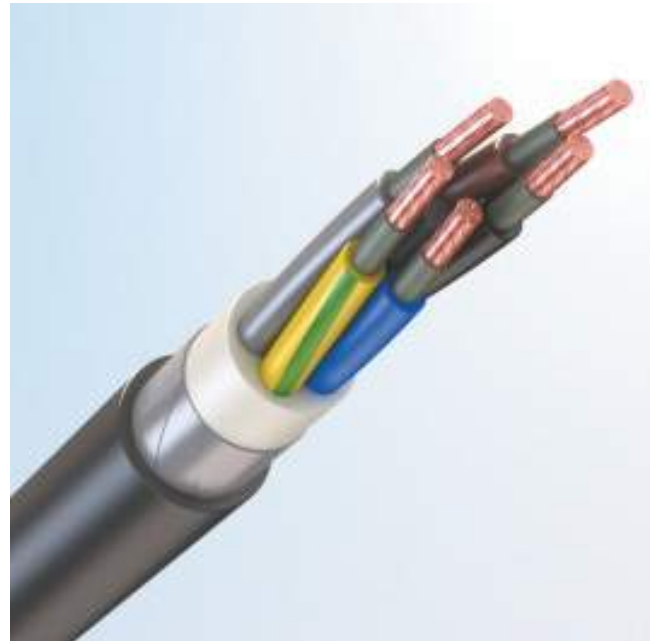

11.1 Cables with PVC sheath

- TOFLEX RBVng(A)-FRLS
- TOFLEX GRBVng(A)-FRLS
- Cu/MGT/HEPR/LSPVC/STA/LSPVC

Possible options:

«ng(A)-FRLS-HL»



DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GRBV) of 5th class (according to IEC 60228).
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Armour** – two steel galvanized tapes (the top tapes cover the gaps between the lower tape windings).
- ⑥ **Outer sheath:**
 - «ng(A)-FRLS» – made from PVC-compound with low fire hazard, low smoke and gas emission.
 - «ng(A)-FRLS-HL» – made from cold-resistant PVC-compound with low fire hazard, low smoke and gas emission.

► **Ordering example:**

«TOFLEX RBVng(A)-FRLS3×95RM(N,G)-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|-------------------------|---------------------------------------|
| | | | | TOFLEX RBVng(A)-FRLS | TOFLEX RBVng(A)-FRLS-HL | |
| 2x1,5 RE | 1 | 14.6 | 109.2 | 371 | 359 | 150.5 |
| 2x2,5 RE | 1 | 15.4 | 115.2 | 422 | 409 | 165.8 |
| 2x4 RE | 1 | 16.3 | 122.1 | 488 | 474 | 184.1 |
| 2x6 RE | 1 | 17.3 | 129.6 | 568 | 553 | 204.6 |
| 2x10 RE | 1 | 18.8 | 141.3 | 704 | 687 | 238.4 |
| 2x16 RE | 1 | 20.7 | 155.6 | 903 | 885 | 282.1 |
| 2x16 RM | 1 | 21.6 | 162.3 | 953 | 933 | 303.9 |
| 2x25 RE | 1 | 24.1 | 181.1 | 1251 | 1228 | 380.6 |
| 2x25 RM | 1 | 24.8 | 186.3 | 1300 | 1275 | 400.0 |
| 2x35 RM | 1 | 26.8 | 201.3 | 1584 | 1557 | 457.8 |
| 2x50 RM | 1 | 30.2 | 226.8 | 2111 | 2081 | 574.4 |
| 2x70 RM | 1 | 33.8 | 253.8 | 2680 | 2646 | 705.7 |
| 2x95 RM | 1 | 39.2 | 294.3 | 3678 | 3630 | 933.6 |
| 2x120 RM | 1 | 42.0 | 315.3 | 4379 | 4328 | 1053.3 |
| 2x150 RM | 1 | 46.8 | 351.3 | 5392 | 5326 | 1324.7 |
| 2x185 RM | 1 | 50.8 | 381.3 | 6470 | 6398 | 1548.9 |
| 2x240 RM | 1 | 58.0 | 435.3 | 8566 | 8475 | 1971.1 |
| 3x1,5 RE | 1 | 15.2 | 113.8 | 400 | 387 | 159.5 |
| 3x2,5 RE | 1 | 16.0 | 120.2 | 461 | 448 | 175.4 |
| 3x4 RE | 1 | 17.0 | 127.7 | 541 | 526 | 194.1 |
| 3x6 RE | 1 | 18.1 | 135.7 | 633 | 617 | 215.0 |
| 3x10 RE | 1 | 19.8 | 148.3 | 809 | 791 | 248.9 |
| 3x16 RE | 1 | 21.8 | 163.6 | 1061 | 1041 | 292.3 |
| 3x16 RM | 1 | 22.8 | 170.9 | 1111 | 1091 | 313.7 |
| 3x25 RE | 1 | 25.4 | 190.8 | 1488 | 1463 | 393.7 |
| 3x25 RM | 1 | 26.2 | 196.4 | 1539 | 1513 | 412.7 |
| 3x35 RM | 1 | 28.3 | 212.6 | 1903 | 1874 | 468.8 |
| 3x50 RM | 1 | 32.4 | 243.0 | 2617 | 2584 | 607.0 |
| 3x70 RM | 1 | 37.0 | 277.8 | 3491 | 3445 | 764.4 |
| 3x95 RM | 1 | 41.6 | 311.6 | 4509 | 4457 | 943.1 |
| 3x120 RM | 1 | 45.8 | 343.2 | 5586 | 5520 | 1143.6 |
| 3x150 RM | 1 | 49.6 | 372.2 | 6679 | 6608 | 1331.2 |
| 3x185 RM | 1 | 54.7 | 410.5 | 8420 | 8341 | 1560.0 |
| 3x240 RM | 1 | 61.5 | 461.5 | 10621 | 10523 | 1971.9 |
| 4x1,5 RE | 1 | 16.2 | 121.7 | 450 | 436 | 177.8 |
| 4x2,5 RE | 1 | 17.2 | 129.0 | 524 | 509 | 195.7 |
| 4x4 RE | 1 | 18.3 | 137.3 | 616 | 600 | 216.7 |
| 4x6 RE | 1 | 19.5 | 146.3 | 736 | 718 | 240.1 |
| 4x10 RE | 1 | 21.4 | 160.4 | 953 | 934 | 277.9 |
| 4x16 RE | 1 | 24.1 | 180.6 | 1296 | 1271 | 341.4 |
| 4x16 RM | 1 | 25.2 | 188.7 | 1353 | 1327 | 365.6 |
| 4x25 RE | 1 | 27.7 | 207.7 | 1793 | 1765 | 439.7 |
| 4x25 RM | 1 | 28.5 | 214.0 | 1852 | 1823 | 460.6 |
| 4x35 RM | 1 | 30.9 | 232.1 | 2308 | 2276 | 522.0 |
| 4x50 RM | 1 | 36.6 | 274.8 | 3399 | 3354 | 726.6 |
| 4x70 RM | 1 | 40.5 | 303.8 | 4261 | 4211 | 848.0 |
| 4x95 RM | 1 | 46.8 | 350.7 | 5701 | 5634 | 1136.6 |
| 4x120 RM | 1 | 50.1 | 376.0 | 6871 | 6799 | 1265.2 |
| 4x150 RM | 1 | 55.3 | 414.6 | 8606 | 8526 | 1481.7 |

| | | | | | | |
|----------|---|------|-------|-------|-------|--------|
| 4x185 RM | 1 | 61.1 | 458.2 | 10565 | 10468 | 1825.7 |
| 4x240 RM | 1 | 68.6 | 514.5 | 13312 | 13185 | 2293.5 |
| 5x1,5 RE | 1 | 17.4 | 130.6 | 506 | 491 | 198.9 |
| 5x2,5 RE | 1 | 18.5 | 138.7 | 594 | 577 | 219.1 |
| 5x4 RE | 1 | 19.7 | 148.0 | 712 | 694 | 243.0 |
| 5x6 RE | 1 | 21.1 | 158.2 | 863 | 844 | 269.5 |
| 5x10 RE | 1 | 23.2 | 174.0 | 1125 | 1104 | 312.2 |
| 5x16 RE | 1 | 26.2 | 196.2 | 1535 | 1509 | 383.2 |
| 5x16 RM | 1 | 27.4 | 205.3 | 1600 | 1572 | 410.4 |
| 5x25 RE | 1 | 30.2 | 226.6 | 2150 | 2118 | 495.4 |
| 5x25 RM | 1 | 31.2 | 233.7 | 2218 | 2185 | 518.9 |
| 5x35 RM | 1 | 35.1 | 262.9 | 2909 | 2866 | 654.8 |
| 5x50 RM | 1 | 40.0 | 300.3 | 4097 | 4047 | 817.5 |
| 5x70 RM | 1 | 44.8 | 335.7 | 5260 | 5204 | 981.6 |
| 5x95 RM | 1 | 51.2 | 384.3 | 6926 | 6852 | 1277.4 |
| 5x120 RM | 1 | 56.8 | 426.1 | 8890 | 8799 | 1518.6 |
| 5x150 RM | 1 | 61.7 | 462.6 | 10604 | 10505 | 1764.2 |
| 5x185 RM | 1 | 68.1 | 510.6 | 13125 | 12999 | 2162.8 |
| 5x240 RM | 1 | 75.8 | 568.2 | 16336 | 16194 | 2625.5 |

| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|--------------------------|---------------------------------------|
| | | | | TOFLEX RBaVng(A)-FRLS | TOFLEX RBaVng(A)-FRLS-HL | |
| 1x4 RE | 1 | 14.6 | 146.0 | 346 | 333 | 139.5 |
| 1x6 RE | 1 | 14.6 | 146.0 | 358 | 345 | 136.9 |
| 1x10 RE | 1 | 14.6 | 146.0 | 382 | 369 | 132.1 |
| 1x16 RE | 1 | 14.8 | 147.7 | 428 | 415 | 128.5 |
| 1x16 RM | 1 | 15.2 | 152.2 | 443 | 429 | 134.2 |
| 1x25 RE | 1 | 16.3 | 162.7 | 552 | 537 | 151.3 |
| 1x25 RM | 1 | 16.6 | 166.2 | 566 | 551 | 156.0 |
| 1x35 RM | 1 | 17.6 | 176.2 | 678 | 661 | 169.2 |
| 1x50 RM | 1 | 19.3 | 193.2 | 877 | 858 | 197.2 |
| 1x70 RM | 1 | 20.9 | 209.2 | 1075 | 1055 | 219.4 |
| 1x95 RM | 1 | 23.0 | 230.2 | 1365 | 1343 | 255.9 |
| 1x120 RM | 1 | 24.8 | 248.2 | 1665 | 1638 | 293.9 |
| 1x150 RM | 1 | 26.6 | 266.2 | 1975 | 1947 | 330.4 |
| 1x185 RM | 1 | 28.6 | 286.2 | 2369 | 2338 | 372.0 |
| 1x240 RM | 1 | 31.3 | 313.2 | 2927 | 2893 | 427.7 |
| 1x300 RM | 1 | 36.8 | 367.7 | 3777 | 3730 | 603.5 |
| 1x400 RM | 1 | 40.1 | 401.1 | 4665 | 4613 | 688.1 |
| 1x500 RM | 1 | 43.7 | 436.9 | 5727 | 5670 | 782.0 |
| 1x630 RM | 1 | 48.9 | 488.5 | 7348 | 7273 | 966.6 |

**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLENE RUBBER (HEPR) INSULATION**

11. ARMoured WITH STEEL GALVANIZED TAPES


IEC 60502-1

11.2 Cables sheathed with cross-linked highly elastic polymer compound

- TOFLEX RBRng(A)-FRHF
- TOFLEX GRBRng(A)-FRHF
- Cu/MGT/HEPR/HFFR/STA/ XLHFFR

Possible options:

"ng(A)-FRHF-HL"

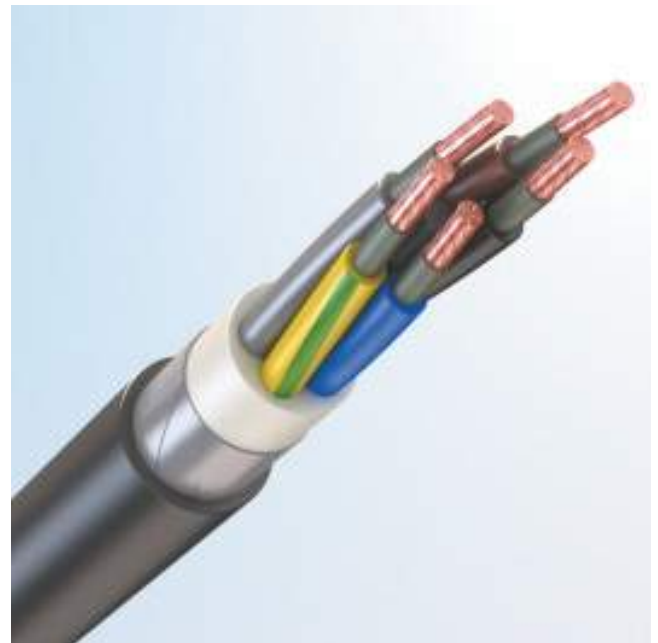

DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GRBR) of 5th class.
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Armour** – two steel galvanized tapes (the top tapes cover the gaps between the lower tape windings).
- ⑥ **Outer sheath:**
 - «ng(A)-FRHF» – made from halogen-free cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-FRHF-HL» – made from cold-resistant halogen-free cross-linked highly elastic polymer compound with low fire hazard.

► **Ordering example:**

«TOFLEX RBRng(A)-FRHF-HL5×95RM(N,G)-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|-------------------------|---------------------------------------|
| | | | | TOFLEX RBRng(A)-FRHF | TOFLEX RBRng(A)-FRHF-HL | |
| 2x1,5 RE | 1 | 14.6 | 109.2 | 336 | 336 | 150.5 |
| 2x2,5 RE | 1 | 15.4 | 115.2 | 385 | 385 | 165.8 |
| 2x4 RE | 1 | 16.3 | 122.1 | 447 | 447 | 184.1 |
| 2x6 RE | 1 | 17.3 | 129.6 | 524 | 524 | 204.6 |
| 2x10 RE | 1 | 18.8 | 141.3 | 655 | 655 | 238.4 |
| 2x16 RE | 1 | 20.7 | 155.6 | 848 | 848 | 282.1 |
| 2x16 RM | 1 | 21.6 | 162.3 | 894 | 894 | 303.9 |
| 2x25 RE | 1 | 24.1 | 181.1 | 1179 | 1179 | 380.6 |
| 2x25 RM | 1 | 24.8 | 186.3 | 1225 | 1225 | 400.0 |
| 2x35 RM | 1 | 26.8 | 201.3 | 1502 | 1502 | 457.8 |
| 2x50 RM | 1 | 30.2 | 226.8 | 2015 | 2015 | 574.4 |
| 2x70 RM | 1 | 33.8 | 253.8 | 2569 | 2569 | 705.7 |
| 2x95 RM | 1 | 39.2 | 294.3 | 3525 | 3525 | 933.6 |
| 2x120 RM | 1 | 42.0 | 315.3 | 4212 | 4212 | 1053.3 |
| 2x150 RM | 1 | 46.8 | 351.3 | 5178 | 5178 | 1324.7 |
| 2x185 RM | 1 | 50.8 | 381.3 | 6231 | 6231 | 1548.9 |
| 2x240 RM | 1 | 58.0 | 435.3 | 8263 | 8263 | 1971.1 |
| 3x1,5 RE | 1 | 15.2 | 113.8 | 364 | 364 | 159.5 |
| 3x2,5 RE | 1 | 16.0 | 120.2 | 422 | 422 | 175.4 |
| 3x4 RE | 1 | 17.0 | 127.7 | 499 | 499 | 194.1 |
| 3x6 RE | 1 | 18.1 | 135.7 | 588 | 588 | 215.0 |
| 3x10 RE | 1 | 19.8 | 148.3 | 758 | 758 | 248.9 |
| 3x16 RE | 1 | 21.8 | 163.6 | 1004 | 1004 | 292.3 |
| 3x16 RM | 1 | 22.8 | 170.9 | 1051 | 1051 | 313.7 |
| 3x25 RE | 1 | 25.4 | 190.8 | 1414 | 1414 | 393.7 |
| 3x25 RM | 1 | 26.2 | 196.4 | 1462 | 1462 | 412.7 |
| 3x35 RM | 1 | 28.3 | 212.6 | 1818 | 1818 | 468.8 |
| 3x50 RM | 1 | 32.4 | 243.0 | 2517 | 2517 | 607.0 |
| 3x70 RM | 1 | 37.0 | 277.8 | 3355 | 3355 | 764.4 |
| 3x95 RM | 1 | 41.6 | 311.6 | 4352 | 4352 | 943.1 |
| 3x120 RM | 1 | 45.8 | 343.2 | 5387 | 5387 | 1143.6 |
| 3x150 RM | 1 | 49.6 | 372.2 | 6460 | 6460 | 1331.2 |
| 3x185 RM | 1 | 54.7 | 410.5 | 8174 | 8174 | 1560.0 |
| 3x240 RM | 1 | 61.5 | 461.5 | 10313 | 10313 | 1971.9 |
| 4x1,5 RE | 1 | 16.2 | 121.7 | 411 | 411 | 177.8 |
| 4x2,5 RE | 1 | 17.2 | 129.0 | 482 | 482 | 195.7 |
| 4x4 RE | 1 | 18.3 | 137.3 | 570 | 570 | 216.7 |
| 4x6 RE | 1 | 19.5 | 146.3 | 687 | 687 | 240.1 |
| 4x10 RE | 1 | 21.4 | 160.4 | 898 | 898 | 277.9 |
| 4x16 RE | 1 | 24.1 | 180.6 | 1227 | 1227 | 341.4 |
| 4x16 RM | 1 | 25.2 | 188.7 | 1281 | 1281 | 365.6 |
| 4x25 RE | 1 | 27.7 | 207.7 | 1712 | 1712 | 439.7 |
| 4x25 RM | 1 | 28.5 | 214.0 | 1768 | 1768 | 460.6 |
| 4x35 RM | 1 | 30.9 | 232.1 | 2216 | 2216 | 522.0 |
| 4x50 RM | 1 | 36.6 | 274.8 | 3269 | 3269 | 726.6 |
| 4x70 RM | 1 | 40.5 | 303.8 | 4114 | 4114 | 848.0 |
| 4x95 RM | 1 | 46.8 | 350.7 | 5502 | 5502 | 1136.6 |
| 4x120 RM | 1 | 50.1 | 376.0 | 6656 | 6656 | 1265.2 |
| 4x150 RM | 1 | 55.3 | 414.6 | 8365 | 8365 | 1481.7 |

| | | | | | | |
|----------|---|------|-------|-------|-------|--------|
| 4x185 RM | 1 | 61.1 | 458.2 | 10269 | 10269 | 1825.7 |
| 4x240 RM | 1 | 68.6 | 514.5 | 12930 | 12930 | 2293.5 |
| 5x1,5 RE | 1 | 17.4 | 130.6 | 463 | 463 | 198.9 |
| 5x2,5 RE | 1 | 18.5 | 138.7 | 548 | 548 | 219.1 |
| 5x4 RE | 1 | 19.7 | 148.0 | 662 | 662 | 243.0 |
| 5x6 RE | 1 | 21.1 | 158.2 | 809 | 809 | 269.5 |
| 5x10 RE | 1 | 23.2 | 174.0 | 1064 | 1064 | 312.2 |
| 5x16 RE | 1 | 26.2 | 196.2 | 1460 | 1460 | 383.2 |
| 5x16 RM | 1 | 27.4 | 205.3 | 1520 | 1520 | 410.4 |
| 5x25 RE | 1 | 30.2 | 226.6 | 2059 | 2059 | 495.4 |
| 5x25 RM | 1 | 31.2 | 233.7 | 2124 | 2124 | 518.9 |
| 5x35 RM | 1 | 35.1 | 262.9 | 2783 | 2783 | 654.8 |
| 5x50 RM | 1 | 40.0 | 300.3 | 3950 | 3950 | 817.5 |
| 5x70 RM | 1 | 44.8 | 335.7 | 5089 | 5089 | 981.6 |
| 5x95 RM | 1 | 51.2 | 384.3 | 6702 | 6702 | 1277.4 |
| 5x120 RM | 1 | 56.8 | 426.1 | 8617 | 8617 | 1518.6 |
| 5x150 RM | 1 | 61.7 | 462.6 | 10303 | 10303 | 1764.2 |
| 5x185 RM | 1 | 68.1 | 510.6 | 12738 | 12738 | 2162.8 |
| 5x240 RM | 1 | 75.8 | 568.2 | 15896 | 15896 | 2625.5 |


| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|--------------------------|---------------------------------------|
| | | | | TOFLEX RBaRng(A)-FRHF | TOFLEX RBaRng(A)-FRHF-HL | |
| 1x4 RE | 1 | 14.6 | 146.0 | 292 | 292 | 128.6 |
| 1x6 RE | 1 | 14.6 | 146.0 | 304 | 304 | 126.0 |
| 1x10 RE | 1 | 14.6 | 146.0 | 329 | 329 | 121.2 |
| 1x16 RE | 1 | 14.8 | 147.7 | 374 | 374 | 117.5 |
| 1x16 RM | 1 | 15.2 | 152.2 | 387 | 387 | 122.8 |
| 1x25 RE | 1 | 16.3 | 162.7 | 491 | 491 | 139.1 |
| 1x25 RM | 1 | 16.6 | 166.2 | 504 | 504 | 143.4 |
| 1x35 RM | 1 | 17.6 | 176.2 | 611 | 611 | 155.8 |
| 1x50 RM | 1 | 19.3 | 193.2 | 803 | 803 | 182.4 |
| 1x70 RM | 1 | 20.9 | 209.2 | 995 | 995 | 203.2 |
| 1x95 RM | 1 | 23.0 | 230.2 | 1276 | 1276 | 237.9 |
| 1x120 RM | 1 | 24.8 | 248.2 | 1559 | 1559 | 272.4 |
| 1x150 RM | 1 | 26.6 | 266.2 | 1861 | 1861 | 307.2 |
| 1x185 RM | 1 | 28.6 | 286.2 | 2246 | 2246 | 346.9 |
| 1x240 RM | 1 | 31.3 | 313.2 | 2791 | 2791 | 400.1 |
| 1x300 RM | 1 | 36.8 | 367.7 | 3585 | 3585 | 564.6 |
| 1x400 RM | 1 | 40.1 | 401.1 | 4455 | 4455 | 645.4 |
| 1x500 RM | 1 | 43.7 | 436.9 | 5497 | 5497 | 735.3 |
| 1x630 RM | 1 | 48.9 | 488.5 | 7047 | 7047 | 905.9 |

**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLEN RUBBER (HEPR) INSULATION**

11. ARMoured WITH STEEL GALVANIZED TAPES

IEC 60502-1

11.3 Cables sheathed with halogen-free polymer compound

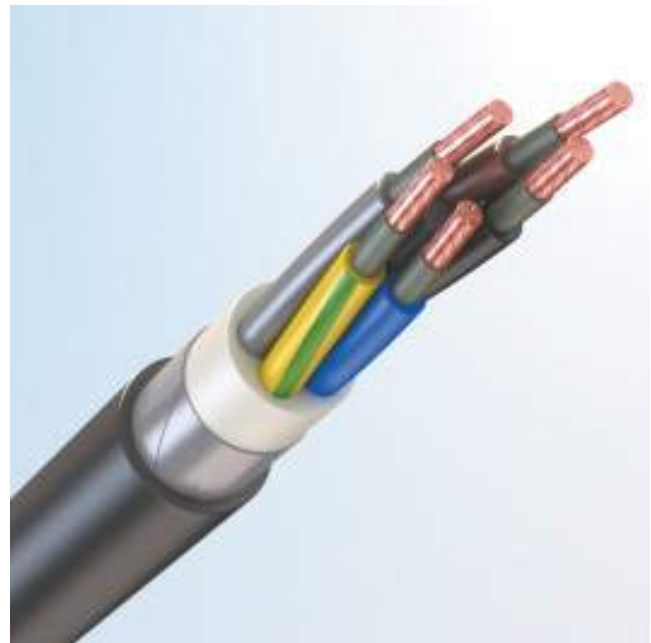

- TOFLEX RBPng(A)-FRHF
- TOFLEX GRBPng(A)-FRHF
- Cu/MGT/HEPR/HFFR/STA/HFFR

Possible options:

"ng(A)-FRHF-HL"

DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GRBP) – of 5th class.
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Armour** – two steel galvanized tapes (the top tapes cover the gaps between the lower tape windings).
- ⑥ **Outer sheath:**
 - «ng(A)-FRHF» – made from halogen-free polymer compounds.
 - «ng(A)-FRHF-HL» – made from cold-resistant halogen-free polymer compounds.

► **Ordering example:**

«TOFLEX RBPng(A)-FRHF-HL3×185RM-1 IEC 60502-1»

CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|-------------------------|---------------------------------------|
| | | | | TOFLEX RBPng(A)-FRHF | TOFLEX RBPng(A)-FRHF-HL | |
| 2x1,5 RE | 1 | 14.6 | 109.2 | 346 | 346 | 150.5 |
| 2x2,5 RE | 1 | 15.4 | 115.2 | 395 | 395 | 165.8 |
| 2x4 RE | 1 | 16.3 | 122.1 | 459 | 459 | 184.1 |
| 2x6 RE | 1 | 17.3 | 129.6 | 536 | 536 | 204.6 |
| 2x10 RE | 1 | 18.8 | 141.3 | 668 | 668 | 238.4 |
| 2x16 RE | 1 | 20.7 | 155.6 | 863 | 863 | 282.1 |
| 2x16 RM | 1 | 21.6 | 162.3 | 910 | 910 | 303.9 |
| 2x25 RE | 1 | 24.1 | 181.1 | 1199 | 1199 | 380.6 |
| 2x25 RM | 1 | 24.8 | 186.3 | 1245 | 1245 | 400.0 |
| 2x35 RM | 1 | 26.8 | 201.3 | 1523 | 1523 | 457.8 |
| 2x50 RM | 1 | 30.2 | 226.8 | 2040 | 2040 | 574.4 |
| 2x70 RM | 1 | 33.8 | 253.8 | 2596 | 2596 | 705.7 |
| 2x95 RM | 1 | 39.2 | 294.3 | 3563 | 3563 | 933.6 |
| 2x120 RM | 1 | 42.0 | 315.3 | 4253 | 4253 | 1053.3 |
| 2x150 RM | 1 | 46.8 | 351.3 | 5231 | 5231 | 1324.7 |
| 2x185 RM | 1 | 50.8 | 381.3 | 6289 | 6289 | 1548.9 |
| 2x240 RM | 1 | 58.0 | 435.3 | 8337 | 8337 | 1971.1 |
| 3x1,5 RE | 1 | 15.2 | 113.8 | 374 | 374 | 159.5 |
| 3x2,5 RE | 1 | 16.0 | 120.2 | 433 | 433 | 175.4 |
| 3x4 RE | 1 | 17.0 | 127.7 | 511 | 511 | 194.1 |
| 3x6 RE | 1 | 18.1 | 135.7 | 601 | 601 | 215.0 |
| 3x10 RE | 1 | 19.8 | 148.3 | 772 | 772 | 248.9 |
| 3x16 RE | 1 | 21.8 | 163.6 | 1020 | 1020 | 292.3 |
| 3x16 RM | 1 | 22.8 | 170.9 | 1068 | 1068 | 313.7 |
| 3x25 RE | 1 | 25.4 | 190.8 | 1434 | 1434 | 393.7 |
| 3x25 RM | 1 | 26.2 | 196.4 | 1483 | 1483 | 412.7 |
| 3x35 RM | 1 | 28.3 | 212.6 | 1841 | 1841 | 468.8 |
| 3x50 RM | 1 | 32.4 | 243.0 | 2543 | 2543 | 607.0 |
| 3x70 RM | 1 | 37.0 | 277.8 | 3391 | 3391 | 764.4 |
| 3x95 RM | 1 | 41.6 | 311.6 | 4393 | 4393 | 943.1 |
| 3x120 RM | 1 | 45.8 | 343.2 | 5440 | 5440 | 1143.6 |
| 3x150 RM | 1 | 49.6 | 372.2 | 6517 | 6517 | 1331.2 |
| 3x185 RM | 1 | 54.7 | 410.5 | 8237 | 8237 | 1560.0 |
| 3x240 RM | 1 | 61.5 | 461.5 | 10392 | 10392 | 1971.9 |
| 4x1,5 RE | 1 | 16.2 | 121.7 | 422 | 422 | 177.8 |
| 4x2,5 RE | 1 | 17.2 | 129.0 | 494 | 494 | 195.7 |
| 4x4 RE | 1 | 18.3 | 137.3 | 583 | 583 | 216.7 |
| 4x6 RE | 1 | 19.5 | 146.3 | 701 | 701 | 240.1 |
| 4x10 RE | 1 | 21.4 | 160.4 | 914 | 914 | 277.9 |
| 4x16 RE | 1 | 24.1 | 180.6 | 1246 | 1246 | 341.4 |
| 4x16 RM | 1 | 25.2 | 188.7 | 1301 | 1301 | 365.6 |
| 4x25 RE | 1 | 27.7 | 207.7 | 1734 | 1734 | 439.7 |
| 4x25 RM | 1 | 28.5 | 214.0 | 1791 | 1791 | 460.6 |
| 4x35 RM | 1 | 30.9 | 232.1 | 2241 | 2241 | 522.0 |
| 4x50 RM | 1 | 36.6 | 274.8 | 3305 | 3305 | 726.6 |
| 4x70 RM | 1 | 40.5 | 303.8 | 4154 | 4154 | 848.0 |
| 4x95 RM | 1 | 46.8 | 350.7 | 5556 | 5556 | 1136.6 |
| 4x120 RM | 1 | 50.1 | 376.0 | 6713 | 6713 | 1265.2 |
| 4x150 RM | 1 | 55.3 | 414.6 | 8429 | 8429 | 1481.7 |

| | | | | | | |
|----------|---|------|-------|-------|-------|--------|
| 4x185 RM | 1 | 61.1 | 458.2 | 10348 | 10348 | 1825.7 |
| 4x240 RM | 1 | 68.6 | 514.5 | 13032 | 13032 | 2293.5 |
| 5x1,5 RE | 1 | 17.4 | 130.6 | 475 | 475 | 198.9 |
| 5x2,5 RE | 1 | 18.5 | 138.7 | 561 | 561 | 219.1 |
| 5x4 RE | 1 | 19.7 | 148.0 | 676 | 676 | 243.0 |
| 5x6 RE | 1 | 21.1 | 158.2 | 824 | 824 | 269.5 |
| 5x10 RE | 1 | 23.2 | 174.0 | 1081 | 1081 | 312.2 |
| 5x16 RE | 1 | 26.2 | 196.2 | 1481 | 1481 | 383.2 |
| 5x16 RM | 1 | 27.4 | 205.3 | 1543 | 1543 | 410.4 |
| 5x25 RE | 1 | 30.2 | 226.6 | 2084 | 2084 | 495.4 |
| 5x25 RM | 1 | 31.2 | 233.7 | 2149 | 2149 | 518.9 |
| 5x35 RM | 1 | 35.1 | 262.9 | 2818 | 2818 | 654.8 |
| 5x50 RM | 1 | 40.0 | 300.3 | 3989 | 3989 | 817.5 |
| 5x70 RM | 1 | 44.8 | 335.7 | 5133 | 5133 | 981.6 |
| 5x95 RM | 1 | 51.2 | 384.3 | 6761 | 6761 | 1277.4 |
| 5x120 RM | 1 | 56.8 | 426.1 | 8689 | 8689 | 1518.6 |
| 5x150 RM | 1 | 61.7 | 462.6 | 10383 | 10383 | 1764.2 |
| 5x185 RM | 1 | 68.1 | 510.6 | 12839 | 12839 | 2162.8 |
| 5x240 RM | 1 | 75.8 | 568.2 | 16009 | 16009 | 2625.5 |
| | | | | | | |


| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|--------------------------|---------------------------------------|
| | | | | TOFLEX RBaPng(A)-FRHF | TOFLEX RBaPng(A)-FRHF-HL | |
| 1x4 RE | 1 | 14.6 | 146.0 | 304 | 304 | 128.6 |
| 1x6 RE | 1 | 14.6 | 146.0 | 316 | 316 | 126.0 |
| 1x10 RE | 1 | 14.6 | 146.0 | 340 | 340 | 121.2 |
| 1x16 RE | 1 | 14.8 | 147.7 | 386 | 386 | 117.5 |
| 1x16 RM | 1 | 15.2 | 152.2 | 399 | 399 | 122.8 |
| 1x25 RE | 1 | 16.3 | 162.7 | 505 | 505 | 139.1 |
| 1x25 RM | 1 | 16.6 | 166.2 | 518 | 518 | 143.4 |
| 1x35 RM | 1 | 17.6 | 176.2 | 626 | 626 | 155.8 |
| 1x50 RM | 1 | 19.3 | 193.2 | 819 | 819 | 182.4 |
| 1x70 RM | 1 | 20.9 | 209.2 | 1012 | 1012 | 203.2 |
| 1x95 RM | 1 | 23.0 | 230.2 | 1296 | 1296 | 237.9 |
| 1x120 RM | 1 | 24.8 | 248.2 | 1582 | 1582 | 272.4 |
| 1x150 RM | 1 | 26.6 | 266.2 | 1886 | 1886 | 307.2 |
| 1x185 RM | 1 | 28.6 | 286.2 | 2272 | 2272 | 346.9 |
| 1x240 RM | 1 | 31.3 | 313.2 | 2820 | 2820 | 400.1 |
| 1x300 RM | 1 | 36.8 | 367.7 | 3627 | 3627 | 564.6 |
| 1x400 RM | 1 | 40.1 | 401.1 | 4500 | 4500 | 645.4 |
| 1x500 RM | 1 | 43.7 | 436.9 | 5547 | 5547 | 735.3 |
| 1x630 RM | 1 | 48.9 | 488.5 | 7112 | 7112 | 905.9 |

**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLENE RUBBER (HEPR) INSULATION**

12. ARMoured WITH FULL LAY-UP FROM STEEL GALVANIZED WIRES

IEC 60502-1

12.1 Cables with PVC sheath

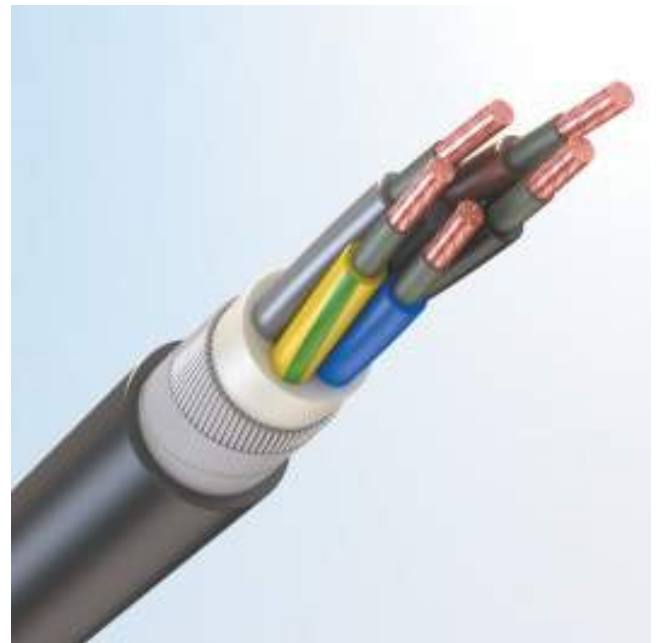

- TOFLEX RKVng(A)-FRLS
- TOFLEX GRKVng(A)-FRLS
- Cu/MGT/HEPR/LSPVC/SWA/LSPVC

Possible options:

«ng(A)-FRLS-HL»



DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GRKV) of 5th class (according to IEC 60228).
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Armour** – steel galvanized wires.
- ⑥ **Outer sheath:**
 - «ng(A)-FRLS» – made from PVC-compound with low fire hazard, low smoke and gas emission.
 - «ng(A)-FRLS-HL» – made from cold-resistant PVC-compound with low fire hazard, low smoke and gas emission.

► **Ordering example:**

«TOFLEX RKVng(A)-FRLS3×95RM(N,G)-1 IEC 60502-1»



CABLE FEATURES




| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|-------------------------|---------------------------------------|
| | | | | TOFLEX RkVng(A)-FRLS | TOFLEX RkVng(A)-FRLS-HL | |
| 2x1,5 RE | 1 | 16.5 | 123.9 | 588 | 574 | 162.1 |
| 2x2,5 RE | 1 | 17.3 | 129.9 | 653 | 638 | 177.4 |
| 2x4 RE | 1 | 18.2 | 136.8 | 740 | 724 | 195.6 |
| 2x6 RE | 1 | 19.2 | 144.3 | 831 | 815 | 216.2 |
| 2x10 RE | 1 | 20.8 | 156.0 | 999 | 981 | 249.9 |
| 2x16 RE | 1 | 23.5 | 176.3 | 1402 | 1382 | 298.3 |
| 2x16 RM | 1 | 24.8 | 186.0 | 1490 | 1467 | 336.1 |
| 2x25 RE | 1 | 26.9 | 201.8 | 1833 | 1807 | 398.6 |
| 2x25 RM | 1 | 27.6 | 207.0 | 1893 | 1866 | 418.1 |
| 2x35 RM | 1 | 29.6 | 222.0 | 2231 | 2202 | 475.8 |
| 2x50 RM | 1 | 33.8 | 253.5 | 3097 | 3063 | 597.6 |
| 2x70 RM | 1 | 38.2 | 286.5 | 3858 | 3813 | 778.3 |
| 2x120 RM | 1 | 47.0 | 352.5 | 6117 | 6052 | 1146 |
| 3x1,5 RE | 1 | 17.1 | 128.5 | 632 | 617 | 171.1 |
| 3x2,5 RE | 1 | 18.0 | 134.9 | 706 | 690 | 186.9 |
| 3x4 RE | 1 | 19.0 | 142.4 | 806 | 790 | 205.6 |
| 3x6 RE | 1 | 20.1 | 150.4 | 915 | 898 | 226.5 |
| 3x10 RE | 1 | 22.5 | 169.0 | 1281 | 1262 | 265.1 |
| 3x16 RE | 1 | 25.0 | 187.3 | 1615 | 1591 | 324.7 |
| 3x16 RM | 1 | 25.9 | 194.6 | 1693 | 1668 | 346.7 |
| 3x25 RE | 1 | 28.2 | 211.5 | 2094 | 2067 | 411.7 |
| 3x25 RM | 1 | 29.0 | 217.1 | 2174 | 2145 | 430.8 |
| 3x50 RM | 1 | 36.8 | 275.7 | 3750 | 3707 | 677.7 |
| 3x95 RM | 1 | 46.5 | 348.8 | 6209 | 6145 | 1035 |
| 4x1,5 RE | 1 | 18.2 | 136.4 | 702 | 687 | 189.4 |
| 4x2,5 RE | 1 | 19.2 | 143.7 | 788 | 772 | 207.2 |
| 4x4 RE | 1 | 20.3 | 152.0 | 905 | 888 | 228.2 |
| 4x6 RE | 1 | 21.5 | 161.0 | 1045 | 1027 | 251.6 |
| 4x10 RE | 1 | 24.6 | 184.1 | 1492 | 1469 | 310.0 |
| 4x16 RE | 1 | 26.8 | 201.3 | 1861 | 1835 | 359.5 |
| 4x16 RM | 1 | 27.9 | 209.4 | 1961 | 1934 | 383.7 |
| 4x25 RE | 1 | 30.5 | 228.4 | 2467 | 2437 | 457.7 |
| 4x35 RM | 1 | 35.3 | 264.8 | 3395 | 3354 | 590.9 |
| 5x1,5 RE | 1 | 19.4 | 145.3 | 783 | 766 | 210.4 |
| 5x2,5 RE | 1 | 20.5 | 153.4 | 891 | 874 | 230.7 |
| 5x4 RE | 1 | 22.5 | 168.7 | 1184 | 1165 | 259.2 |
| 5x6 RE | 1 | 24.2 | 181.9 | 1388 | 1364 | 301.4 |
| 5x10 RE | 1 | 26.4 | 197.7 | 1720 | 1695 | 345.5 |
| 5x16 RE | 1 | 28.9 | 216.9 | 2170 | 2141 | 401.2 |
| 5x16 RM | 1 | 30.1 | 226.0 | 2259 | 2230 | 428.4 |
| 5x25 RE | 1 | 33.8 | 253.3 | 3135 | 3102 | 518.7 |
| 5x25 RM | 1 | 35.5 | 266.4 | 3304 | 3262 | 588.0 |

**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLENE RUBBER (HEPR) INSULATION**

12. ARMoured WITH FULL LAY-UP FROM STEEL GALVANIZED WIRES

IEC 60502-1

12.2 Cables sheathed with cross-linked highly elastic polymer compound

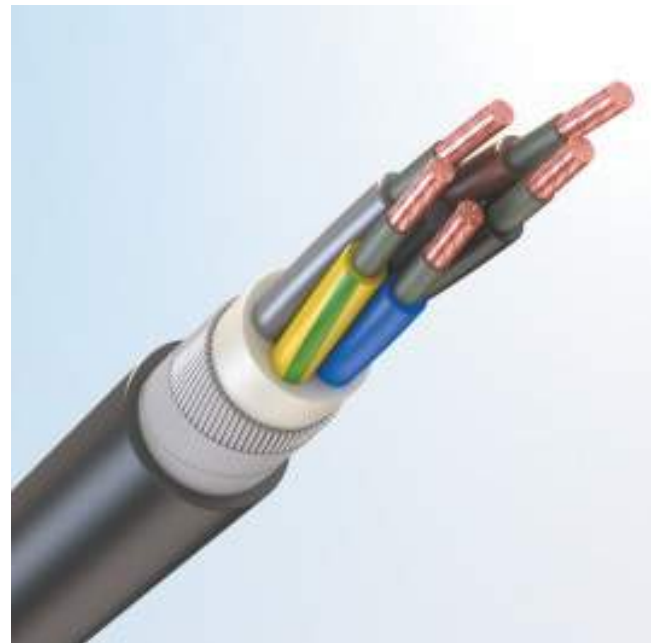

- TOFLEX RKRng(A)-FRHF
- TOFLEX GRKRng(A)-FRHF
- Cu/MGT/HEPR/HFFR/SWA/ XLHFFR

Possible options:

"ng(A)-FRHF-HL"



DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GRKV) of 5th class (according to IEC 60228).
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Armour** – steel galvanized wires.
- ⑥ **Outer sheath:**
 - «ng(A)-FRHF» – made from halogen-free cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-FRHF-HL» – made from cold-resistant halogen-free cross-linked highly elastic polymer compound with low fire hazard.

► **Ordering example:**

«TOFLEX RKRng(A)-FRHF-HL5×95RM(N,G)-1 IEC 60502-1»



CABLE FEATURES




| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|-------------------------|---------------------------------------|
| | | | | TOFLEX RkVng(A)-FRLS | TOFLEX RkVng(A)-FRLS-HL | |
| 2x1,5 RE | 1 | 16.5 | 123.9 | 548 | 548 | 162.1 |
| 2x2,5 RE | 1 | 17.3 | 129.9 | 610 | 610 | 177.4 |
| 2x4 RE | 1 | 18.2 | 136.8 | 694 | 694 | 195.6 |
| 2x6 RE | 1 | 19.2 | 144.3 | 783 | 783 | 216.2 |
| 2x10 RE | 1 | 20.8 | 156.0 | 945 | 945 | 249.9 |
| 2x16 RE | 1 | 23.5 | 176.3 | 1340 | 1340 | 298.3 |
| 2x16 RM | 1 | 24.8 | 186.0 | 1419 | 1419 | 336.1 |
| 2x25 RE | 1 | 26.9 | 201.8 | 1753 | 1753 | 398.6 |
| 2x25 RM | 1 | 27.6 | 207.0 | 1811 | 1811 | 418.1 |
| 2x35 RM | 1 | 29.6 | 222.0 | 2140 | 2140 | 475.8 |
| 2x50 RM | 1 | 33.8 | 253.5 | 2990 | 2990 | 597.6 |
| 2x70 RM | 1 | 38.2 | 286.5 | 3716 | 3716 | 778.3 |
| 2x120 RM | 1 | 47.0 | 352.5 | 5910 | 5910 | 1146 |
| 3x1,5 RE | 1 | 17.1 | 128.5 | 590 | 590 | 171.1 |
| 3x2,5 RE | 1 | 18.0 | 134.9 | 662 | 662 | 186.9 |
| 3x4 RE | 1 | 19.0 | 142.4 | 759 | 759 | 205.6 |
| 3x6 RE | 1 | 20.1 | 150.4 | 865 | 865 | 226.5 |
| 3x10 RE | 1 | 22.5 | 169.0 | 1224 | 1224 | 265.1 |
| 3x16 RE | 1 | 25.0 | 187.3 | 1544 | 1544 | 324.7 |
| 3x16 RM | 1 | 25.9 | 194.6 | 1618 | 1618 | 346.7 |
| 3x25 RE | 1 | 28.2 | 211.5 | 2012 | 2012 | 411.7 |
| 3x25 RM | 1 | 29.0 | 217.1 | 2089 | 2089 | 430.8 |
| 3x50 RM | 1 | 36.8 | 275.7 | 3619 | 3619 | 677.7 |
| 3x95 RM | 1 | 46.5 | 348.8 | 6014 | 6014 | 1035 |
| 4x1,5 RE | 1 | 18.2 | 136.4 | 658 | 658 | 189.4 |
| 4x2,5 RE | 1 | 19.2 | 143.7 | 741 | 741 | 207.2 |
| 4x4 RE | 1 | 20.3 | 152.0 | 855 | 855 | 228.2 |
| 4x6 RE | 1 | 22.3 | 167.0 | 1137 | 1137 | 256.3 |
| 4x10 RE | 1 | 24.6 | 184.1 | 1424 | 1424 | 310.0 |
| 4x16 RE | 1 | 26.8 | 201.3 | 1785 | 1785 | 359.5 |
| 4x16 RM | 1 | 27.9 | 209.4 | 1881 | 1881 | 383.7 |
| 4x25 RE | 1 | 30.5 | 228.4 | 2378 | 2378 | 457.7 |
| 4x35 RM | 1 | 35.3 | 264.8 | 3274 | 3274 | 590.9 |
| 5x1,5 RE | 1 | 19.4 | 145.3 | 735 | 735 | 210.4 |
| 5x2,5 RE | 1 | 20.5 | 153.4 | 840 | 840 | 230.7 |
| 5x4 RE | 1 | 22.5 | 168.7 | 1128 | 1128 | 259.2 |
| 5x6 RE | 1 | 24.2 | 181.9 | 1320 | 1320 | 301.4 |
| 5x10 RE | 1 | 26.4 | 197.7 | 1646 | 1646 | 345.5 |
| 5x16 RE | 1 | 28.9 | 216.9 | 2086 | 2086 | 401.2 |
| 5x16 RM | 1 | 30.1 | 226.0 | 2172 | 2172 | 428.4 |
| 5x25 RE | 1 | 33.8 | 253.3 | 3035 | 3035 | 518.7 |
| 5x25 RM | 1 | 35.5 | 266.4 | 3181 | 3181 | 588.0 |

**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLENE RUBBER (HEPR) INSULATION**

12. ARMoured WITH FULL LAY-UP FROM STEEL GALVANIZED WIRES

IEC 60502-1

12.3 Cables sheathed with halogen-free polymer compound

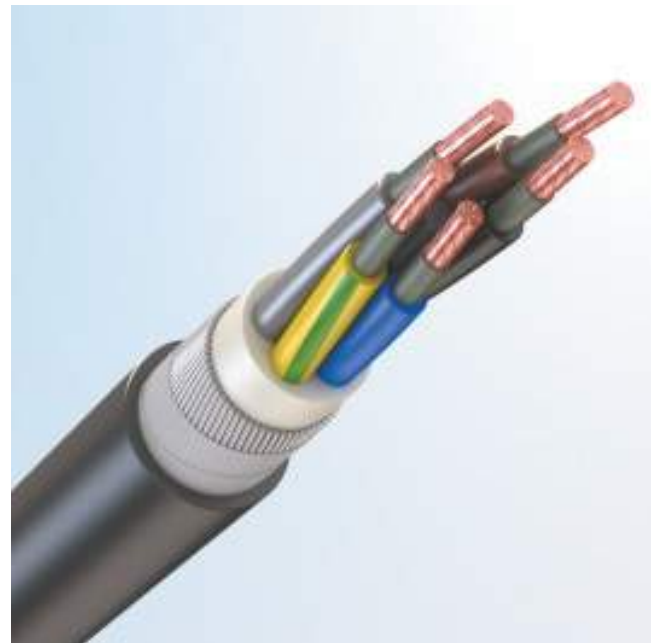

- TOFLEX RKPng(A)-FRHF
- TOFLEX GRKPng(A)-FRHF
- Cu/MGT/HEPR/HFFR/SWA/HFFR

Possible options:

"ng(A)-FRHF-HL"



DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GRKV) of 5th class (according to IEC 60228).
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Armour** – steel galvanized wires.
- ⑥ **Outer sheath:**
 - «ng(A)-FRHF» – made from halogen-free polymer compounds.
 - «ng(A)-FRHF-HL» – made from cold-resistant halogen-free polymer compounds.

► **Ordering example:**

«TOFLEX RKPng(A)-FRHF-HL3×185RM-1 IEC 60502-1»



CABLE FEATURES




| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|-------------------------|---------------------------------------|
| | | | | TOFLEX RKPng(A)-FRHF | TOFLEX RKPng(A)-FRHF-HL | |
| 2x1,5 RE | 1 | 16.5 | 123.9 | 560 | 560 | 162.1 |
| 2x2,5 RE | 1 | 17.3 | 129.9 | 622 | 622 | 177.4 |
| 2x4 RE | 1 | 18.2 | 136.8 | 707 | 707 | 195.6 |
| 2x6 RE | 1 | 19.2 | 144.3 | 796 | 796 | 216.2 |
| 2x10 RE | 1 | 20.8 | 156.0 | 960 | 960 | 249.9 |
| 2x16 RE | 1 | 23.5 | 176.3 | 1357 | 1357 | 298.3 |
| 2x16 RM | 1 | 24.8 | 186.0 | 1438 | 1438 | 336.1 |
| 2x25 RE | 1 | 26.9 | 201.8 | 1775 | 1775 | 398.6 |
| 2x25 RM | 1 | 27.6 | 207.0 | 1833 | 1833 | 418.1 |
| 2x35 RM | 1 | 29.6 | 222.0 | 2164 | 2164 | 475.8 |
| 2x50 RM | 1 | 33.8 | 253.5 | 3018 | 3018 | 597.6 |
| 2x70 RM | 1 | 38.2 | 286.5 | 3753 | 3753 | 778.3 |
| 2x120 RM | 1 | 47.0 | 352.5 | 5964 | 5964 | 1146 |
| 3x1,5 RE | 1 | 17.1 | 128.5 | 603 | 603 | 171.1 |
| 3x2,5 RE | 1 | 18.0 | 134.9 | 674 | 674 | 186.9 |
| 3x4 RE | 1 | 19.0 | 142.4 | 773 | 773 | 205.6 |
| 3x6 RE | 1 | 20.1 | 150.4 | 879 | 879 | 226.5 |
| 3x10 RE | 1 | 22.5 | 169.0 | 1240 | 1240 | 265.1 |
| 3x16 RE | 1 | 25.0 | 187.3 | 1564 | 1564 | 324.7 |
| 3x16 RM | 1 | 25.9 | 194.6 | 1639 | 1639 | 346.7 |
| 3x25 RE | 1 | 28.2 | 211.5 | 2035 | 2035 | 411.7 |
| 3x25 RM | 1 | 29.0 | 217.1 | 2112 | 2112 | 430.8 |
| 3x50 RM | 1 | 36.8 | 275.7 | 3655 | 3655 | 677.7 |
| 3x95 RM | 1 | 46.5 | 348.8 | 6067 | 6067 | 1035 |
| 4x1,5 RE | 1 | 18.2 | 136.4 | 671 | 671 | 189.4 |
| 4x2,5 RE | 1 | 19.2 | 143.7 | 755 | 755 | 207.2 |
| 4x4 RE | 1 | 20.3 | 152.0 | 870 | 870 | 228.2 |
| 4x6 RE | 1 | 22.3 | 167.0 | 1153 | 1153 | 256.3 |
| 4x10 RE | 1 | 24.6 | 184.1 | 1444 | 1444 | 310.0 |
| 4x16 RE | 1 | 26.8 | 201.3 | 1806 | 1806 | 359.5 |
| 4x16 RM | 1 | 27.9 | 209.4 | 1904 | 1904 | 383.7 |
| 4x25 RE | 1 | 30.5 | 228.4 | 2403 | 2403 | 457.7 |
| 4x35 RM | 1 | 35.3 | 264.8 | 3308 | 3308 | 590.9 |
| 5x1,5 RE | 1 | 19.4 | 145.3 | 749 | 749 | 210.4 |
| 5x2,5 RE | 1 | 20.5 | 153.4 | 855 | 855 | 230.7 |
| 5x4 RE | 1 | 22.5 | 168.7 | 1144 | 1144 | 259.2 |
| 5x6 RE | 1 | 24.2 | 181.9 | 1339 | 1339 | 301.4 |
| 5x10 RE | 1 | 26.4 | 197.7 | 1667 | 1667 | 345.5 |
| 5x16 RE | 1 | 28.9 | 216.9 | 2110 | 2110 | 401.2 |
| 5x16 RM | 1 | 30.1 | 226.0 | 2197 | 2197 | 428.4 |
| 5x25 RE | 1 | 33.8 | 253.3 | 3062 | 3062 | 518.7 |
| 5x25 RM | 1 | 35.5 | 266.4 | 3215 | 3215 | 588.0 |

**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLENE RUBBER (HEPR) INSULATION**

13. ARMoured WITH BRAIDING FROM STEEL GALVANIZED WIRES

IEC 60502-1

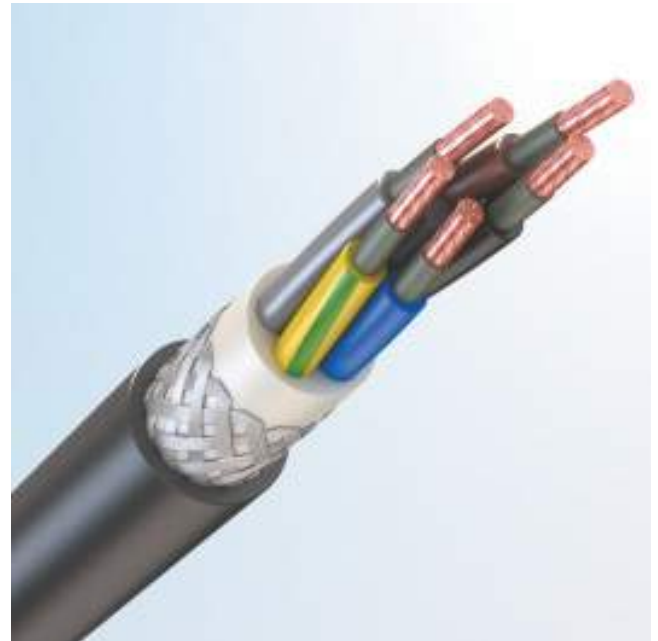

13.1 Cables with PVC sheath

- TOFLEX RPVng(A)-FRLS
- TOFLEX GRPVng(A)-FRLS
- Cu/MGT/HEPR/ LSPVC/SWB/LSPVC

Possible options:

«ng(A)-FRLS-HL»



DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GRPV) of 5th class (according to IEC 60228).
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Armour** – with full lay-up from galvanized steel wires.
- ⑥ **Outer sheath:**
 - «ng(A)-FRLS» – made from PVC-compound with low fire hazard, low smoke and gas emission.
 - «ng(A)-FRLS-HL» – made from cold-resistant PVC-compound with low fire hazard, low smoke and gas emission.

► **Ordering example:**

«TOFLEX RPVng(A)-FRLS3×95RM(N,G)-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|-------------------------|---------------------------------------|
| | | | | TOFLEX RPVng(A)-FRLS | TOFLEX RPVng(A)-FRLS-HL | |
| 2x1,5 RE | 1 | 15.0 | 112.2 | 375 | 362 | 152.9 |
| 2x2,5 RE | 1 | 15.8 | 118.2 | 426 | 413 | 168.2 |
| 2x4 RE | 1 | 16.7 | 125.1 | 491 | 477 | 186.4 |
| 2x6 RE | 1 | 17.7 | 132.6 | 571 | 556 | 207.0 |
| 2x10 RE | 1 | 19.2 | 144.3 | 712 | 695 | 240.7 |
| 2x16 RE | 1 | 21.1 | 158.6 | 912 | 894 | 284.5 |
| 2x16 RM | 1 | 22.0 | 165.3 | 961 | 942 | 306.2 |
| 2x25 RE | 1 | 24.5 | 184.1 | 1261 | 1237 | 383.2 |
| 2x25 RM | 1 | 25.2 | 189.3 | 1309 | 1285 | 402.7 |
| 2x35 RM | 1 | 27.2 | 204.3 | 1594 | 1568 | 460.4 |
| 2x50 RM | 1 | 30.6 | 229.8 | 2122 | 2092 | 577.0 |
| 2x70 RM | 1 | 35.0 | 262.8 | 2771 | 2730 | 753.6 |
| 2x95 RM | 1 | 39.2 | 294.3 | 3563 | 3516 | 933.6 |
| 2x120 RM | 1 | 42.0 | 315.3 | 4254 | 4205 | 1053.3 |
| 2x150 RM | 1 | 46.8 | 351.3 | 5254 | 5190 | 1324.7 |
| 2x185 RM | 1 | 50.8 | 381.3 | 6318 | 6247 | 1548.9 |
| 3x1,5 RE | 1 | 15.6 | 116.8 | 404 | 391 | 161.9 |
| 3x2,5 RE | 1 | 16.4 | 123.2 | 465 | 451 | 177.7 |
| 3x4 RE | 1 | 17.4 | 130.7 | 544 | 529 | 196.4 |
| 3x6 RE | 1 | 18.5 | 138.7 | 642 | 626 | 217.4 |
| 3x10 RE | 1 | 20.2 | 151.3 | 817 | 800 | 251.3 |
| 3x16 RE | 1 | 22.2 | 166.6 | 1070 | 1051 | 294.7 |
| 3x16 RM | 1 | 23.2 | 173.9 | 1120 | 1100 | 316.0 |
| 3x25 RE | 1 | 25.8 | 193.8 | 1498 | 1473 | 396.3 |
| 3x25 RM | 1 | 26.6 | 199.4 | 1549 | 1523 | 415.4 |
| 3x35 RM | 1 | 28.7 | 215.6 | 1913 | 1885 | 471.4 |
| 3x50 RM | 1 | 32.8 | 246.0 | 2628 | 2596 | 609.6 |
| 3x70 RM | 1 | 37.0 | 277.8 | 3383 | 3340 | 764.4 |
| 3x95 RM | 1 | 41.6 | 311.6 | 4386 | 4336 | 943.1 |
| 3x120 RM | 1 | 45.8 | 343.2 | 5451 | 5388 | 1143.6 |
| 3x150 RM | 1 | 49.6 | 372.2 | 6531 | 6462 | 1331.2 |
| 3x185 RM | 1 | 53.9 | 404.5 | 7898 | 7823 | 1552.7 |
| 4x1,5 RE | 1 | 16.6 | 124.7 | 453 | 439 | 180.2 |
| 4x2,5 RE | 1 | 17.6 | 132.0 | 527 | 512 | 198.0 |
| 4x4 RE | 1 | 18.7 | 140.3 | 624 | 608 | 219.0 |
| 4x6 RE | 1 | 19.9 | 149.3 | 744 | 727 | 242.5 |
| 4x10 RE | 1 | 21.8 | 163.4 | 962 | 943 | 280.2 |
| 4x16 RE | 1 | 24.5 | 183.6 | 1305 | 1281 | 344.0 |
| 4x16 RM | 1 | 25.6 | 191.7 | 1362 | 1338 | 368.3 |
| 4x25 RE | 1 | 28.1 | 210.7 | 1803 | 1775 | 442.3 |
| 4x25 RM | 1 | 28.9 | 217.0 | 1862 | 1834 | 463.2 |
| 4x35 RM | 1 | 31.3 | 235.1 | 2318 | 2288 | 524.7 |
| 4x50 RM | 1 | 36.6 | 274.8 | 3293 | 3250 | 726.6 |
| 4x70 RM | 1 | 40.5 | 303.8 | 4142 | 4094 | 848.0 |
| 4x95 RM | 1 | 46.8 | 350.7 | 5563 | 5498 | 1136.6 |
| 4x120 RM | 1 | 50.1 | 376.0 | 6721 | 6652 | 1265.2 |
| 4x150 RM | 1 | 54.5 | 408.6 | 8079 | 8003 | 1474.4 |
| 5x1,5 RE | 1 | 17.8 | 133.6 | 514 | 499 | 201.2 |
| 5x2,5 RE | 1 | 18.9 | 141.7 | 602 | 586 | 221.5 |


| | | | | | | |
|----------|---|------|-------|------|------|--------|
| 5x4 RE | 1 | 20.1 | 151.0 | 720 | 703 | 245.3 |
| 5x6 RE | 1 | 21.5 | 161.2 | 872 | 853 | 271.9 |
| 5x10 RE | 1 | 23.6 | 177.0 | 1134 | 1113 | 314.5 |
| 5x16 RE | 1 | 26.6 | 199.2 | 1545 | 1519 | 385.8 |
| 5x16 RM | 1 | 27.8 | 208.3 | 1610 | 1583 | 413.0 |
| 5x25 RE | 1 | 30.6 | 229.6 | 2160 | 2130 | 498.0 |
| 5x25 RM | 1 | 31.6 | 236.7 | 2228 | 2197 | 521.5 |
| 5x35 RM | 1 | 35.5 | 265.9 | 2920 | 2879 | 657.9 |
| 5x50 RM | 1 | 40.0 | 300.3 | 3979 | 3932 | 817.5 |
| 5x70 RM | 1 | 44.8 | 335.7 | 5126 | 5073 | 981.6 |
| 5x95 RM | 1 | 51.2 | 384.3 | 6773 | 6702 | 1277.4 |
| 5x120 RM | 1 | 55.4 | 415.6 | 8255 | 8178 | 1455.9 |

**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLENE RUBBER (HEPR) INSULATION**

13. ARMoured WITH BRAIDING FROM STEEL GALVANIZED WIRES

IEC 60502-1

13.2 Cables sheathed with cross-linked highly elastic polymer compound

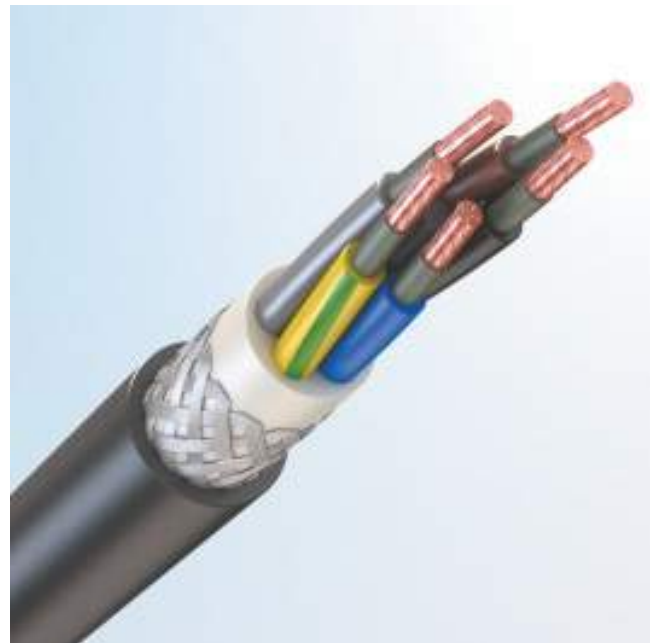

- TOFLEX RPRng(A)-FRHF
- TOFLEX GRPRng(A)-FRHF
- Cu/MGT/HEPR/HFFR/SWB/ XLHFFR

Possible options:

"ng(A)-FRHF-HL"

DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GRPV) of 5th class (according to IEC 60228).
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Armour** – with full lay-up from galvanized steel wires.
- ⑥ **Outer sheath:**
 - «ng(A)-FRHF» – made from halogen-free cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-FRHF-HL» – made from cold-resistant halogen-free cross-linked highly elastic polymer compound with low fire hazard.

► **Ordering example:**

«TOFLEX RPRng(A)-FRHF-HL5×95RM(N,G)-1 IEC 60502-1»

CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|-------------------------|---------------------------------------|
| | | | | TOFLEX RPRng(A)-FRHF | TOFLEX RPRng(A)-FRHF-HL | |
| 2x1,5 RE | 1 | 15.0 | 112.2 | 336 | 336 | 152.9 |
| 2x2,5 RE | 1 | 15.8 | 118.2 | 385 | 385 | 168.2 |
| 2x4 RE | 1 | 16.7 | 125.1 | 447 | 447 | 186.4 |
| 2x6 RE | 1 | 17.7 | 132.6 | 523 | 523 | 207.0 |
| 2x10 RE | 1 | 19.2 | 144.3 | 659 | 659 | 240.7 |
| 2x16 RE | 1 | 21.1 | 158.6 | 853 | 853 | 284.5 |
| 2x16 RM | 1 | 22.0 | 165.3 | 899 | 899 | 306.2 |
| 2x25 RE | 1 | 24.5 | 184.1 | 1184 | 1184 | 383.2 |
| 2x25 RM | 1 | 25.2 | 189.3 | 1229 | 1229 | 402.7 |
| 2x35 RM | 1 | 27.2 | 204.3 | 1506 | 1506 | 460.4 |
| 2x50 RM | 1 | 30.6 | 229.8 | 2019 | 2019 | 577.0 |
| 2x70 RM | 1 | 35.0 | 262.8 | 2632 | 2632 | 753.6 |
| 2x95 RM | 1 | 39.2 | 294.3 | 3402 | 3402 | 933.6 |
| 2x120 RM | 1 | 42.0 | 315.3 | 4079 | 4079 | 1053.3 |
| 2x150 RM | 1 | 46.8 | 351.3 | 5028 | 5028 | 1324.7 |
| 2x185 RM | 1 | 50.8 | 381.3 | 6067 | 6067 | 1548.9 |
| 3x1,5 RE | 1 | 15.6 | 116.8 | 364 | 364 | 161.9 |
| 3x2,5 RE | 1 | 16.4 | 123.2 | 422 | 422 | 177.7 |
| 3x4 RE | 1 | 17.4 | 130.7 | 498 | 498 | 196.4 |
| 3x6 RE | 1 | 18.5 | 138.7 | 593 | 593 | 217.4 |
| 3x10 RE | 1 | 20.2 | 151.3 | 763 | 763 | 251.3 |
| 3x16 RE | 1 | 22.2 | 166.6 | 1009 | 1009 | 294.7 |
| 3x16 RM | 1 | 23.2 | 173.9 | 1056 | 1056 | 316.0 |
| 3x25 RE | 1 | 25.8 | 193.8 | 1418 | 1418 | 396.3 |
| 3x25 RM | 1 | 26.6 | 199.4 | 1467 | 1467 | 415.4 |
| 3x35 RM | 1 | 28.7 | 215.6 | 1822 | 1822 | 471.4 |
| 3x50 RM | 1 | 32.8 | 246.0 | 2521 | 2521 | 609.6 |
| 3x70 RM | 1 | 37.0 | 277.8 | 3240 | 3240 | 764.4 |
| 3x95 RM | 1 | 41.6 | 311.6 | 4221 | 4221 | 943.1 |
| 3x120 RM | 1 | 45.8 | 343.2 | 5242 | 5242 | 1143.6 |
| 3x150 RM | 1 | 49.6 | 372.2 | 6301 | 6301 | 1331.2 |
| 3x185 RM | 1 | 53.9 | 404.5 | 7643 | 7643 | 1552.7 |
| 4x1,5 RE | 1 | 16.6 | 124.7 | 410 | 410 | 180.2 |
| 4x2,5 RE | 1 | 17.6 | 132.0 | 481 | 481 | 198.0 |
| 4x4 RE | 1 | 18.7 | 140.3 | 575 | 575 | 219.0 |
| 4x6 RE | 1 | 19.9 | 149.3 | 691 | 691 | 242.5 |
| 4x10 RE | 1 | 21.8 | 163.4 | 903 | 903 | 280.2 |
| 4x16 RE | 1 | 24.5 | 183.6 | 1232 | 1232 | 344.0 |
| 4x16 RM | 1 | 25.6 | 191.7 | 1285 | 1285 | 368.3 |
| 4x25 RE | 1 | 28.1 | 210.7 | 1716 | 1716 | 442.3 |
| 4x25 RM | 1 | 28.9 | 217.0 | 1772 | 1772 | 463.2 |
| 4x35 RM | 1 | 31.3 | 235.1 | 2220 | 2220 | 524.7 |
| 4x50 RM | 1 | 36.6 | 274.8 | 3155 | 3155 | 726.6 |
| 4x70 RM | 1 | 40.5 | 303.8 | 3987 | 3987 | 848.0 |
| 4x95 RM | 1 | 46.8 | 350.7 | 5354 | 5354 | 1136.6 |
| 4x120 RM | 1 | 50.1 | 376.0 | 6494 | 6494 | 1265.2 |
| 4x150 RM | 1 | 54.5 | 408.6 | 7828 | 7828 | 1474.4 |
| 5x1,5 RE | 1 | 17.8 | 133.6 | 468 | 468 | 201.2 |
| 5x2,5 RE | 1 | 18.9 | 141.7 | 553 | 553 | 221.5 |


| | | | | | | |
|----------|---|------|-------|------|------|--------|
| 5x4 RE | 1 | 20.1 | 151.0 | 667 | 667 | 245.3 |
| 5x6 RE | 1 | 21.5 | 161.2 | 814 | 814 | 271.9 |
| 5x10 RE | 1 | 23.6 | 177.0 | 1070 | 1070 | 314.5 |
| 5x16 RE | 1 | 26.6 | 199.2 | 1465 | 1465 | 385.8 |
| 5x16 RM | 1 | 27.8 | 208.3 | 1525 | 1525 | 413.0 |
| 5x25 RE | 1 | 30.6 | 229.6 | 2065 | 2065 | 498.0 |
| 5x25 RM | 1 | 31.6 | 236.7 | 2130 | 2130 | 521.5 |
| 5x35 RM | 1 | 35.5 | 265.9 | 2789 | 2789 | 657.9 |
| 5x50 RM | 1 | 40.0 | 300.3 | 3828 | 3828 | 817.5 |
| 5x70 RM | 1 | 44.8 | 335.7 | 4953 | 4953 | 981.6 |
| 5x95 RM | 1 | 51.2 | 384.3 | 6543 | 6543 | 1277.4 |
| 5x120 RM | 1 | 55.4 | 415.6 | 8002 | 8002 | 1455.9 |

**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLENE RUBBER (HEPR) INSULATION**

13. ARMoured WITH BRAIDING FROM STEEL GALVANIZED WIRES

IEC 60502-1

13.3 Cables sheathed with halogen-free polymer compound

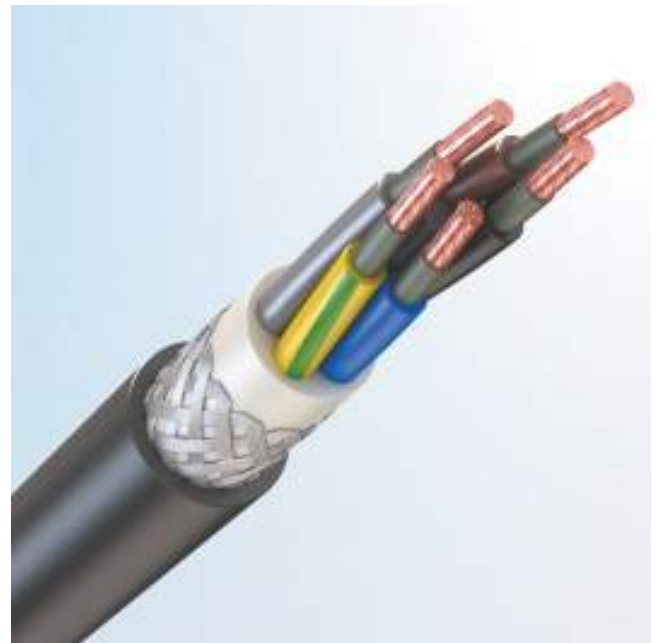

- TOFLEX RPPng(A)-FRHF
- TOFLEX GRPPng(A)-FRHF
- Cu/MGT/HEPR/HFFR/SWB/HFFR

Possible options:

"ng(A)-FRHF-HL"



DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GRPV) of 5th class (according to IEC 60228).
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Armour** – with full lay-up from galvanized steel wires.
- ⑥ **Outer sheath:**
 - «ng(A)-FRHF» – made from halogen-free polymer compounds.
 - «ng(A)-FRHF-HL» – made from cold-resistant halogen-free polymer compounds.

► **Ordering example:**

«TOFLEX RPPng(A)-FRHF-HL3×185RM-1 IEC 60502-1»



CABLE FEATURES




| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|-------------------------|---------------------------------------|
| | | | | TOFLEX RPPng(A)-FRHF | TOFLEX RPPng(A)-FRHF-HL | |
| 2x1,5 RE | 1 | 15.0 | 112.2 | 349 | 349 | 152.9 |
| 2x2,5 RE | 1 | 15.8 | 118.2 | 398 | 398 | 168.2 |
| 2x4 RE | 1 | 16.7 | 125.1 | 461 | 461 | 186.4 |
| 2x6 RE | 1 | 17.7 | 132.6 | 538 | 538 | 207.0 |
| 2x10 RE | 1 | 19.2 | 144.3 | 676 | 676 | 240.7 |
| 2x16 RE | 1 | 21.1 | 158.6 | 871 | 871 | 284.5 |
| 2x16 RM | 1 | 22.0 | 165.3 | 918 | 918 | 306.2 |
| 2x25 RE | 1 | 24.5 | 184.1 | 1207 | 1207 | 383.2 |
| 2x25 RM | 1 | 25.2 | 189.3 | 1254 | 1254 | 402.7 |
| 2x35 RM | 1 | 27.2 | 204.3 | 1532 | 1532 | 460.4 |
| 2x50 RM | 1 | 30.6 | 229.8 | 2049 | 2049 | 577.0 |
| 2x70 RM | 1 | 35.0 | 262.8 | 2673 | 2673 | 753.6 |
| 2x95 RM | 1 | 39.2 | 294.3 | 3448 | 3448 | 933.6 |
| 2x120 RM | 1 | 42.0 | 315.3 | 4129 | 4129 | 1053.3 |
| 2x150 RM | 1 | 46.8 | 351.3 | 5093 | 5093 | 1324.7 |
| 2x185 RM | 1 | 50.8 | 381.3 | 6137 | 6137 | 1548.9 |
| 3x1,5 RE | 1 | 15.6 | 116.8 | 377 | 377 | 161.9 |
| 3x2,5 RE | 1 | 16.4 | 123.2 | 436 | 436 | 177.7 |
| 3x4 RE | 1 | 17.4 | 130.7 | 513 | 513 | 196.4 |
| 3x6 RE | 1 | 18.5 | 138.7 | 608 | 608 | 217.4 |
| 3x10 RE | 1 | 20.2 | 151.3 | 780 | 780 | 251.3 |
| 3x16 RE | 1 | 22.2 | 166.6 | 1028 | 1028 | 294.7 |
| 3x16 RM | 1 | 23.2 | 173.9 | 1076 | 1076 | 316.0 |
| 3x25 RE | 1 | 25.8 | 193.8 | 1443 | 1443 | 396.3 |
| 3x25 RM | 1 | 26.6 | 199.4 | 1492 | 1492 | 415.4 |
| 3x35 RM | 1 | 28.7 | 215.6 | 1850 | 1850 | 471.4 |
| 3x50 RM | 1 | 32.8 | 246.0 | 2553 | 2553 | 609.6 |
| 3x70 RM | 1 | 37.0 | 277.8 | 3284 | 3284 | 764.4 |
| 3x95 RM | 1 | 41.6 | 311.6 | 4270 | 4270 | 943.1 |
| 3x120 RM | 1 | 45.8 | 343.2 | 5305 | 5305 | 1143.6 |
| 3x150 RM | 1 | 49.6 | 372.2 | 6369 | 6369 | 1331.2 |
| 3x185 RM | 1 | 53.9 | 404.5 | 7718 | 7718 | 1552.7 |
| 4x1,5 RE | 1 | 16.6 | 124.7 | 424 | 424 | 180.2 |
| 4x2,5 RE | 1 | 17.6 | 132.0 | 496 | 496 | 198.0 |
| 4x4 RE | 1 | 18.7 | 140.3 | 591 | 591 | 219.0 |
| 4x6 RE | 1 | 19.9 | 149.3 | 708 | 708 | 242.5 |
| 4x10 RE | 1 | 21.8 | 163.4 | 922 | 922 | 280.2 |
| 4x16 RE | 1 | 24.5 | 183.6 | 1255 | 1255 | 344.0 |
| 4x16 RM | 1 | 25.6 | 191.7 | 1310 | 1310 | 368.3 |
| 4x25 RE | 1 | 28.1 | 210.7 | 1743 | 1743 | 442.3 |
| 4x25 RM | 1 | 28.9 | 217.0 | 1800 | 1800 | 463.2 |
| 4x35 RM | 1 | 31.3 | 235.1 | 2251 | 2251 | 524.7 |
| 4x50 RM | 1 | 36.6 | 274.8 | 3198 | 3198 | 726.6 |
| 4x70 RM | 1 | 40.5 | 303.8 | 4034 | 4034 | 848.0 |
| 4x95 RM | 1 | 46.8 | 350.7 | 5418 | 5418 | 1136.6 |
| 4x120 RM | 1 | 50.1 | 376.0 | 6564 | 6564 | 1265.2 |
| 4x150 RM | 1 | 54.5 | 408.6 | 7904 | 7904 | 1474.4 |
| 5x1,5 RE | 1 | 17.8 | 133.6 | 483 | 483 | 201.2 |
| 5x2,5 RE | 1 | 18.9 | 141.7 | 569 | 569 | 221.5 |

| | | | | | | |
|----------|---|------|-------|------|------|--------|
| 5x4 RE | 1 | 20.1 | 151.0 | 684 | 684 | 245.3 |
| 5x6 RE | 1 | 21.5 | 161.2 | 833 | 833 | 271.9 |
| 5x10 RE | 1 | 23.6 | 177.0 | 1090 | 1090 | 314.5 |
| 5x16 RE | 1 | 26.6 | 199.2 | 1490 | 1490 | 385.8 |
| 5x16 RM | 1 | 27.8 | 208.3 | 1552 | 1552 | 413.0 |
| 5x25 RE | 1 | 30.6 | 229.6 | 2095 | 2095 | 498.0 |
| 5x25 RM | 1 | 31.6 | 236.7 | 2161 | 2161 | 521.5 |
| 5x35 RM | 1 | 35.5 | 265.9 | 2831 | 2831 | 657.9 |
| 5x50 RM | 1 | 40.0 | 300.3 | 3875 | 3875 | 817.5 |
| 5x70 RM | 1 | 44.8 | 335.7 | 5006 | 5006 | 981.6 |
| 5x95 RM | 1 | 51.2 | 384.3 | 6614 | 6614 | 1277.4 |
| 5x120 RM | 1 | 55.4 | 415.6 | 8079 | 8079 | 1455.9 |

**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLENE RUBBER (HEPR) INSULATION**

14. SHIELDED, ARMoured WITH STEEL GALVANIZED TAPES*

IEC 60502-1

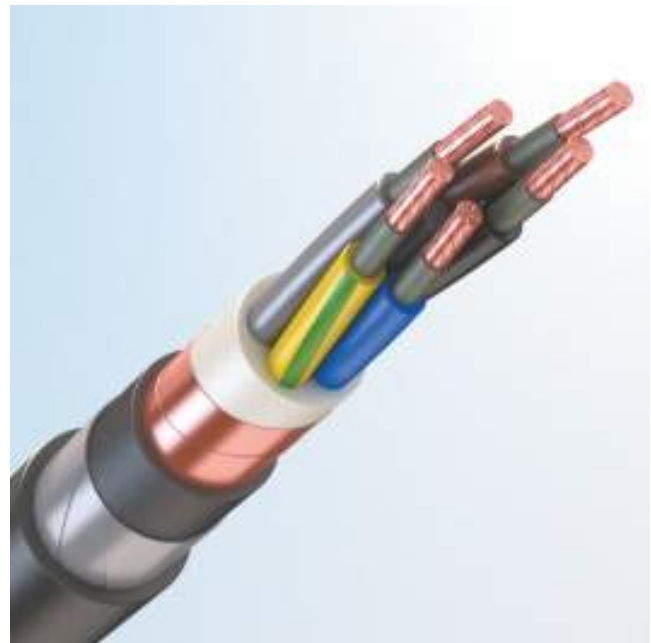

14.1 Cables with PVC sheath

- TOFLEX REBVng(A)-FRLS
- TOFLEX GREBVng(A)-FRLS
- Cu/HEPR/OSCR/LSPVC/STA/LSPVC

Possible options:

«ng(A)-FRLS-HL»



DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GREBV) of 5th class (according to IEC 60228).
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑥ **Separation layer** – corresponds to the type of the outer sheath.
- ⑦ **Armour** – two steel galvanized tapes (the top tapes cover the gaps between the lower tape windings).
- ⑧ **Outer sheath:**
 - «ng(A)-FRLS» – made from PVC-compound with low fire hazard, low smoke and gas emission.
 - «ng(A)-FRLS-HL» – made from cold-resistant PVC-compound with low fire hazard, low smoke and gas emission.

► **Ordering example:**

«TOFLEX REBVng(A)-FRLS 3×95RM(N, G)-1 IEC 60502-1»

«TOFLEX REBVng(A)-FRLS 3×95/50RM(N, G)-1 IEC 60502-1»

*In the production of power cables with aluminium or aluminium alloy tapes armour in the cable grade «Ba» must be specified instead of «B».



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|--------------------------|---------------------------------------|
| | | | | TOFLEX REBVng(A)-FRLS | TOFLEX REBVng(A)-FRLS-HL | |
| 2x1,5 RE | 1 | 16.7 | 125.6 | 511 | 506 | 200.4 |
| 2x2,5 RE | 1 | 17.5 | 131.6 | 565 | 558 | 218.3 |
| 2x4 RE | 1 | 18.5 | 138.5 | 638 | 632 | 239.5 |
| 2x6 RE | 1 | 19.5 | 146.0 | 727 | 719 | 263.4 |
| 2x10 RE | 1 | 21.0 | 157.7 | 881 | 873 | 302.2 |
| 2x16 RE | 1 | 22.9 | 171.9 | 1098 | 1089 | 352.1 |
| 2x16 RM | 1 | 24.2 | 181.7 | 1185 | 1176 | 392.5 |
| 2x25 RE | 1 | 26.3 | 197.4 | 1478 | 1467 | 461.9 |
| 2x25 RM | 1 | 27.0 | 202.7 | 1533 | 1521 | 483.6 |
| 2x35 RM | 1 | 29.0 | 217.7 | 1835 | 1823 | 547.8 |
| 2x50 RM | 1 | 32.8 | 246.2 | 2433 | 2416 | 696.3 |
| 2x70 RM | 1 | 37.6 | 282.2 | 3252 | 3233 | 893.0 |
| 2x95 RM | 1 | 41.8 | 313.7 | 4101 | 4079 | 1089.5 |
| 2x120 RM | 1 | 45.8 | 343.7 | 4999 | 4972 | 1307.9 |
| 2x150 RM | 1 | 49.8 | 373.7 | 5961 | 5931 | 1542.2 |
| 2x185 RM | 1 | 54.6 | 409.7 | 7444 | 7411 | 1792.0 |
| 2x240 RM | 1 | 61.4 | 460.7 | 9361 | 9318 | 2275.0 |
| 3x1,5 RE | 1 | 17.4 | 130.1 | 546 | 540 | 211.4 |
| 3x2,5 RE | 1 | 18.2 | 136.6 | 609 | 603 | 230.0 |
| 3x4 RE | 1 | 19.2 | 144.0 | 698 | 690 | 251.9 |
| 3x6 RE | 1 | 20.3 | 152.1 | 805 | 797 | 276.4 |
| 3x10 RE | 1 | 22.0 | 164.6 | 995 | 986 | 315.8 |
| 3x16 RE | 1 | 24.4 | 183.0 | 1296 | 1286 | 381.7 |
| 3x16 RM | 1 | 25.4 | 190.2 | 1356 | 1345 | 406.8 |
| 3x25 RE | 1 | 27.6 | 207.2 | 1726 | 1715 | 479.2 |
| 3x25 RM | 1 | 28.4 | 212.8 | 1784 | 1773 | 500.7 |
| 3x35 RM | 1 | 30.5 | 228.9 | 2167 | 2154 | 563.8 |
| 3x50 RM | 1 | 36.2 | 271.3 | 3165 | 3147 | 786.7 |
| 3x70 RM | 1 | 39.6 | 297.1 | 3891 | 3871 | 911.7 |
| 3x95 RM | 1 | 44.5 | 334.0 | 5010 | 4983 | 1136.2 |
| 3x120 RM | 1 | 48.7 | 365.6 | 6142 | 6112 | 1356.2 |
| 3x150 RM | 1 | 53.4 | 400.6 | 7631 | 7598 | 1568.8 |
| 3x185 RM | 1 | 58.7 | 440.3 | 9274 | 9233 | 1903.7 |
| 3x240 RM | 1 | 64.9 | 486.9 | 11461 | 11415 | 2294.1 |
| 4x1,5 RE | 1 | 18.4 | 138.1 | 600 | 593 | 233.2 |
| 4x2,5 RE | 1 | 19.4 | 145.3 | 682 | 675 | 254.1 |
| 4x4 RE | 1 | 20.5 | 153.6 | 789 | 781 | 278.8 |
| 4x6 RE | 1 | 21.7 | 162.7 | 920 | 911 | 306.1 |
| 4x10 RE | 1 | 23.6 | 176.8 | 1154 | 1144 | 350.0 |
| 4x16 RE | 1 | 26.3 | 196.9 | 1522 | 1511 | 422.5 |
| 4x16 RM | 1 | 27.3 | 205.1 | 1589 | 1577 | 450.2 |
| 4x25 RE | 1 | 29.9 | 224.1 | 2052 | 2039 | 532.6 |
| 4x25 RM | 1 | 30.7 | 230.4 | 2119 | 2105 | 556.2 |
| 4x35 RM | 1 | 33.5 | 251.5 | 2637 | 2620 | 646.8 |
| 4x50 RM | 1 | 39.2 | 294.2 | 3796 | 3776 | 872.3 |
| 4x70 RM | 1 | 43.1 | 323.1 | 4698 | 4675 | 1008.9 |
| 4x95 RM | 1 | 49.7 | 373.1 | 6269 | 6238 | 1353.8 |
| 4x120 RM | 1 | 53.9 | 404.4 | 7832 | 7799 | 1505.1 |
| 4x150 RM | 1 | 59.3 | 444.4 | 9469 | 9427 | 1828.8 |

| | | | | | | |
|----------|---|------|-------|-------|-------|--------|
| 4x185 RM | 1 | 64.5 | 483.6 | 11399 | 11354 | 2145.6 |
| 4x240 RM | 1 | 72.0 | 539.9 | 14255 | 14204 | 2652.9 |
| 5x1,5 RE | 1 | 19.6 | 147.0 | 671 | 664 | 258.0 |
| 5x2,5 RE | 1 | 20.7 | 155.1 | 768 | 760 | 281.8 |
| 5x4 RE | 1 | 21.9 | 164.4 | 898 | 889 | 309.7 |
| 5x6 RE | 1 | 23.3 | 174.5 | 1061 | 1052 | 340.7 |
| 5x10 RE | 1 | 25.8 | 193.3 | 1373 | 1363 | 406.9 |
| 5x16 RE | 1 | 28.3 | 212.5 | 1780 | 1768 | 471.0 |
| 5x16 RM | 1 | 29.6 | 221.7 | 1856 | 1843 | 502.2 |
| 5x25 RE | 1 | 32.8 | 245.9 | 2471 | 2454 | 617.2 |
| 5x25 RM | 1 | 33.7 | 253.0 | 2548 | 2531 | 644.5 |
| 5x35 RM | 1 | 38.0 | 285.3 | 3407 | 3387 | 799.0 |
| 5x50 RM | 1 | 42.6 | 319.7 | 4528 | 4506 | 976.5 |
| 5x70 RM | 1 | 48.5 | 364.1 | 5919 | 5889 | 1252.3 |
| 5x95 RM | 1 | 55.0 | 412.6 | 7908 | 7874 | 1522.3 |
| 5x120 RM | 1 | 60.2 | 451.5 | 9669 | 9627 | 1816.1 |
| 5x150 RM | 1 | 65.1 | 487.9 | 11446 | 11400 | 2087.1 |


| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|---------------------------|---------------------------------------|
| | | | | TOFLEX REBaVng(A)-FRLS | TOFLEX REBaVng(A)-FRLS-HL | |
| 1x1,5 RE | 1 | 14.6 | 146.0 | 325 | 319 | 127.8 |
| 1x2,5 RE | 1 | 14.6 | 146.0 | 331 | 326 | 125.9 |
| 1x4 RE | 1 | 14.7 | 147.2 | 345 | 341 | 125.9 |
| 1x6 RE | 1 | 15.2 | 152.2 | 381 | 376 | 133.3 |
| 1x10 RE | 1 | 16.0 | 160.0 | 442 | 437 | 144.8 |
| 1x16 RE | 1 | 17.0 | 169.5 | 529 | 523 | 158.8 |
| 1x16 RM | 1 | 17.4 | 174.0 | 546 | 541 | 165.5 |
| 1x25 RE | 1 | 18.5 | 184.5 | 663 | 656 | 184.9 |
| 1x25 RM | 1 | 18.8 | 188.0 | 675 | 668 | 190.3 |
| 1x35 RM | 1 | 19.8 | 198.0 | 792 | 785 | 205.7 |
| 1x50 RM | 1 | 21.5 | 215.0 | 1007 | 999 | 237.3 |
| 1x70 RM | 1 | 23.1 | 231.0 | 1216 | 1208 | 262.9 |
| 1x95 RM | 1 | 25.6 | 256.0 | 1550 | 1540 | 318.8 |
| 1x120 RM | 1 | 27.0 | 270.0 | 1829 | 1818 | 342.8 |
| 1x150 RM | 1 | 28.8 | 288.0 | 2151 | 2140 | 382.8 |
| 1x185 RM | 1 | 30.8 | 308.0 | 2559 | 2546 | 428.5 |
| 1x240 RM | 1 | 33.9 | 339.0 | 3175 | 3158 | 510.6 |
| 1x300 RM | 1 | 39.4 | 393.5 | 4055 | 4035 | 691.8 |
| 1x400 RM | 1 | 42.7 | 426.9 | 4969 | 4946 | 784.4 |
| 1x500 RM | 1 | 47.5 | 474.7 | 6218 | 6188 | 971.5 |
| 1x630 RM | 1 | 51.8 | 518.3 | 7762 | 7729 | 1104.7 |

**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLENE RUBBER (HEPR) INSULATION**

14. SHIELDED, ARMoured WITH STEEL GALVANIZED TAPES*

IEC 60502-1

14.2 Cables sheathed with cross-linked highly elastic polymer compound

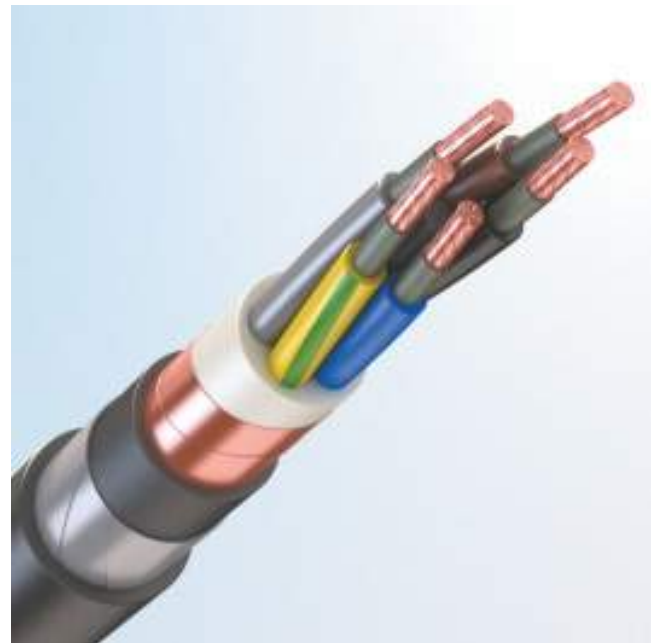

- TOFLEX REBRng(A)-FRHF
- TOFLEX GREBRng(A)-FRHF
- Cu/MGT/HEPR/OSCR/HFFR/STA/XLHFFR

Possible options:

"ng(A)-FRHF-HL"



DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GREBV) of 5th class (according to IEC 60228).
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑥ **Separation layer** – corresponds to the type of the outer sheath.
- ⑦ **Armour** – two steel galvanized tapes (the top tapes cover the gaps between the lower tape windings).
- ⑧ **Outer sheath:**
 - «ng(A)-FRHF» – made from halogen-free cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-FRHF-HL» – made from cold-resistant halogen-free cross-linked highly elastic polymer compound with low fire hazard.

► **Ordering example:**

«TOFLEX REBRng(A)-FRHF 3×95RM(N, G)-1 IEC 60502-1»

«TOFLEX REBRng(A)-FRHF 3×95/50RM(N, G)-1 IEC 60502-1»

*In the production of power cables with aluminium or aluminium alloy tapes armour in the cable grade «Ba» must be specified instead of «B».



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|--------------------------|---------------------------------------|
| | | | | TOFLEX REBRng(A)-FRHF | TOFLEX REBRng(A)-FRHF-HL | |
| 2x1,5 RE | 1 | 16.7 | 125.6 | 486 | 486 | 200.4 |
| 2x2,5 RE | 1 | 17.5 | 131.6 | 537 | 537 | 218.3 |
| 2x4 RE | 1 | 18.5 | 138.5 | 609 | 609 | 239.5 |
| 2x6 RE | 1 | 19.5 | 146.0 | 695 | 695 | 263.4 |
| 2x10 RE | 1 | 21.0 | 157.7 | 845 | 845 | 302.2 |
| 2x16 RE | 1 | 22.9 | 171.9 | 1057 | 1057 | 352.1 |
| 2x16 RM | 1 | 24.2 | 181.7 | 1141 | 1141 | 392.5 |
| 2x25 RE | 1 | 26.3 | 197.4 | 1427 | 1427 | 461.9 |
| 2x25 RM | 1 | 27.0 | 202.7 | 1480 | 1480 | 483.6 |
| 2x35 RM | 1 | 29.0 | 217.7 | 1777 | 1777 | 547.8 |
| 2x50 RM | 1 | 32.8 | 246.2 | 2355 | 2355 | 696.3 |
| 2x70 RM | 1 | 37.6 | 282.2 | 3158 | 3158 | 893.0 |
| 2x95 RM | 1 | 41.8 | 313.7 | 3991 | 3991 | 1089.5 |
| 2x120 RM | 1 | 45.8 | 343.7 | 4863 | 4863 | 1307.9 |
| 2x150 RM | 1 | 49.8 | 373.7 | 5806 | 5806 | 1542.2 |
| 2x185 RM | 1 | 54.6 | 409.7 | 7269 | 7269 | 1792.0 |
| 2x240 RM | 1 | 61.4 | 460.7 | 9136 | 9136 | 2275.0 |
| 3x1,5 RE | 1 | 17.4 | 130.1 | 520 | 520 | 211.4 |
| 3x2,5 RE | 1 | 18.2 | 136.6 | 581 | 581 | 230.0 |
| 3x4 RE | 1 | 19.2 | 144.0 | 667 | 667 | 251.9 |
| 3x6 RE | 1 | 20.3 | 152.1 | 772 | 772 | 276.4 |
| 3x10 RE | 1 | 22.0 | 164.6 | 958 | 958 | 315.8 |
| 3x16 RE | 1 | 24.4 | 183.0 | 1252 | 1252 | 381.7 |
| 3x16 RM | 1 | 25.4 | 190.2 | 1310 | 1310 | 406.8 |
| 3x25 RE | 1 | 27.6 | 207.2 | 1675 | 1675 | 479.2 |
| 3x25 RM | 1 | 28.4 | 212.8 | 1731 | 1731 | 500.7 |
| 3x35 RM | 1 | 30.5 | 228.9 | 2108 | 2108 | 563.8 |
| 3x50 RM | 1 | 36.2 | 271.3 | 3081 | 3081 | 786.7 |
| 3x70 RM | 1 | 39.6 | 297.1 | 3796 | 3796 | 911.7 |
| 3x95 RM | 1 | 44.5 | 334.0 | 4888 | 4888 | 1136.2 |
| 3x120 RM | 1 | 48.7 | 365.6 | 6001 | 6001 | 1356.2 |
| 3x150 RM | 1 | 53.4 | 400.6 | 7474 | 7474 | 1568.8 |
| 3x185 RM | 1 | 58.7 | 440.3 | 9081 | 9081 | 1903.7 |
| 3x240 RM | 1 | 64.9 | 486.9 | 11236 | 11236 | 2294.1 |
| 4x1,5 RE | 1 | 18.4 | 138.1 | 571 | 571 | 233.2 |
| 4x2,5 RE | 1 | 19.4 | 145.3 | 652 | 652 | 254.1 |
| 4x4 RE | 1 | 20.5 | 153.6 | 756 | 756 | 278.8 |
| 4x6 RE | 1 | 21.7 | 162.7 | 884 | 884 | 306.1 |
| 4x10 RE | 1 | 23.6 | 176.8 | 1114 | 1114 | 350.0 |
| 4x16 RE | 1 | 26.3 | 196.9 | 1475 | 1475 | 422.5 |
| 4x16 RM | 1 | 27.3 | 205.1 | 1539 | 1539 | 450.2 |
| 4x25 RE | 1 | 29.9 | 224.1 | 1996 | 1996 | 532.6 |
| 4x25 RM | 1 | 30.7 | 230.4 | 2060 | 2060 | 556.2 |
| 4x35 RM | 1 | 33.5 | 251.5 | 2564 | 2564 | 646.8 |
| 4x50 RM | 1 | 39.2 | 294.2 | 3706 | 3706 | 872.3 |
| 4x70 RM | 1 | 43.1 | 323.1 | 4594 | 4594 | 1008.9 |
| 4x95 RM | 1 | 49.7 | 373.1 | 6129 | 6129 | 1353.8 |
| 4x120 RM | 1 | 53.9 | 404.4 | 7680 | 7680 | 1505.1 |
| 4x150 RM | 1 | 59.3 | 444.4 | 9280 | 9280 | 1828.8 |

| | | | | | | |
|----------|---|------|-------|-------|-------|--------|
| 4x185 RM | 1 | 64.5 | 483.6 | 11186 | 11186 | 2145.6 |
| 4x240 RM | 1 | 72.0 | 539.9 | 14005 | 14005 | 2652.9 |
| 5x1,5 RE | 1 | 19.6 | 147.0 | 640 | 640 | 258.0 |
| 5x2,5 RE | 1 | 20.7 | 155.1 | 735 | 735 | 281.8 |
| 5x4 RE | 1 | 21.9 | 164.4 | 862 | 862 | 309.7 |
| 5x6 RE | 1 | 23.3 | 174.5 | 1022 | 1022 | 340.7 |
| 5x10 RE | 1 | 25.8 | 193.3 | 1328 | 1328 | 406.9 |
| 5x16 RE | 1 | 28.3 | 212.5 | 1729 | 1729 | 471.0 |
| 5x16 RM | 1 | 29.6 | 221.7 | 1801 | 1801 | 502.2 |
| 5x25 RE | 1 | 32.8 | 245.9 | 2401 | 2401 | 617.2 |
| 5x25 RM | 1 | 33.7 | 253.0 | 2476 | 2476 | 644.5 |
| 5x35 RM | 1 | 38.0 | 285.3 | 3321 | 3321 | 799.0 |
| 5x50 RM | 1 | 42.6 | 319.7 | 4429 | 4429 | 976.5 |
| 5x70 RM | 1 | 48.5 | 364.1 | 5787 | 5787 | 1252.3 |
| 5x95 RM | 1 | 55.0 | 412.6 | 7755 | 7755 | 1522.3 |
| 5x120 RM | 1 | 60.2 | 451.5 | 9479 | 9479 | 1816.1 |
| 5x150 RM | 1 | 65.1 | 487.9 | 11236 | 11236 | 2087.1 |
| 5x185 RM | 1 | 71.5 | 535.9 | 13820 | 13820 | 2519.5 |
| 5x240 RM | 1 | 80.7 | 605.6 | 17973 | 17973 | 3087.0 |


| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|---------------------------|---------------------------------------|
| | | | | TOFLEX REBaRng(A)-FRHF | TOFLEX REBaRng(A)-FRHF-HL | |
| 1x1,5 RE | 1 | 14.6 | 146.0 | 304 | 304 | 127.8 |
| 1x2,5 RE | 1 | 14.6 | 146.0 | 312 | 312 | 125.9 |
| 1x4 RE | 1 | 14.7 | 147.2 | 328 | 328 | 125.9 |
| 1x6 RE | 1 | 15.2 | 152.2 | 362 | 362 | 133.3 |
| 1x10 RE | 1 | 16.0 | 160.0 | 422 | 422 | 144.8 |
| 1x16 RE | 1 | 17.0 | 169.5 | 507 | 507 | 158.8 |
| 1x16 RM | 1 | 17.4 | 174.0 | 524 | 524 | 165.5 |
| 1x25 RE | 1 | 18.5 | 184.5 | 638 | 638 | 184.9 |
| 1x25 RM | 1 | 18.8 | 188.0 | 649 | 649 | 190.3 |
| 1x35 RM | 1 | 19.8 | 198.0 | 765 | 765 | 205.7 |
| 1x50 RM | 1 | 21.5 | 215.0 | 976 | 976 | 237.3 |
| 1x70 RM | 1 | 23.1 | 231.0 | 1182 | 1182 | 262.9 |
| 1x95 RM | 1 | 25.6 | 256.0 | 1510 | 1510 | 318.8 |
| 1x120 RM | 1 | 27.0 | 270.0 | 1786 | 1786 | 342.8 |
| 1x150 RM | 1 | 28.8 | 288.0 | 2105 | 2105 | 382.8 |
| 1x185 RM | 1 | 30.8 | 308.0 | 2509 | 2509 | 428.5 |
| 1x240 RM | 1 | 33.9 | 339.0 | 3111 | 3111 | 510.6 |
| 1x300 RM | 1 | 39.4 | 393.5 | 3976 | 3976 | 691.8 |
| 1x400 RM | 1 | 42.7 | 426.9 | 4881 | 4881 | 784.4 |
| 1x500 RM | 1 | 47.5 | 474.7 | 6106 | 6106 | 971.5 |
| 1x630 RM | 1 | 51.8 | 518.3 | 7636 | 7636 | 1104.7 |

**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLENE RUBBER (HEPR) INSULATION**

14. SHIELDED, ARMoured WITH STEEL GALVANIZED TAPES*

IEC 60502-1

14.3 Cables sheathed with halogen-free polymer compound

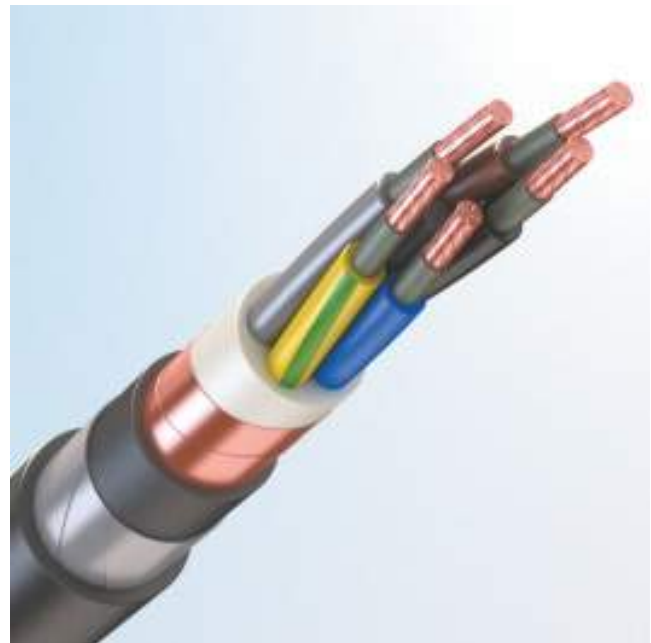

- TOFLEX REBPng(A)-FRHF
- TOFLEX GREBPng(A)-FRHF
- Cu/MGT/HEPR/OSCR/HFFR/STA/HFFR

Possible options:

"ng(A)-FRHF-HL"



DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GREBV) of 5th class (according to IEC 60228).
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑥ **Separation layer** – corresponds to the type of the outer sheath.
- ⑦ **Armour** – two steel galvanized tapes (the top tapes cover the gaps between the lower tape windings).
- ⑧ **Outer sheath:**
 - «ng(A)-FRHF» – made from halogen-free polymer compounds.
 - «ng(A)-FRHF-HL» – made from cold-resistant halogen-free polymer compounds.

► **Ordering example:**

«TOFLEX REBPng(A)-FRHF-HL3×95RM(N, G)-1 IEC 60502-1»

«TOFLEX REBPng(A)-FRHF-HL×95/50RM(N, G)-1 IEC 60502-1»

*In the production of power cables with aluminium or aluminium alloy tapes armour in the cable grade «Ba» must be specified instead of «B».



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|--------------------------|---------------------------------------|
| | | | | TOFLEX REBPng(A)-FRHF | TOFLEX REBPng(A)-FRHF-HL | |
| 2x1,5 RE | 1 | 16.7 | 125.6 | 492 | 492 | 200.4 |
| 2x2,5 RE | 1 | 17.5 | 131.6 | 544 | 544 | 218.3 |
| 2x4 RE | 1 | 18.5 | 138.5 | 616 | 616 | 239.5 |
| 2x6 RE | 1 | 19.5 | 146.0 | 702 | 702 | 263.4 |
| 2x10 RE | 1 | 21.0 | 157.7 | 854 | 854 | 302.2 |
| 2x16 RE | 1 | 22.9 | 171.9 | 1066 | 1066 | 352.1 |
| 2x16 RM | 1 | 24.2 | 181.7 | 1150 | 1150 | 392.5 |
| 2x25 RE | 1 | 26.3 | 197.4 | 1438 | 1438 | 461.9 |
| 2x25 RM | 1 | 27.0 | 202.7 | 1491 | 1491 | 483.6 |
| 2x35 RM | 1 | 29.0 | 217.7 | 1789 | 1789 | 547.8 |
| 2x50 RM | 1 | 32.8 | 246.2 | 2372 | 2372 | 696.3 |
| 2x70 RM | 1 | 37.6 | 282.2 | 3177 | 3177 | 893.0 |
| 2x95 RM | 1 | 41.8 | 313.7 | 4013 | 4013 | 1089.5 |
| 2x120 RM | 1 | 45.8 | 343.7 | 4890 | 4890 | 1307.9 |
| 2x150 RM | 1 | 49.8 | 373.7 | 5836 | 5836 | 1542.2 |
| 2x185 RM | 1 | 54.6 | 409.7 | 7302 | 7302 | 1792.0 |
| 2x240 RM | 1 | 61.4 | 460.7 | 9179 | 9179 | 2275.0 |
| 3x1,5 RE | 1 | 17.4 | 130.1 | 526 | 526 | 211.4 |
| 3x2,5 RE | 1 | 18.2 | 136.6 | 588 | 588 | 230.0 |
| 3x4 RE | 1 | 19.2 | 144.0 | 674 | 674 | 251.9 |
| 3x6 RE | 1 | 20.3 | 152.1 | 779 | 779 | 276.4 |
| 3x10 RE | 1 | 22.0 | 164.6 | 967 | 967 | 315.8 |
| 3x16 RE | 1 | 24.4 | 183.0 | 1262 | 1262 | 381.7 |
| 3x16 RM | 1 | 25.4 | 190.2 | 1320 | 1320 | 406.8 |
| 3x25 RE | 1 | 27.6 | 207.2 | 1686 | 1686 | 479.2 |
| 3x25 RM | 1 | 28.4 | 212.8 | 1743 | 1743 | 500.7 |
| 3x35 RM | 1 | 30.5 | 228.9 | 2121 | 2121 | 563.8 |
| 3x50 RM | 1 | 36.2 | 271.3 | 3100 | 3100 | 786.7 |
| 3x70 RM | 1 | 39.6 | 297.1 | 3816 | 3816 | 911.7 |
| 3x95 RM | 1 | 44.5 | 334.0 | 4915 | 4915 | 1136.2 |
| 3x120 RM | 1 | 48.7 | 365.6 | 6031 | 6031 | 1356.2 |
| 3x150 RM | 1 | 53.4 | 400.6 | 7506 | 7506 | 1568.8 |
| 3x185 RM | 1 | 58.7 | 440.3 | 9122 | 9122 | 1903.7 |
| 3x240 RM | 1 | 64.9 | 486.9 | 11282 | 11282 | 2294.1 |
| 4x1,5 RE | 1 | 18.4 | 138.1 | 578 | 578 | 233.2 |
| 4x2,5 RE | 1 | 19.4 | 145.3 | 659 | 659 | 254.1 |
| 4x4 RE | 1 | 20.5 | 153.6 | 764 | 764 | 278.8 |
| 4x6 RE | 1 | 21.7 | 162.7 | 892 | 892 | 306.1 |
| 4x10 RE | 1 | 23.6 | 176.8 | 1123 | 1123 | 350.0 |
| 4x16 RE | 1 | 26.3 | 196.9 | 1485 | 1485 | 422.5 |
| 4x16 RM | 1 | 27.3 | 205.1 | 1550 | 1550 | 450.2 |
| 4x25 RE | 1 | 29.9 | 224.1 | 2008 | 2008 | 532.6 |
| 4x25 RM | 1 | 30.7 | 230.4 | 2073 | 2073 | 556.2 |
| 4x35 RM | 1 | 33.5 | 251.5 | 2581 | 2581 | 646.8 |
| 4x50 RM | 1 | 39.2 | 294.2 | 3726 | 3726 | 872.3 |
| 4x70 RM | 1 | 43.1 | 323.1 | 4617 | 4617 | 1008.9 |
| 4x95 RM | 1 | 49.7 | 373.1 | 6160 | 6160 | 1353.8 |
| 4x120 RM | 1 | 53.9 | 404.4 | 7712 | 7712 | 1505.1 |
| 4x150 RM | 1 | 59.3 | 444.4 | 9322 | 9322 | 1828.8 |


| | | | | | | |
|----------|---|------|-------|-------|-------|--------|
| 4x185 RM | 1 | 64.5 | 483.6 | 11232 | 11232 | 2145.6 |
| 4x240 RM | 1 | 72.0 | 539.9 | 14056 | 14056 | 2652.9 |
| 5x1,5 RE | 1 | 19.6 | 147.0 | 648 | 648 | 258.0 |
| 5x2,5 RE | 1 | 20.7 | 155.1 | 743 | 743 | 281.8 |
| 5x4 RE | 1 | 21.9 | 164.4 | 871 | 871 | 309.7 |
| 5x6 RE | 1 | 23.3 | 174.5 | 1031 | 1031 | 340.7 |
| 5x10 RE | 1 | 25.8 | 193.3 | 1339 | 1339 | 406.9 |
| 5x16 RE | 1 | 28.3 | 212.5 | 1740 | 1740 | 471.0 |
| 5x16 RM | 1 | 29.6 | 221.7 | 1814 | 1814 | 502.2 |
| 5x25 RE | 1 | 32.8 | 245.9 | 2418 | 2418 | 617.2 |
| 5x25 RM | 1 | 33.7 | 253.0 | 2493 | 2493 | 644.5 |
| 5x35 RM | 1 | 38.0 | 285.3 | 3340 | 3340 | 799.0 |
| 5x50 RM | 1 | 42.6 | 319.7 | 4451 | 4451 | 976.5 |
| 5x70 RM | 1 | 48.5 | 364.1 | 5816 | 5816 | 1252.3 |
| 5x95 RM | 1 | 55.0 | 412.6 | 7788 | 7788 | 1522.3 |
| 5x120 RM | 1 | 60.2 | 451.5 | 9521 | 9521 | 1816.1 |
| 5x150 RM | 1 | 65.1 | 487.9 | 11282 | 11282 | 2087.1 |
| 5x185 RM | 1 | 71.5 | 535.9 | 13871 | 13871 | 2519.5 |
| 5x240 RM | 1 | 80.7 | 605.6 | 18037 | 18037 | 3087.0 |

| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|---------------------------|---------------------------------------|
| | | | | TOFLEX REBaPng(A)-FRHF | TOFLEX REBaPng(A)-FRHF-HL | |
| 1x1,5 RE | 1 | 14.6 | 146.0 | 309 | 309 | 127.8 |
| 1x2,5 RE | 1 | 14.6 | 146.0 | 317 | 317 | 125.9 |
| 1x4 RE | 1 | 14.7 | 147.2 | 332 | 332 | 125.9 |
| 1x6 RE | 1 | 15.2 | 152.2 | 367 | 367 | 133.3 |
| 1x10 RE | 1 | 16.0 | 160.0 | 427 | 427 | 144.8 |
| 1x16 RE | 1 | 17.0 | 169.5 | 512 | 512 | 158.8 |
| 1x16 RM | 1 | 17.4 | 174.0 | 529 | 529 | 165.5 |
| 1x25 RE | 1 | 18.5 | 184.5 | 644 | 644 | 184.9 |
| 1x25 RM | 1 | 18.8 | 188.0 | 655 | 655 | 190.3 |
| 1x35 RM | 1 | 19.8 | 198.0 | 772 | 772 | 205.7 |
| 1x50 RM | 1 | 21.5 | 215.0 | 984 | 984 | 237.3 |
| 1x70 RM | 1 | 23.1 | 231.0 | 1191 | 1191 | 262.9 |
| 1x95 RM | 1 | 25.6 | 256.0 | 1520 | 1520 | 318.8 |
| 1x120 RM | 1 | 27.0 | 270.0 | 1797 | 1797 | 342.8 |
| 1x150 RM | 1 | 28.8 | 288.0 | 2117 | 2117 | 382.8 |
| 1x185 RM | 1 | 30.8 | 308.0 | 2521 | 2521 | 428.5 |
| 1x240 RM | 1 | 33.9 | 339.0 | 3128 | 3128 | 510.6 |
| 1x300 RM | 1 | 39.4 | 393.5 | 3996 | 3996 | 691.8 |
| 1x400 RM | 1 | 42.7 | 426.9 | 4904 | 4904 | 784.4 |
| 1x500 RM | 1 | 47.5 | 474.7 | 6135 | 6135 | 971.5 |
| 1x630 RM | 1 | 51.8 | 518.3 | 7668 | 7668 | 1104.7 |

**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLENE RUBBER (HEPR) INSULATION**

15. SHIELDED, ARMoured WITH FULL LAY-UP FROM STEEL GALVANIZED WIRES

IEC 60502-1

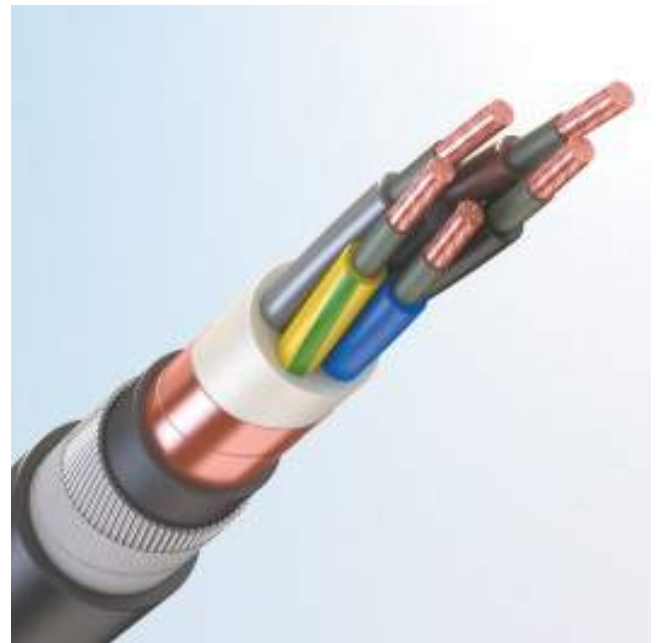

15.1 Cables with PVC sheath

- TOFLEX REKVng(A)-FRLS
- TOFLEX GREKVng(A)-FRLS
- Cu/MGT/HEPR/OSC R/LSPVC/SWA/LSPVC

Possible options:

"ng(A)-FRLS-HL"



DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GREKV) of 5th class (according to IEC 60228).
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑥ **Separation layer** – corresponds to the type of the outer sheath.
- ⑦ **Armour** – steel galvanized wires.
- ⑧ **Outer sheath:**
 - «ng(A)-FRLS» – made from PVC-compound with low fire hazard, low smoke and gas emission.
 - «ng(A)-FRLS-HL» – made from cold-resistant PVC-compound with low fire hazard, low smoke and gas emission.

► **Ordering example:**

«TOFLEX REKVng(A)-FRLS3×95RM(N, G)-1 IEC 60502-1»

«TOFLEX REKVng(A)-FRLS3×95/50RM(N, G)-1 IEC 60502-1»



CABLE FEATURES




| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|--------------------------|---------------------------------------|
| | | | | TOFLEX REKVng(A)-FRLS | TOFLEX REKVng(A)-FRLS-HL | |
| 2x1,5 RE | 1 | 18.7 | 140.3 | 763 | 747 | 211.9 |
| 2x2,5 RE | 1 | 19.5 | 146.3 | 834 | 817 | 229.8 |
| 2x4 RE | 1 | 20.4 | 153.2 | 920 | 902 | 251.0 |
| 2x6 RE | 1 | 22.2 | 166.7 | 1177 | 1158 | 279.6 |
| 2x10 RE | 1 | 24.2 | 181.4 | 1398 | 1375 | 334.1 |
| 2x16 RE | 1 | 26.1 | 195.6 | 1670 | 1645 | 385.3 |
| 2x16 RM | 1 | 27.0 | 202.4 | 1755 | 1729 | 410.5 |
| 2x25 RE | 1 | 29.1 | 218.1 | 2099 | 2071 | 479.9 |
| 2x25 RM | 1 | 29.8 | 223.4 | 2166 | 2136 | 501.6 |
| 2x50 RM | 1 | 37.2 | 278.9 | 3577 | 3533 | 767.6 |
| 2x95 RM | 1 | 46.8 | 350.9 | 5818 | 5754 | 1182.7 |
| 3x1,5 RE | 1 | 19.3 | 144.8 | 812 | 795 | 222.9 |
| 3x2,5 RE | 1 | 20.2 | 151.3 | 893 | 875 | 241.5 |
| 3x4 RE | 1 | 21.2 | 158.7 | 992 | 974 | 263.5 |
| 3x6 RE | 1 | 23.0 | 172.8 | 1282 | 1262 | 292.6 |
| 3x10 RE | 1 | 25.1 | 188.3 | 1540 | 1515 | 348.3 |
| 3x16 RE | 1 | 27.2 | 203.7 | 1864 | 1838 | 399.7 |
| 3x16 RM | 1 | 28.1 | 210.9 | 1951 | 1923 | 424.8 |
| 3x25 RE | 1 | 30.4 | 227.9 | 2372 | 2342 | 497.2 |
| 3x35 RM | 1 | 34.9 | 261.6 | 3216 | 3176 | 632.1 |
| 4x1,5 RE | 1 | 20.4 | 152.8 | 882 | 864 | 244.7 |
| 4x2,5 RE | 1 | 21.3 | 160.0 | 985 | 967 | 265.7 |
| 4x4 RE | 1 | 23.2 | 174.3 | 1265 | 1245 | 295.0 |
| 4x6 RE | 1 | 24.9 | 186.4 | 1466 | 1442 | 338.4 |
| 4x10 RE | 1 | 26.7 | 200.5 | 1739 | 1713 | 383.6 |
| 4x16 RE | 1 | 29.0 | 217.6 | 2143 | 2115 | 440.5 |
| 4x16 RM | 1 | 30.1 | 225.8 | 2236 | 2206 | 468.3 |
| 4x25 RE | 1 | 33.4 | 250.8 | 3000 | 2967 | 555.8 |
| 4x25 RM | 1 | 35.1 | 263.1 | 3167 | 3126 | 624.8 |
| 4x35 RM | 1 | 37.9 | 284.2 | 3804 | 3760 | 719.0 |
| 5x1,5 RE | 1 | 22.4 | 167.7 | 1120 | 1101 | 274.3 |
| 5x2,5 RE | 1 | 23.4 | 175.8 | 1260 | 1240 | 298.1 |
| 5x4 RE | 1 | 25.1 | 188.1 | 1443 | 1418 | 342.2 |
| 5x6 RE | 1 | 26.4 | 198.2 | 1648 | 1622 | 374.0 |
| 5x10 RE | 1 | 28.5 | 214.0 | 1982 | 1954 | 424.9 |
| 5x25 RE | 1 | 37.1 | 278.6 | 3615 | 3571 | 688.5 |
| 5x25 RM | 1 | 38.1 | 285.7 | 3714 | 3669 | 716.9 |

**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLEN RUBBER (HEPR) INSULATION**

15. SHIELDED, ARMoured WITH FULL LAY-UP FROM STEEL GALVANIZED WIRES

IEC 60502-1

15.2 Cables sheathed with cross-linked highly elastic polymer compound

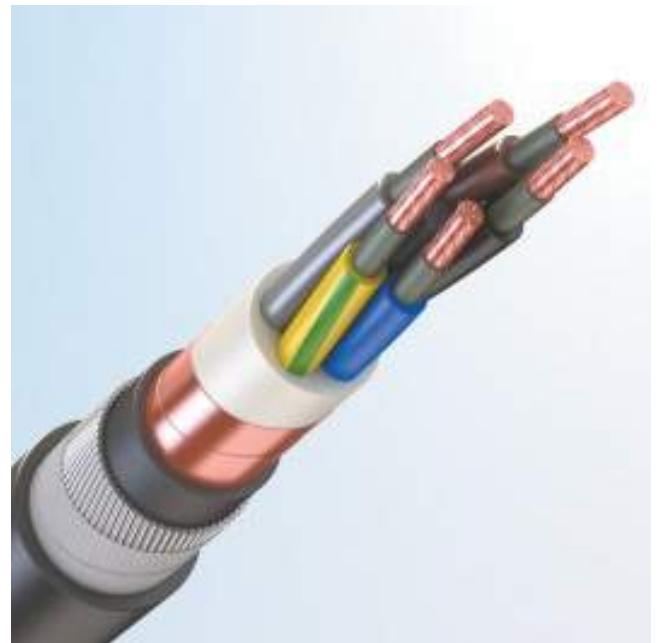

- TOFLEX REKVng(A)-FRLS
- TOFLEX GREKVng(A)-FRLS
- Cu/MGT/HEPR/OSC R/LSPVC/SWA/LSPVC

Possible options:

«ng(A)-FRHF-HL»



DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GREKV) of 5th class (according to IEC 60228).
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑥ **Separation layer** – corresponds to the type of the outer sheath.
- ⑦ **Armour** – steel galvanized wires.
- ⑧ **Outer sheath:**
 - «ng(A)-FRHF» – made from halogen-free cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-FRHF-HL» – made from cold-resistant halogen-free cross-linked highly elastic polymer compound with low fire hazard.

► Ordering example:

«TOFLEX REKRng(A)-FRHF3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX REKRng(A)-FRHF3×95/50RM(N,G)-1 IEC 60502-1»



CABLE FEATURES




| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|--------------------------|---------------------------------------|
| | | | | TOFLEX REKRng(A)-FRHF | TOFLEX REKRng(A)-FRHF-HL | |
| 2x1,5 RE | 1 | 18.7 | 140.3 | 712 | 712 | 211.9 |
| 2x2,5 RE | 1 | 19.5 | 146.3 | 781 | 781 | 229.8 |
| 2x4 RE | 1 | 20.4 | 153.2 | 863 | 863 | 251.0 |
| 2x6 RE | 1 | 22.2 | 166.7 | 1115 | 1115 | 279.6 |
| 2x10 RE | 1 | 24.2 | 181.4 | 1324 | 1324 | 334.1 |
| 2x16 RE | 1 | 26.1 | 195.6 | 1588 | 1588 | 385.3 |
| 2x16 RM | 1 | 27.0 | 202.4 | 1670 | 1670 | 410.5 |
| 2x25 RE | 1 | 29.1 | 218.1 | 2005 | 2005 | 479.9 |
| 2x25 RM | 1 | 29.8 | 223.4 | 2068 | 2068 | 501.6 |
| 2x50 RM | 1 | 37.2 | 278.9 | 3430 | 3430 | 767.6 |
| 2x95 RM | 1 | 46.8 | 350.9 | 5598 | 5598 | 1182.7 |
| 3x1,5 RE | 1 | 19.3 | 144.8 | 760 | 760 | 222.9 |
| 3x2,5 RE | 1 | 20.2 | 151.3 | 838 | 838 | 241.5 |
| 3x4 RE | 1 | 21.2 | 158.7 | 934 | 934 | 263.5 |
| 3x6 RE | 1 | 23.0 | 172.8 | 1219 | 1219 | 292.6 |
| 3x10 RE | 1 | 25.1 | 188.3 | 1463 | 1463 | 348.3 |
| 3x16 RE | 1 | 27.2 | 203.7 | 1780 | 1780 | 399.7 |
| 3x16 RM | 1 | 28.1 | 210.9 | 1862 | 1862 | 424.8 |
| 3x25 RE | 1 | 30.4 | 227.9 | 2274 | 2274 | 497.2 |
| 3x35 RM | 1 | 34.9 | 261.6 | 3085 | 3085 | 632.1 |
| 4x1,5 RE | 1 | 20.4 | 152.8 | 827 | 827 | 244.7 |
| 4x2,5 RE | 1 | 21.3 | 160.0 | 927 | 927 | 265.7 |
| 4x4 RE | 1 | 23.2 | 174.3 | 1201 | 1201 | 295.0 |
| 4x6 RE | 1 | 24.9 | 186.4 | 1390 | 1390 | 338.4 |
| 4x10 RE | 1 | 26.7 | 200.5 | 1656 | 1656 | 383.6 |
| 4x16 RE | 1 | 29.0 | 217.6 | 2053 | 2053 | 440.5 |
| 4x16 RM | 1 | 30.1 | 225.8 | 2141 | 2141 | 468.3 |
| 4x25 RE | 1 | 33.4 | 250.8 | 2893 | 2893 | 555.8 |
| 4x25 RM | 1 | 35.1 | 263.1 | 3036 | 3036 | 624.8 |
| 4x35 RM | 1 | 37.9 | 284.2 | 3660 | 3660 | 719.0 |
| 5x1,5 RE | 1 | 22.4 | 167.7 | 1060 | 1060 | 274.3 |
| 5x2,5 RE | 1 | 23.4 | 175.8 | 1196 | 1196 | 298.1 |
| 5x4 RE | 1 | 25.1 | 188.1 | 1367 | 1367 | 342.2 |
| 5x6 RE | 1 | 26.4 | 198.2 | 1567 | 1567 | 374.0 |
| 5x10 RE | 1 | 28.5 | 214.0 | 1894 | 1894 | 424.9 |
| 5x25 RE | 1 | 37.1 | 278.6 | 3476 | 3476 | 688.5 |
| 5x25 RM | 1 | 38.1 | 285.7 | 3571 | 3571 | 716.9 |

**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLENE RUBBER (HEPR) INSULATION**

15. SHIELDED, ARMoured WITH FULL LAY-UP FROM STEEL GALVANIZED WIRES

IEC 60502-1

15.3 Cables sheathed with halogen-free polymer compound

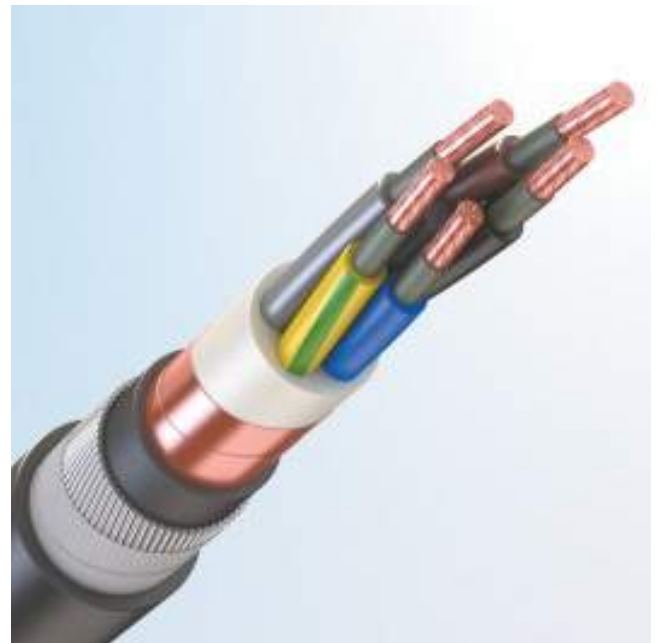

- TOFLEX REKVng(A)-FRLS
- TOFLEX GREKVng(A)-FRLS
- Cu/MGT/HEPR/OSC R/LSPVC/SWA/LSPVC

Possible options:

«ng(A)-FRHF-HL»



DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GREKV) of 5th class (according to IEC 60228).
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑥ **Separation layer** – corresponds to the type of the outer sheath.
- ⑦ **Armour** – steel galvanized wires.
- ⑧ **Outer sheath:**
 - «ng(A)-FRHF» – made from halogen-free polymer compounds.
 - «ng(A)-FRHF-HL» – made from cold-resistant halogen-free polymer compounds.

► **Ordering example:**

«TOFLEX REKVng(A)-FRHF-HL3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX REKVng(A)-FRHF-HL3×95/50RM(N,G)-1 IEC 60502-1»



CABLE FEATURES




| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|--------------------------|---------------------------------------|
| | | | | TOFLEX REKpng(A)-FRHF | TOFLEX REKpng(A)-FRHF-HL | |
| 2x1,5 RE | 1 | 18.7 | 140.3 | 728 | 728 | 211.9 |
| 2x2,5 RE | 1 | 19.5 | 146.3 | 798 | 798 | 229.8 |
| 2x4 RE | 1 | 20.4 | 153.2 | 881 | 881 | 251.0 |
| 2x6 RE | 1 | 22.2 | 166.7 | 1134 | 1134 | 279.6 |
| 2x10 RE | 1 | 24.2 | 181.4 | 1347 | 1347 | 334.1 |
| 2x16 RE | 1 | 26.1 | 195.6 | 1613 | 1613 | 385.3 |
| 2x16 RM | 1 | 27.0 | 202.4 | 1696 | 1696 | 410.5 |
| 2x25 RE | 1 | 29.1 | 218.1 | 2033 | 2033 | 479.9 |
| 2x25 RM | 1 | 29.8 | 223.4 | 2097 | 2097 | 501.6 |
| 2x50 RM | 1 | 37.2 | 278.9 | 3474 | 3474 | 767.6 |
| 2x95 RM | 1 | 46.8 | 350.9 | 5663 | 5663 | 1182.7 |
| 3x1,5 RE | 1 | 19.3 | 144.8 | 776 | 776 | 222.9 |
| 3x2,5 RE | 1 | 20.2 | 151.3 | 855 | 855 | 241.5 |
| 3x4 RE | 1 | 21.2 | 158.7 | 953 | 953 | 263.5 |
| 3x6 RE | 1 | 23.0 | 172.8 | 1238 | 1238 | 292.6 |
| 3x10 RE | 1 | 25.1 | 188.3 | 1487 | 1487 | 348.3 |
| 3x16 RE | 1 | 27.2 | 203.7 | 1806 | 1806 | 399.7 |
| 3x16 RM | 1 | 28.1 | 210.9 | 1890 | 1890 | 424.8 |
| 3x25 RE | 1 | 30.4 | 227.9 | 2304 | 2304 | 497.2 |
| 3x35 RM | 1 | 34.9 | 261.6 | 3126 | 3126 | 632.1 |
| 4x1,5 RE | 1 | 20.4 | 152.8 | 844 | 844 | 244.7 |
| 4x2,5 RE | 1 | 21.3 | 160.0 | 945 | 945 | 265.7 |
| 4x4 RE | 1 | 23.2 | 174.3 | 1221 | 1221 | 295.0 |
| 4x6 RE | 1 | 24.9 | 186.4 | 1414 | 1414 | 338.4 |
| 4x10 RE | 1 | 26.7 | 200.5 | 1682 | 1682 | 383.6 |
| 4x16 RE | 1 | 29.0 | 217.6 | 2081 | 2081 | 440.5 |
| 4x16 RM | 1 | 30.1 | 225.8 | 2170 | 2170 | 468.3 |
| 4x25 RE | 1 | 33.4 | 250.8 | 2926 | 2926 | 555.8 |
| 4x25 RM | 1 | 35.1 | 263.1 | 3077 | 3077 | 624.8 |
| 4x35 RM | 1 | 37.9 | 284.2 | 3705 | 3705 | 719.0 |
| 5x1,5 RE | 1 | 22.4 | 167.7 | 1079 | 1079 | 274.3 |
| 5x2,5 RE | 1 | 23.4 | 175.8 | 1216 | 1216 | 298.1 |
| 5x4 RE | 1 | 25.1 | 188.1 | 1391 | 1391 | 342.2 |
| 5x6 RE | 1 | 26.4 | 198.2 | 1593 | 1593 | 374.0 |
| 5x10 RE | 1 | 28.5 | 214.0 | 1921 | 1921 | 424.9 |
| 5x25 RE | 1 | 37.1 | 278.6 | 3519 | 3519 | 688.5 |
| 5x25 RM | 1 | 38.1 | 285.7 | 3615 | 3615 | 716.9 |

**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLENE RUBBER (HEPR) INSULATION**

16. SHIELDED, ARMoured WITH BRAIDING FROM STEEL GALVANIZED WIRES

IEC 60502-1

16.1 Cables with PVC sheath

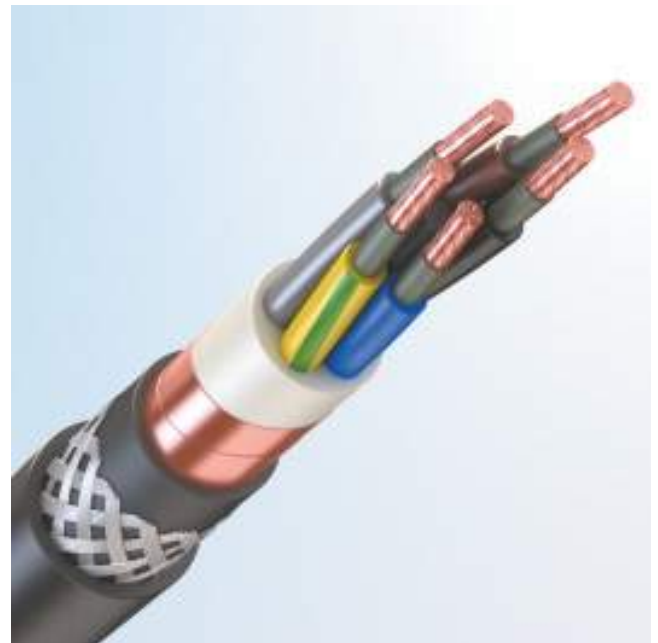

- TOFLEX REPVng(A)-FRLS
- TOFLEX GREPVng(A)-FRLS
- Cu/HEPR/OSCR/LSPVC/SWB/LSPVC

Possible options:

«ng(A)-FRLS-HL»



DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GREPV) of 5th class (according to IEC 60228).
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑥ **Separation layer** – corresponds to the type of the outer sheath.
- ⑦ **Armour** – with full lay-up from galvanized steel wires.
- ⑧ **Outer sheath:**
 - «ng(A)-FRLS» – made from PVC-compound with low fire hazard, low smoke and gas emission.
 - «ng(A)-FRLS-HL» – made from cold-resistant PVC-compound with low fire hazard, low smoke and gas emission.

► **Ordering example:**

«TOFLEX REPVng(A)-FRLS 3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX REPVng(A)-FRLS 3×95/50RM(N,G)-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|--------------------------|---------------------------------------|
| | | | | TOFLEX REPVng(A)-FRLS | TOFLEX REPVng(A)-FRLS-HL | |
| 2x1,5 RE | 1 | 17.1 | 128.6 | 508 | 494 | 202.7 |
| 2x2,5 RE | 1 | 17.9 | 134.6 | 566 | 551 | 220.6 |
| 2x4 RE | 1 | 18.9 | 141.5 | 639 | 623 | 241.9 |
| 2x6 RE | 1 | 19.9 | 149.0 | 727 | 711 | 265.7 |
| 2x10 RE | 1 | 21.4 | 160.7 | 882 | 864 | 304.5 |
| 2x16 RE | 1 | 23.3 | 174.9 | 1098 | 1078 | 354.5 |
| 2x16 RM | 1 | 24.6 | 184.7 | 1184 | 1160 | 395.1 |
| 2x25 RE | 1 | 26.7 | 200.4 | 1476 | 1450 | 464.5 |
| 2x25 RM | 1 | 27.4 | 205.7 | 1530 | 1504 | 486.2 |
| 2x35 RM | 1 | 29.4 | 220.7 | 1832 | 1803 | 550.4 |
| 2x50 RM | 1 | 33.2 | 249.2 | 2431 | 2398 | 698.9 |
| 2x70 RM | 1 | 37.6 | 282.2 | 3122 | 3078 | 893.0 |
| 2x95 RM | 1 | 41.8 | 313.7 | 3955 | 3905 | 1089.5 |
| 2x120 RM | 1 | 45.8 | 343.7 | 4836 | 4773 | 1307.9 |
| 2x150 RM | 1 | 49.8 | 373.7 | 5782 | 5713 | 1542.2 |
| 2x185 RM | 1 | 53.8 | 403.7 | 6889 | 6815 | 1784.7 |
| 3x1,5 RE | 1 | 17.8 | 133.1 | 542 | 527 | 213.7 |
| 3x2,5 RE | 1 | 18.6 | 139.6 | 611 | 595 | 232.4 |
| 3x4 RE | 1 | 19.6 | 147.0 | 698 | 682 | 254.3 |
| 3x6 RE | 1 | 20.7 | 155.1 | 805 | 788 | 278.7 |
| 3x10 RE | 1 | 22.4 | 167.6 | 995 | 976 | 318.1 |
| 3x16 RE | 1 | 24.8 | 186.0 | 1294 | 1270 | 384.3 |
| 3x16 RM | 1 | 25.8 | 193.2 | 1354 | 1329 | 409.4 |
| 3x25 RE | 1 | 28.0 | 210.2 | 1724 | 1696 | 481.8 |
| 3x25 RM | 1 | 28.8 | 215.8 | 1782 | 1754 | 503.3 |
| 3x35 RM | 1 | 30.9 | 231.9 | 2164 | 2134 | 566.4 |
| 3x50 RM | 1 | 36.2 | 271.3 | 3041 | 2999 | 786.7 |
| 3x70 RM | 1 | 39.6 | 297.1 | 3754 | 3707 | 911.7 |
| 3x95 RM | 1 | 44.5 | 334.0 | 4856 | 4804 | 1136.2 |
| 3x120 RM | 1 | 48.7 | 365.6 | 5966 | 5899 | 1356.2 |
| 3x150 RM | 1 | 52.6 | 394.6 | 7089 | 7017 | 1561.5 |
| 4x1,5 RE | 1 | 18.8 | 141.1 | 601 | 585 | 235.5 |
| 4x2,5 RE | 1 | 19.8 | 148.3 | 683 | 666 | 256.5 |
| 4x4 RE | 1 | 20.9 | 156.6 | 790 | 772 | 281.1 |
| 4x6 RE | 1 | 22.1 | 165.7 | 920 | 901 | 308.5 |
| 4x10 RE | 1 | 24.4 | 182.8 | 1182 | 1158 | 368.1 |
| 4x16 RE | 1 | 26.7 | 199.9 | 1519 | 1494 | 425.1 |
| 4x16 RM | 1 | 27.7 | 208.1 | 1586 | 1559 | 452.8 |
| 4x25 RE | 1 | 30.3 | 227.1 | 2049 | 2019 | 535.2 |
| 4x25 RM | 1 | 31.1 | 233.4 | 2115 | 2085 | 558.9 |
| 4x35 RM | 1 | 33.9 | 254.5 | 2635 | 2602 | 649.4 |
| 4x50 RM | 1 | 39.2 | 294.2 | 3660 | 3614 | 872.3 |
| 4x70 RM | 1 | 43.1 | 323.1 | 4546 | 4495 | 1008.9 |
| 4x95 RM | 1 | 49.7 | 373.1 | 6089 | 6021 | 1353.8 |
| 4x120 RM | 1 | 53.1 | 398.4 | 7285 | 7212 | 1497.8 |
| 5x1,5 RE | 1 | 20.0 | 150.0 | 672 | 655 | 260.4 |
| 5x2,5 RE | 1 | 21.1 | 158.1 | 769 | 751 | 284.2 |
| 5x4 RE | 1 | 22.3 | 167.4 | 898 | 879 | 312.1 |
| 5x6 RE | 1 | 24.1 | 180.5 | 1089 | 1066 | 358.6 |


| | | | | | | |
|---------|---|------|-------|------|------|--------|
| 5x10 RE | 1 | 26.2 | 196.3 | 1371 | 1346 | 409.5 |
| 5x16 RE | 1 | 28.7 | 215.5 | 1777 | 1749 | 473.6 |
| 5x16 RM | 1 | 30.0 | 224.7 | 1853 | 1823 | 504.8 |
| 5x25 RE | 1 | 33.2 | 248.9 | 2469 | 2436 | 619.9 |
| 5x25 RM | 1 | 34.9 | 262.0 | 2626 | 2585 | 692.2 |
| 5x35 RM | 1 | 38.0 | 285.3 | 3275 | 3230 | 799.0 |
| 5x50 RM | 1 | 42.6 | 319.7 | 4379 | 4328 | 976.5 |
| 5x70 RM | 1 | 48.5 | 364.1 | 5744 | 5677 | 1252.3 |
| 5x95 RM | 1 | 54.2 | 406.6 | 7349 | 7274 | 1515.0 |

**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLENE RUBBER (HEPR) INSULATION**

16. SHIELDED, ARMoured WITH BRAIDING FROM STEEL GALVANIZED WIRES

IEC 60502-1

16.2 Cables sheathed with cross-linked highly elastic polymer compound

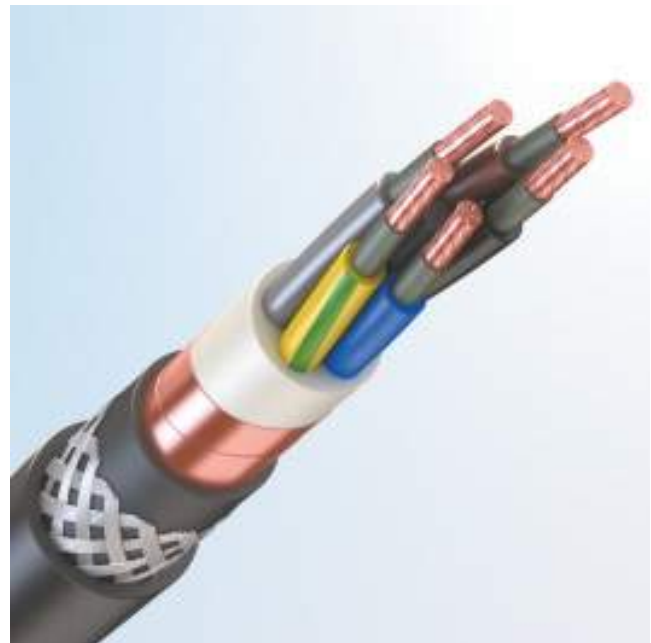

- TOFLEX REPRng(A)-FRHF
- TOFLEX GREPRng(A)-FRHF
- Cu/MGT/HEPR/OSCR/HFFR/SWB/XLHFFR

Possible options:

"ng(A)-FRHF-HL"

DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GREPV) of 5th class (according to IEC 60228).
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑥ **Separation layer** – corresponds to the type of the outer sheath.
- ⑦ **Armour** – with full lay-up from galvanized steel wires.
- ⑧ **Outer sheath:**
 - «ng(A)-FRHF» – made from halogen-free cross-linked highly elastic polymer compound with low fire hazard.
 - «ng(A)-FRHF-HL» – made from cold-resistant halogen-free cross-linked highly elastic polymer compound with low fire hazard.

► **Ordering example:**

«TOFLEX REPRng(A)-FRHF3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX REPRng(A)-FRHF3×95/50RM(N,G)-1 IEC 60502-1»

CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire,kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|-------------------------|--------------------------|---------------------------------------|
| | | | | TOFLEX REPVng(A)-FRLS | TOFLEX REPVng(A)-FRLS-HL | |
| 2x1,5 RE | 1 | 17.1 | 128.6 | 462 | 462 | 202.7 |
| 2x2,5 RE | 1 | 17.9 | 134.6 | 517 | 517 | 220.6 |
| 2x4 RE | 1 | 18.9 | 141.5 | 587 | 587 | 241.9 |
| 2x6 RE | 1 | 19.9 | 149.0 | 672 | 672 | 265.7 |
| 2x10 RE | 1 | 21.4 | 160.7 | 821 | 821 | 304.5 |
| 2x16 RE | 1 | 23.3 | 174.9 | 1030 | 1030 | 354.5 |
| 2x16 RM | 1 | 24.6 | 184.7 | 1105 | 1105 | 395.1 |
| 2x25 RE | 1 | 26.7 | 200.4 | 1388 | 1388 | 464.5 |
| 2x25 RM | 1 | 27.4 | 205.7 | 1440 | 1440 | 486.2 |
| 2x35 RM | 1 | 29.4 | 220.7 | 1733 | 1733 | 550.4 |
| 2x50 RM | 1 | 33.2 | 249.2 | 2315 | 2315 | 698.9 |
| 2x70 RM | 1 | 37.6 | 282.2 | 2967 | 2967 | 893.0 |
| 2x95 RM | 1 | 41.8 | 313.7 | 3777 | 3777 | 1089.5 |
| 2x120 RM | 1 | 45.8 | 343.7 | 4613 | 4613 | 1307.9 |
| 2x150 RM | 1 | 49.8 | 373.7 | 5532 | 5532 | 1542.2 |
| 2x185 RM | 1 | 53.8 | 403.7 | 6614 | 6614 | 1784.7 |
| 3x1,5 RE | 1 | 17.8 | 133.1 | 494 | 494 | 213.7 |
| 3x2,5 RE | 1 | 18.6 | 139.6 | 560 | 560 | 232.4 |
| 3x4 RE | 1 | 19.6 | 147.0 | 645 | 645 | 254.3 |
| 3x6 RE | 1 | 20.7 | 155.1 | 748 | 748 | 278.7 |
| 3x10 RE | 1 | 22.4 | 167.6 | 932 | 932 | 318.1 |
| 3x16 RE | 1 | 24.8 | 186.0 | 1216 | 1216 | 384.3 |
| 3x16 RM | 1 | 25.8 | 193.2 | 1272 | 1272 | 409.4 |
| 3x25 RE | 1 | 28.0 | 210.2 | 1633 | 1633 | 481.8 |
| 3x25 RM | 1 | 28.8 | 215.8 | 1688 | 1688 | 503.3 |
| 3x35 RM | 1 | 30.9 | 231.9 | 2062 | 2062 | 566.4 |
| 3x50 RM | 1 | 36.2 | 271.3 | 2898 | 2898 | 786.7 |
| 3x70 RM | 1 | 39.6 | 297.1 | 3594 | 3594 | 911.7 |
| 3x95 RM | 1 | 44.5 | 334.0 | 4672 | 4672 | 1136.2 |
| 3x120 RM | 1 | 48.7 | 365.6 | 5734 | 5734 | 1356.2 |
| 3x150 RM | 1 | 52.6 | 394.6 | 6835 | 6835 | 1561.5 |
| 4x1,5 RE | 1 | 18.8 | 141.1 | 550 | 550 | 235.5 |
| 4x2,5 RE | 1 | 19.8 | 148.3 | 629 | 629 | 256.5 |
| 4x4 RE | 1 | 20.9 | 156.6 | 732 | 732 | 281.1 |
| 4x6 RE | 1 | 22.1 | 165.7 | 858 | 858 | 308.5 |
| 4x10 RE | 1 | 24.4 | 182.8 | 1107 | 1107 | 368.1 |
| 4x16 RE | 1 | 26.7 | 199.9 | 1435 | 1435 | 425.1 |
| 4x16 RM | 1 | 27.7 | 208.1 | 1498 | 1498 | 452.8 |
| 4x25 RE | 1 | 30.3 | 227.1 | 1951 | 1951 | 535.2 |
| 4x25 RM | 1 | 31.1 | 233.4 | 2014 | 2014 | 558.9 |
| 4x35 RM | 1 | 33.9 | 254.5 | 2523 | 2523 | 649.4 |
| 4x50 RM | 1 | 39.2 | 294.2 | 3506 | 3506 | 872.3 |
| 4x70 RM | 1 | 43.1 | 323.1 | 4374 | 4374 | 1008.9 |
| 4x95 RM | 1 | 49.7 | 373.1 | 5857 | 5857 | 1353.8 |
| 4x120 RM | 1 | 53.1 | 398.4 | 7034 | 7034 | 1497.8 |
| 5x1,5 RE | 1 | 20.0 | 150.0 | 618 | 618 | 260.4 |
| 5x2,5 RE | 1 | 21.1 | 158.1 | 711 | 711 | 284.2 |
| 5x4 RE | 1 | 22.3 | 167.4 | 836 | 836 | 312.1 |
| 5x6 RE | 1 | 24.1 | 180.5 | 1015 | 1015 | 358.6 |


| | | | | | | |
|---------|---|------|-------|------|------|--------|
| 5x10 RE | 1 | 26.2 | 196.3 | 1290 | 1290 | 409.5 |
| 5x16 RE | 1 | 28.7 | 215.5 | 1686 | 1686 | 473.6 |
| 5x16 RM | 1 | 30.0 | 224.7 | 1757 | 1757 | 504.8 |
| 5x25 RE | 1 | 33.2 | 248.9 | 2360 | 2360 | 619.9 |
| 5x25 RM | 1 | 34.9 | 262.0 | 2494 | 2494 | 692.2 |
| 5x35 RM | 1 | 38.0 | 285.3 | 3128 | 3128 | 799.0 |
| 5x50 RM | 1 | 42.6 | 319.7 | 4210 | 4210 | 976.5 |
| 5x70 RM | 1 | 48.5 | 364.1 | 5521 | 5521 | 1252.3 |
| 5x95 RM | 1 | 54.2 | 406.6 | 7095 | 7095 | 1515.0 |

**FIRE-RESISTANT POWER CABLES
WITH HARD GRADE ETHYLENE
PROPYLENE RUBBER (HEPR) INSULATION**

16. SHIELDED, ARMoured WITH BRAIDING FROM STEEL GALVANIZED WIRES

IEC 60502-1

16.3 Cables sheathed with halogen-free polymer compound

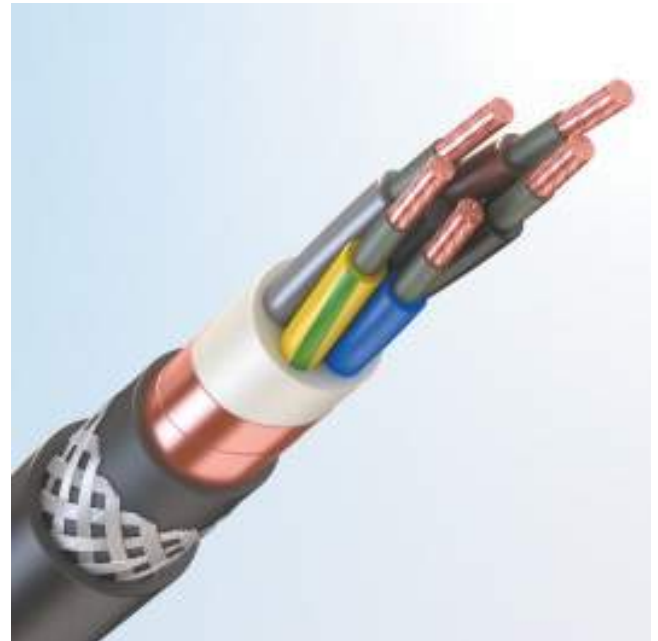

- TOFLEX REPPng(A)-FRHF
- TOFLEX GREPPng(A)-FRHF
- Cu/MGT/HEPR/OSCR/HFFR/SWB/HFFR

Possible options:

"ng(A)-FRHF-HL"



DESIGN FEATURES

- ① **Electrical conductor** – copper of 1st, 2nd class; copper flexible (version GREPV) of 5th class (according to IEC 60228).
- ② **Thermal barrier** – micatape double-layer lapping.
- ③ **Insulation** – hard grade ethylene propylene rubber (HEPR).
- ④ **Inner sheath** – corresponds to the type of the outer sheath.
- ⑤ **Shield** – is made from copper foil, copper tape or copper wires. Cable shield has flexible conductors and copper wire braid. The cross section of the copper wires shield is indicated after the slash in the cable label size.
- ⑥ **Separation layer** – corresponds to the type of the outer sheath.
- ⑦ **Armour** – with full lay-up from galvanized steel wires.
- ⑧ **Outer sheath:**
 - «ng(A)-FRHF» — made from halogen-free polymer compounds.
 - «ng(A)-FRHF-HL» — made from cold-resistant halogen-free polymer compounds.

► **Ordering example:**

«TOFLEX REPPng(A)-FRHF-HL3×95RM(N,G)-1 IEC 60502-1»

«TOFLEX REPPng(A)-FRHF-HL3×95/50RM(N,G)-1 IEC 60502-1»



CABLE FEATURES



| Conductor cross section, mm ² | Voltage, kV | Outer wire diameter, mm | Minimum bending radius, mm | Weight for 1 km wire, kg | | Amount of combustible materials, l/km |
|------------------------------------------|-------------|-------------------------|----------------------------|--------------------------|--------------------------|---------------------------------------|
| | | | | TOFLEX REPPng(A)-FRHF | TOFLEX REPPng(A)-FRHF-HL | |
| 2x1,5 RE | 1 | 17.1 | 128.6 | 476 | 476 | 202.7 |
| 2x2,5 RE | 1 | 17.9 | 134.6 | 532 | 532 | 220.6 |
| 2x4 RE | 1 | 18.9 | 141.5 | 603 | 603 | 241.9 |
| 2x6 RE | 1 | 19.9 | 149.0 | 689 | 689 | 265.7 |
| 2x10 RE | 1 | 21.4 | 160.7 | 839 | 839 | 304.5 |
| 2x16 RE | 1 | 23.3 | 174.9 | 1050 | 1050 | 354.5 |
| 2x16 RM | 1 | 24.6 | 184.7 | 1128 | 1128 | 395.1 |
| 2x25 RE | 1 | 26.7 | 200.4 | 1414 | 1414 | 464.5 |
| 2x25 RM | 1 | 27.4 | 205.7 | 1466 | 1466 | 486.2 |
| 2x35 RM | 1 | 29.4 | 220.7 | 1762 | 1762 | 550.4 |
| 2x50 RM | 1 | 33.2 | 249.2 | 2347 | 2347 | 698.9 |
| 2x70 RM | 1 | 37.6 | 282.2 | 3011 | 3011 | 893.0 |
| 2x95 RM | 1 | 41.8 | 313.7 | 3826 | 3826 | 1089.5 |
| 2x120 RM | 1 | 45.8 | 343.7 | 4676 | 4676 | 1307.9 |
| 2x150 RM | 1 | 49.8 | 373.7 | 5601 | 5601 | 1542.2 |
| 2x185 RM | 1 | 53.8 | 403.7 | 6689 | 6689 | 1784.7 |
| 3x1,5 RE | 1 | 17.8 | 133.1 | 509 | 509 | 213.7 |
| 3x2,5 RE | 1 | 18.6 | 139.6 | 576 | 576 | 232.4 |
| 3x4 RE | 1 | 19.6 | 147.0 | 661 | 661 | 254.3 |
| 3x6 RE | 1 | 20.7 | 155.1 | 765 | 765 | 278.7 |
| 3x10 RE | 1 | 22.4 | 167.6 | 951 | 951 | 318.1 |
| 3x16 RE | 1 | 24.8 | 186.0 | 1240 | 1240 | 384.3 |
| 3x16 RM | 1 | 25.8 | 193.2 | 1297 | 1297 | 409.4 |
| 3x25 RE | 1 | 28.0 | 210.2 | 1661 | 1661 | 481.8 |
| 3x25 RM | 1 | 28.8 | 215.8 | 1716 | 1716 | 503.3 |
| 3x35 RM | 1 | 30.9 | 231.9 | 2092 | 2092 | 566.4 |
| 3x50 RM | 1 | 36.2 | 271.3 | 2941 | 2941 | 786.7 |
| 3x70 RM | 1 | 39.6 | 297.1 | 3641 | 3641 | 911.7 |
| 3x95 RM | 1 | 44.5 | 334.0 | 4724 | 4724 | 1136.2 |
| 3x120 RM | 1 | 48.7 | 365.6 | 5802 | 5802 | 1356.2 |
| 3x150 RM | 1 | 52.6 | 394.6 | 6907 | 6907 | 1561.5 |
| 4x1,5 RE | 1 | 18.8 | 141.1 | 566 | 566 | 235.5 |
| 4x2,5 RE | 1 | 19.8 | 148.3 | 646 | 646 | 256.5 |
| 4x4 RE | 1 | 20.9 | 156.6 | 750 | 750 | 281.1 |
| 4x6 RE | 1 | 22.1 | 165.7 | 877 | 877 | 308.5 |
| 4x10 RE | 1 | 24.4 | 182.8 | 1130 | 1130 | 368.1 |
| 4x16 RE | 1 | 26.7 | 199.9 | 1461 | 1461 | 425.1 |
| 4x16 RM | 1 | 27.7 | 208.1 | 1525 | 1525 | 452.8 |
| 4x25 RE | 1 | 30.3 | 227.1 | 1981 | 1981 | 535.2 |
| 4x25 RM | 1 | 31.1 | 233.4 | 2045 | 2045 | 558.9 |
| 4x35 RM | 1 | 33.9 | 254.5 | 2556 | 2556 | 649.4 |
| 4x50 RM | 1 | 39.2 | 294.2 | 3552 | 3552 | 872.3 |
| 4x70 RM | 1 | 43.1 | 323.1 | 4425 | 4425 | 1008.9 |
| 4x95 RM | 1 | 49.7 | 373.1 | 5925 | 5925 | 1353.8 |
| 4x120 RM | 1 | 53.1 | 398.4 | 7107 | 7107 | 1497.8 |
| 5x1,5 RE | 1 | 20.0 | 150.0 | 635 | 635 | 260.4 |
| 5x2,5 RE | 1 | 21.1 | 158.1 | 729 | 729 | 284.2 |
| 5x4 RE | 1 | 22.3 | 167.4 | 855 | 855 | 312.1 |
| 5x6 RE | 1 | 24.1 | 180.5 | 1038 | 1038 | 358.6 |

| | | | | | | |
|---------|---|------|-------|------|------|--------|
| 5x10 RE | 1 | 26.2 | 196.3 | 1315 | 1315 | 409.5 |
| 5x16 RE | 1 | 28.7 | 215.5 | 1714 | 1714 | 473.6 |
| 5x16 RM | 1 | 30.0 | 224.7 | 1786 | 1786 | 504.8 |
| 5x25 RE | 1 | 33.2 | 248.9 | 2393 | 2393 | 619.9 |
| 5x25 RM | 1 | 34.9 | 262.0 | 2534 | 2534 | 692.2 |
| 5x35 RM | 1 | 38.0 | 285.3 | 3173 | 3173 | 799.0 |
| 5x50 RM | 1 | 42.6 | 319.7 | 4261 | 4261 | 976.5 |
| 5x70 RM | 1 | 48.5 | 364.1 | 5588 | 5588 | 1252.3 |
| 5x95 RM | 1 | 54.2 | 406.6 | 7170 | 7170 | 1515.0 |

NORMATIVE REFERENCES

Cable and wire products comply with IEC 60502-1, are manufactured, tested and gauged strictly in accordance with the following standards:

- **IEC 60331-21:1999**
Tests for electric cables under fire conditions - Circuit integrity - Part 21: Procedures and requirements - Cables of rated voltage up to and including 0,6/1,0 Kv.
- **IEC 60331-23:1999**
Tests for electric cables under fire conditions - Circuit integrity - Part 23: Procedures and requirements - Electric data cables.
- **IEC 60331-25:1999**
Tests for electric cables under fire conditions - Circuit integrity - Part 25: Procedures and requirements - Optical fibre cables.
- **IEC 60332-1-2:2004+AMD1:2015 CSV**
Consolidated version
Tests on electric and optical fibre cables under fire conditions - Part 1-2: Test for vertical flame propagation for a single insulated wire or cable - Procedure for 1 kW pre-mixed flame.
- **IEC 60332-1-3:2004+AMD1:2015 CSV**
Consolidated version
Tests on electric and optical fibre cables under fire conditions - Part 1-3: Test for vertical flame propagation for a single insulated wire or cable - Procedure for determination of flaming droplets/particles.
- **IEC 60332-2-2:2004**
Tests on electric and optical fibre cables under fire conditions - Part 2-2: Test for vertical flame propagation for a single small insulated wire or cable - Procedure for diffusion flame.
- **IEC 60332-3-21:2000**
Tests on electric cables under fire conditions - Part 3-21: Test for vertical flame spread of vertically-mounted bunched wires or cables - Category A F/R.
- **IEC 60332-3-22:2000+AMD1:2008 CSV**
Consolidated version
Tests on electric and optical fibre cables under fire conditions - Part 3-22: Test for vertical flame spread of vertically-mounted bunched wires or cables - Category A.
- **IEC 60332-3-23:2000+AMD1:2008 CSV**
Consolidated version
Tests on electric and optical fibre cables under fire conditions - Part 3-23: Test for vertical flame spread of vertically-mounted bunched wires or cables - Category B.
- **IEC 60332-3-24:2000+AMD1:2008 CSV**
Consolidated version
Tests on electric and optical fibre cables under fire conditions - Part 3-24: Test for vertical flame spread of vertically-mounted bunched wires or cables - Category C.
- **IEC 60332-3-25:2000+AMD1:2008 CSV**
Consolidated version
Tests on electric and optical fibre cables under fire conditions - Part 3-25: Test for vertical flame spread of vertically-mounted bunched wires or cables - Category D.
- **IEC 60754-1:2011**
Test on gases evolved during combustion of materials from cables - Part 1: Determination of the halogen acid gas content.
- **IEC 60754-2:2011**
Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity.
- **IEC 61034-2:2005+AMD1:2013 CSV**
Consolidated version
Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements.
- **IEC 60721-3-1:1997**
Classification of environmental conditions - Part 3 Classification of groups of environmental parameters and their severities - Section 1: Storage.
- **IEC 60721-3-2:1997**
Classification of environmental conditions - Part 3: Classification of groups of environmental parameters and their severities - Section 2: Transportation.
- **IEC 60721-3-3:1994+AMD1:1995+AMD2:1996 CSV**
Consolidated version
Classification of environmental conditions - Part 3-3: Classification of groups of environmental parameters and their severities - Stationary use at weather protected locations.
- **IEC 60721-3-4:1995**
Classification of environmental conditions - Part 3: Classification of groups of environmental parameters and their severities - Section 4: Stationary use at non-weather protected locations.
- **IEC 60721-3-5:1997**
Classification of environmental conditions - Part 3: Classification of groups of environmental parameters and their severities - Section 5: Ground vehicle installations.
- **IEC 60721-3-6:1987+AMD1:1991 CSV**
Consolidated version
Classification of environmental conditions. Part 3: Classification of groups of environmental parameters and their severities. Ship environment.
- **IEC 60721-3-7:1995+AMD1:1996 CSV**
Consolidated version
Classification of environmental conditions - Part 3-7: Classification of groups of environmental parameters and their severities - Portable and non-stationary use.
- **IEC 68-1:1989**
The standard lists a series of environmental test procedures, and their severities, designed to assess the ability of electro technical products to perform under expected conditions of service.

REFERENCE INFORMATION

CURRENT CARRYING CAPACITY

Current carrying capacity is given for an ambient temperature 30 °C when laying in the air and 20 °C when laying in the ground.

Continuous current carrying capacity of cables with copper conductors when laying in the air and in the ground shall correspond to the values indicated in the tables 1, 2 and 3. To determine the current capacity of cables with aluminium conductors the values from the tables 1, 2 and 3 need to multiply by 0,77.

Table 1. Single-conductor cables

| Cross-section, mm ² | Continuous current capacity, A | | | | | |
|--------------------------------|--------------------------------|---------------------|---------------|--------------|------------------------|--------------|
| | In the air | In pipes in the air | In the ground | | In pipes in the ground | |
| | | | $\sigma=1$ | $\sigma=1.5$ | $\sigma=1$ | $\sigma=1.5$ |
| 1.5 | 29 | 20 | 35 | 32 | 22 | 21 |
| 2.5 | 39 | 28 | 45 | 39 | 30 | 27 |
| 4 | 50 | 37 | 58 | 51 | 38 | 35 |
| 6 | 63 | 48 | 73 | 64 | 48 | 44 |
| 10 | 85 | 66 | 97 | 85 | 63 | 59 |
| 16 | 119 | 88 | 125 | 110 | 88 | 77 |
| 25 | 156 | 117 | 160 | 141 | 113 | 100 |
| 35 | 188 | 144 | 191 | 169 | 136 | 121 |
| 50 | 228 | 175 | 226 | 199 | 166 | 150 |
| 70 | 287 | 222 | 277 | 244 | 204 | 184 |
| 95 | 343 | 269 | 331 | 292 | 242 | 217 |
| 120 | 411 | 312 | 377 | 332 | 274 | 251 |
| 150 | 458 | 355 | 420 | 370 | 324 | 287 |
| 185 | 527 | 417 | 476 | 419 | 364 | 323 |
| 240 | 610 | 490 | 550 | 484 | 427 | 379 |
| 300 | 691 | 570 | 620 | 546 | 484 | 429 |
| 400 | 823 | 669 | 700 | 616 | 564 | 500 |
| 500 | 946 | 781 | 790 | 695 | 638 | 565 |
| 630 | 1114 | 891 | 886 | 780 | 728 | 645 |
| 800 | 1263 | 1034 | 904 | 795 | 741 | 656 |

Table 2. Double-conductor cables

| Cross-section, mm ² | Continuous current capacity, A | | | | | |
|--------------------------------|--------------------------------|---------------------|---------------|--------------|------------------------|--------------|
| | In the air | In pipes in the air | In the ground | | In pipes in the ground | |
| | | | $\sigma=1$ | $\sigma=1.5$ | $\sigma=1$ | $\sigma=1.5$ |
| 1.5 | 31 | 26 | 36 | 33 | 27 | 26 |
| 2.5 | 41 | 34 | 47 | 43 | 35 | 33 |
| 4 | 53 | 44 | 62 | 55 | 46 | 43 |
| 6 | 67 | 55 | 77 | 69 | 58 | 54 |
| 10 | 91 | 74 | 103 | 92 | 77 | 72 |
| 16 | 122 | 99 | 134 | 120 | 102 | 95 |
| 25 | 161 | 131 | 175 | 154 | 133 | 124 |
| 35 | 196 | 159 | 210 | 185 | 161 | 150 |
| 50 | 238 | 194 | 251 | 220 | 194 | 180 |
| 70 | 295 | 243 | 304 | 267 | 240 | 222 |
| 95 | 363 | 298 | 367 | 322 | 291 | 269 |
| 120 | 418 | 343 | 417 | 365 | 333 | 307 |

| | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|
| 150 | 472 | 391 | 465 | 407 | 375 | 345 |
| 185 | 544 | 450 | 527 | 461 | 428 | 393 |
| 240 | 636 | 526 | 606 | 531 | 494 | 453 |
| 300 | 739 | 608 | 688 | 601 | 563 | 514 |

Table 3. Three-, four-, five conductor cables

| Cross-section, mm ² | Continuous current capacity, A | | | | | |
|--------------------------------|--------------------------------|---------------------|---------------|--------------|------------------------|--------------|
| | In the air | In pipes in the air | In the ground | | In pipes in the ground | |
| | | | $\sigma=1$ | $\sigma=1.5$ | $\sigma=1$ | $\sigma=1.5$ |
| 1.5 | 36 | 20 | 31 | 27 | 21 | 20 |
| 2.5 | 34 | 26 | 40 | 36 | 28 | 26 |
| 4 | 45 | 35 | 52 | 45 | 36 | 33 |
| 6 | 56 | 44 | 65 | 56 | 45 | 42 |
| 10 | 76 | 60 | 88 | 78 | 60 | 56 |
| 16 | 102 | 80 | 114 | 101 | 79 | 74 |
| 25 | 134 | 105 | 148 | 130 | 103 | 95 |
| 35 | 163 | 128 | 178 | 157 | 124 | 115 |
| 50 | 198 | 154 | 211 | 185 | 152 | 141 |
| 70 | 248 | 194 | 259 | 227 | 189 | 174 |
| 95 | 305 | 233 | 311 | 274 | 226 | 206 |
| 120 | 351 | 268 | 355 | 311 | 260 | 238 |
| 150 | 404 | 309 | 394 | 345 | 299 | 272 |
| 185 | 461 | 355 | 446 | 392 | 340 | 307 |
| 240 | 549 | 422 | 515 | 454 | 402 | 360 |
| 300 | 641 | 495 | 595 | 524 | 464 | 415 |

At an ambient temperature different from 30 ° C when laying in the air and 20 ° C when laying in the ground, to the nominal current capacity the correction factors listed in Table 4 should be applied.

Table 4

| Predicted temperature, °C | Correction factors at ambient temperature, °C | | | | | | | | | | | |
|---------------------------|-----------------------------------------------|------|------|------|------|------|------|------|------|------|------|------|
| | -5 | 0 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 |
| 15 | 1.13 | 1.1 | 1.06 | 1.03 | 1.0 | 0.97 | 0.93 | 0.89 | 0.86 | 0.82 | 0.77 | 0.73 |
| 25 | 1.21 | 1.18 | 1.14 | 1.11 | 1.07 | 1.04 | 1.0 | 0.96 | 0.92 | 0.88 | 0.83 | 0.78 |

Admissible current capacities for cables in overload mode during the laying in the ground can be calculated by multiplying the corresponding values from the tables 1, 2 and 3 by factor 1.17.

Admissible current capacities for cables in overload mode during the laying in the air can be calculated by multiplying the corresponding values from the tables 1, 2 and 3 by factor 1.20.

Admissible current of 1 sec. short-circuit must not exceed the values listed in the table 5.

Table 5

| Nominal section of conductor, mm ² | Admissible current of 1 sec. short-circuit, kA, for cables with | |
|-----------------------------------------------|-----------------------------------------------------------------|----------------------|
| | copper conductors | aluminium conductors |
| 1.5 | 0.21 | — |
| 2.5 | 0.34 | 0.22 |
| 4 | 0.54 | 0.36 |
| 6 | 0.81 | 0.52 |
| 10 | 1.36 | 0.87 |
| 16 | 2.16 | 1.40 |
| 25 | 3.46 | 2.24 |
| 35 | 4.80 | 3.09 |

| | | |
|-----|--------|-------|
| 50 | 6.50 | 4.18 |
| 70 | 9.38 | 6.12 |
| 95 | 13.0 | 8.48 |
| 120 | 16.43 | 10.71 |
| 150 | 20.26 | 13.16 |
| 185 | 25.35 | 16.53 |
| 240 | 33.32 | 21.70 |
| 300 | 41.64 | 27.12 |
| 400 | 55.20 | 36.16 |
| 500 | 49.50 | 32.50 |
| 630 | 86.95 | 56.95 |
| 800 | 110.40 | 72.33 |

For the short circuit lasting for more or less than 1 second, the short circuit current values are determined by multiplying 1 second short circuit current value by the correction factor K according to the formula, where t is the duration of short circuit, in seconds:

$$K = 1/\sqrt{t}$$

Maximum duration of short-circuit must not exceed 5 seconds.

WINDING CABLES ONTO DRUM

Table 6. Winding onto drum

| D, mm | Number | | | | | | | | | | | | |
|-------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-----|-----|
| | 8 | 8a | 8b | 10 | 12 | 12a | 14 | 16a | 17a | 18a | 20 | 20a | 22c |
| 2 | 10,000 | | | | | | | | | | | | |
| 5 | 2,300 | 4,000 | 5,050 | | | | | | | | | | |
| 6 | 1,600 | 2,800 | 3,500 | | | | | | | | | | |
| 7 | 1,200 | 2,050 | 2,550 | 3,900 | | | | | | | | | |
| 8 | 900 | 1,550 | 1,950 | 3,000 | 4,650 | | | | | | | | |
| 9 | 700 | 1,250 | 1,550 | 2,350 | 3,650 | | | | | | | | |
| 10 | 600 | 1,000 | 1,250 | 1,900 | 3,000 | 4,200 | | | | | | | |
| 11 | 500 | 850 | 850 | 1,600 | 2,450 | 3,500 | 4,850 | | | | | | |
| 12 | 400 | 700 | 800 | 1,350 | 2,050 | 2,950 | 4,100 | | | | | | |
| 13 | 350 | 600 | 750 | 1,150 | 1,750 | 2,500 | 3,500 | | | | | | |
| 14 | | 500 | 650 | 1,000 | 1,500 | 2,150 | 3,000 | 4,550 | | | | | |
| 15 | | 450 | 550 | 850 | 1,300 | 1,850 | 2,600 | 3,950 | 4,850 | | | | |
| 16 | | 400 | 500 | 750 | 1,150 | 1,650 | 2,300 | 3,450 | 4,250 | | | | |
| 17 | | 350 | 450 | 650 | 1,050 | 1,450 | 2,050 | 3,050 | 3,750 | 4,200 | | | |
| 18 | | 300 | 400 | 600 | 900 | 1,300 | 1,800 | 2,750 | 3,350 | 3,750 | | | |
| 19 | | | 350 | 550 | 800 | 1,150 | 1,650 | 2,450 | 3,000 | 3,350 | | | |
| 20 | | | 300 | 500 | 750 | 1,050 | 1,450 | 2,200 | 2,700 | 3,000 | 4,550 | | |
| 21 | | | | 450 | 650 | 950 | 1,350 | 2,000 | 2,450 | 2,750 | 4,100 | | |
| 22 | | | | 400 | 600 | 850 | 1,200 | 1,850 | 2,250 | 2,500 | 3,750 | | |
| 23 | | | | 350 | 550 | 800 | 1,100 | 1,700 | 2,050 | 2,300 | 3,450 | | |
| 24 | | | | 350 | 500 | 750 | 1,000 | 1,550 | 1,900 | 2,100 | 3,150 | | |
| 25 | | | | 300 | 500 | 650 | 950 | 1,400 | 1,750 | 1,950 | 2,900 | | |
| 26 | | | | | 450 | 600 | 850 | 1,300 | 1,600 | 1,800 | 2,700 | | |
| 27 | | | | | 400 | 600 | 800 | 1,200 | 1,500 | 1,650 | 2,500 | | |
| 28 | | | | | 400 | 550 | 750 | 1,150 | 1,400 | 1,550 | 2,300 | | |
| 29 | | | | | 350 | 500 | 700 | 1,050 | 1,300 | 1,450 | 2,150 | | |
| 30 | | | | | 350 | 450 | 650 | 1,000 | 1,200 | 1,350 | 2,000 | | |

| | | | | | | | | | | | | | |
|----|--|--|--|--|-----|-----|-----|-----|-------|-------|-------|-----|-----|
| 31 | | | | | 300 | 450 | 600 | 900 | 1,150 | 1,250 | 1,900 | | |
| 32 | | | | | | 400 | 600 | 850 | 1,050 | 1,200 | 1,750 | | |
| 33 | | | | | | 400 | 550 | 800 | 1,000 | 1,100 | 1,650 | | |
| 34 | | | | | | 350 | 500 | 750 | 950 | 1,050 | 1,550 | | |
| 35 | | | | | | 350 | 500 | 700 | 900 | 1,000 | 1,500 | | |
| 36 | | | | | | 350 | 450 | 700 | 850 | 950 | 1,400 | | |
| 37 | | | | | | 300 | 450 | 650 | 800 | 900 | 1,300 | | |
| 38 | | | | | | | 400 | 600 | 750 | 850 | 1,250 | | |
| 39 | | | | | | | 400 | 600 | 700 | 800 | 1,200 | | |
| 40 | | | | | | | 350 | 550 | 650 | 750 | 1,100 | | |
| 41 | | | | | | | 350 | 500 | 650 | 700 | 1,050 | | |
| 42 | | | | | | | 350 | 500 | 600 | 650 | 1,000 | | |
| 43 | | | | | | | 300 | 450 | 600 | 650 | 950 | | |
| 44 | | | | | | | 300 | 450 | 550 | 600 | 900 | | |
| 45 | | | | | | | | 450 | 550 | 600 | 900 | | |
| 46 | | | | | | | | 400 | 500 | 550 | 850 | | |
| 47 | | | | | | | | 400 | 500 | 550 | 800 | | |
| 48 | | | | | | | | | 450 | 500 | 750 | | |
| 49 | | | | | | | | | 450 | 500 | 750 | | |
| 50 | | | | | | | | | 400 | 450 | 700 | | |
| 51 | | | | | | | | | 400 | 450 | 650 | | |
| 52 | | | | | | | | | 350 | 450 | 650 | | |
| 53 | | | | | | | | | 350 | 400 | 600 | | |
| 54 | | | | | | | | | | | | 350 | 550 |
| 55 | | | | | | | | | | | | 350 | 500 |
| 56 | | | | | | | | | | | | 350 | 500 |
| 57 | | | | | | | | | | | | 350 | 500 |
| 58 | | | | | | | | | | | | 300 | 450 |
| 59 | | | | | | | | | | | | 300 | 450 |
| 60 | | | | | | | | | | | | 300 | 400 |
| 61 | | | | | | | | | | | | 300 | 400 |
| 62 | | | | | | | | | | | | 250 | 400 |
| 63 | | | | | | | | | | | | 250 | 400 |
| 64 | | | | | | | | | | | | 250 | 350 |
| 65 | | | | | | | | | | | | 250 | 350 |
| 66 | | | | | | | | | | | | 250 | 350 |
| 67 | | | | | | | | | | | | 250 | 350 |
| 68 | | | | | | | | | | | | 200 | 350 |
| 69 | | | | | | | | | | | | 200 | 300 |
| 70 | | | | | | | | | | | | 200 | 300 |
| 71 | | | | | | | | | | | | 200 | 300 |
| 72 | | | | | | | | | | | | 200 | 300 |
| 73 | | | | | | | | | | | | 200 | 300 |
| 74 | | | | | | | | | | | | 200 | 250 |
| 75 | | | | | | | | | | | | 200 | 250 |
| 76 | | | | | | | | | | | | 200 | 250 |
| 77 | | | | | | | | | | | | 150 | 250 |
| 78 | | | | | | | | | | | | 100 | 250 |
| 79 | | | | | | | | | | | | 100 | 250 |
| 80 | | | | | | | | | | | | | 200 |



Output product catalogue

POWER CABLES with hard grade ethylene propylene rubber (HEPR) insulation TOFLEX®

Limited liability company Tomskcable, 2016

All the specifications, weight and sizes of cable and wire products listed in the catalogue are for information purposes only.

As our company is constantly improving the technologies and expanding the range of output products, we reserve the right to change product design and specification without prior notice.

Output product catalogue

**POWER CABLES
with hard grade ethylene
propylene rubber (HEPR) insulation
TOFLEX®**



Limited liability company Tomskcable
3 Smirnova St. Tomsk, 634059, Russian Federation
Tel./fax +7 3822 49 89 89
e-mail: cable@tomskcable.ru
www.tomskcable.ru

Sales department tel.:

| | |
|----------------|------------------|
| West region | +7 3822 49 71 47 |
| Central region | +7 3822 49 71 50 |
| East region | +7 3822 49 71 48 |
| CIS Countries | +7 3822 49 71 49 |

