


# Stainless steel enclosures

## Series D93

Protection class IP 66  
316 Grade stainless steel

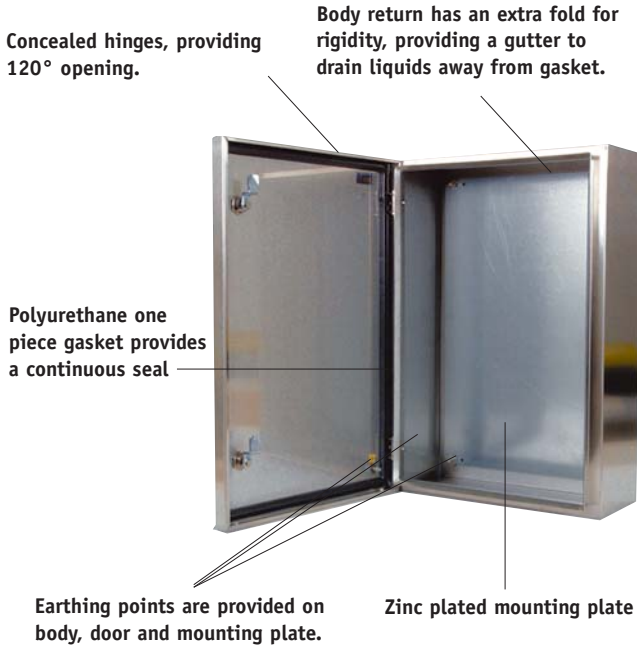

### Technical data - Series D93

<b>Material:</b>	316 grade stainless steel.
<b>Body:</b>	Folded and seam welded. Holes punched in rear of enclosure for wall mounting.
<b>Door:</b>	Surface mounted with 120° opening. Sealing is ensured by an extruded one piece polyurethane gasket.
<b>Lock:</b>	Chrome plated 3 mm DIN-lock with 90° movement. Stainless steel lock (8010) and other accessories available on request.
<b>Mounting Plate:</b>	Fixed onto press welded studs to the rear of the enclosure.
<b>Approvals:</b>	CE
<b>Delivery includes:</b>	Mounting plate, earthing bolts, nuts and washers


## Series ES

Protection class IP 66  
316 Grade stainless steel



### Technical data - Series ES


<b>Material:</b>	316 grade stainless steel
<b>Body:</b>	Folded and seam welded. Holes punched in rear of enclosure for wall mounting.
<b>Approval:</b>	CE
<b>Cover:</b>	Screw down cover with stainless steel captive screws
<b>Internal:</b>	Two fixing supports for attachment of DIN rail or optional mounting plate.
<b>Delivery includes:</b>	Enclosure (less mounting plate)

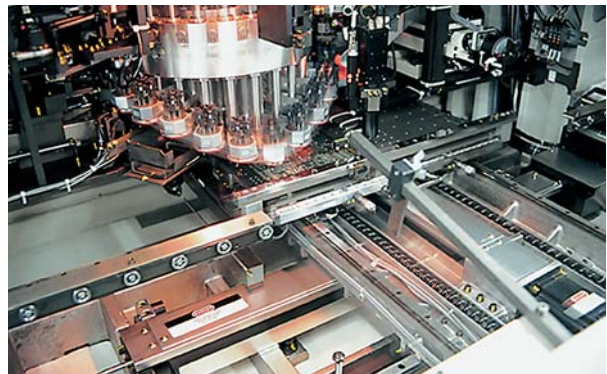

## Stainless steel enclosures

### Series D93

Protection class IP 66  
316 Grade stainless steel

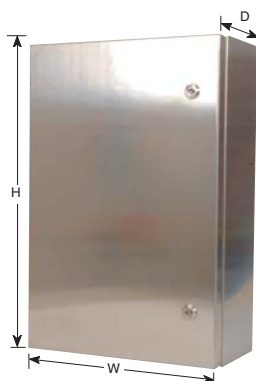

External enclosure dimensions (mm)			Mounting plate dimensions (mm)		No. of locks	Weight (Kg)	Enclosure with standard mounting plate and lock Cat. No.
H	W	D	H	W			
300	200	150	250	170	1	5.2	D 302015
	300	150	250	270	1	7	D 303015
400	300	150	350	270	1	9.6	D 403015
400	300	200	350	270	1	9.9	D 403020
	400	200	350	370	1	10.5	D 404020
	600	200	350	570	1	17	D 406020
500	300	200	450	270	1	11.4	D 503020
	400	200	450	370	1	15	D 504020
600	400	200	550	370	2	17	D 604020
	600	200	550	550	2	22.6	D 606020
800	600	200	750	550	2	29.2	D 806020
700	500	250	650	450	2	24.5	D 705025
600	600	300	550	550	2	28.5	D 606030
800	600	300	750	550	2	32.5	D 806030
	800	300	750	750	2	42.5	D 808030
1000	800	300	950	750	2	49.7	D 1008030
	1200	300	950	1150	2	74	D 10012030 <sup>1)</sup>
1200	800	300	1150	750	2	59	D 1208030
	800	400	1150	750	2	62	D 1208040
	1200	400	1150	1150	2	88	D 12012040 <sup>1)</sup>
1400	800	400	1350	750	2	78	D 1408040

## IP 66 stainless steel terminal enclosures

### Series ES

Protection class IP 66  
316 Grade stainless steel



ES 2A

External dimensions (mm)			Weight (Kg)	Cat. No. <sup>2)</sup>
H	W	D		
150	180	80	1.7	ES 1A
180	200	80	2.0	ES 2A
200	200	80	2.1	ES 21A
150	300	80	2.4	ES 23A
200	200	120	2.5	ES 22A
150	300	120	2.8	ES 24A
200	300	120	3.2	ES 3A
300	300	120	4.3	ES 25A
200	400	120	4.7	ES 4A
300	400	120	5.2	ES 26A
400	400	120	6.4	ES 27A
300	500	120	7.1	ES 7A

**Notes:** <sup>1)</sup> Double door IP 55 rated.  
<sup>2)</sup> Mounting plates available POA.