


# 塑料电缆接头PG型

## Plastic cable gland PG type

ISO9001   CE SGS IP68

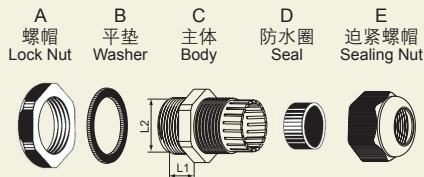

- 产品材质: A.C.E部位采用UL认可的尼龙PA66, B.D部位采用丁腈橡胶。
- 螺纹规格: 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。
- 工作温度: 静态-40℃至100℃, 瞬间耐热至120℃, 动态-20℃至80℃, 瞬间耐热至100℃。
- 产品特点: 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。
- 颜色种类: 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

- Material: Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).
- Thread spec.: Metric, PG, G, NPT.
- Working temperature: -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.
- Characteristics: Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.
- Color: Black(RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.



编号 NO.	产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量/袋 Qty/bag
	PG7	PG7	3~7	12.5	9	19/16	100
	PG7	PG7	2~5	12.5	9	19/16	100
	PG9	PG9	4~9	15.2	9	22/18	100
	PG9	PG9	2~6	15.2	9	22/18	100
	PG11	PG11	5~11	18.6	9	24/21	100
	PG11	PG11	3~7	18.6	9	24/21	100
	PG13.5	PG13.5	6~12	20.4	10	26/23	100
	PG13.5	PG13.5	5~9	20.4	10	26/23	100
	PG16	PG16	10~14	22.5	10	30/26	100
	PG16	PG16	7~12	22.5	10	30/26	100
	PG19	PG19	12~15	24	10	30/27	100
	PG19	PG19	10~12	24	10	30/27	100
	PG21	PG21	13~18	28.3	12	36/32	100
	PG21	PG21	9~16	28.3	12	36/32	100
	PG25	PG25	16~21	30	12	37/35	50
	PG25	PG25	13~18	30	12	37/35	50
	PG29	PG29	18~25	37	13	46/43	50
	PG29	PG29	13~20	37	13	46/43	50
	PG36	PG36	22~33	47	16	56/51	20
	PG36	PG36	20~26	47	16	56/51	20
	PG42	PG42	32~39	54	18	65/60	20
	PG42	PG42	25~31	54	18	65/60	20
	PG48	PG48	37~44	59.3	18	70/63	20
	PG48	PG48	29~35	59.3	18	70/63	20
	PG63	PG63	42~51	70	30	82/77	10
	PG63	PG63	32~40	70	30	82/77	10

